



US 20190216459A1

(19) **United States**

(12) **Patent Application Publication**
Cappola

(10) **Pub. No.: US 2019/0216459 A1**

(43) **Pub. Date: Jul. 18, 2019**

(54) **SURGICAL STAPLER WITH
SELF-RETURNING ASSEMBLY**

Publication Classification

(71) Applicant: **Covidien LP**, Mansfield, MA (US)

(51) **Int. Cl.**
A61B 17/072 (2006.01)

(72) Inventor: **Kenneth Cappola**, Monroe, CT (US)

(52) **U.S. Cl.**
CPC *A61B 17/07207* (2013.01); *A61B 2017/00477* (2013.01)

(21) Appl. No.: **16/215,758**


(57) **ABSTRACT**

(22) Filed: **Dec. 11, 2018**

An articulating surgical tool includes a body portion and a tool assembly pivotally secured to the body portion by a mounting assembly. The mounting assembly includes at least a first spring member for maintaining a longitudinal axis of the tool assembly in alignment with a longitudinal axis of the body portion and for returning the longitudinal axis of the tool assembly into alignment with the longitudinal axis of the body portion following articulation of the tool assembly relative to the body portion.

Related U.S. Application Data

(60) Provisional application No. 62/618,312, filed on Jan. 17, 2018.

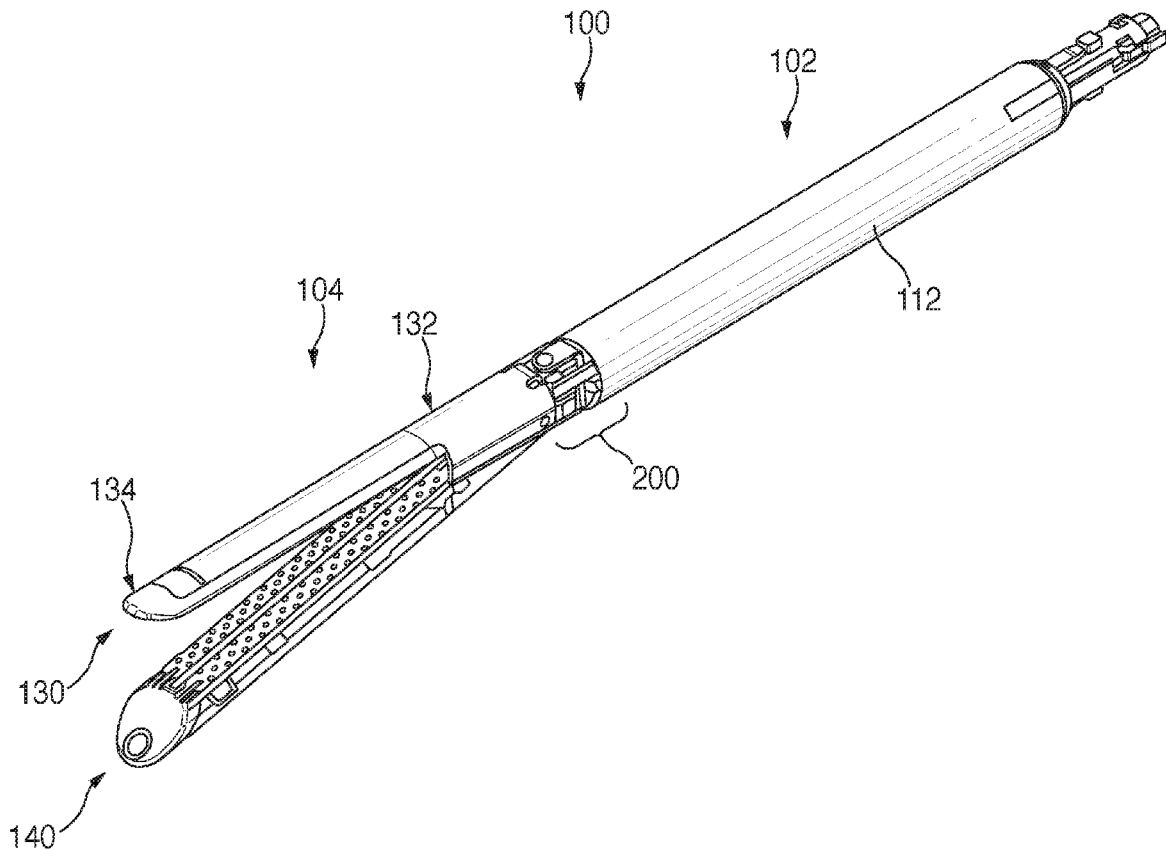

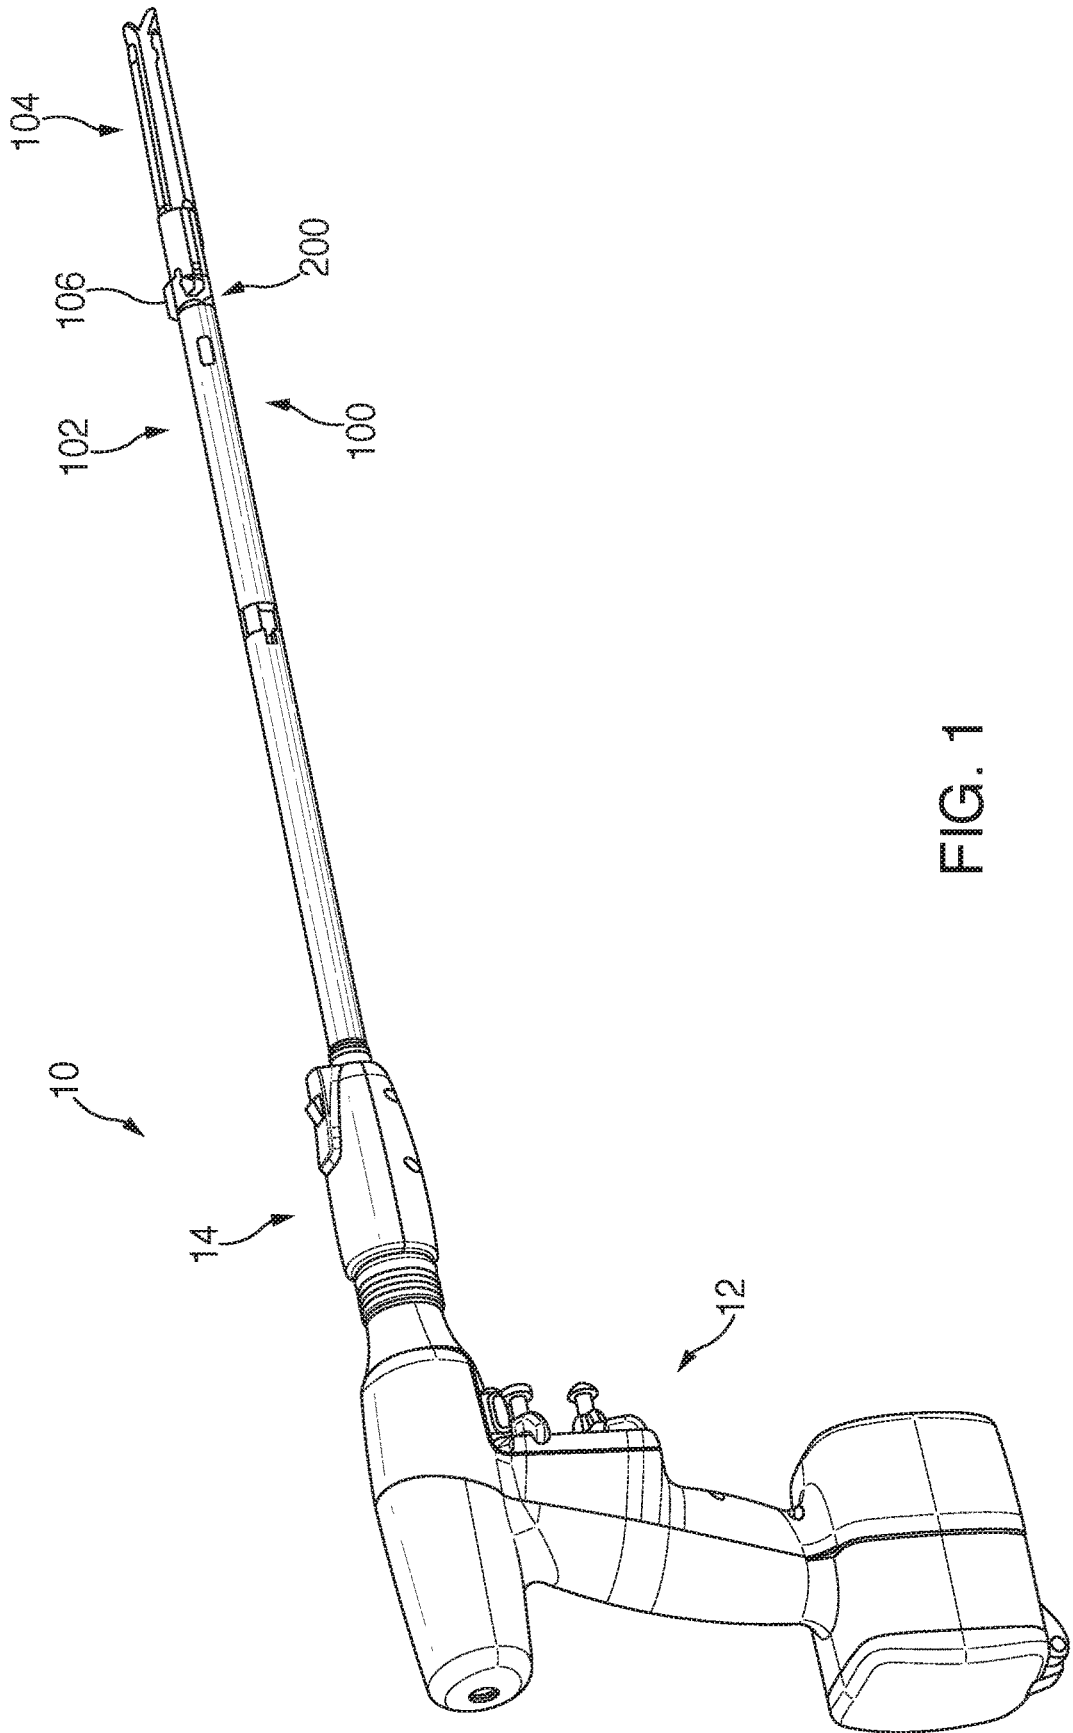


FIG. 1

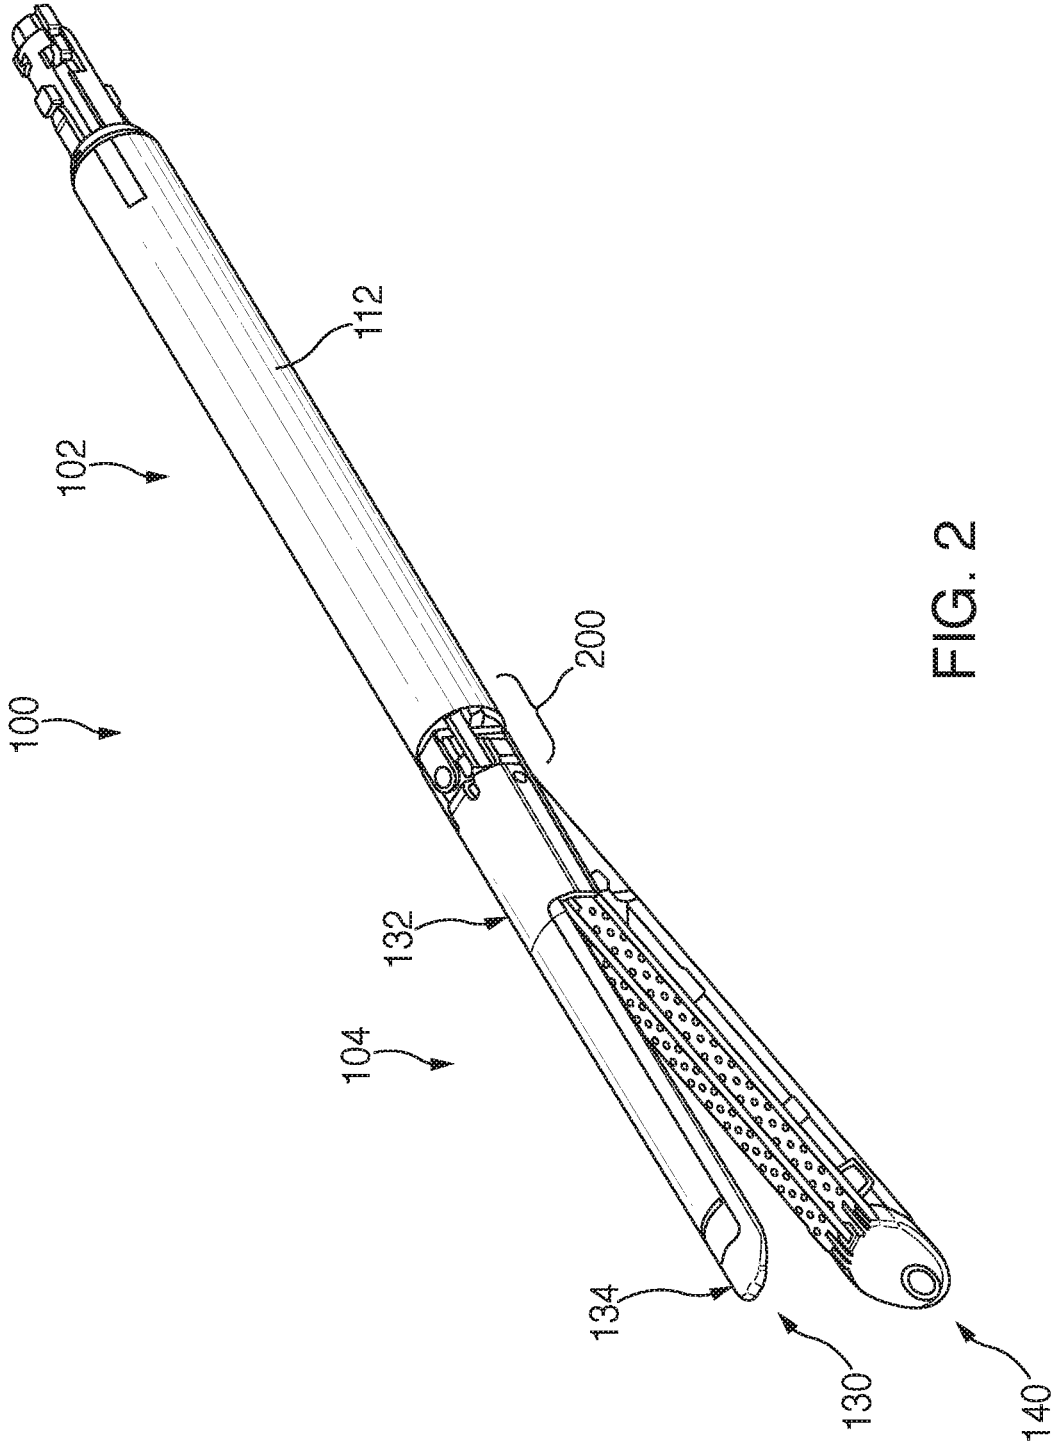


FIG. 2

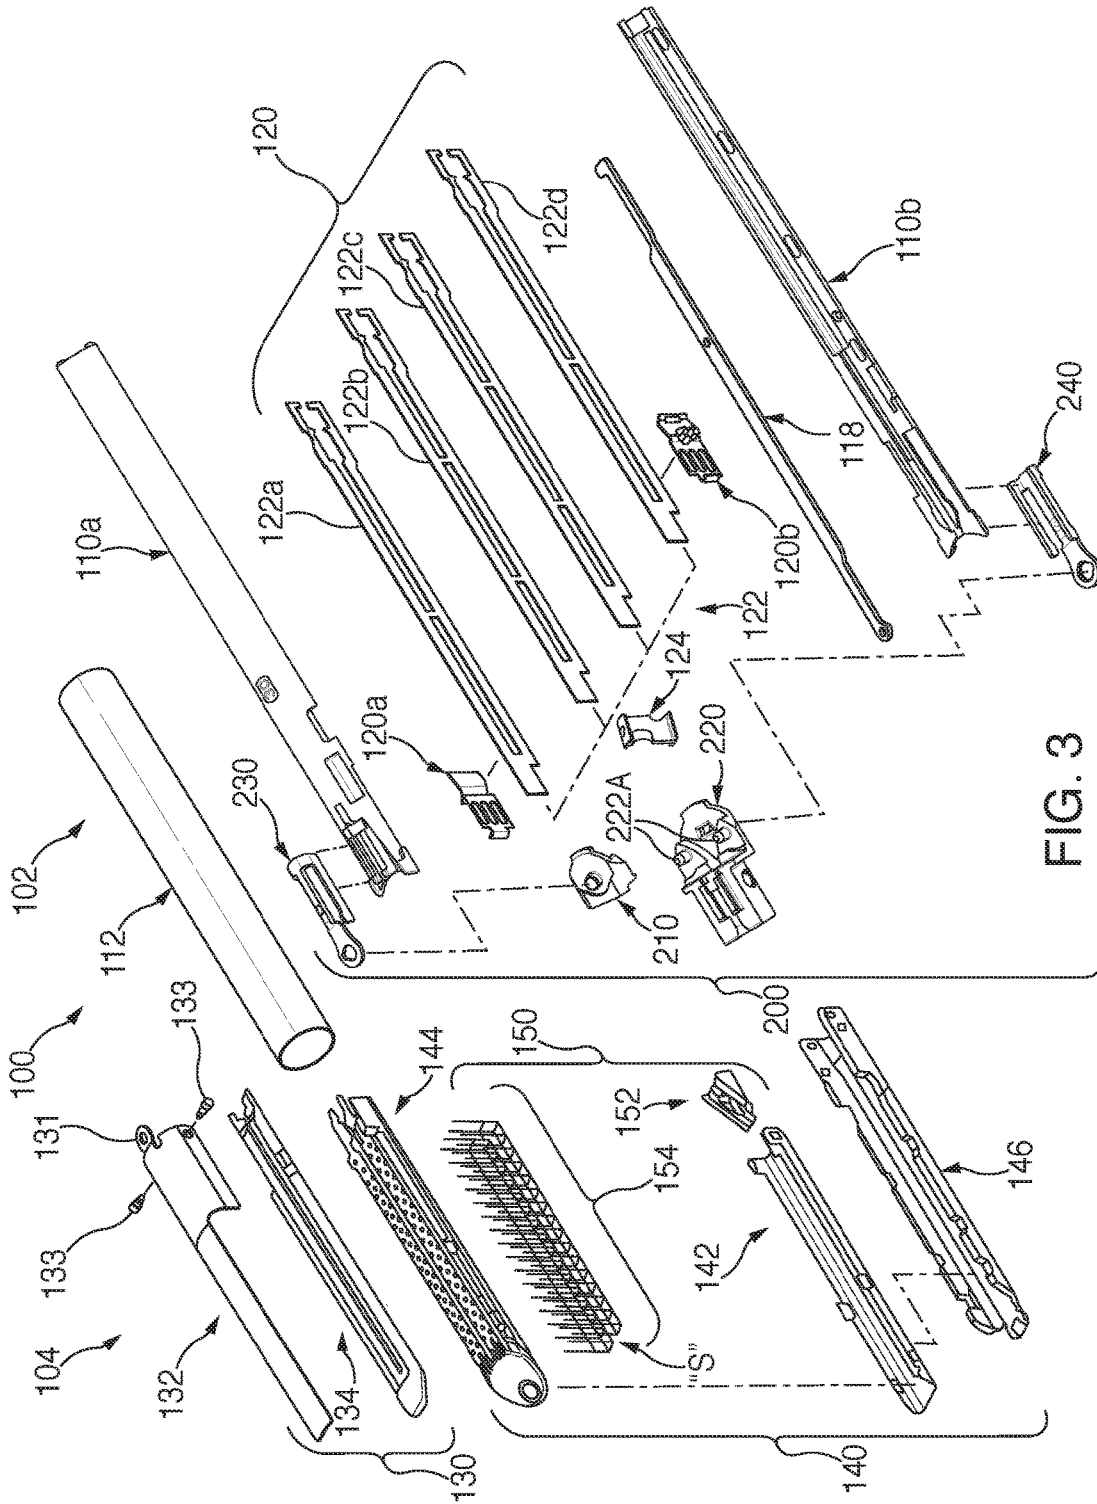
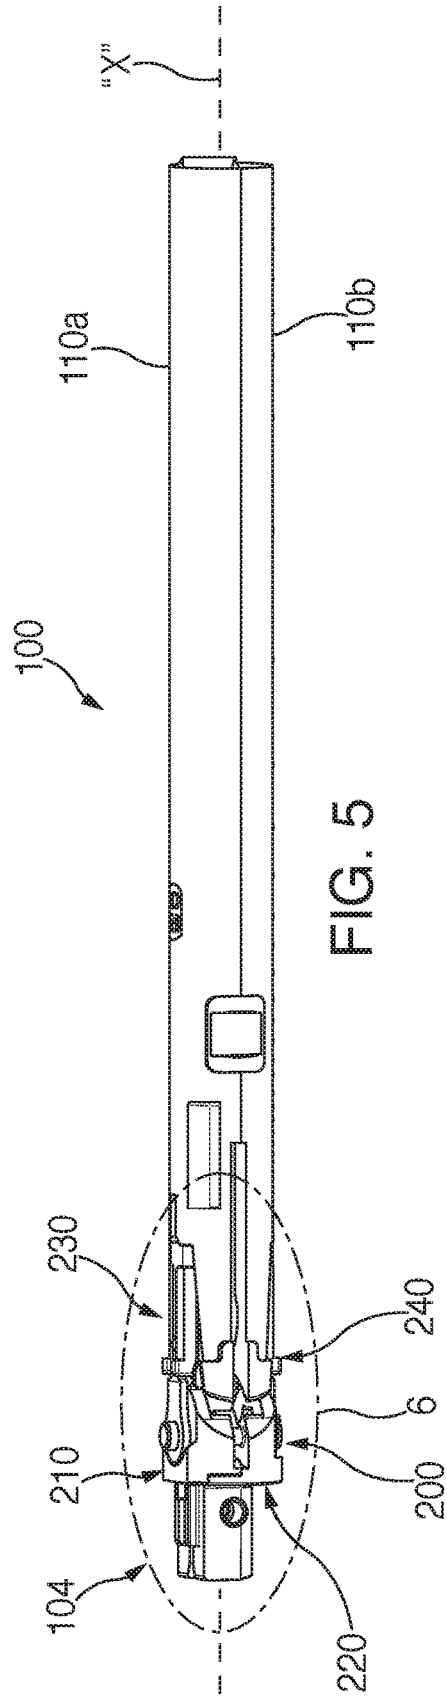
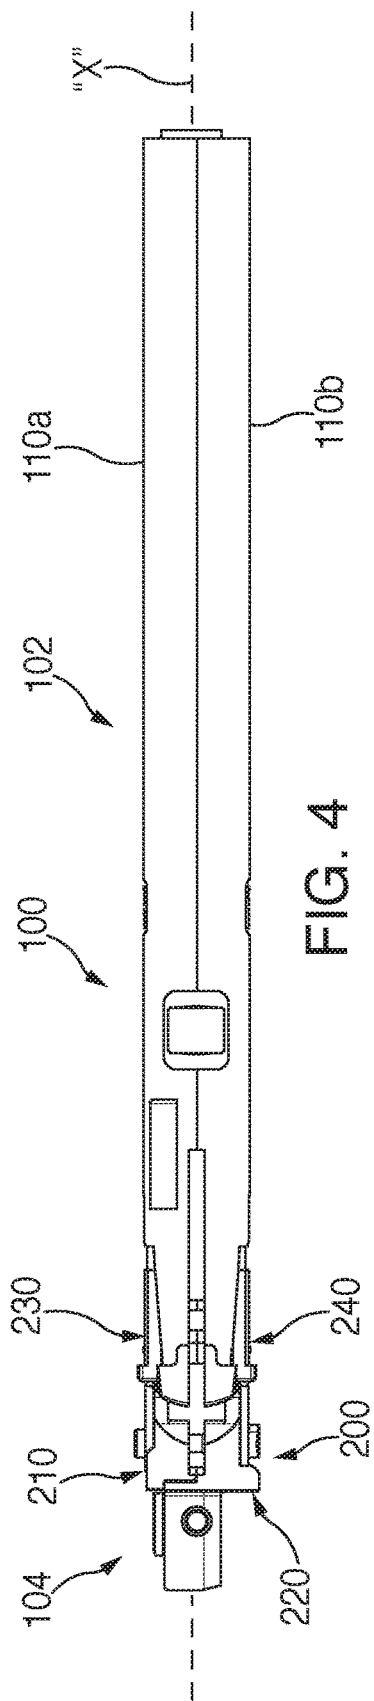


FIG. 3



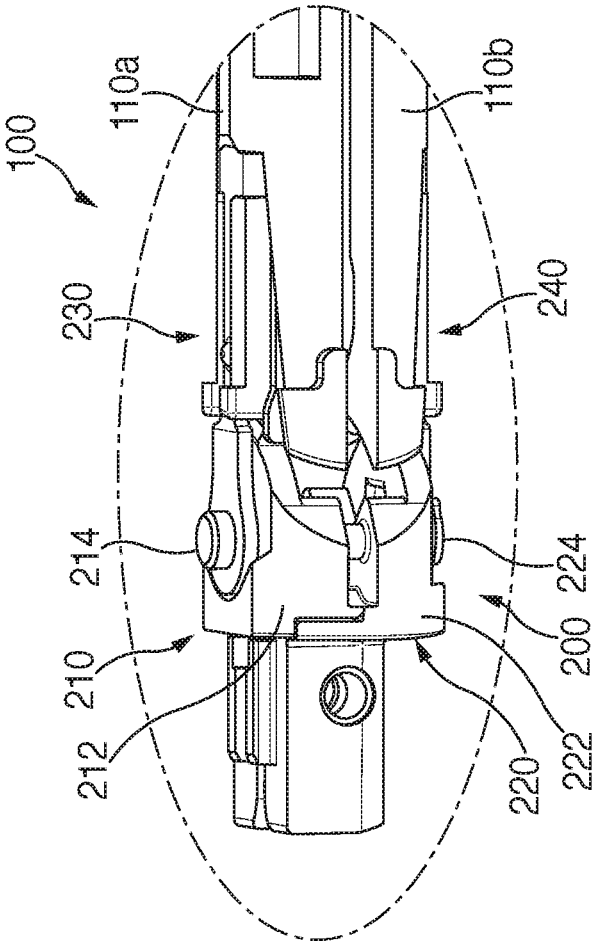


FIG. 6

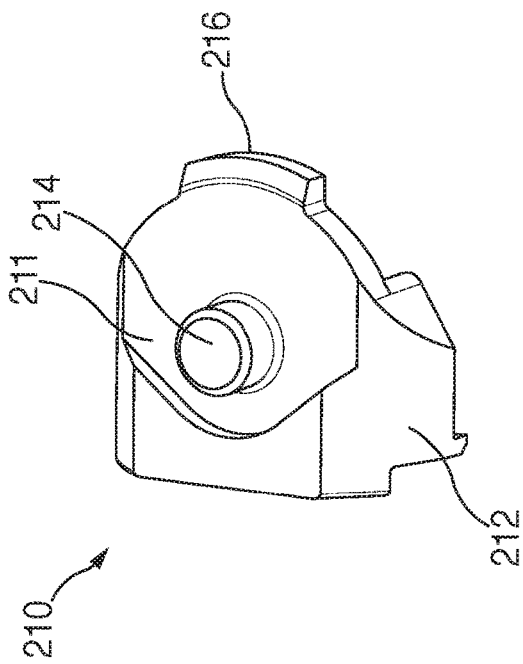


FIG. 7

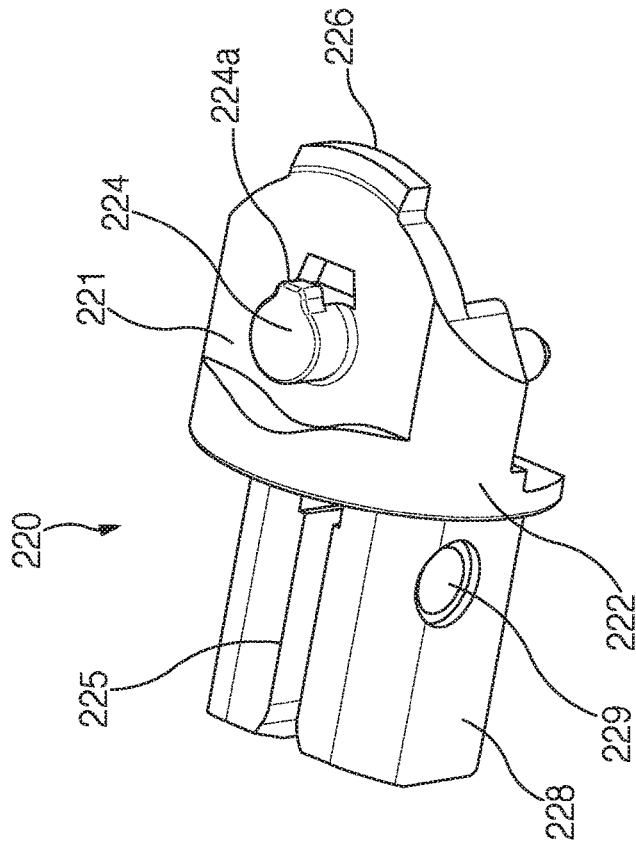


FIG. 8

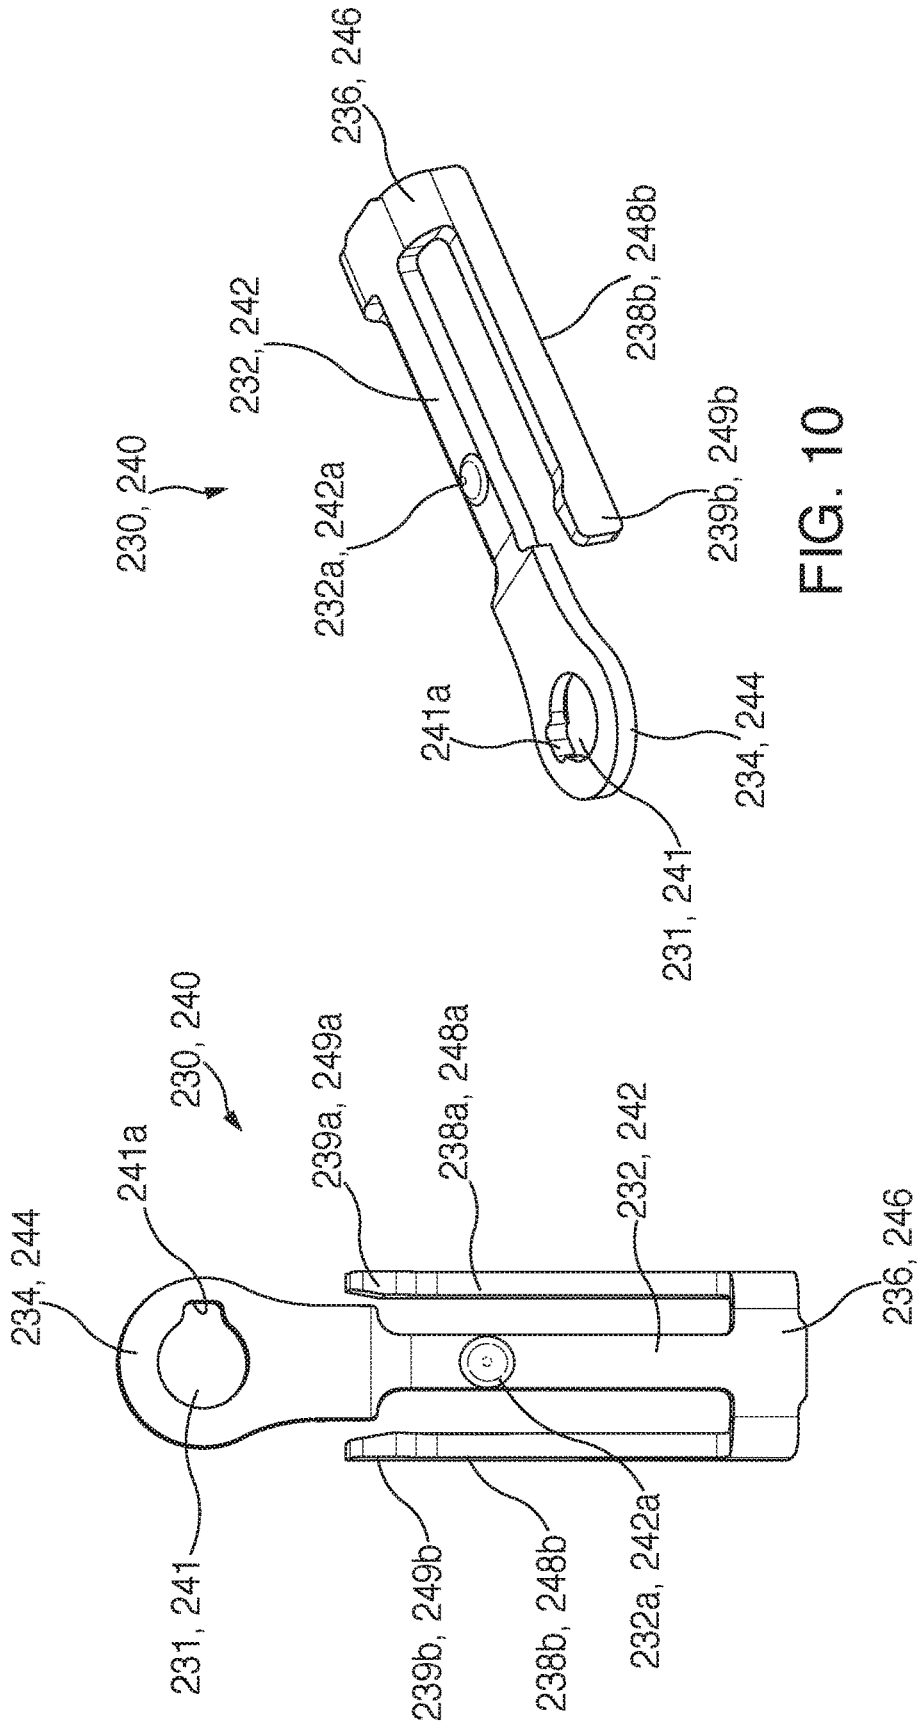


FIG. 9

FIG. 10

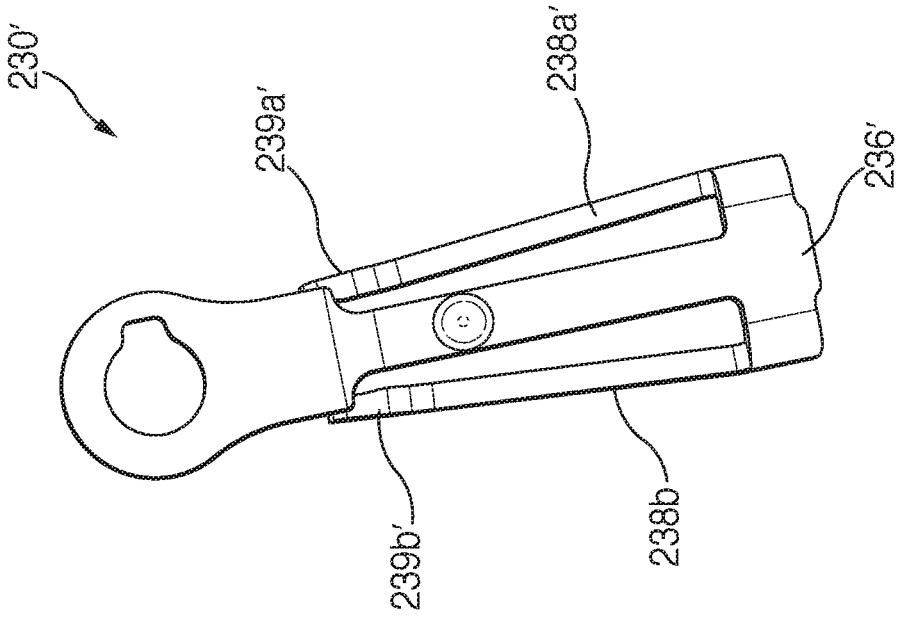


FIG. 9A

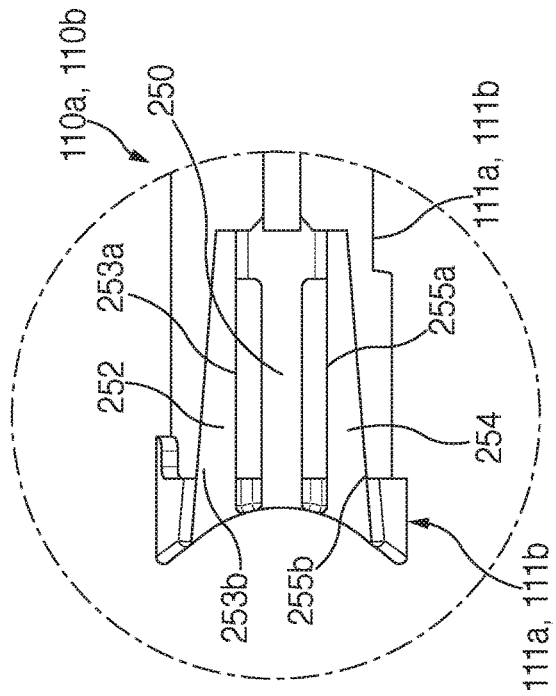
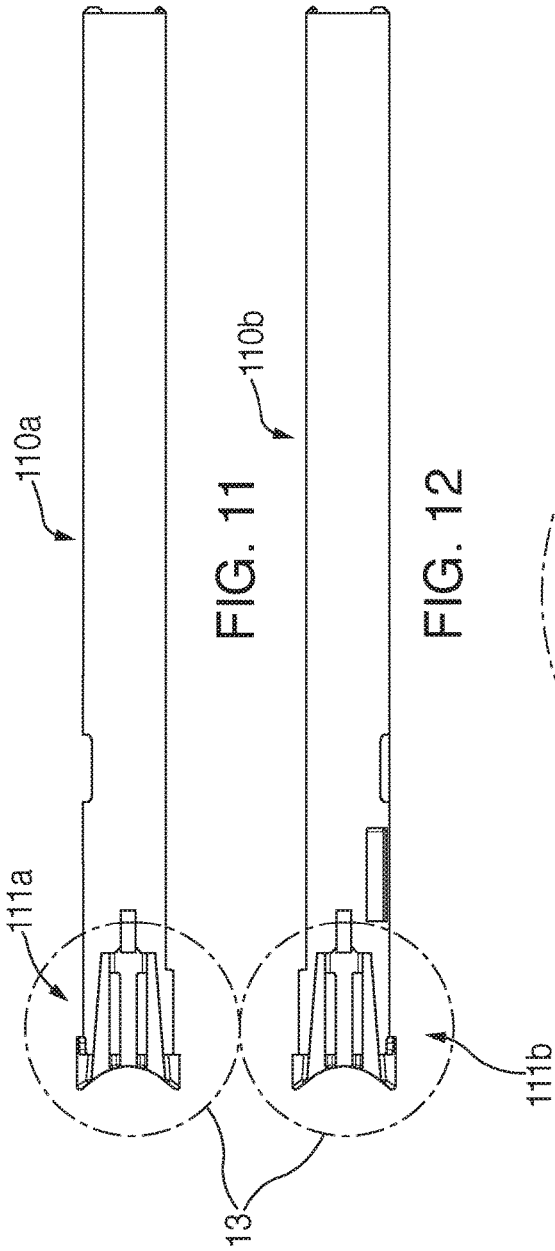


FIG. 11

FIG. 12

FIG. 13

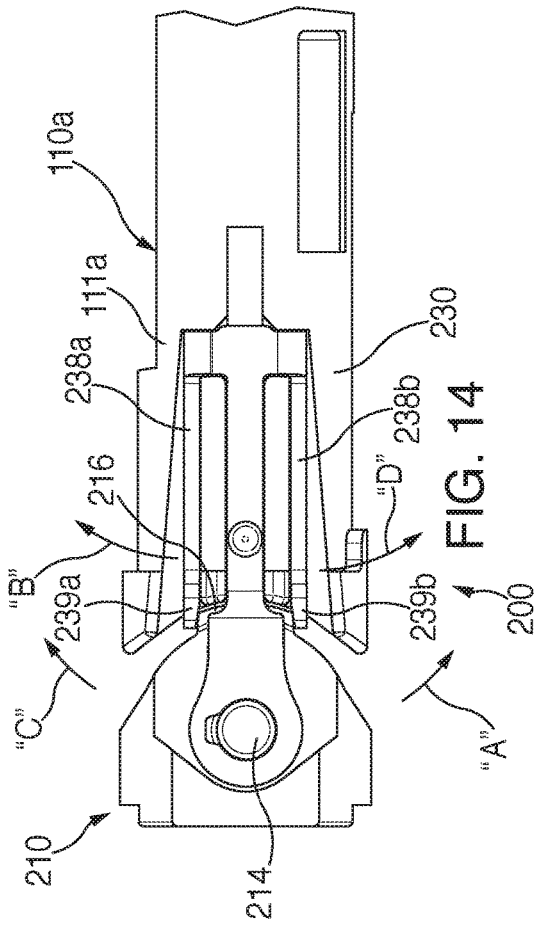


FIG. 14

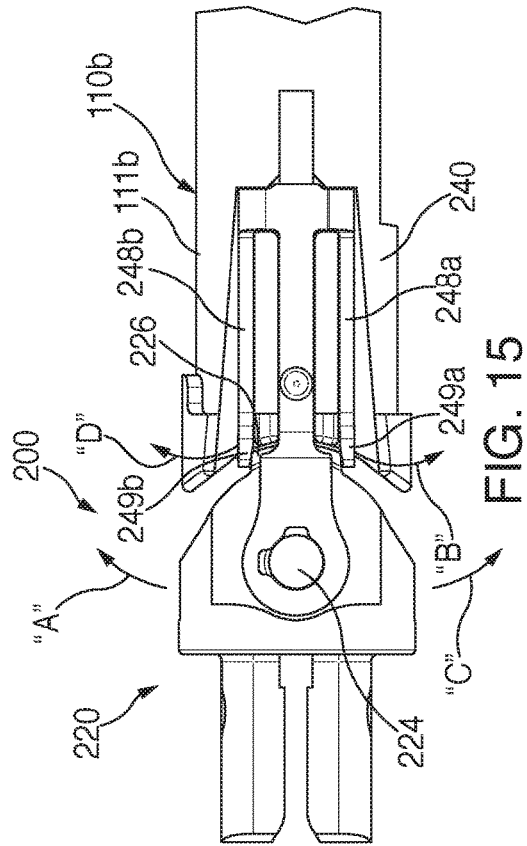


FIG. 15

SURGICAL STAPLER WITH SELF-RETURNING ASSEMBLY

BACKGROUND

[0001] This application claims the benefit of and priority to U.S. Provisional Patent Application Ser. No. 62/618,312 filed Jan. 17, 2018, the entire disclosure of which is incorporated by reference herein.

BACKGROUND

Technical Field

[0002] The present disclosure relates to surgical staplers, and more particularly, to surgical staplers including a self-returning assembly for aligning, and/or maintaining alignment of, a tool assembly of the surgical stapler with an elongate body of the surgical stapler.

Background of Related Art

[0003] Minimally invasive approaches for thoracic and abdominal surgery have gained tremendous popularity over the past decade. The development of surgical stapling devices has enabled surgeons to perform stapling and sealing procedures with ease and minimal complications.

[0004] Endoscopic linear staplers include a tool assembly supported on a distal end of an elongate body which extends from a handle assembly. The tool assembly may be articulable relative to the elongate body to facilitate placement of the tool assembly within a body cavity of a patient. During insertion of the tool assembly into the body cavity of the patient, and prior to articulation of the tool assembly relative to the elongate body, it is desirable to maintain the tool assembly in alignment with the elongate body.

[0005] Accordingly, it would be beneficial to have a surgical stapler that incorporates an assembly for maintaining a tool assembly of the surgical stapler in, and/or returning the tool assembly to, alignment with an elongate body of the surgical stapler.

SUMMARY

[0006] A surgical tool including a self-returning assembly is disclosed. The surgical tool includes a body portion and a tool assembly pivotally secured to the body portion by a mounting assembly. The body portion includes proximal and distal ends and defines a longitudinal axis. The mounting assembly includes at least a first spring member for maintaining a longitudinal axis of the tool assembly in alignment with the longitudinal axis of the body portion and for returning the longitudinal axis of the tool assembly into alignment with the longitudinal axis of the body portion following articulation of the tool assembly relative to the body portion.

[0007] In embodiments the mounting assembly includes at least a first mounting member. The at least first mounting member is configured to pivotally connect the tool assembly to the body portion. The tool assembly may include a cartridge assembly and an anvil assembly. The at least first spring member may include first and second arms. The at least first mounting member may include a cam portion. The cam portion may be received between and engage the first and second arms.

[0008] In embodiments, articulation of the tool assembly in a first direction relative to the body portion causes the cam

portion to deflect the first arm in a second direction. Similarly, articulation of the tool assembly in a third direction relative to the body portion causes the cam portion to deflect the second arm in a fourth direction. Deflection of the first and second arm may create a spring force against the cam portion. The at least first mounting member may include a pivot member and the at least first spring member includes an opening, wherein the pivot member is received within the opening.

[0009] The mounting assembly may include first and second spring members. In embodiments, first and second arms of the first spring member are parallel. Alternatively, the first and second arms of the first spring member angle towards one another. The at least first spring member may include a C-shaped flange for securing the first spring member to the body portion.

[0010] A surgical instrument is provided and includes a handle assembly and a surgical tool operably secured to the handle assembly. The surgical tool includes a body portion and a tool assembly pivotally secured to the body portion by a mounting assembly. The body portion includes proximal and distal ends and defines a longitudinal axis. The mounting assembly includes first and second spring members for pivotally supporting the tool assembly relative to the body portion. The first and second spring members return the tool assembly to an aligned position with the body portion from an articulated position relative to the body portion.

[0011] The mounting assembly may include first and second mounting members, with the first mounting member engaged with the first spring member and the second mounting member engaged with the second spring member. The first and second spring members may each include first and second arms and the first and second mounting members may each include a cam portion. The cam portion of the first mounting member may be received between and engage the first and second arms of the first spring member and the cam portion of the second mounting member may be received between and engage the first and second arms of the second spring member.

[0012] In embodiments, articulation of the tool assembly in a first direction relative to the body portion causes the cam portion of the first mounting member to deflect the first arm of the first spring member in a second direction and the cam portion of the second mounting member to deflect the first arm of the first spring member in the second direction. Deflection of the first arms of the first and second spring members may create a spring force against the cam portions of the respective first and second mounting members.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate embodiments of the disclosure and, together with a general description of the disclosure given above, and the detailed description of the embodiment(s) given below, serve to explain the principles of the disclosure, wherein:

[0014] FIG. 1 is a side, perspective view of an embodiment of the presently disclosed surgical stapling apparatus including a tool assembly with an anvil assembly and a cartridge assembly in an approximated position;

[0015] FIG. 2 is a side, perspective view of a disposable loading unit of the surgical stapling apparatus shown in FIG. 1 with the anvil assembly and cartridge assembly in an open position;

[0016] FIG. 3 is a side, perspective view of the loading unit shown in FIG. 2 with parts separated;

[0017] FIG. 4 is an enlarged side view of an elongate body portion and a mounting assembly of the loading unit shown in FIG. 2;

[0018] FIG. 5 is an enlarged side, perspective view of the elongate body portion and the mounting assembly shown in FIG. 4;

[0019] FIG. 6 is an enlarged view of the indicated area of detail shown in FIG. 5;

[0020] FIG. 7 is top, perspective view of a first mounting member of the mounting assembly shown in FIG. 4;

[0021] FIG. 8 is a bottom, perspective view of a second mounting member of the mounting assembly shown in FIG. 4;

[0022] FIG. 9 is a top view of a spring member of the mounting assembly shown in FIG. 4;

[0023] FIG. 9A is a top view of a spring member of a mounting assembly according to another embodiment of the present disclosure;

[0024] 10 is a top, perspective view of the spring member shown in FIG. 9;

[0025] FIG. 11 is a top view of a first housing half of the elongate body portion of the loading unit shown in FIG. 4;

[0026] FIG. 12 is a top view of a second housing half of the elongate body portion of the loading unit shown in FIG. 4;

[0027] FIG. 13 is an enlarge view of the indicated area of detail shown in FIGS. 11 and 12;

[0028] FIG. 14 is a top view of the mounting assembly shown in FIG. 4; and

[0029] FIG. 15 is a bottom view of the mounting assembly shown in FIG. 4.

DETAILED DESCRIPTION

[0030] Embodiments of the present disclosure will now be described in detail with reference to the drawings wherein like reference numerals designate identical or corresponding elements in each of the several views. In this description, the term “proximal” is generally used to refer to the portion of the apparatus that is closer to a clinician, while the term “distal” is generally used to refer to the portion of the apparatus that is farther from the clinician.

[0031] As noted above, alignment of a tool assembly of a surgical stapler with an elongate body of the surgical stapler facilitates insertion and removal of the tool assembly into/from within the body cavity of a patient directly through an incision or with the aid of a cannula or other access device. Alignment of the tool assembly with the elongate body also provides a user with a reference for the location of the tool assembly relative to the elongate body prior to articulation of the tool assembly. To ensure that the tool assembly of the surgical stapler is maintained in alignment with the elongate body of the surgical stapler during insertion and removal of the tool assembly into/from within the body cavity of a patient, and to facilitate return of the tool assembly into alignment with the elongate body following articulation of the tool assembly, the embodiments of the present disclosure include a self-returning mounting assembly.

[0032] Although the embodiments of the present disclosure will be described as they relate to linear endoscopic and laparoscopic surgical staplers, it is envisioned that the aspects of the present disclosure may be incorporated into surgical instruments of various configurations having an

articulating tool assembly, e.g., curved surgical staplers, vessel sealers, graspers, cutters, retractors, etc.

[0033] FIG. 1 illustrates an embodiment of the presently disclosed surgical instrument shown generally as surgical stapler 10. The surgical stapler 10 includes a handle assembly 12, an adapter assembly 14 releasably secured to the handle assembly 12, and a loading unit 100 releasably secured to the adapter assembly 14. The handle assembly 12 and the adapter assembly 14 are configured to effect operation of the loading unit 100. The loading unit 100 may be configured for single use, e.g., disposable, and multiple uses, e.g., including a replaceable cartridge. Although the handle assembly 12 is shown as being powered, and with a pistol grip, it is envisioned that the handle assembly may be manually operated, and/or may have alternative configurations, e.g. pencil grip.

[0034] In embodiments, the adapter assembly 14 of the surgical stapler 10 may be integrally formed with the handle assembly 12 and/or integrally formed with the loading unit 100. For a detailed description of the structure and function of an exemplary powered handle and adapter assemblies, please refer to commonly owned U.S. Pat. No. 9,055,943 (“the ‘943 patent”), the content of which is incorporated by reference herein in its entirety. For a detailed description of an exemplary manual handle assembly, please refer to commonly owned U.S. Pat. No. 8,070,033, the content of which is incorporated by reference herein in its entirety.

[0035] Referring to FIGS. 1 and 2, the loading unit 100, for use with the surgical stapler 10, includes a body portion 102 and a tool assembly 104 pivotally secured to the body portion 102. The loading unit 100, including the body portion 102 and the tool assembly 104, will only be described to the extent necessary to fully disclose the aspects of the present disclosure. For a detailed description of the structure and function of exemplary loading units, please refer to commonly owned U.S. Pat. App. Pub. Nos. 2013/0098965, 2016/0249921, and 2016/0249929 (“the ‘965 Publication”, “the ‘921 Publication”, and “the ‘929 Publication”, respectively), and commonly owned U.S. patent application Ser. No. 15/440,010 (“the ‘010 application”), the contents of each of which are hereby incorporated by reference herein in their entirety.

[0036] With particular reference now to FIG. 3, the body portion 102 of the loading unit 100 includes a first housing half 110a and a second housing half 110b which are contained within an outer sleeve 112 of the body portion 102. A drive member 122 of a drive assembly 120 is slidably received within a channel (not shown) defined by the first and second housing halves 110a, 110b. An articulation link 118 extends through the body portion 102 of the loading unit 100 and facilitates articulation of the tool assembly 104 relative to the body portion 102. A pair of blow-out plate assemblies 120a, 120b is positioned adjacent the distal end of the first and second housing halves 110a, 110b to prevent outward buckling and/or bulging of the drive member 122 of the drive assembly 120 during articulation of the tool assembly 104 and during firing of the loading unit 100. The distal end of the drive member 122 of the drive assembly 120 supports a clamping member 124. In embodiments, the drive member 122 is formed from a plurality of stacked sheets 122a-d of material, e.g., stainless steel. A detailed description of the above-identified components of the load-

ing unit **100** is provided in the '965 and '921 Publications, the content of which was previously incorporated herein by reference.

[0037] Still referring to FIG. 3, the tool assembly **104** of the loading unit **100** includes an anvil assembly **130** and a cartridge assembly **140** which are movable in relation to each other between an open position (FIG. 2) and an approximated position (FIG. 1). The anvil assembly **130** includes an anvil body **132** and an anvil plate **134**. The cartridge assembly **140** includes a support plate **142**, a cartridge body **144**, a plurality of staples "S", and a staple firing assembly **150** that includes an actuation sled **152** and a plurality of staple pushers **154**. The cartridge assembly **140** is receivable in a jaw member **146**. As noted above, the loading unit **100** may be configured such that the cartridge assembly **140** is replaceable to permit reuse of the loading unit **100**. Alternatively, the loading unit **100** may be configured for single use. The jaw member **146** of the tool assembly **104** is pivotally secured to the anvil body **132** of the anvil assembly **130**. For a detailed discussion of an exemplary tool assembly, see the '965 Publication which has been incorporated herein by reference.

[0038] In embodiments configured for use with a powered handle assembly **12** (FIG. 1), the loading unit **100** may include an identification assembly (not shown) for communicating with the handle assembly **20** (FIG. 1). In embodiments, the loading unit **100** may include one or more lockout features (not shown) for preventing the firing, and/or subsequent firing, of the surgical stapler **10**, e.g. shipping lock, lockout mechanism, shipping wedge. In embodiments, the staples "S" of the tool assembly **104** may be of any size, configuration, and/or formed of any material.

[0039] With reference now to FIGS. 4-6, the tool assembly **104** (FIG. 2) of the loading unit **100** is pivotally secured to body portion **102** of the loading unit **100** by a mounting assembly **200**. The mounting assembly **200** includes a first mounting member **210**, and a second mounting member **220** secured to the first mounting member **210**. The mounting assembly **200** further includes a self-returning assembly in the form of first and second spring members **230**, **240** operably secured to the first and second housing halves **110a**, **110b**, respectively, of the body assembly **102** and pivotally secured to the first and second mounting members **210**, **220**, respectively. The mounting assembly **200** is configured to maintain the tool assembly **104** in longitudinal alignment with the tool assembly **104** during passive use of the tool assembly **104**, i.e., during insertion and withdrawn of the tool assembly **104** into alignment with the body portion **102** from an articulated position relative to the body portion **102**.

[0040] As noted above, the tool assembly **104** of the loading unit **100** (FIG. 2) is articulated relative to the body portion **102** of the loading unit **100** by the articulation link **118** (FIG. 3). It is envisioned that the aspects of the present disclosure may be modified for use with other articulation mechanism, e.g., cable actuated, gear driven, passive.

[0041] With particular reference now to FIG. 7, the first mounting member **210** of the mounting assembly **200** (FIG. 4) of the loading unit **100** (FIG. 4) includes a base portion **212**, a pivot member **214** extending radially outward from the base portion **212**, and a cam portion **216** of the first mounting member **210** extending outwardly from the base portion **212**. The base portion **212** is configured to enable

pivoting of the first mounting member **210** relative to the first housing half **110a**. When the loading unit **100** is assembled, the pivot member **214** of the first mounting member **210** extends perpendicular to a longitudinal axis "X" of the loading unit **100**. The pivot member **214** is configured to engage the first spring member **230** (FIG. 9). More particularly, the pivot member **214** of the first mounting member **210** is configured to be received through an opening **231** (FIG. 9) in the first spring member **230**. The pivot member **214** is further configured to be received through an opening **131** (FIG. 3) in the anvil body **132** (FIG. 3) of the anvil assembly **130** (FIG. 3). As will be described below in relation to a pivot member **224** of the second mounting member **220**, the pivot member **214** of the first mounting member **210** may include a tab (not shown) for securing the first spring member **230** to the first mounting member **210**.

[0042] As noted above, the cam portion **216** of the first mounting member **210** extends outwardly from the base portion **212**. The cam portion **216** of the first mounting member **210** extends parallel to the longitudinal axis "X" (FIG. 4) of the loading unit **100** (FIG. 4) and is configured to be received between and engage spring arms **238a**, **238b** of the first spring member **230**. The body portion **212** of the first mounting member **210** includes a cutout **211** to accommodate the pivot portion **234** of the first spring member **230**, and to permit pivoting of the first mounting member **210** relative to the first spring member **230**.

[0043] With reference now to FIG. 8, the second mounting member **220** of the mounting assembly **200** (FIG. 4) of the loading unit **100** (FIG. 4) includes a base portion **222**, a pivot member **224** extending laterally outward from the base portion **222**, a cam portion **226** extending longitudinally outwardly from the base portion **222**, and a connector portion **228** extending longitudinally outwardly opposite the cam portion **226**. Although shown including a pair of pins **222a** (FIG. 3) for securing the second mounting member **220** to the first mounting member **210**, it is envisioned that the first and second mounting members **210**, **220** may be secured together in any suitable manner. The base portion **222** is configured to enable pivoting of the second mounting member **220** relative to the second housing half **110b**.

[0044] With reference to FIG. 8, the pivot member **224** of the second mounting member **220** of the mounting assembly **200** is configured to engage the second spring member **240** (FIG. 9). More particularly, the pivot member **224** is configured to be received through an opening **241** of the second spring member **240**. As shown, the pivot member **224** includes a tab **224a** that is configured to secure the second spring member **240** to the second mounting member **220**. For a detailed description of an exemplary pivoting connection, please refer to the '010 application, the content of which was previously incorporated herein by reference.

[0045] As noted above, the cam portion **226** of the second mounting member **220** of the mounting assembly **200** extends outwardly from the base portion **222**. When the loading unit **100** is assembled, the cam portion **226** of the first mounting member **220** extends parallel to the longitudinal axis "X" (FIG. 4) of the loading unit **100** (FIG. 4). The cam portion **226** of the second mounting member **220** is configured to be received between and engage spring arms **246a**, **246b** of the second spring member **240**. The body portion **222** of the second mounting member **220** includes a cutout **221** to accommodate a pivot portion **244** of the

second spring member 240, and to permit pivoting of the second mounting member 220 relative to the second spring member 240.

[0046] The connector portion 228 of the second mounting member 220 of the mounting assembly 200 is configured to engage and support the tool assembly 104 (FIG. 2) of the loading unit 100 (FIG. 2). More particularly, the connector portion 228 of the second mounting member 220 defines openings 229 for receiving pivot pins 133 (FIG. 3). The pivot pins 133 pivotally secure together the anvil body 132 of the anvil assembly 130 and the jaw member 146 (FIG. 3) of the cartridge assembly 140 (FIG. 3). The connector portion 228 of the second mounting member 220 further defines a slot 225 for receiving the drive member 122 (FIG. 3) of the drive assembly 120 (FIG. 3) therethrough.

[0047] With reference now to FIGS. 9 and 10, the first and second spring members 230, 240 are substantially similar. The first and second spring members 230, 240 each include a base portion 232, 242, a pivot portion 234, 244 secured to a first end of the base portion 232, 242, a C-shaped flange 236, 246 secured to the second end of the base portion 232, 242, and first and second spring arms 238a, 248a, 238b, 248b extending from the C-shaped flange 236, 246, respectively, along the respective base portion 232, 242. As shown, the base portions 232, 242, the pivot portions 234, 244, the C-shaped flanges 236, 246, and the first and second spring arms 238a, 238b, 248a, 248b are integrally formed, e.g., monolithic. In embodiments, the integrally formed first and second spring members 230, 240 may be formed from a single sheet of material. Alternatively, any or all of the spring members 230, 240 may be formed of separate components that are secured together, e.g., welded, adhesive. The spring members 230, 240 may be formed of metal, plastic, or other suitable semi-flexible material.

[0048] With continued reference to FIGS. 9 and 10, the base portion 232, 242 of each of the first and second spring members 230, 240 includes an elongate body. The base portions 232, 242 may each include a tab 232a, 242b, respectively, that engages the outer sleeve 112 (FIG. 3) of the body portion 102 (FIG. 3) of the loading unit 100 (FIG. 3). As discussed above, the pivot portion 234, 244 of the first and second spring members 230, 240 each define an opening 231, 241, respectively, configured to receive the respective pivot members 214, 224 of the respective first and second mounting members 210, 220. As shown and described, the pivot portion 244 of the second spring member 240 defines a notch 241a in communication with the opening 241 in the pivot portion 244 for accommodating a tab 224a of the pivot portion 224 of the second mounting member 220. As noted above, the first mounting member 210 and the first spring member 230 may also be configured in a similar manner.

[0049] The C-shaped flanges 236, 246 of the respective first and second spring members 230, 240 of the mounting assembly 200 are disposed on the second end of the respective base portions 232, 242. The C-shaped flanges 236, 246 are configured to facilitate securement of the respective first and second spring members 230, 240 to the first and second housing halves 110a, 110b, respectively, of the body portion 102. As noted above, the C-shaped flanges 236, 246 support the first and second spring arms 238a, 248a, 238b, 248b, respectively.

[0050] With particular reference to FIG. 9, the first and second spring arms 238a, 248a, 238b, 248b, extend parallel to one another. As will be described in further detail below,

free ends the first and second spring arms 239a, 249a, 239b, 249b of the respective first and second spring members 230, 240 engage the respective cam portion 216, 226 of the first and second mounting members 210, 220.

[0051] With reference to FIG. 9A, in another embodiment of a spring member, the first and second spring arms 238a', 238b' of a spring member 230' are supported on a C-shaped flange 236' such that the first and second spring arms 238a', 238b' of the spring member 230' extend at an angle towards one another. More particular, free ends 239a', 239b' of the respective first and second arms 238a', 238b' of the spring member 230' extend towards one another. The first and second spring arms 238a', 238b' of the spring member 230' are configured to deflect away from each other in order to receive cam portion 216 of the first mounting member 210 therebetween. As will be described in further detail below, the spring loaded nature of the engagement between the spring member 230' and the first mounting member 210 requires a larger force to articulate the tool assembly 104 relative to the body portion 102. Although shown and described with reference to the first mounting member 210, the spring member 230' may be used with the second mounting member 220.

[0052] With reference now to FIGS. 11-13, the first and second housing halves 110a, 110b of the body portion 102 of the loading unit 100 are configured to support respective first and second spring members 230, 240. Distal portions 111a, 111b of the first and second housing halves 110a, 110b each define a plurality of channels 250, 252, 254 for accommodating the respective first and second spring members 230, 240. Each of the distal portions 111a, 111b of the first and second housing halves 110a, 110b are curved to accommodate articulation of the tool assembly 104 of the loading unit 100 relative to the body portion 102 of the loading unit 100.

[0053] With particular reference to FIG. 13, the distal portions 111a, 111b of the first and second housing halves 110a, 110b, respectively, are substantially similar. Each distal portion 111a, 111b includes a central slot or channel 250, a first channel 252 disposed on a first side of the central channel 250, and a second channel 254 disposed on an opposite side of the central channel 250. Each of the first and second channels 252, 254 are mirror images of one another. The central channel 250 is configured to receive the body portion 232, 242 of the first and second spring members 230, 240. The first channel 252 is configured to receive the first arms 238a, 248a of the first and second spring members 230, 240, respectively, and the second channel 254 is configured to receive the second arms 238b, 248b of the first and second spring members 230, 240, respectively.

[0054] With continued reference to FIG. 13, the first and second channels 252, 254 are defined by an inner surface 253a, 255a, respectively, and an outer surface 253b, 255b, respectively, of the first and second housing halves 110a, 110b. The inner surfaces 253a, 255a extend parallel to one another and to the longitudinal axis "X" (FIG. 4) of the body portion 102 (FIG. 4) of the loading unit 100 (FIG. 4). The inner surfaces 253a, 255a are configured to engage the first and second arms 238a, 248a, 238b, 248b of the first and second spring members 230, 240, respectively, when the first and second arms 238a, 248a, 238b, 248b of the first and second arms 230, 240, respectively, are in a first or relaxed position. More particularly, the spacing between the inner surfaces 253a, 255a of the first and second housing halves

110a, 110b, respectively, correspond to the width of the cam portions **216, 226** (FIGS. 7 and 8) of the first and second mounting members **210, 220**, respectively.

[0055] The outer surfaces **253b, 255b** of the first and second housing halves **110a, 110b** extend at an angle relative to inner surfaces **253a, 255a**, respectively, to form substantially triangular first and second channels **252, 254**. The triangular configuration of the first and second channels **252, 254** created by the outer surfaces **253b, 255b** of the first and second housing halves **110a, 110b** enables the first and second arms **238a, 248a, 238b, 248b** of the respective first and second spring members **230, 240** to deflect during articulation of the tool assembly **104** relative to the body portion **102** of the loading unit **100**.

[0056] With reference now to FIGS. 14 and 15, the first spring member **230** of the mounting assembly **200** is supported between the first housing half **110a** of the body portion **102** of the loading unit **100** and the first mounting member **210** of the mounting assembly **200**. Similarly, the second spring member **240** of the mounting assembly **200** is supported between the second housing half **110b** of the body portion **102** of the loading unit and the second mounting member **220**. The cam portions **216, 226** of the respective first and second mounting members **210, 220** are received between the first and second spring arms **238a, 248a, 238b, 248b**, respectively, of the respective first and second spring members **230, 240** such that the free ends **239a, 249a, 239b, 249b** of the respective first and second spring arms **238a, 248a, 238b, 248b** engage the respective cam portion **216, 226**.

[0057] With continued reference to FIGS. 14 and 15, during operation of surgical stapler **10** (FIG. 1), the tool assembly **104** of the loading unit **100** may be articulated relative to the body portion **102** of the loading unit **100** through operation of the handle assembly **12** (FIG. 1) and/or adapter assembly **14** (FIG. 1). As the tool assembly **104** pivots in a first direction, as indicated by arrows "A" in FIGS. 14 and 15, the cam portions **216, 226** of the respective first and second mounting members **210, 220**, engage the free ends **239a, 249a**, respectively, of the respective first spring arms **238a, 248a** of the first and second spring members **230, 240**, respectively, and deflect the first spring arms **238a, 248a** outwardly, as indicated by arrows "B" in FIGS. 14 and 15. The outward deflection of the second spring arms **238a, 248a** creates a biasing force in the first spring arms **238a, 248a** that, when the force causing the articulation of the tool assembly **104** is removed, causes the tool assembly **104** to return to its initial position.

[0058] Similarly, as the tool assembly **104** pivots in a second direction, as indicated by arrows "C" in FIGS. 14 and 15, the cam portions **216, 226** of the respective first and second mounting members **210, 220**, engage the free ends **239b, 249b**, respectively, of the respective second spring arms **238b, 248b** of the first and second spring members **230, 240**, respectively, and deflect the second spring arms **238b, 248b** outwardly, as indicated by arrows "D" in FIGS. 14 and 15. The outward deflection of the second spring arms **238b, 248b** creates a biasing force in the second spring arms **238b, 248b** that, when the force causing the articulation of the tool assembly **104** is removed, causes the tool assembly **104** to return to its initial position.

[0059] As noted above, the first and second arms **238a, 248a, 238b, 248b** of the respective first and second spring members **230, 240** may be angled inwardly to create a

biasing force against the cam portions **216, 226** of the respective first and second mounting members **210, 220** prior to any articulation of the tool assembly **104** relative to the body portion **102** of the loading unit **100**. As such, the first and second arms **238a, 248a, 238b, 248b** of the respective first and second spring members **230, 240** are preloaded. In this manner, a greater force would be required to articulate the tool assembly **104** as the spring bias provided by the first and second spring arms **238a, 248a, 238b, 248b** of the respective first and second spring members **230, 240** on the respective cam portions **216, 226** of the first and second mounting members **210, 220** must be overcome before the tool assembly **104** may articulate. The preloading of the first and second spring arms **238a, 248a, 238b, 248b** of the respective first and second spring members **230, 240** limits incidental and/or accidental articulation of the tool assembly **104** relative to the body portion **102** during use of the surgical stapler **10**. Similarly, the preloaded configuration maintains the tool assembly **104** in alignment with the body portion **102** to facilitate insertion and/or removal of the loading unit **100** from within a patient, e.g., through an access port.

[0060] Persons skilled in the art will understand that the devices and methods specifically described herein and illustrated in the accompanying drawings are non-limiting exemplary embodiments. It is envisioned that the elements and features illustrated or described in connection with one exemplary embodiment may be combined with the elements and features of another without departing from the scope of the present disclosure. As well, one skilled in the art will appreciate further features and advantages of the disclosure based on the above-described embodiments. Accordingly, the disclosure is not to be limited by what has been particularly shown and described, except as indicated by the appended claims.

What is claimed is:

1. A surgical tool comprising:

a body portion having proximal and distal ends and defining a longitudinal axis;

a tool assembly pivotally secured to the body portion by a mounting assembly, wherein the mounting assembly includes at least a first spring member for maintaining a longitudinal axis of the tool assembly in alignment with the longitudinal axis of the body portion and for returning the longitudinal axis of the tool assembly into alignment with the longitudinal axis of the body portion following articulation of the tool assembly relative to the body portion.

2. The surgical tool of claim 1, wherein the mounting assembly includes at least a first mounting member, the at least first mounting member being configured to pivotally connect the tool assembly to the body portion.

3. The surgical tool of claim 1, wherein the tool assembly includes a cartridge assembly and an anvil assembly.

4. The surgical tool of claim 2, wherein the at least first spring member includes first and second arms and the at least first mounting member includes a cam portion, the cam portion being received between and engaging the first and second arms.

5. The surgical tool of claim 4, wherein articulation of the tool assembly in a first direction relative to the body portion causes the cam portion to deflect the first arm in a second direction.

6. The surgical tool of claim 5, wherein articulation of the tool assembly in the second direction relative to the body portion causes the cam portion to deflect the second arm in the first direction.

7. The surgical tool of claim 6, wherein deflection of the first and second arm creates a spring force against the cam portion.

8. The surgical tool of claim 2, wherein the at least first mounting member includes a pivot member and the at least first spring member includes an opening, wherein the pivot member is received within the opening.

9. The surgical tool of claim 1, wherein the mounting assembly includes first and second spring members.

10. The surgical tool of claim 4, wherein the first and second arms of the at least first spring member are parallel.

11. The surgical tool of claim 4, wherein the first and second arms of the at least first spring member angle towards one another.

12. The surgical tool of claim 1, wherein the at least first spring member includes a C-shaped flange for securing the at least first spring member to the body portion.

13. A surgical instrument comprising:

a handle assembly; and

a surgical tool operably secured to the handle assembly, the surgical tool including:

a body portion having proximal and distal ends and defining a longitudinal axis; and

a tool assembly pivotally secured to the body portion by a mounting assembly, the mounting assembly includes first and second spring members for pivotally supporting the tool assembly relative to the body

portion, wherein the first and second spring members return the tool assembly to an aligned position with the body portion from an articulated position relative to the body portion.

14. The surgical instrument of claim 13, wherein the mounting assembly further includes first and second mounting members, the first mounting member being engaged with the first spring member and the second mounting member being engaged with the second spring member.

15. The surgical instrument of claim 14, wherein the first and second spring members each include first and second arms and the first and second mounting members each include a cam portion, the cam portion of the first mounting member being received between and engaging the first and second arms of the first spring member and the cam portion of the second mounting member being received between and engaging the first and second arms of the second spring member.

16. The surgical instrument of claim 15, wherein articulation of the tool assembly in a first direction relative to the body portion causes the cam portion of the first mounting member to deflect the first arm of the first spring member in a second direction and the cam portion of the second mounting member to deflect the first arm of the first spring member in the second direction.

17. The surgical instrument of claim 16, wherein deflection of the first arms of the first and second spring members creates a spring force against the cam portions of the respective first and second mounting members.

* * * * *