



(51) International Patent Classification:

F24H 1/20 (2022.01) *F24H 15/225* (2022.01)
F24H 4/04 (2006.01) *F24H 15/37* (2022.01)
F24H 9/20 (2022.01) *F24H 15/375* (2022.01)

(21) International Application Number:

PCT/IB2023/059953

(22) International Filing Date:

04 October 2023 (04.10.2023)

(25) Filing Language:

Italian

(26) Publication Language:

English

(30) Priority Data:

102022000020442 05 October 2022 (05.10.2022) IT

(71) Applicant: **ARISTON S.P.A.** [IT/IT]; 45, Viale Aristide Merloni, 60044 Fabriano (IT).

(72) Inventors: **BOARO, Matteo**; 38, via Francesco Petrarca, 60128 Ancona (IT). **CANESTRARI, Paolo**; 135, Via Seraloggia, 60044 Fabriano (AN) (IT). **CECCACCI, Lorenzo**; 45, Via Sirio Sebastianelli, 60015 Falconara Marittima (AN) (IT). **CONTI, Alessandro**; 17/B, Viale Zonghi, 60044 Fabriano (AN) (IT). **SAMPAOLES, Marco**; 107, Via Cristoforo Colombo, 62017 Porto Recanati (MC) (IT).

(74) Agent: **PREMRU, Rok**; 2, via San Filippo, 60044 Fabriano (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: WATER HEATER WITH OPTIMIZED TEMPERATURE HYSTERESYS

(57) Abstract: The object of the present invention is an electrical storage water heater with vertically developing storage and upper and bottom resistive heating elements and possibly a bottom heating element consisting of the condenser of a heat pump. The water to be heated enters the bottom portion and is drawn from the upper section. The water heater has reduced consumption, thanks to an improved control in which the upper and bottom hysteresis are suitably differentiated.

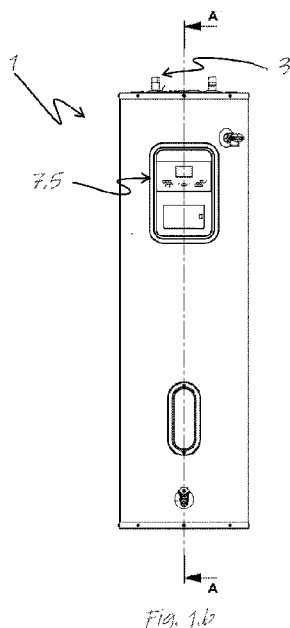


Fig. 1.b

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*

WATER HEATER WITH OPTIMIZED TEMPERATURE HYSTERESYS

DESCRIPTION

An electrical storage water heater for domestic or technical water for room heating is described below.

A method for managing an electrical storage water heater is also described.

Storage water heaters have the advantage of requiring less power compared to
5 instant water heaters. However, storage water heaters have some drawbacks. For example, they are subject to heat standing losses, that increase as the average temperature of the water contained in the storage is increased.

Traditionally, such water heaters comprise electrical resistive heating elements, hereinafter for shortness “resistances”. Storage water heaters that use a heat pump
10 as heating means are also known, in addition or as an alternative to the resistances.

The need to reduce the electricity consumption has led to the development of “intelligent” water heaters equipped with algorithms which, when regulating the storage temperature, take past events into account. Therefore, when the probability of a user needing to draw hot water is low, the storage is kept at a low average
15 temperature, while when the probability of drawing hot water is high, the temperature of the storage is kept at a higher average temperature.

With the progressive transition of energy sources from fossil to renewable, the supply of electrical energy on the grid is subject to the availability of wind or photovoltaic energy, resources that are intermittent and uncontrollable by their
20 nature. Furthermore, the power grid, for shortness “grid” is faced with a high

variability in power demand during a day, for example different usage peaks in a day.

Therefore, the grid finds itself in conditions in which energy supply and demand must be balanced and, contrary to the past, it is now the demand that must at least
5 in part adapt to the supply. At present there is a need for the household appliances to be able to adapt their consumption request i.e., supply, to the conditions of the grid. Storage water heaters are known in which the algorithms for managing the heating elements take into account an imbalanced situation of the power grid.

EP3662210B1 describes an electrical storage water heater, the heating is
10 controlled by an electronic regulator which takes into account the user's habits. The water heater keeps the thermostating temperature low during the periods in which expectations for hot water drawing is low. The learning of the water drawing pattern, referred to as "withdrawal" patterns is based on an estimate of the withdrawals made by analysing temperature variations in the tank. The method
15 links operation of the heating elements essentially to the expected withdrawals patterns, it provides significant reductions in consumption in normal operation, but does not teach how to respond to signals from the grid in an optimised way, for instance how to respond to grid imbalances, eventually adapting to conditions of scarcity or overabundance.

20 Document US11300325B2 describes a storage water heater with an electrical resistance in an upper zone and one in a bottom zone of the storage. The management of the resistances is assigned to an electronic regulator which takes into account the energy scarcity or overabundance of energy on the grid. A temperature hysteresis is applied both to the top and bottom heating element. In a
25 balancing condition of the grid, the water heater does not adopt any strategy to rationalise consumption. In conditions of electricity scarcity (the energy supply exceeds the availability and there is an imbalance towards the supply) the power consumption of the bottom resistance is reduced according to a heuristic algorithm that takes into account past water withdrawals. The reduction is obtained by
30 lowering both the activation and the deactivation thresholds a figure shows a

corresponding reduction of the resulting hysteresis. In conditions of energy overabundance (imbalance towards the production), the water heater increases the energy consumption by raising the temperature threshold for activating for the resistances while keeping unchanged the deactivation threshold, thus reducing the hysteresis. The activation temperature threshold increase does not take into any account the real needs of the user and therefore does not maximize the amount of energy that is stored and made available for future use, the increase in consumption results in part in a waste of energy.

There is a need that the energy consumption increase can be translated into an energy storage allowing a subsequent energy reduction.

Document US20130200168A1 describes a water heater with an upper and a bottom resistance, capable of operating in a normal mode and in an energy saving mode in which the thermostating temperature is reduced according to user habits. The water heater, possibly through an external controller associated with it, is able to respond to a condition of the power grid of scarcity or overabundance of energy by activating or deactivating the heating elements.

Document WO2019060 describes a water heater, with an upper and a bottom resistance, capable of receiving signals from the electricity grid indicative of a condition of scarcity or overabundance of energy and respond to a signal of overabundance of energy by passing in a high-consumption operating mode and to a signal of energy scarcity by switching to a low-consumption operating mode. The document does not teach modes selectable by a user.

There is a need to regulate the water heater in order to reduce the energy consumption under normal conditions and to have an additional level of flexibility in order to respond to grid imbalance conditions without excessively penalising the comfort. Comfort means a performance level that guarantees having water at the set temperature whenever the user wishes it. There are no known water heaters that handle both the needs of optimising the consumption under normal conditions and being further configured to have flexible consumption in response to grid conditions.

These and other objects, which shall become clear hereinafter, are achieved with a method and apparatus according to the method main claims and with an apparatus (or system) according to the apparatus main claims.

Other objects may also be achieved by means of the additional features of the dependent claims.

An electrical storage water heater is described below which comprises a vertically developing tank or storage, the tank comprising an upper zone wherefrom heated water is drawn and a bottom one in which water to be heated is introduced. The bottom and upper zones are heated by respective heating elements and respective temperature sensors. In short, such configuration shall be hereinafter referred to as “two-zone”.

A method for managing the operation of an electrical storage water heater of the “two-zone” type is also described.

Description of the figures:

- Figures 1.a, 1.b, 1.c, 1.d show various views of a possible embodiment of a water heater with electrical resistances;
- Figures 2.a, 2.b and 2.c show a second possible embodiment of a water heater comprising electrical resistances and a heat pump;
- Figures 3.a and 3.b show tables of correspondence between hourly rates and particular grid conditions;
- Figure 4 shows a table with values taken by a variable in different possible operating modes.

Further features of the present invention shall be better highlighted by the following descriptions of possible embodiments, in accordance with the claims and illustrated, purely by way of a non-limiting example, with the aid of the figures. It should be noted that the invention is not limited to the constructive details and examples and to what is illustrated in the figures; other embodiments are possible without thereby departing from the scope of the claims. The terms used in the description should not be construed as limiting. The terms “receive”, “read”, “detect”, “sense” are used in a broad sense to indicate receiving

information comprising the cases of information contained in signals coming from outside, retrieved from a memory or received as input from a user interface. Similarly, “communication” or “connection” are not limited to communication via physical links or wiring.

- 5 In the figures, reference number 1 indicates a water heater comprising a vertically developing storage 10 having an upper 11 and a bottom 12 portion.

The upper portion 11 of the storage 10 comprises at least one first heating element 41, while the bottom portion 12 of the storage 11 comprises at least one second heating element 51, 61, hereinafter also referred to heating elements or elements
10 in short. The at least one upper element 41 may comprise an electrical resistance, the at least one bottom element 51, 61 can be an electrical resistance 51 and/or a condenser 61 of a heat pump 6.

In the proximity of the respective elements 41, 51, 61, are a first temperature sensor or upper temperature sensor 42, which detects a higher temperature referred
15 to as “Tdome”, or also “dome temperature” and a second temperature sensor or bottom temperature sensor 52 which detects a bottom temperature “Tbottom”. The temperature sensors 42, 52 may be conventional temperature sensors (for example thermistors).

A water heater 1 comprising as heating elements only resistances 41, 51 shall
20 hereinafter be referred to as an electrical water heater or electrical model, to distinguish it from the “hybrid” model which also comprises a condenser 61 of a heat pump 6.

The storage 10 is configured to let cold water in in the proximity of the bottom 12 through a first opening 2, and to let heated water, directed to the user, out through
25 a second opening 3 close to the top of the storage 10. This way, in stationary conditions, the stratification of the temperatures contributes to the fact that the water let out from the storage 10 is that at highest the temperature.

The water heater 1 also comprises a regulator 5 for regulating the operation of the heating elements 41, 51, 61.

- 30 The regulator 5 comprises memory means and is adapted to receive the

temperature readings made by the temperature sensors 42, 52 and a temperature “Tset” which can be set by the user, via a user interface 7.

The regulator 5 is configured to calculate a control temperature for each heating element 41, 51, 61. The control temperatures may be equal to the temperatures
5 detected by the temperature sensors 42, 52 or may be equal to their weighted average. A plurality of heating elements 41, 51, 61 may share the same control temperature.

The regulator 5 may be an electronic control unit comprising:

- a memory with program instructions and parameters,
- 10 - means for executing instructions and calculations,
- means for controlling the heating elements and receiving signals from the outside.

The regulator 5 is configured to implement a set temperature, Tset that may be set via a user interface 7.

15 The user interface 7 may be integrated in the water heater and comprise manual input means such as buttons or knobs and/or be external and comprise means for sending input data to the regulator 5 that is configured to receive it. When integrated in the water heater 1, the user interface 7 may be assembled in a single assembly with the regulator 5, as shown in figures 1.a, 1.b, 2.a and 2.b.

20 The upper section 11 of the storage is heated directly by the at least one upper heating element 41 and indirectly, by convection effect, by the at least one bottom heating element 51, 61. The at least one upper heating element 41 has the upper temperature Tdome as control temperature or has the upper temperature Tdome as the prevailing component in a weighted average of the temperatures sensed by the
25 temperature sensors 42, 52. For the at least one bottom heating element 51, 61 the control temperature is the bottom temperature Tbottom or alternatively an average temperature “Tavg” that is obtained as the average between the dome temperature Tdome and the bottom temperature Tbottom. Preferably, such average is a weighted average, even more preferably the weight “Wdome” of the dome
30 temperature is less than the weight “Wbottom” of the bottom temperature

T_{bottom}.

According to a preferred embodiment, the weight W_{dome} of the dome temperature is comprised in an interval between 0.25 and 0.40, for example 0.3.

At least one of the weights W_{dome}, W_{bottom} is a parameter stored in the memory of the regulator 5, the other being calculable accordingly or being stored as well.

A thermostating temperature “T_{target}” is set for each heating element 41, 51, 61.

In a possible embodiment, the regulator 5 sets a common thermostating temperature T_{target} at least for the electrical resistances 41, 51. The thermostating temperature T_{target} of each heating element 41, 51, 61 is comprised in an interval between a minimum “T_{min}” and maximum “T_{max}” temperature ($T_{min} \leq T_{target} \leq T_{max}$).

The maximum temperature T_{max} is a factory parameter, possibly modifiable on site, and may vary, for example, between 55°C and 85°C. Preferably, it reaches the highest values if a thermostatic mixing valve is present.

The minimum temperature T_{min} is one considered as acceptable to guarantee the comfort for domestic uses; it may be comprised between 37°C and 42°C, for example around 40°C. Thermostating at temperatures higher than the minimum T_{min} enables mixing the drawn water with cold water bringing the advantage of increasing the volume of delivered water beyond the volume of the storage.

The heating elements 41, 51, 61 are configured to be activated when the respective control temperature drops below the thermostating temperature T_{target} minus a hysteresis value and to be deactivated at the thermostating temperature T_{target}.

The at least one upper element 41 has an upper hysteresis ThystDome (so the switch on temperature is T_{target} – ThystDome) while the at least one bottom heating element 51, 61 has a bottom hysteresis Thyst (so the switch on is temperature T_{target} – Thyst). In general, there may be different hysteresis for each heating element. The median value between activation and deactivation temperatures is therefore:

for the upper heating element 41 $T_{target} - ThystDome / 2$;

for the bottom heating element 51, 61 $T_{target} - Thyst / 2$.

By shifting all the temperature values of the amplitude of the hysteresis, the present description can be applied also to a possible embodiment in which the heating elements are activated at the thermostating temperature, T_{target} , and are switched off at the temperature $T_{\text{target}} + \text{Thyst}$, $T_{\text{target}} + \text{ThystDome}$, which is
5 when the temperature increase is equal to the hysteresis Thyst , ThystDome . In this case, the median value between activation and deactivation temperatures is therefore:

for the upper heating element 41 $T_{\text{target}} + \text{ThystDome} / 2$;

for the bottom heating element 51, 61 $T_{\text{target}} + \text{Thyst} / 2$.

10 In an embodiment schematically illustrated in Figure 2.a, 2.b, the at least one bottom heating element 51, 61 comprises, a bottom resistance 51 and a condenser 61 of a heat pump 6.

In the illustrated example the condenser 61 comprises two sets of windings 611, 612 respectively positioned above and below the bottom resistance 51.

15 The heat pump 6 has a higher energy efficiency compared to the resistance 51, but may heat only up to a maximum heat pump temperature threshold Thp , hereon heat pump threshold Thp for brevity; a typical value for the heat pump threshold Thp of the pump is about 55°C . Beyond this heat pump threshold Thp , the heating function can be performed by the resistances 41, 51.

20 In the embodiment of figure 2 the bottom resistance 51 may work in relay with the condenser 61 of the heat pump 6. In the relay operation below the heat pump threshold Thp the bottom element used is the condenser 61, above the threshold Thp , the bottom element used is the resistance 51.

The relay operation between the exchanger 61 of the heat pump 6 and the bottom
25 resistance 51 allows reducing both the instantaneous power consumption and the electrical energy consumption, because of the higher energy efficiency of the heat pump 6 compared to the resistance 51.

When the heat pump 6 and the bottom resistance 51 operate in relay, it is preferable that the control temperature for both is the average temperature T_{avg}
30 for a more efficient operation of the water heater 1. According to some

embodiments in the water heater models 1 which comprise a condenser 61 as a unique or additional bottom heating element, for all of the bottom heating elements 51, 61 the control temperature is the average temperature T_{avg} .

In the exclusively electrical models, for the bottom resistance 51 the control temperature is preferably the bottom temperature T_{bottom} as measured by the bottom sensor 52.

In the preferred embodiments the upper 41 and bottom 51 resistances never activate together and even more preferably, the upper resistance 41 has priority over the bottom one 51. In other words, in these embodiments, priority is always given to heating the water contained in the upper part 11 of the storage 10, (which is the first water to be supplied).

In order to meet the contrasting needs to reduce the energy consumption and to guarantee enough hot water, the water heater 1 has at least two heating modes which may be selected according to users' need.

The heating modes, hereinafter also called "modes" for brevity, allow having water at a set temperature T_{set} , but they are different for the control logic of the heating elements 41, 51, 61 and for consumption. The heating modes are preferably selectable with the user interface 7.

In a first heating mode called "Manual" or "Comfort", the water heater 1 sets the thermostating temperature T_{target} equal to the set temperature T_{set} for all the resistive heating elements 41, 51 and for any heat pump 6, provided the user temperature T_{set} is not higher than the heat pump threshold T_{hp} . The user temperature T_{set} varies between the minimum temperature T_{min} and the maximum temperature T_{max} . In the first heating mode, Comfort:

- the upper 41 and bottom 51 resistances are never activated together,
- the upper resistance 41 has priority over the bottom one 51,
- if a condenser 61 is present as a bottom element, the bottom resistance 51 operates in relay with the heat pump 6.

According to a possible embodiment, the heating modes further comprise a second heating mode which is an optimised mode, called "I-memory". The second mode

I-memory differs from the first mode, Comfort, for the thermostating temperature T_{target} which is equal to an optimised temperature T_{mem} that varies over time and is a function of a saved withdrawals pattern (the withdrawals pattern comprising the data of volume and temperature of withdrawals over a period). The
5 optimised temperature T_{mem} may vary from the minimum T_{min} to the maximum T_{max} temperature. Methods for calculating such optimised temperature are known; by way of an example a method is described in EP2366081B1 (the content whereof forms an integral part of the present description).

In Figure 2, the water heater 1 comprises at least one heating element of the
10 resistive type 41, 51 and one consisting of the condenser 61 of a heat pump 6, adapted to heat up to a maximum temperature heat pump threshold T_{hp} .

In particular, in the embodiments herein described that include a heat pump 6, the water heater 1 may also comprise a third heating mode that is a sustainable mode called “Green” and/or a fourth heating mode that is a quick mode called “Fast”.

15 The third heating mode, Green, prioritizes reducing the electrical consumption, and is uses exclusively the heat pump 6, while the resistive elements 41, 51 are always deactivated. In the third mode Green, the thermostating temperature T_{target} is equal to the minimum between the user temperature T_{set} , and the heat pump 6 threshold T_{hp} .

20 The fourth mode, Fast, prioritizes heating rapidly and differs from the first mode, Comfort, in that the bottom resistance 51 is not activated in relay, but simultaneously with the heat pump 6, with the only additional constraint that the upper resistance 41 is and remains off, while the bottom resistance 51 is on. In the fourth mode, Fast, the heat pump 6 is preferably controlled with the average
25 temperature T_{avg} , while the bottom resistance 51 is preferably controlled with the bottom temperature T_{bottom} .

In the third Green and fourth Fast mode, the thermostating temperature T_{target} is equal to the user set temperature T_{set} . It is possible to implement a fifth mode called “I-memory green” which is equal to the third mode, Green, with the
30 thermostating temperature, T_{target} , equal to the minimum between the optimised

temperature, T_{mem} , and the heat pump temperature threshold Thp . Similarly, it is possible to implement a sixth mode called “I-memory fast” that is equal to the fourth mode, Fast, with the thermostating temperature T_{target} equal to the optimised temperature T_{mem} . This allows combining the advantages of the second mode I-memory with the third mode Green, or the fourth mode Fast. Figure 4 shows in a table the values of the thermostating temperature T_{target} for each heating mode.

From the above description it is clear that each heating mode is configured to reach one of a user set temperature T_{set} , a temperature threshold Thp of a heating element which is a condenser 61 of a heat pump 6 or an optimised temperature T_{mem} .

At least two hysteresis values are defined: an upper hysteresis “ThystDome” for the upper element 41 and a bottom hysteresis “Thyst” for the at least one bottom element 51, 61. It has been observed that adopting different hysteresis values for the upper 41 and bottom heating elements 51, 61 allows further reducing the consumption or, for the same consumption, improving comfort. Hereinafter, dome hysteresis $ThystDome$ indicates the hysteresis of one or more upper elements, bottom hysteresis $Thyst$ indicates that of one or more bottom elements 51.

In particular, in the embodiments of the water heater 1 with only electrical resistances 41, 51 it is advantageous having a bottom hysteresis $Thyst$ of higher value, (for example comprised between 2°C and 21°C , preferably between 12°C and 18°C , in particular 15°C) and a hysteresis at the dome $ThystDome$ of smaller value (for example between 1°C and 20°C , preferably between 3°C and 9°C , in particular 5°C).

Instead, in the embodiments in which the water heater 1 comprises a condenser 61 of a heat pump 6 as a bottom heating element, the situation is reversed and it is more convenient having a bottom hysteresis $Thyst$ of smaller value (for example in an interval between 1°C at 20°C , preferably between 3°C and 9°C , in particular 5°C) and a hysteresis at the dome $ThystDome$ of higher value (for example an interval comprised between 2°C and 21°C , preferably between 9°C and 18°C , in

particular 12°C).

This is because in the embodiments in which the water heating is obtained only by means of electrical resistances, it is preferred to avoid the activation of the bottom resistance 51 for small and momentary temperature oscillations which are
5 due to the entry of cold water caused by small withdrawals and subsequent turbulences of water. A higher value hysteresis $Thys$ at the bottom resistance 51, renders it more stable and less sensitive to small turbulences. To compensate for less sensitivity, it is very useful to set an upper hysteresis $ThysDome$ at a smaller value, so as to render the upper resistance 41 very sensitive even to small
10 turbulences so that it is promptly activated to guarantee the correct temperature at the outlet 3 of the water heater 1..

In the embodiments that also include a condenser 61 as a bottom heating element, the priority is in maximizing use of the heat pump 6 thus limiting the use of the resistances 41, 51. Herein here it is therefore advisable to activate the heat pump
15 6 even for small water temperature fluctuations by adopting a bottom hysteresis $Thys$ smaller in value than the upper hysteresis $ThysDome$.

Optionally, in the heat pump models the electrical model hysteresis are used when the average temperature T_{avg} , or the thermostating temperature T_{target} , is greater than the heat pump threshold Thp . In these conditions the heat pump 6 is unable
20 to make a contribution and the water heater 1 may be controlled as if it were an electrical model.

According to a possible embodiment, the water heater 1 is powered by energy from a power grid and is configured to operate with at least two heating modes selected between the first mode "Comfort", the second mode "I-memory", the
25 third mode "Green", the fourth mode "Fast", the fifth mode "I-memory green", or the sixth mode "I-memory fast" and to receive the heating mode selection from a user interface. The regulator 5 is further configured to deactivate the heating elements 41, 51, 61 and/or modify the control parameters thereof according to a scarcity or overabundance condition (detected or estimated or foreseen) of
30 electrical energy and of the selected heating mode.

In ideal conditions, the demand for electrical energy and the energy fed into the power grid balance each other. In practice these values vary with respect to each other giving rise to imbalance conditions which cause a frequency and voltage drift. Beyond an allowed interval, the grid does not tolerate this imbalance, and to avoid damage or generalised blackouts, or in any case to comply with voltage and frequency standards, either users or generators may have to be disconnected. In what follows conditions of significant imbalance towards the energy supply will be referred to as conditions of scarcity and vice versa those of significant imbalance towards the energy fed into the grid will be referred to as conditions of overabundance.

Both in the scarcity condition of the grid (imbalance towards the demand) and/or in the overabundance (imbalance towards the supply) of energy, several severity levels may be defined and preferably the water heater 1 is configured to respond to at least two different severity levels (hereinafter “level”) for to a condition of energy scarcity and/or overabundance from the grid.

In a possible embodiment, the regulator 5 is adapted to manage the following severity levels, listed in order of increasing severity:

- a first scarcity level that indicates a moderate imbalance towards the demand referred to as “Load shed”,
- 20 - a second scarcity level that indicates a strong imbalance towards the demand referred to as “Critical peak event”,
- a third scarcity level that indicates a very strong imbalance towards the demand with the risk of detachment referred to as “Grid emergency”,
- a first overabundance level that indicates a moderate imbalance towards the supply called “Load up”,
- 25 - a second overabundance level that indicates a strong imbalance towards the supply referred to as “Advanced load up”.

It should be noted that the response of the water heater 1 does not guarantee an immediate and certain change in the consumption level, but there is a probability associated to the change in consumption and the probability increases with the

severity level and with the persistence of the grid condition over time. This is because of the physical constraints of the thermodynamic system and because the regulator 5 of the water heater 1 preferably implements rules which ensure that a minimum comfort level is maintained. If several water heaters 1 exist in the same power grid, over large numbers, the overall effect to have a variation of energy demand is certain, therefore the objective of balancing the grid is achieved.

According to a first embodiment, the water heater 1 is able to receive and the regulator 5 is configured to respond to signals S, that indicate a condition of scarcity or overabundance of energy in the grid, according to at least some of the five severity levels defined, first, second and third scarcity levels: "Load shed", "Critical peak event", "Grid emergency", first and second overabundance levels: "Load up", "Advanced load up".

Several known protocols allow a device connected to the grid to receive signals S that correspond to at least some of the listed severity levels. Some protocols include in a signal S a severity level and a duration required for the response.

By way of a non-limiting example, the water heater 1 may be configured to receive signals compatible with the protocol CTA2045. In general, similar protocols are increasingly widespread because they are functional for implementing so-called "demand response" services, that allow the energy supply in a period to be flexible in order to follow the demand.

The water heater 1 may receive the signals S directly from the grid or may receive them indirectly by means of other devices that receive them from the grid.

According to possible embodiments, the signals S are sent to the water heater 1 by a local device that manages the energy consumption of one or more devices.

In a second embodiment, the water heater 1 responds to an hourly schedule of the energy price and assigns one of the severity levels to price values higher or lower with respect to an average value. Without loss of generality, the hourly schedule may be preset in the water heater 1, manually updated by a user, periodically updated or received in real time by the water heater 1 that is set up to receive and manage an hourly price signal. By way of a non-limiting example, the water heater

1 may be configured to receive hourly rate signals with the protocol JA-13.

The same water heater 1 may be configured to receive signals S and to have hourly schedules set. The first, second and third scarcity level “Load shed”, “Critical peak event”, “Grid emergency” have priority over any other setting comprising hourly price schedules. Preferably, the response to a grid condition has priority over the hourly schedules. In general, the water heater 1 gives priority to the signals S from the grid.

The water heater 1 described above may operate as follows:

1. receiving from a user interface the input of a heating mode “Comfort”, “I-memory”, “Green”, “Fast”, “I-memory green”, “I-memory fast” that defines a control logic for each heating element,
2. receiving a first signal S to which one of the severity levels of a scarcity or overabundance condition in the grid is associated and a time duration, the severity level being one among the list containing the first, second, third scarcity level, “Load shed”, “Critical peak event”, “Grid emergency”, and first and second overabundance level “Load up”, “Advanced load up”,
3. according to the selected heating mode and to the severity level, a new thermostating temperature T_{target} is set for all the heating elements and/or a new hysteresis T_{hyst} is set for the bottom heating elements,
 - in the event of a third scarcity level “Grid emergency”, the heating elements are deactivated,
 - in the event of a second scarcity level “Critical peak event”, in the heat pump model, deactivating the resistances 41, 51, in the case of an electrical water heater, deactivating the bottom resistance 51,
 - if a second signal S arrives, going back to step 2,
 - if a new heating mode “Comfort”, “Green”, “I-memory”, “fast”, “I-memory green”, “I-memory fast” is selected or a new temperature T_{set} is set, continuing the step 3 with the new heating mode or the new set temperature value T_{set} for the remaining time duration,
 - at the end of the time duration associated with the signal S, restoring the

control logic associated to the selected heating mode.

The water heater 1 may be configured to respond to an energy price hourly schedule, by associating to the lower price values the severity levels corresponding to the overabundance condition, by decreasing price and increasing overabundance severity level and by associating to the higher prices the severity levels corresponding to the scarcity condition, by increasing price and increasing scarcity severity level. Preferably prices that are in an intermediate level are not associated with any severity level.

A method is described for optimising the consumption according to an hourly rate schedule, using figures 3.a and 3.b. The method comprises the following steps:

- step 1: receiving from a user interface 7 a heating mode that defines a control logic for each heating element;
- step 2: reading in memory or receiving from input or from the grid an hourly scheduling of the energy prices, each associated with a period of the day referred to as time band;
- wherein the order of execution between step 1 or 2 is indifferent;
- step 3: identifying the minimum and maximum price among all those associated with the various time bands;
- step 4: selecting the severity levels to which there is a need to respond;
- step 5: dividing the interval between minimum and maximum price into as many sub-intervals as the selected severity levels plus a possible intermediate interval;
- step 6: sorting the intervals by increasing price and:
 - associating the lowest price intervals with the conditions of energy overabundance in order of decreasing severity and increasing price;
 - associating the higher price intervals with the energy scarcity conditions in order of decreasing severity and decreasing price;
 - leaving the intermediate price interval not associated with any severity level;
- step 7: for each new time band in which the price does not belong to the

intermediate level, controlling the heating elements according to the active heating mode and severity level.

Figure 3.a shows a depiction according to a possible embodiment in which the selected severity levels are a first and second scarcity level “Load shed”, “Critical peak event”, and first overabundance level “Load up”. Figure 3.b shows a second possible embodiment wherein all the defined severity levels are selected.

Some preferred embodiments for changing the control parameters according to the severity levels are described below.

It has been said that the water heater 1 is configured to respond to the different severity levels by modifying the control parameters; according to a preferred embodiment the control parameters comprise at least the thermostating temperature T_{target} . Preferably the control parameters comprise also upper hysteresis Th_{stdome} and/or bottom hysteresis Th_{st} .

For the first scarcity level “load shed” the water heater 1 sets the thermostating temperature T_{target} to the minimum value between a comfort threshold T_{comfort} , and the previous thermostating temperature T_{target} , in formulas there is:

$$T_{\text{target}} = \min (T_{\text{comfort}}, T_{\text{target}})$$

The comfort threshold T_{comfort} is a value comprised in the comfort interval that corresponds to about 40°C-50°C, preferably it is equal to about 42°C.

In any heating mode the thermostating temperature T_{target} may already be lower than a comfort threshold $T_{\text{comfort}} = 42^{\circ}\text{C}$ either because the user has already set it to the minimum value or because it is set by the algorithm in case of second mode I-memory. In all the other cases an actual reduction of the consumptions is achieved.

In some possible embodiments the water heater 1 combines both the reduction of the described thermostating temperature T_{target} , and the deactivation of the bottom resistance 51 in order to respond to the second scarcity level “critical peak event”, and in case of heat pump model it deactivates also the upper resistance 41, by heating only with the heat pump. This response is applicable to all heating modes.

The water heater 1, for responding to the third scarcity level “Grid emergency”, may deactivate all the heating elements and/or may set the thermostating temperature T_{target} to a value just above the average temperature of the mains water, by way of a non limiting example equal to 16°C . In this case, the functionality is no longer guaranteed; the third scarcity level “Grid emergency” indicates the risk of blackouts or an hourly cost of energy that the user is not willing to bear.

According to a possible embodiment, the bottom hysteresis Thyst under normal mains conditions is greater than or equal to 4°C and the water heater 1, in order to respond to the first overabundance level “Load up”, increases the average temperature in the bottom section with respect to the thermostating temperature T_{target} ; this is achieved by reducing the bottom hysteresis Thyst , which corresponds to increasing the temperature at which the elements are reactivated. By way of an example, the hysteresis may be reduced to a value lower than or equal to 3°C . It should be noted that in an alternative embodiment where the hysteresis defined the switch-off threshold, the hysteresis would be increased in order to obtain the same effect of average temperature increase.

In response to the second overabundance level “Advanced load up”, in addition to increasing the average temperature in the bottom section, by reducing the bottom hysteresis Thyst , the water heater 1 may increase the thermostating temperature T_{target} up to the maximum temperature T_{max} . In case of third mode “Green”, the thermostating temperature T_{target} maximum value has the heat pump threshold Thp as upper limit.

It should be noted that the response to the severity level maintains the essential characteristics of the heating mode, for example if in the second mode I-memory the thermostating temperature T_{target} is 40°C , a severity level “Load up” causes a reduction in the bottom hysteresis Thyst (i.e. a small increase in the average temperature in the bottom section with respect to the thermostating control temperature T_{target}) but not a thermostating increase at unnecessary temperatures. In other words, the regulator 5 is configured so that the response to the severity

level does not constitute a shift from one mode to another, but a modification within the selected heating mode. Therefore, the response to severity levels is combined with the control logic determined by the selected heating mode resulting in a modified logic that depends both on the selected heating mode and the severity
5 level.

Any reference to a user interface is to be understood in the broad sense and includes any device able to receive an input from a user and send it to the regulator
5; in particular it includes, by way of a non-limiting example, a dedicated physical user interface 7 comprised in the water heater, or the interface of a smart phone or
10 other devices that are not part of the water heater 1, but from which the water heater 1 is configured to receive input with any known communication technology including wireless communication or a vocal command sensor.

It is clear for the expert of the field that a system with the characteristics of water heater 1 can be used to heat other types of liquid and is not limited to water.

CLAIMS

1. Water heater (1) comprising:
 - a vertical development storage (10), adapted to contain water, having an upper portion (11) and a bottom portion (12);
 - 5 - respective upper temperature sensor (42), associated to the upper portion (11) of the storage (10), to detect the upper temperature “Tdome” of the storage (10), and a bottom temperature sensor (52) associated to the bottom portion (12) of the storage (10), to detect the bottom temperature “Tbottom” of the storage (10);
 - 10 - and at least an upper heating element (41) associated to the upper portion (11) of the storage (10);
 - and at least one bottom heating element (51; 61), associated to the bottom portion (12) of the storage (10);
 - a regulator (5) of the heating elements (41; 51; 61) adapted to: - 15 - receive: readings by the temperature sensors (42; 52),
 - deactivating the heating elements (41; 51; 61) when a respective control temperature reaches a respective thermostating temperature Ttarget,
 - activating the at least one upper heating element (41) when a respective control temperature drops below the thermostating temperature Ttarget
 - 20 minus an upper hysteresis value ThystDome;
 - activating the at least one bottom heating element (51; 61) when a respective control temperature drops below the respective thermostating temperature the minus a bottom hysteresis value Thyst;
 - 25 characterised in that, if the at least one bottom heating element comprises a condenser (61) of a heat pump (6), then the bottom hysteresis Thyst is lower than the upper hysteresis ThystDome, at least for an interval of values of the control temperature,
 - and if the at least one bottom heating elements are only of the resistive type (51), then the bottom hysteresis Thyst value is higher than the upper hysteresis
 - 30 value ThystDome.

2. Water heater (1) as in claim 1 wherein the thermostating temperature T_{target} is the same for the heating elements (41; 51) that are electrical resistances.
3. Water heater (1) according to claim 1 or 2, wherein at least one bottom
5 heating element consists of the condenser (61) of a heat pump (6) and the regulator (5) is configured to apply:
 - a first hysteresis ThystDome comprised in an interval from 2°C to 21°C and preferably 12°C , to the at least one upper element (41), and
 - a second hysteresis Thyst , lower than the first hysteresis, preferably
10 comprised in an interval from 1°C to 20°C , even more preferably of 5°C , to the at least one bottom element (51; 61).
4. Water heater (1) according to claim 1 or 2, wherein the at least one bottom heating elements (51) are only of the resistive type, the regulator (5) is configured to apply:
15
 - a first hysteresis ThystDome comprised in an interval from 1°C to 20°C and preferably 5°C , to the at least one upper heating element (41), and
 - a second hysteresis Thyst , higher than the first hysteresis, comprised in an interval from 2°C to 21°C , even more preferably of 15°C , to the at least one bottom heating element (51).
- 20 5. Water heater (1) according to claim 1 or 2, wherein at least one bottom heating element consists of the condenser (61) of a heat pump (6) adapted to heat up to a maximum temperature threshold Thp and wherein the regulator (5) is configured to:
 - thermostating at temperatures lower than the maximum threshold Thp
25 by using hysteresis values according to claim 3,
 - thermostating at temperatures higher than the maximum threshold Thp by using hysteresis values according to claim 4.

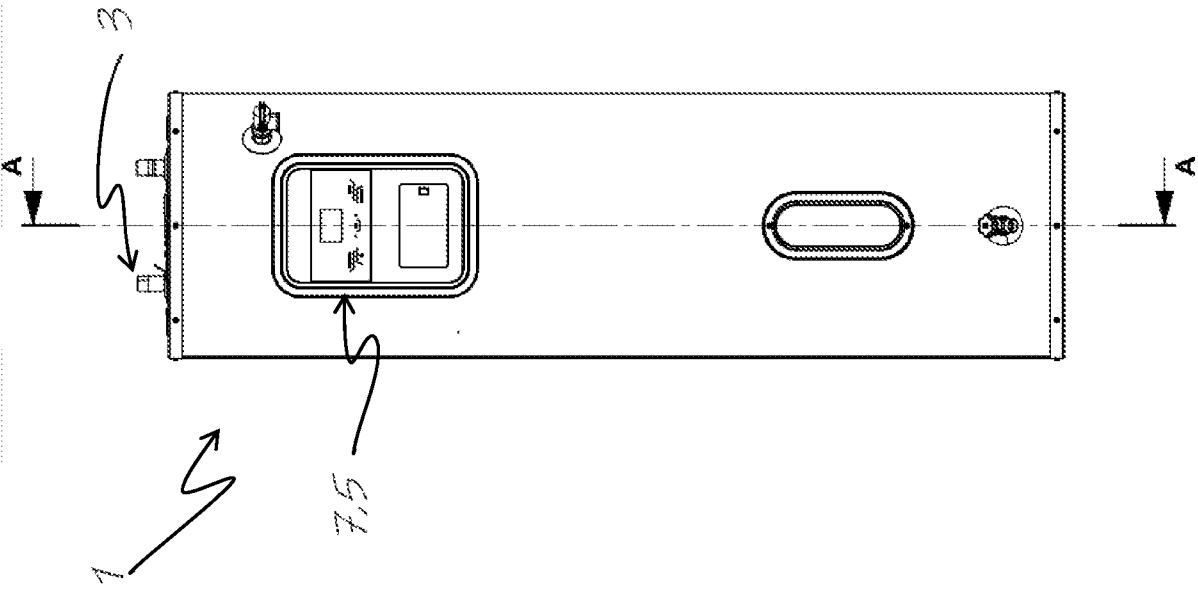


Fig. 1.b

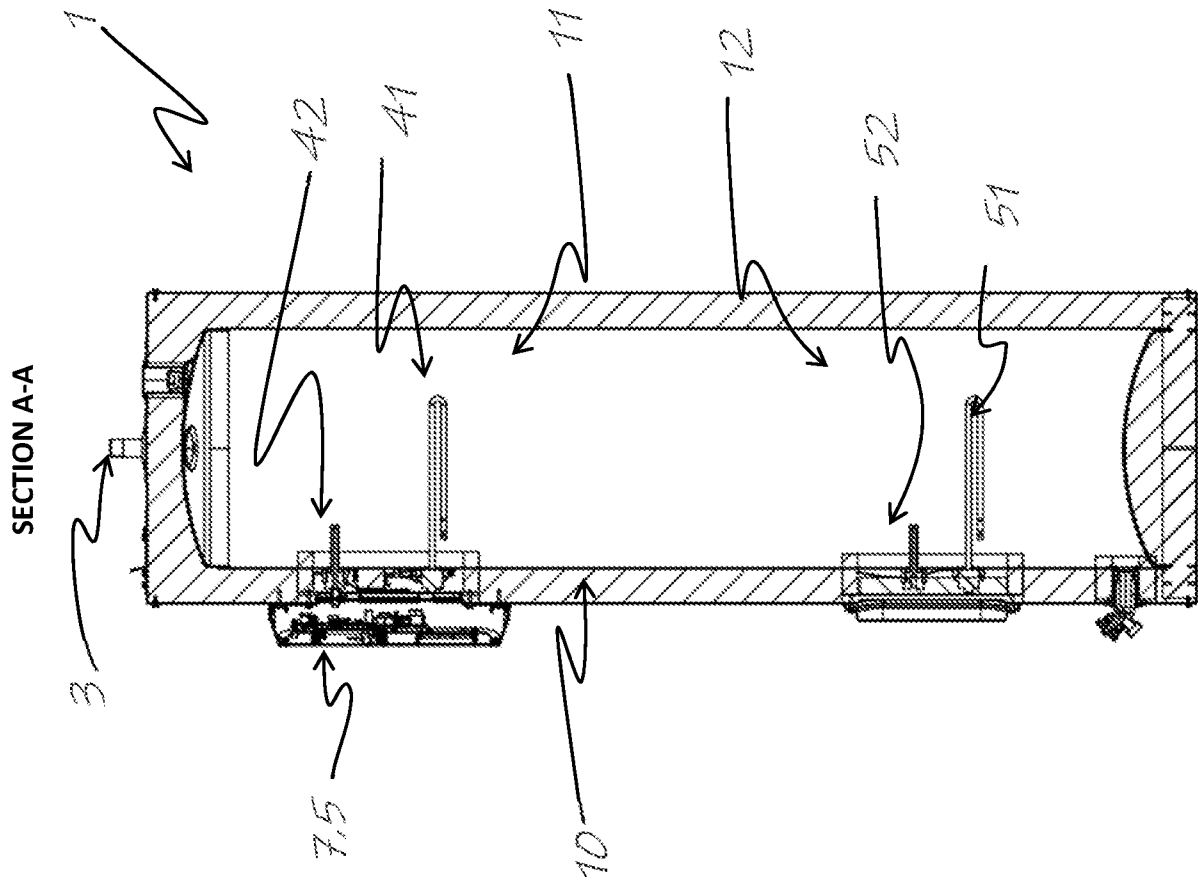


Fig. 1.a


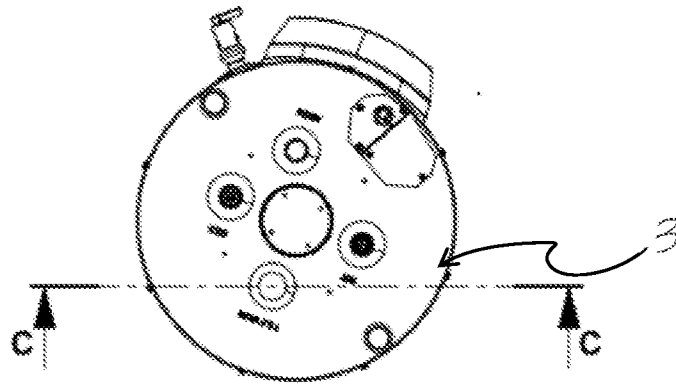


Fig. 1.c

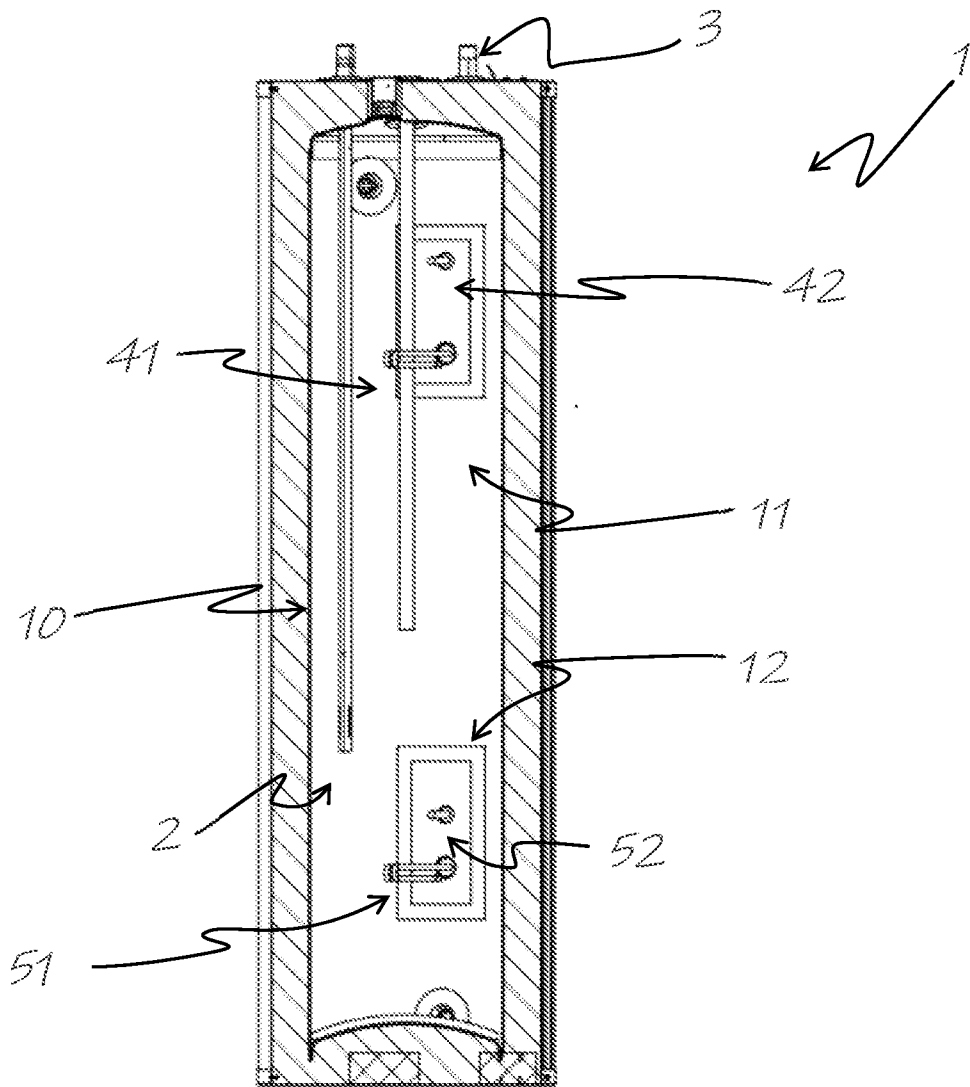

SECTION C-C

Fig. 1.d

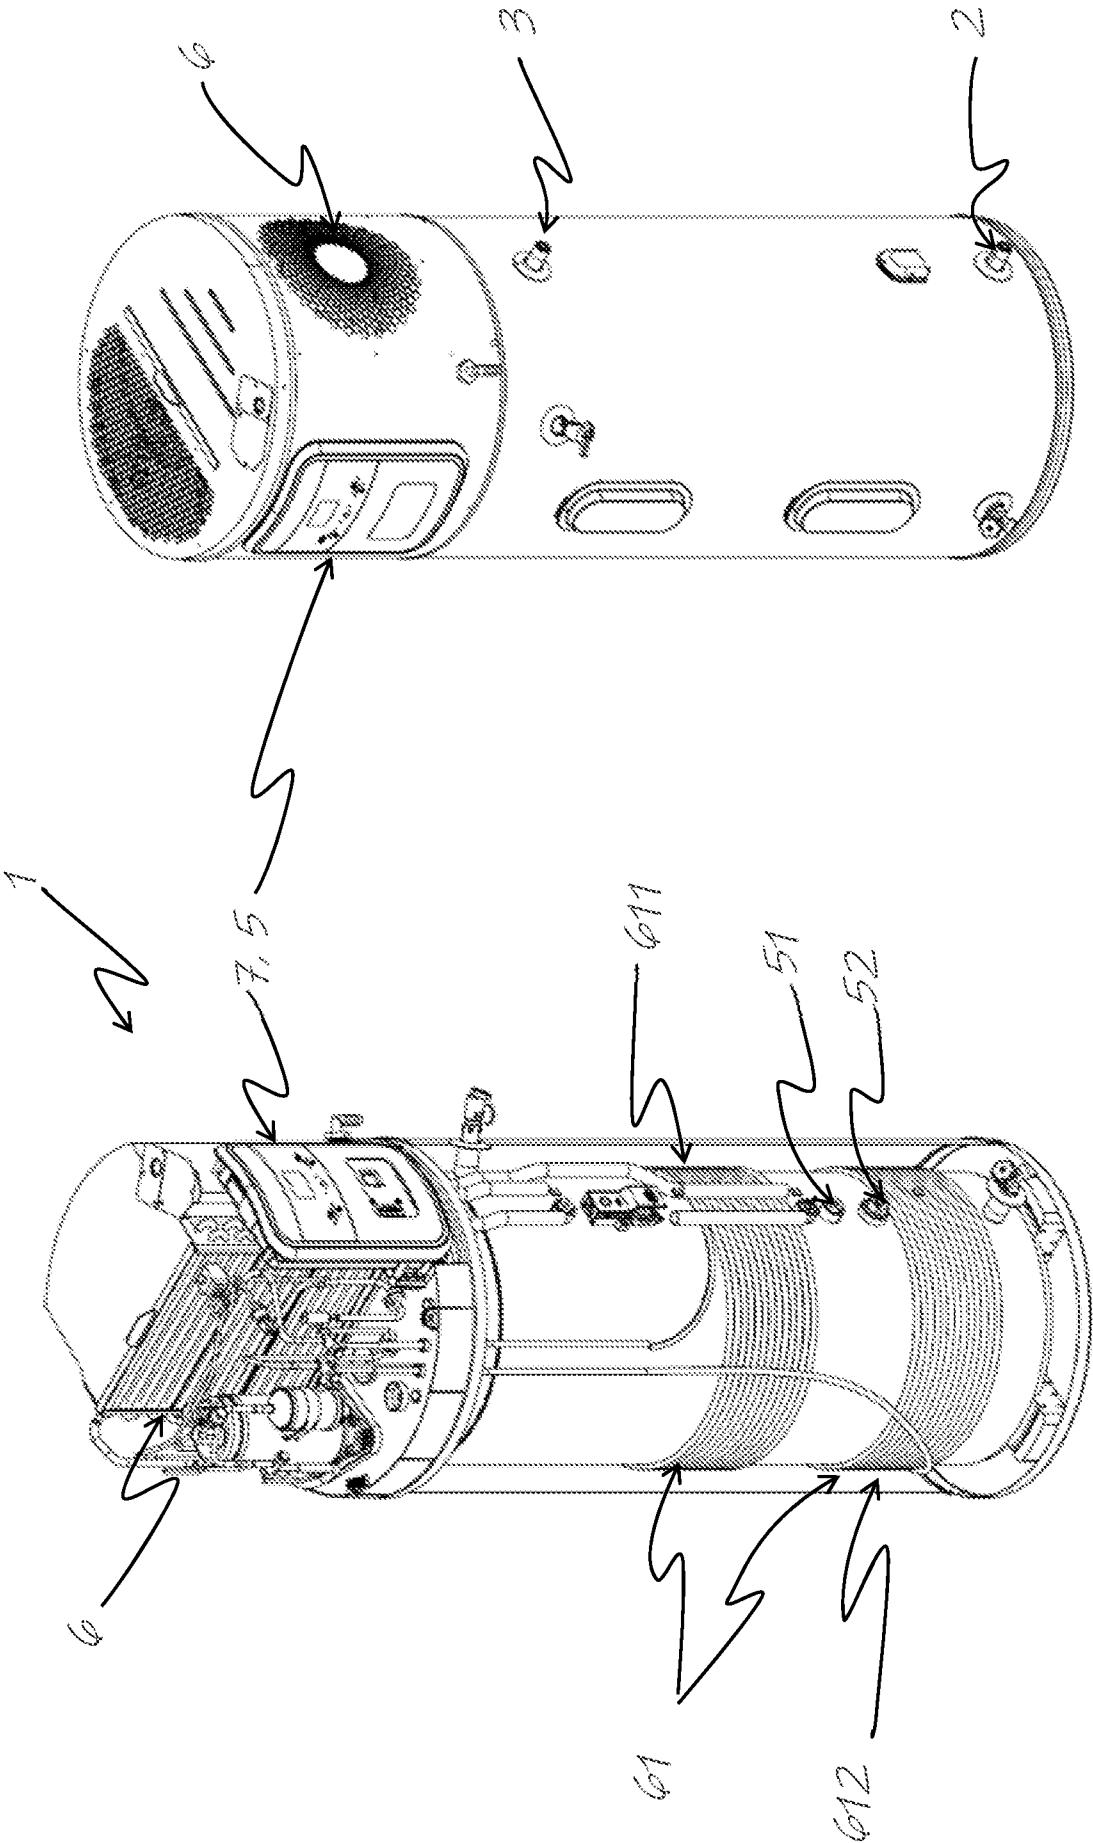


Fig. 2.b

Fig 2.a

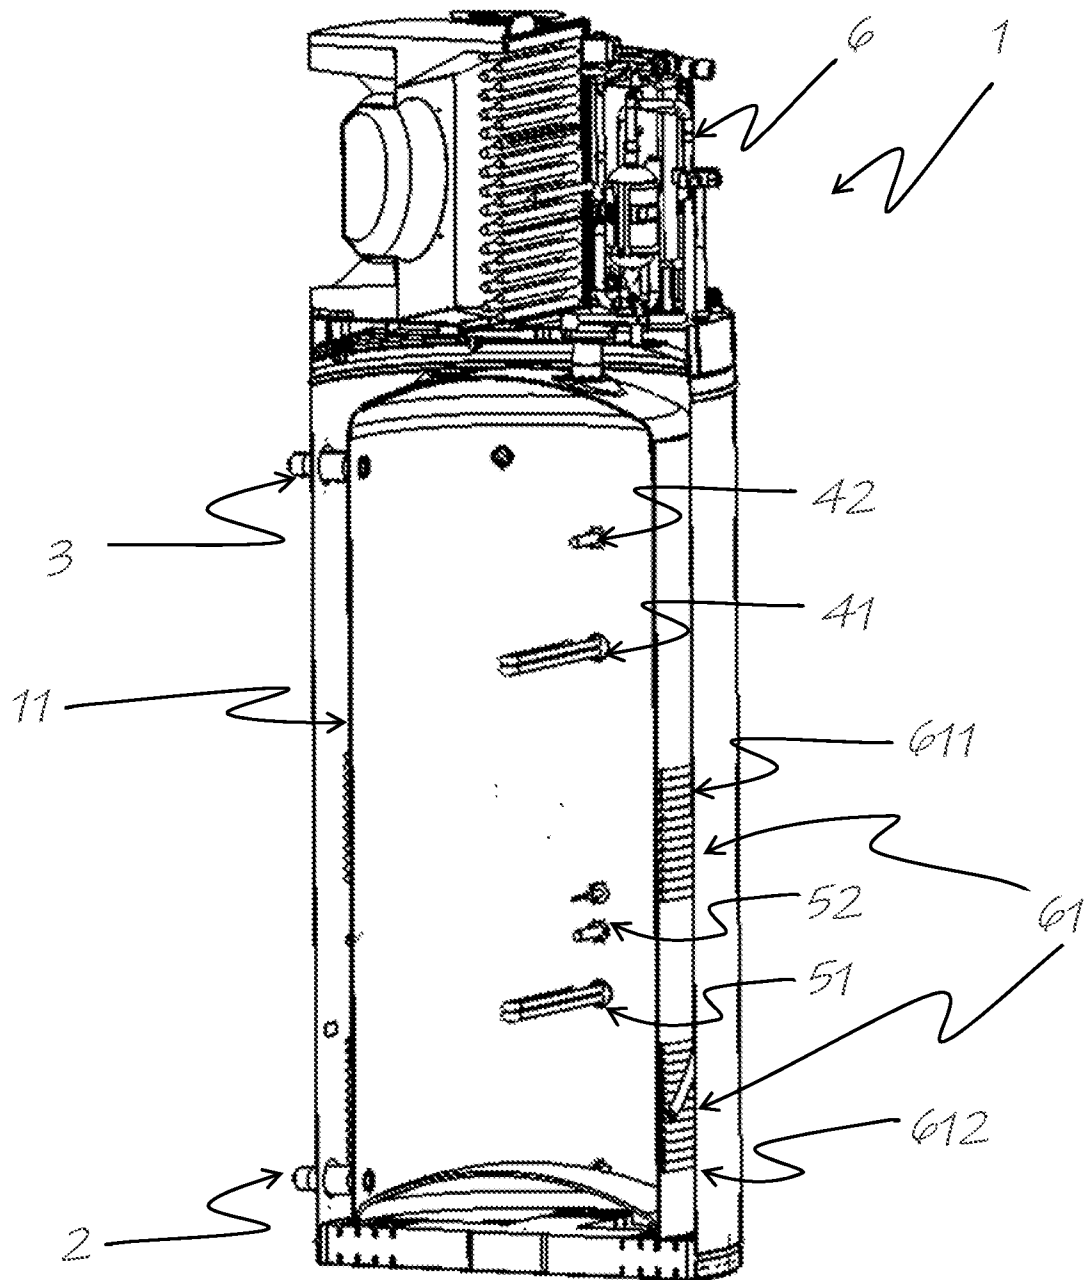


Fig.2.c

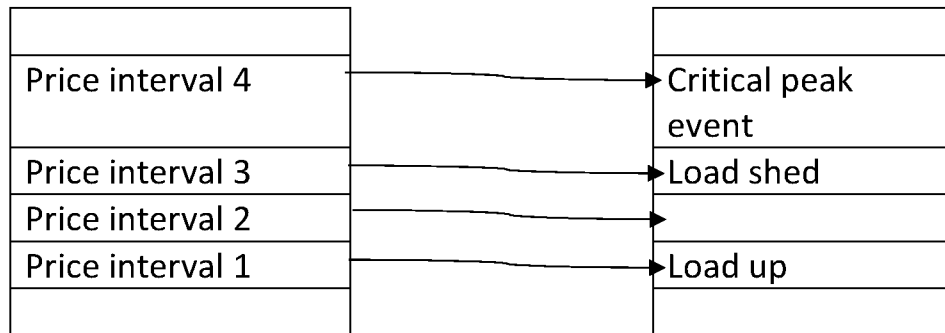


Fig. 3.a

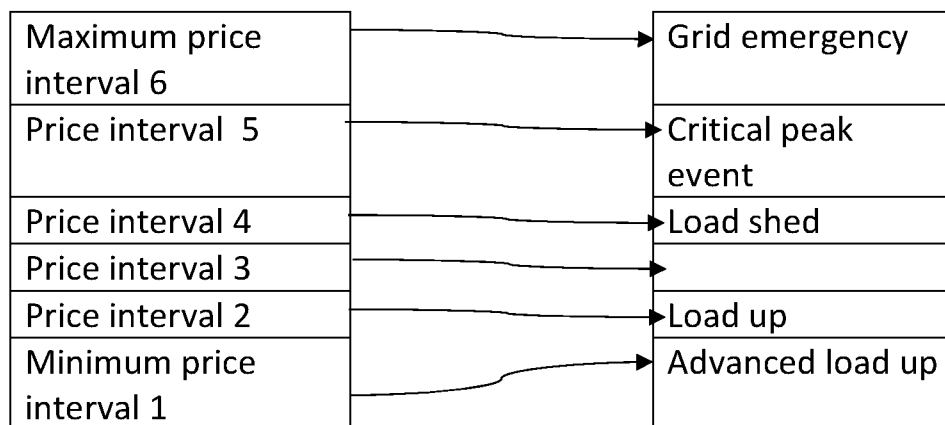


Fig. 3.b

	Ttarget
Confort	Tset
I-memory	Tmem
Green	Tset
Fast	Tset
I-memory Green	Tmem
I-memory Fast	Tmem

Fig. 4

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2023/059953

A. CLASSIFICATION OF SUBJECT MATTER INV. F24H1/20 F24H4/04 F24H9/20 F24H15/225 F24H15/37 F24H15/375 ADD. According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) F24H Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 11 300 325 B2 (SMITH CORP A O [US]) 12 April 2022 (2022-04-12) cited in the application column 2, line 34 - column 15, line 52; figures 1, 4, 8-10 -----	1-5
A	EP 2 256 427 A2 (STIEBEL ELTRON GMBH & CO KG [DE]) 1 December 2010 (2010-12-01) paragraphs [0008] - [0040]; claim 6; figures 6, 9 -----	1-5
A	CN 110 131 890 B (HEFEI MIDEA HEATING VENTILATION EQUIPMENT CO LTD; MIDEA GROUP CO LTD) 23 July 2021 (2021-07-23) paragraphs [0047] - [0150]; claim 6; figures 1-2 -----	1-5
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents : <div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 48%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance;; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance;; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search 8 January 2024		Date of mailing of the international search report 23/01/2024
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Hoffmann, Stéphanie

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2023/059953

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 11300325	B2	12-04-2022	CA 3076486 A1 28-03-2019
			US 2019086121 A1 21-03-2019
			WO 2019060371 A1 28-03-2019
EP 2256427	A2	01-12-2010	DE 102009022246 A1 05-01-2011
			EP 2256427 A2 01-12-2010
			PT 2256427 T 02-04-2019
CN 110131890	B	23-07-2021	NONE