



US011845601B2

(12) **United States Patent
Clair**

(10) **Patent No.:** US 11,845,601 B2

(45) **Date of Patent:** Dec. 19, 2023

(54) **METHOD AND APPARATUS FOR STORING
FOOD**

(71) Applicant: **Lara Clair**, Stouffville (CA)

(72) Inventor: **Lara Clair**, Stouffville (CA)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **17/489,963**

(22) Filed: **Sep. 30, 2021**

(65) **Prior Publication Data**

US 2022/0106100 A1 Apr. 7, 2022

Related U.S. Application Data

(60) Provisional application No. 63/086,849, filed on Oct. 2, 2020.

(51) **Int. Cl.**
B65D 81/20 (2006.01)
A23L 3/36 (2006.01)
B65D 77/04 (2006.01)

(52) **U.S. Cl.**
CPC **B65D 81/2038** (2013.01); **A23L 3/363** (2013.01); **B65D 77/0453** (2013.01); **B65D 81/2015** (2013.01)

(58) **Field of Classification Search**
CPC B65D 25/16; B65D 81/20; B65D 81/2007; B65D 81/2038; B65D 77/0453; A23L 3/363
USPC 206/524.8; 220/367.1, 495.01, 495.04, 220/495.05, 913, 203.28, 203.29
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,098,404 A *	7/1978	Markert	B65D 15/14
				220/624
5,628,404 A *	5/1997	Hendrix	B65D 25/16
				206/524.8
6,510,674 B1 *	1/2003	Case	B65D 3/22
				53/449
6,994,227 B2 *	2/2006	Kwon	B65D 81/2038
				220/203.11
7,607,642 B2 *	10/2009	Kim	B65D 81/2038
				251/366
8,662,334 B2 *	3/2014	Turvey	B65D 81/2038
				220/360
11,292,652 B1 *	4/2022	Rojas	B65D 25/16
2010/0000995 A1 *	1/2010	Yarbrough	A47L 9/182
				220/212
2011/0091138 A1 *	4/2011	Wakabayashi	B65D 33/2541
				383/100
2016/0257475 A1 *	9/2016	Gervais	B65D 43/0214

* cited by examiner



Primary Examiner — Luan K Bui

(74) *Attorney, Agent, or Firm* — SAND, SEBOLT & WERNOW CO., LPA

(57) **ABSTRACT**

A system, apparatus, and method of storing food including a storage container having a base; a resilient liner nesting in the base, and a lid that interlockingly engages with the liner and/or base to close off access to foodstuffs retained in a compartment defined by the liner. A valve assembly in the lid is actuated by a pump to evacuate air from the liner's compartment and create a vacuum or near-vacuum condition therein. Apertures defined in the wall of the base allow air to flow into a compartment of the base as the resilient liner shrinks around the food. The closed storage container may be placed in a freezer to freeze the food therein. For defrosting, the base of the closed storage container is placed in a volume of water, some of which flows through the apertures in the base's wall and comes into direct contact with the liner.

20 Claims, 46 Drawing Sheets

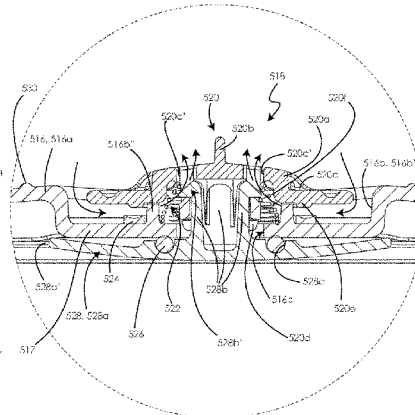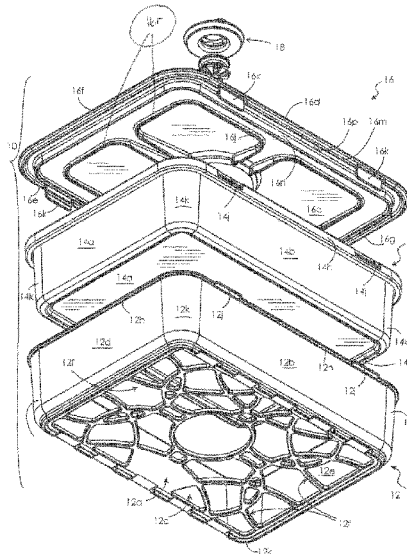

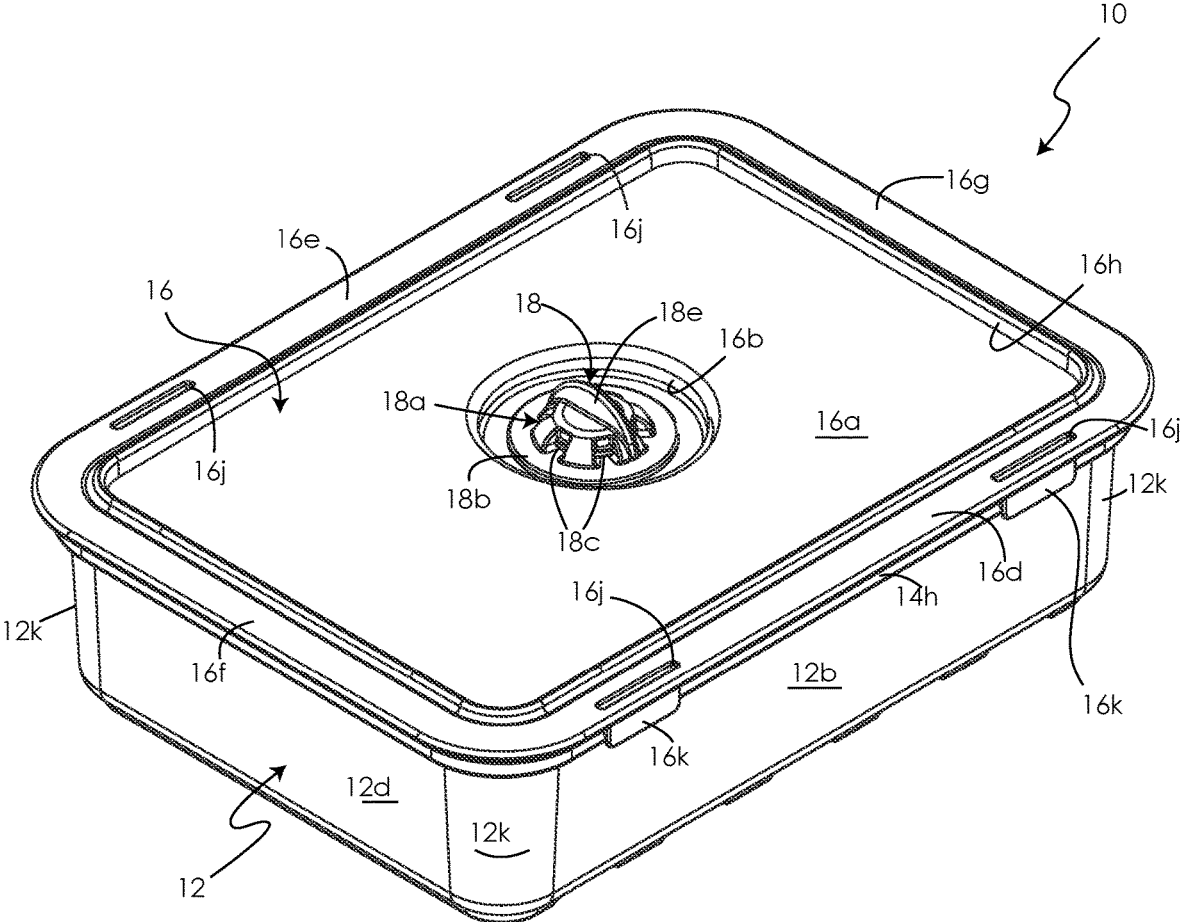


FIG. 1

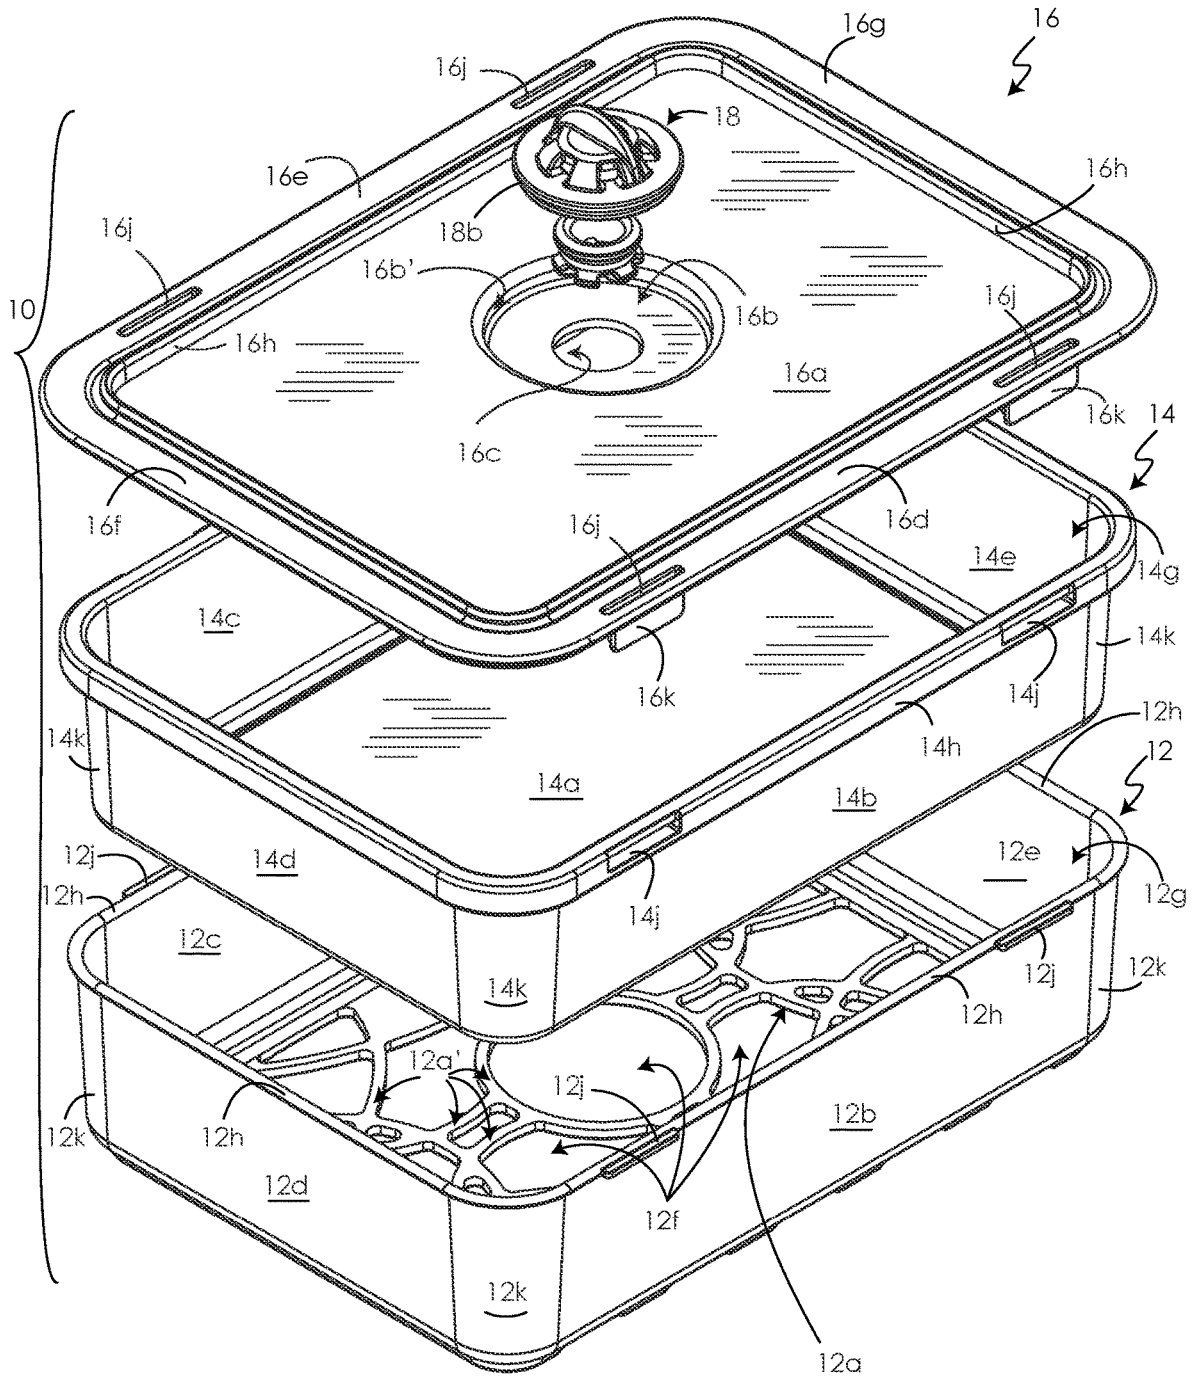


FIG. 2

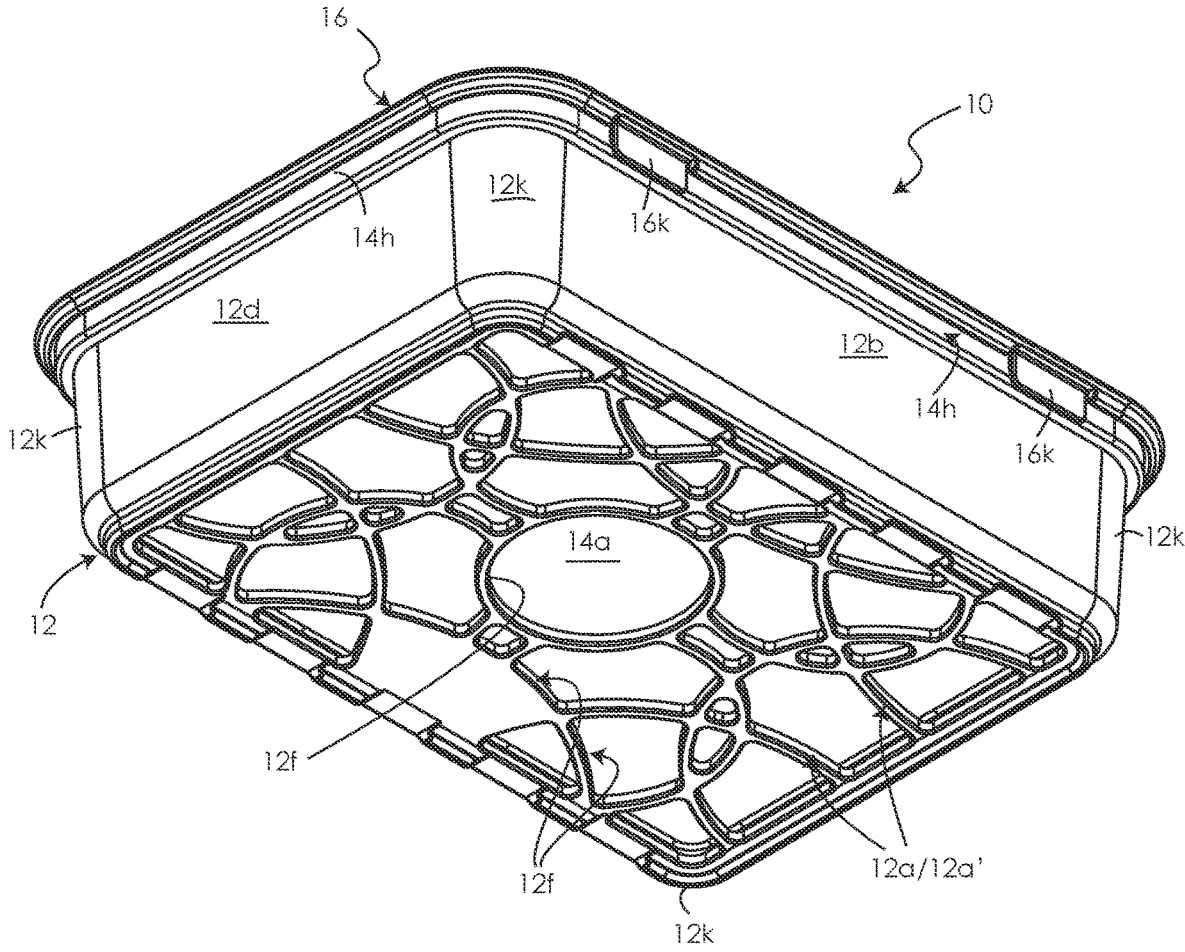


FIG. 3

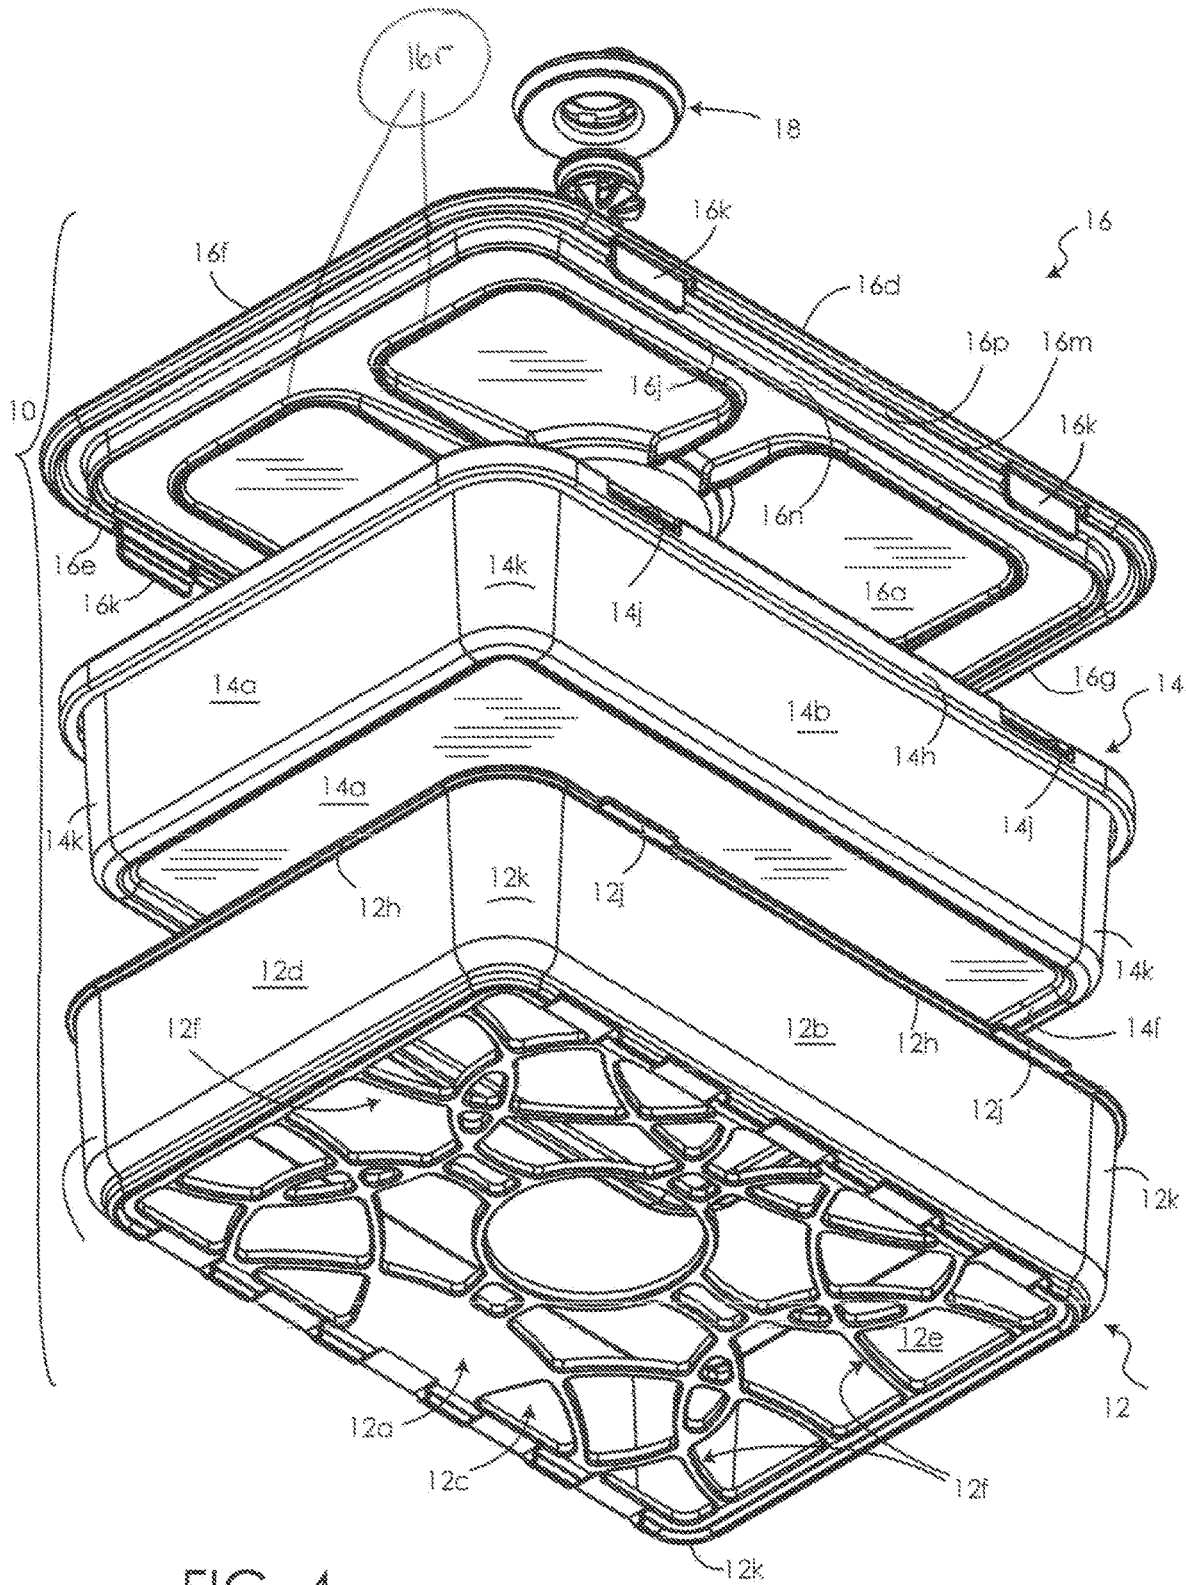
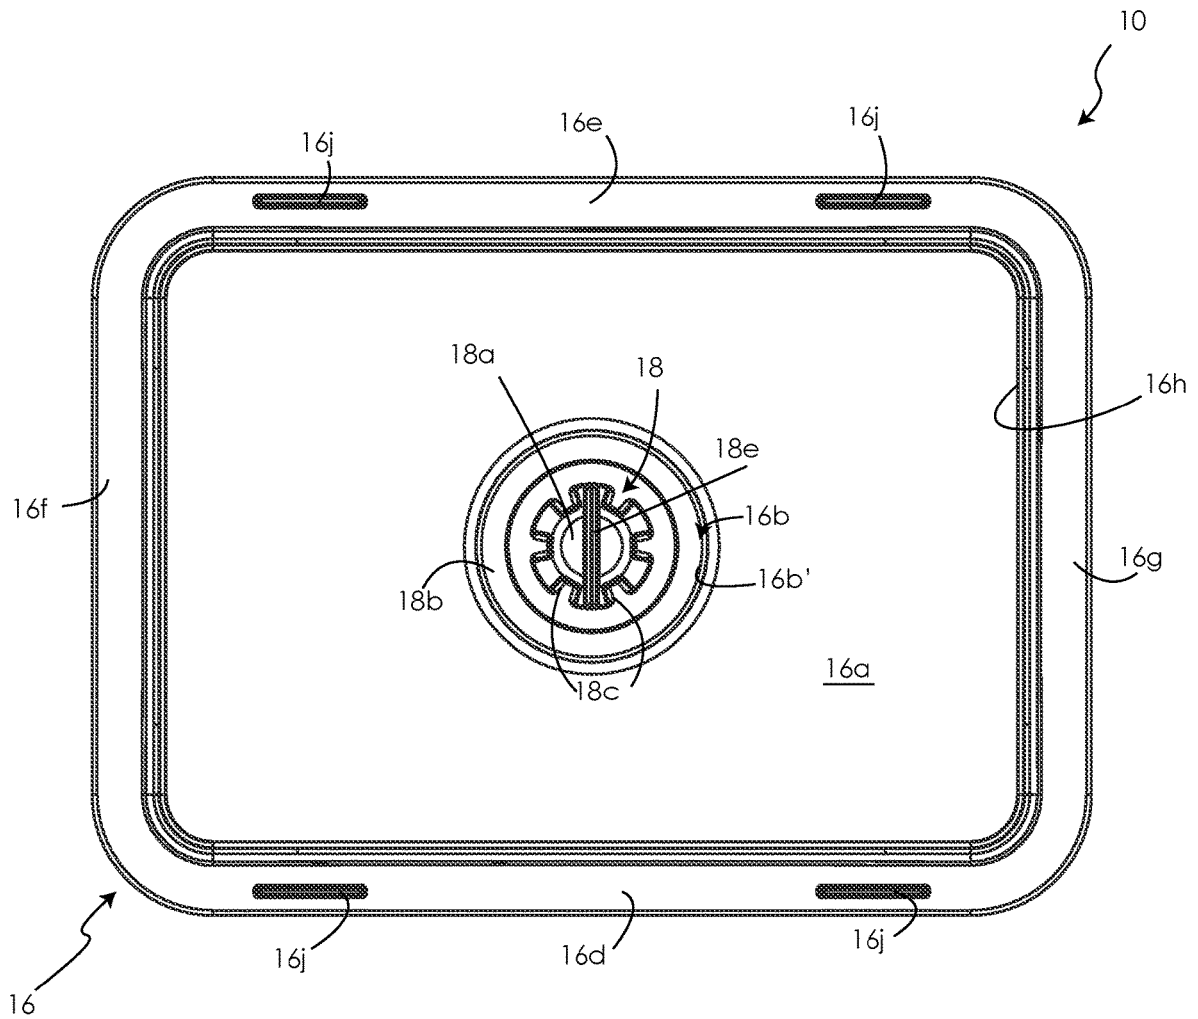


FIG. 4



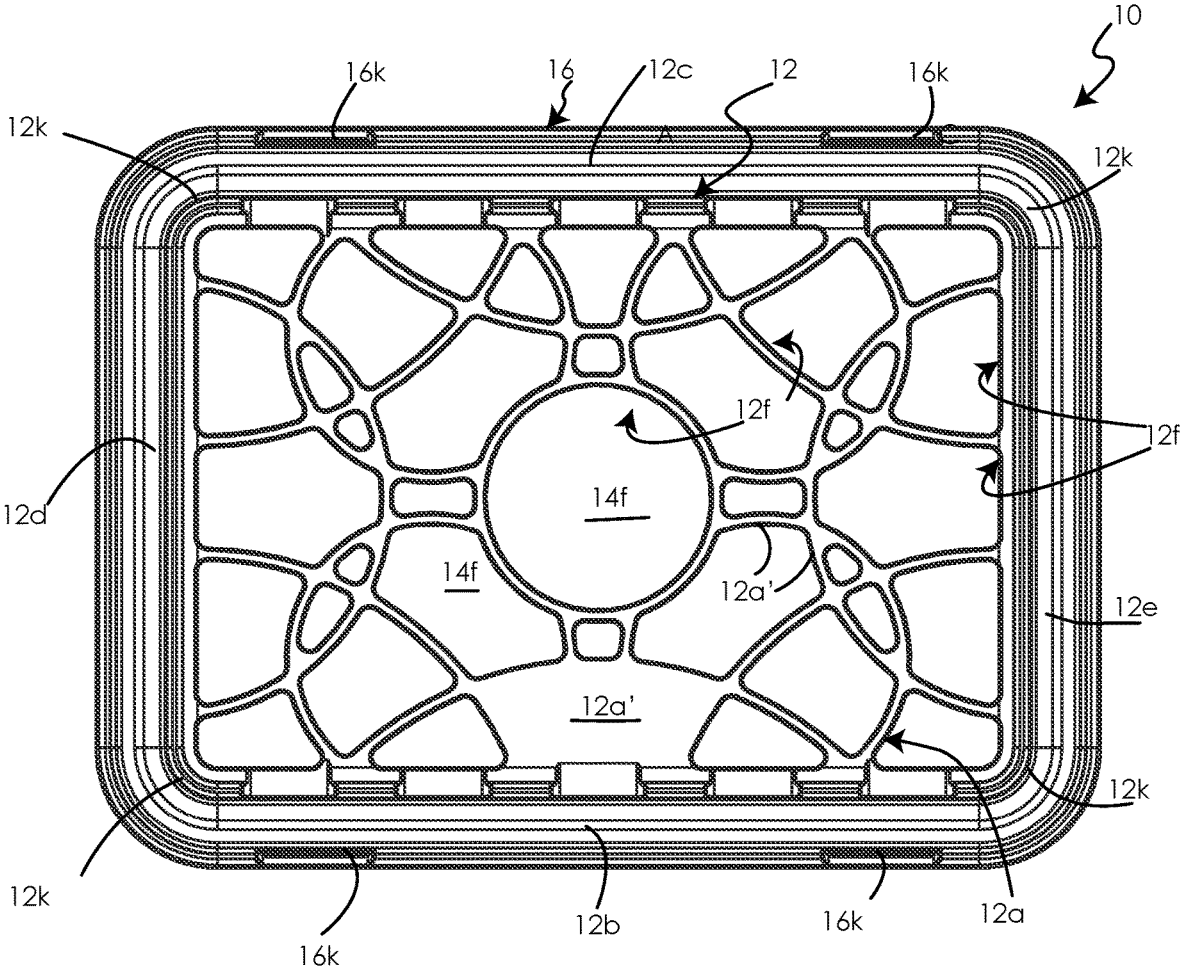


FIG. 6

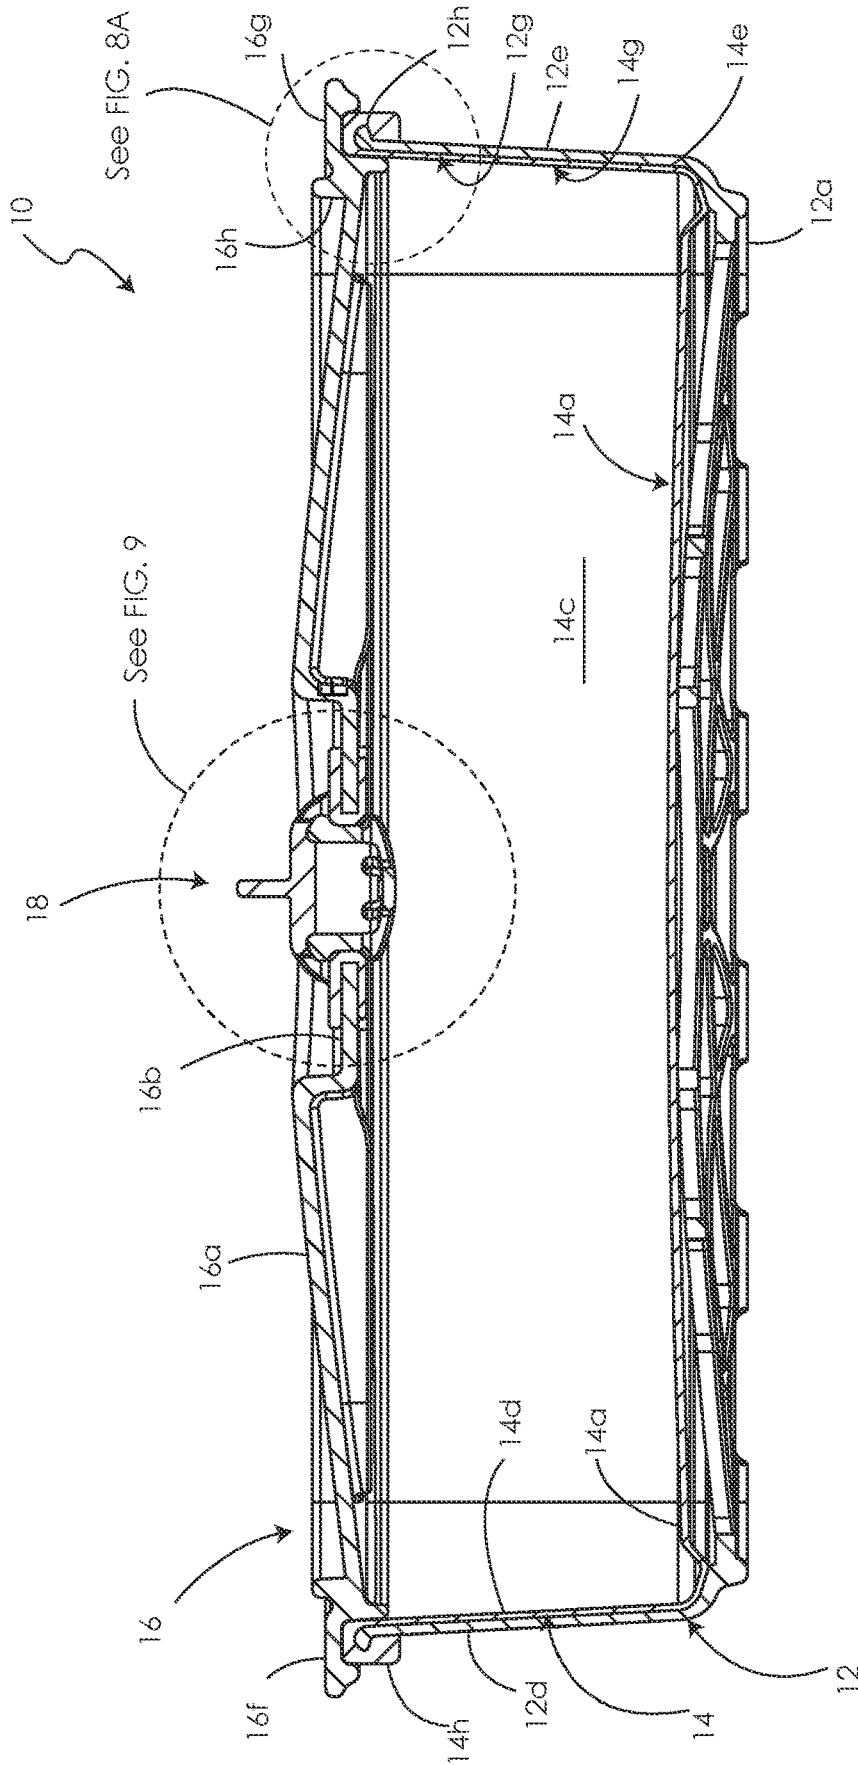


FIG. 8

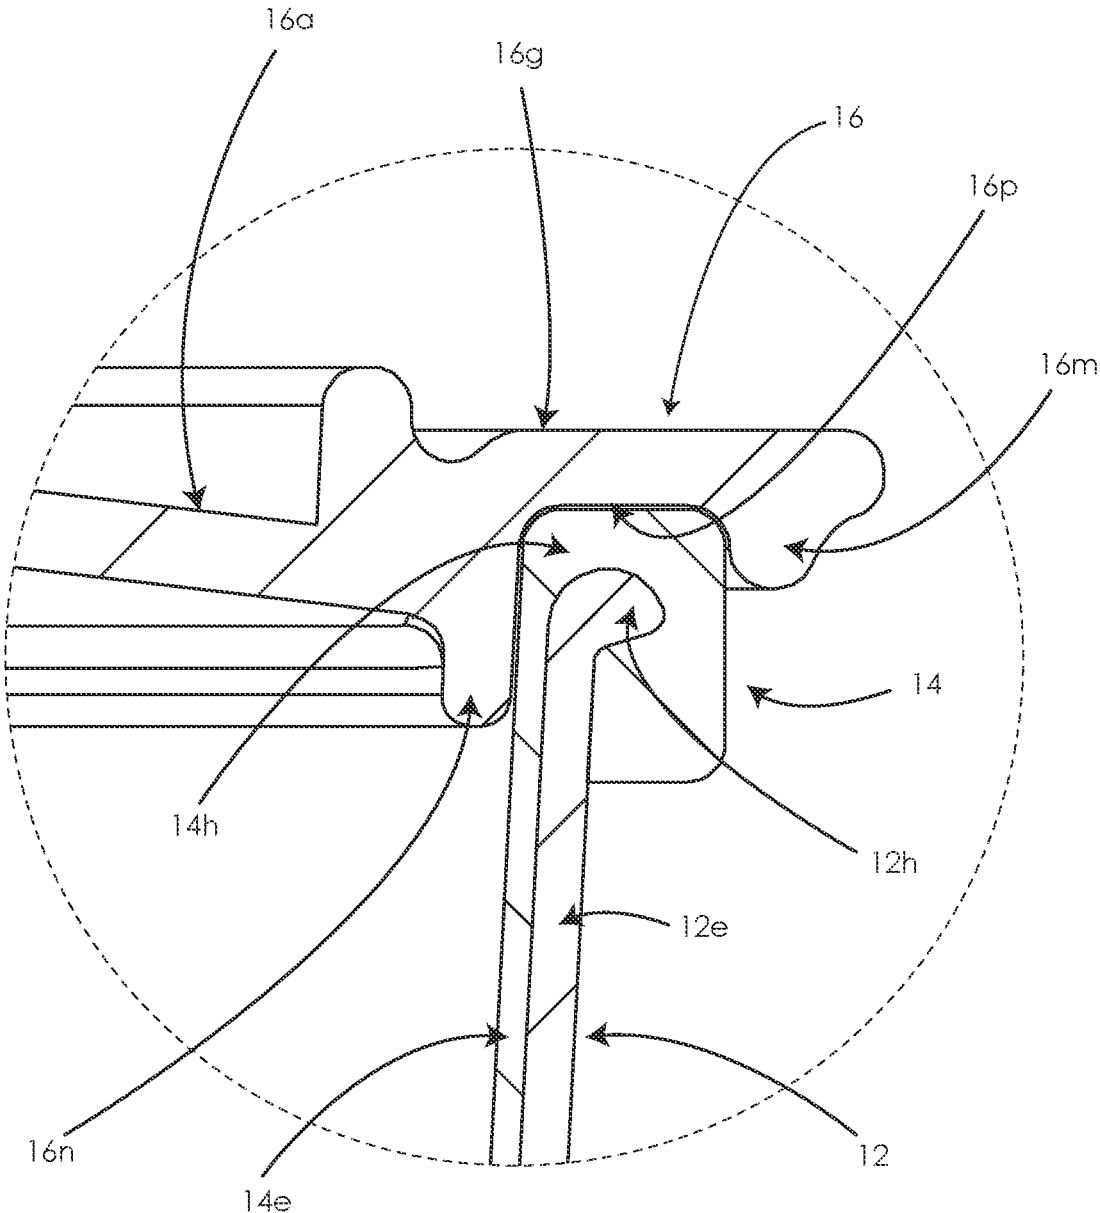


FIG. 8A

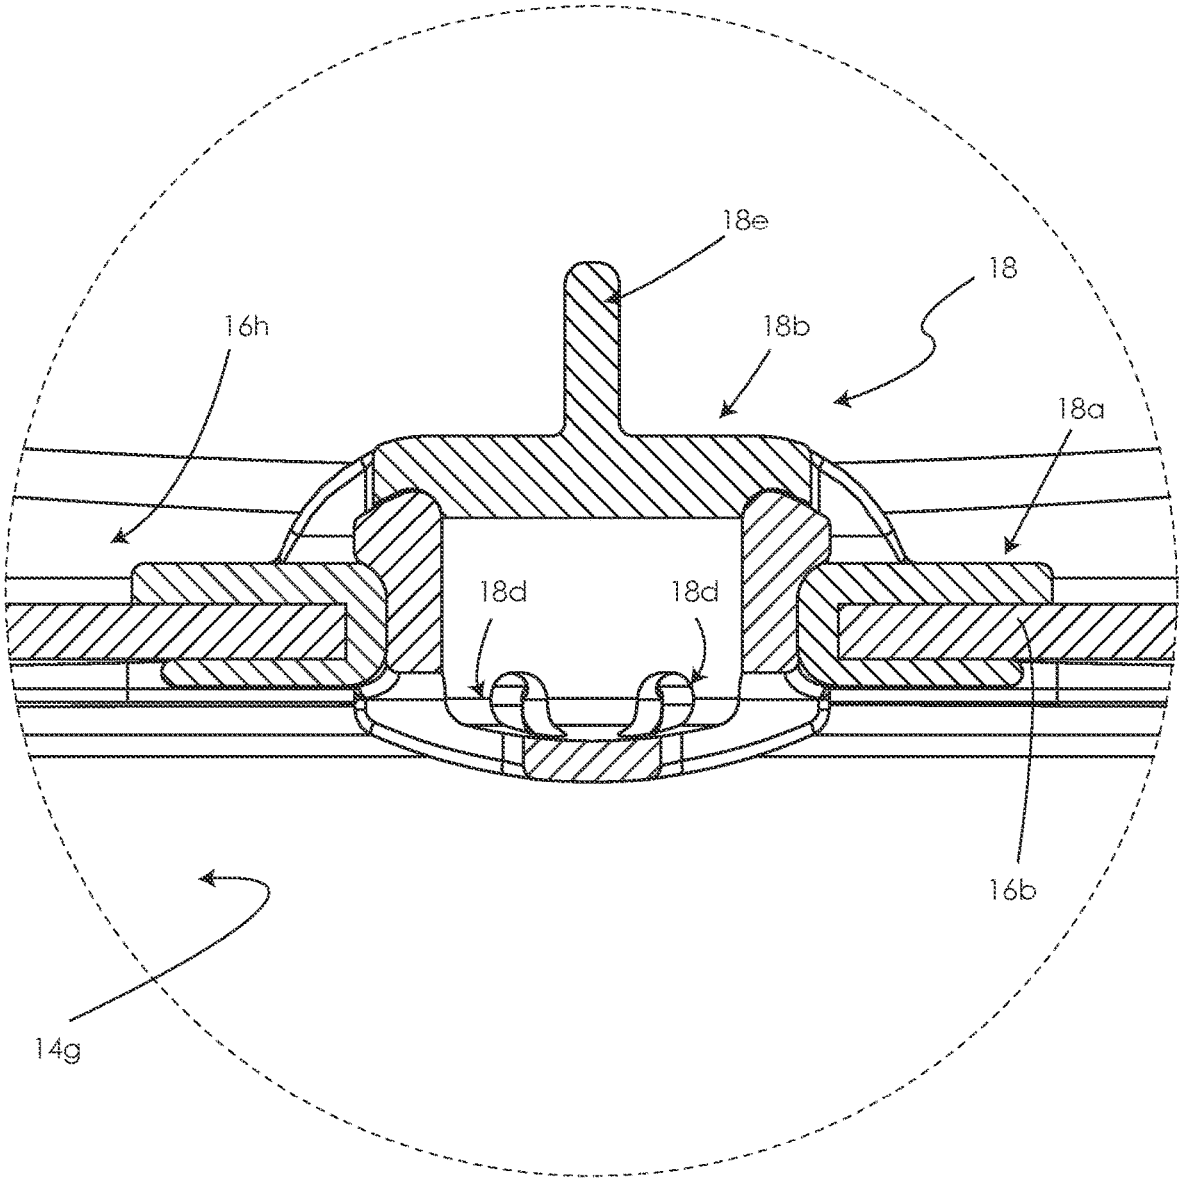


FIG. 9

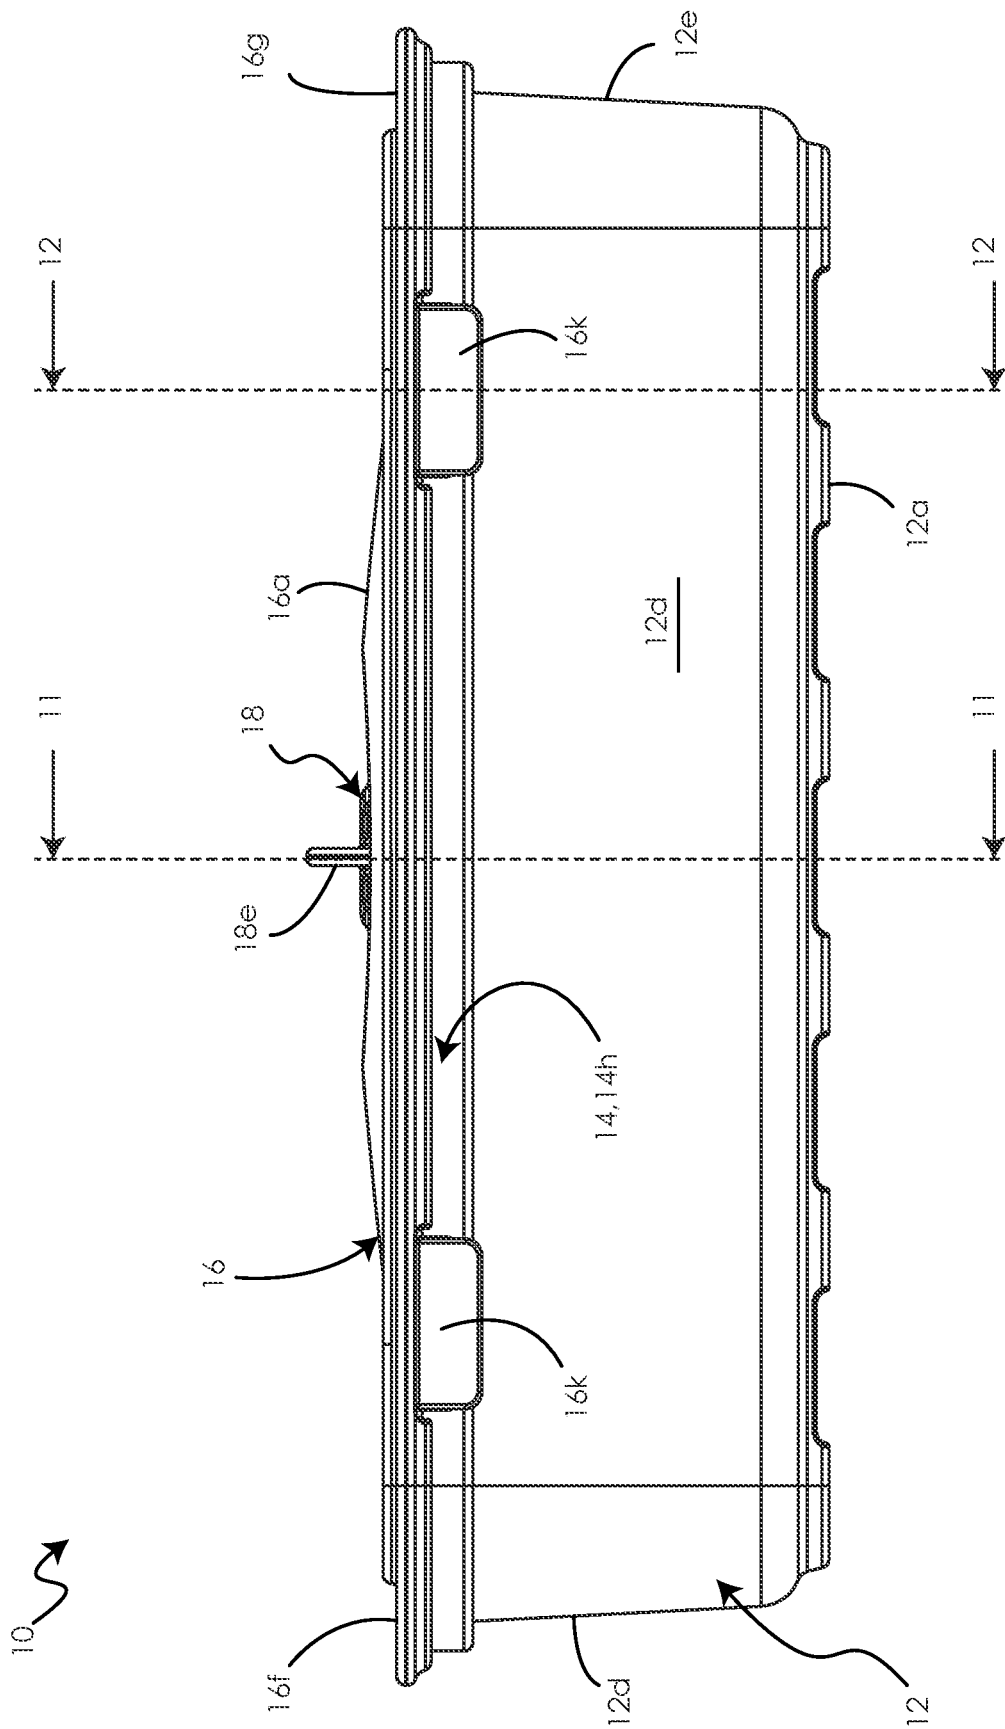


FIG. 10

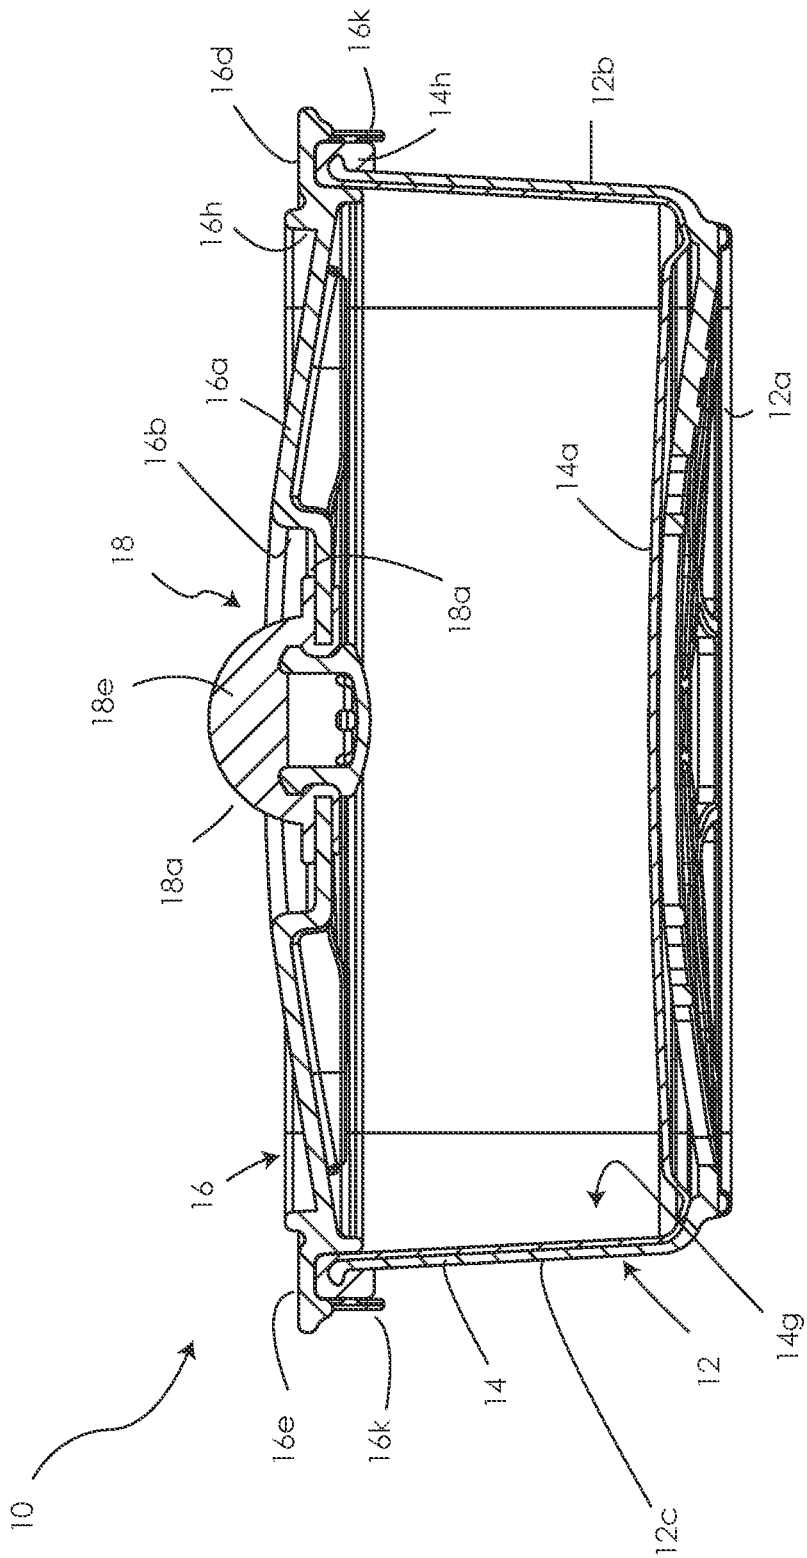


FIG. 11

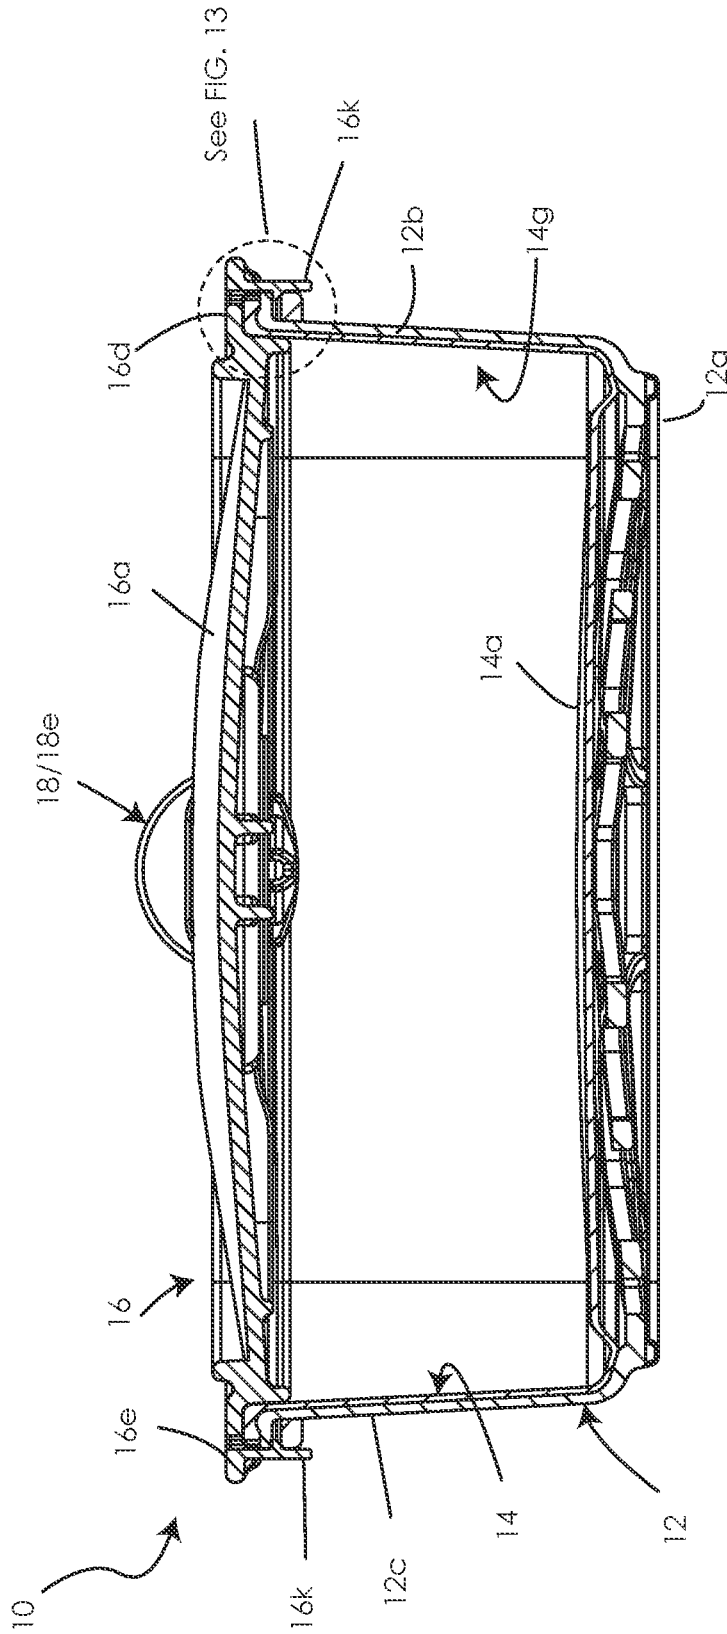


FIG. 12

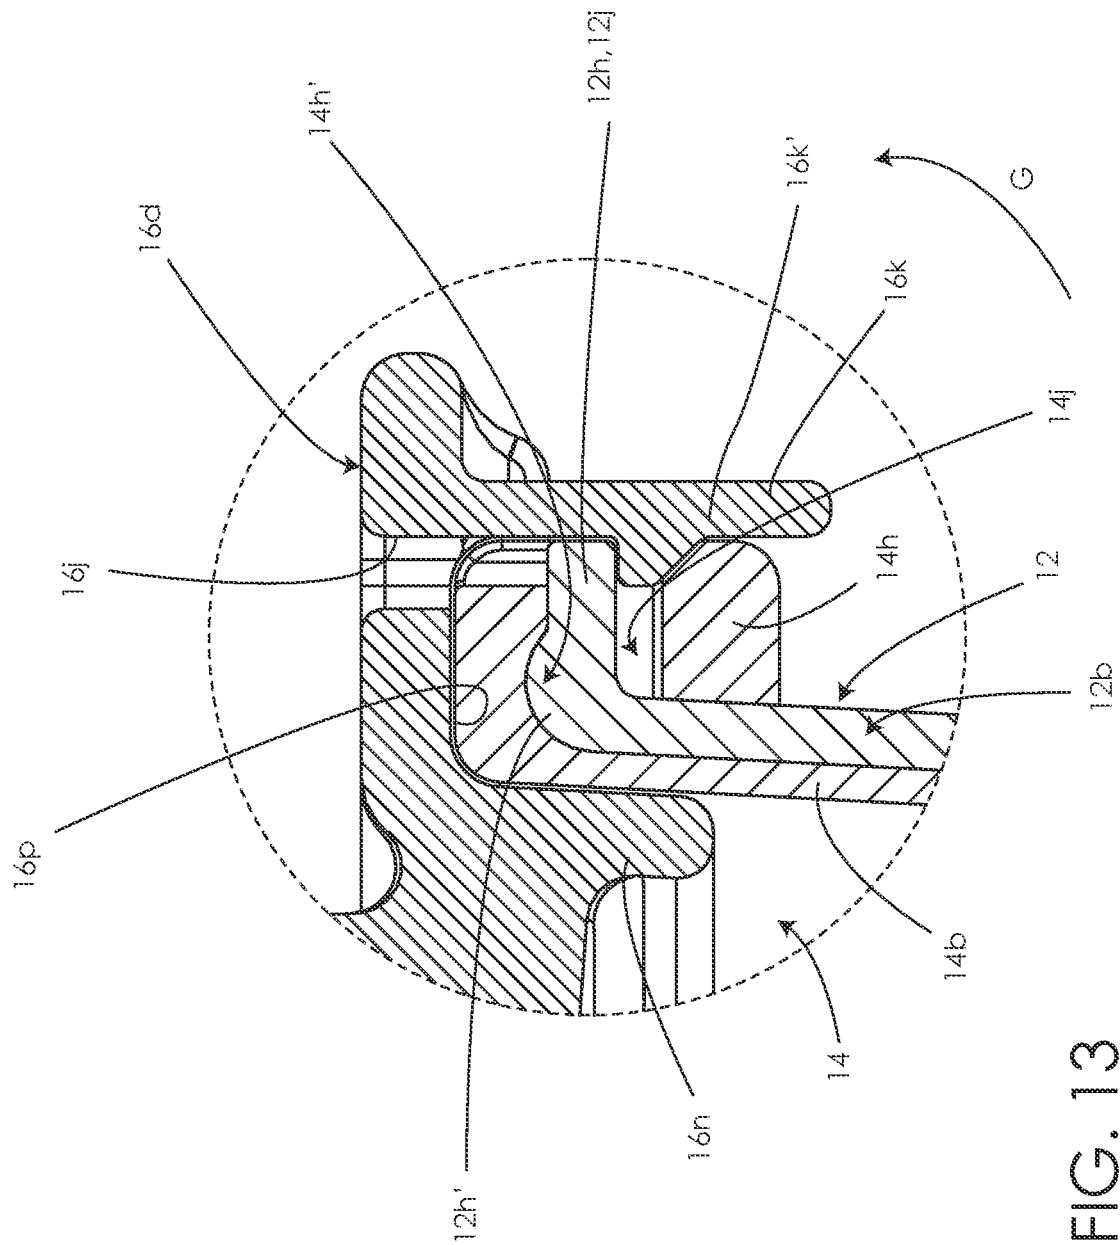


FIG. 13

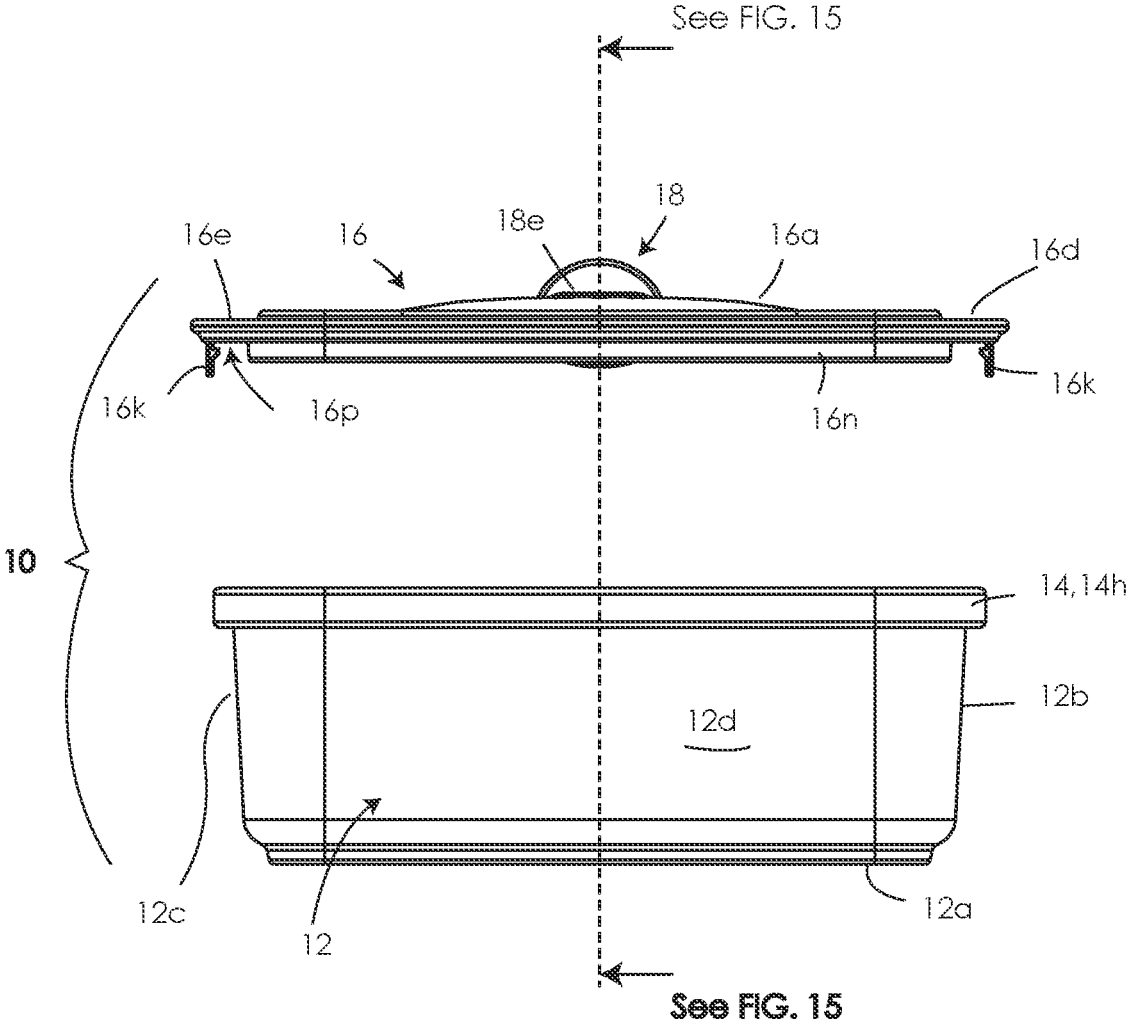


FIG. 14

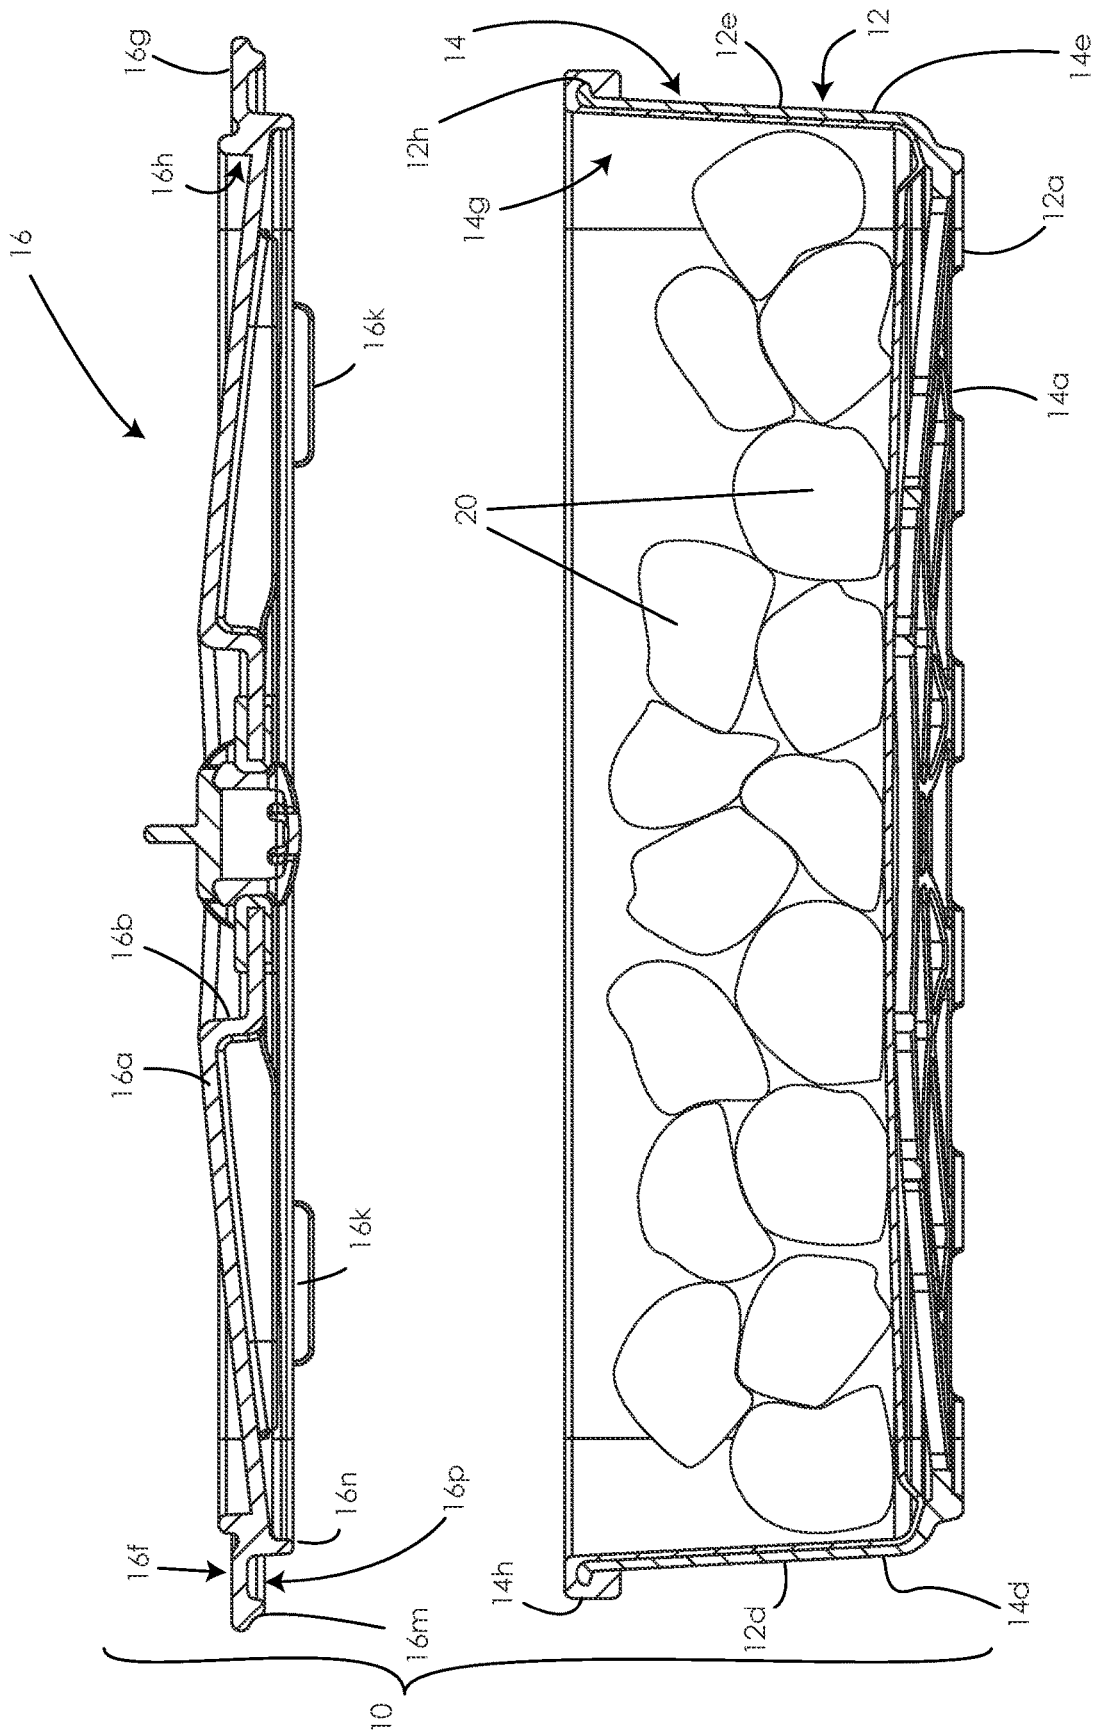


FIG. 15

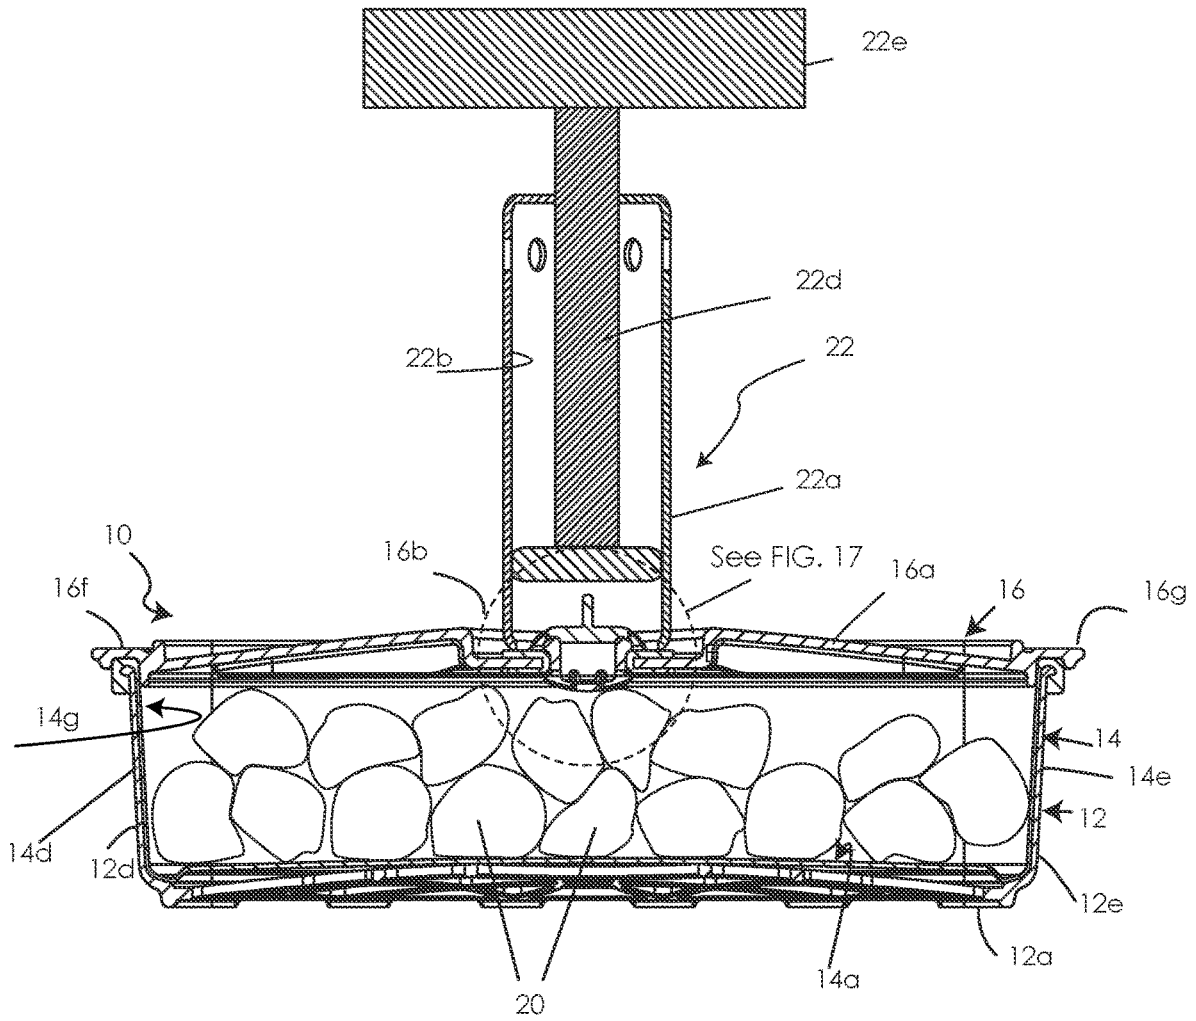


FIG. 16

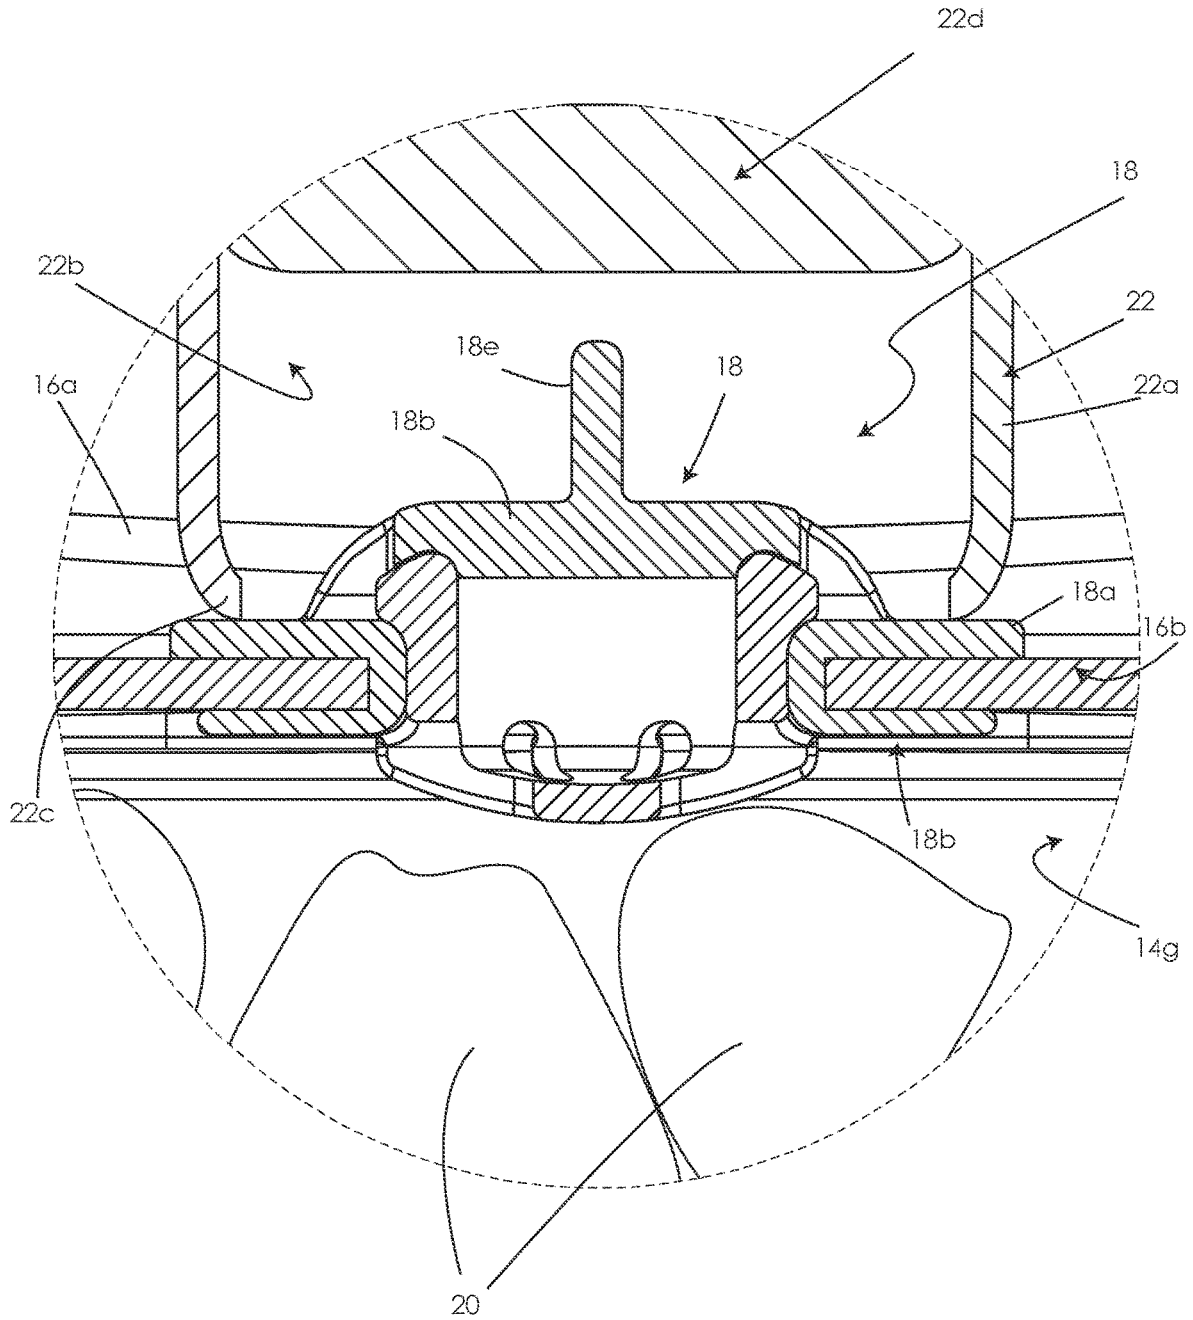


FIG. 17

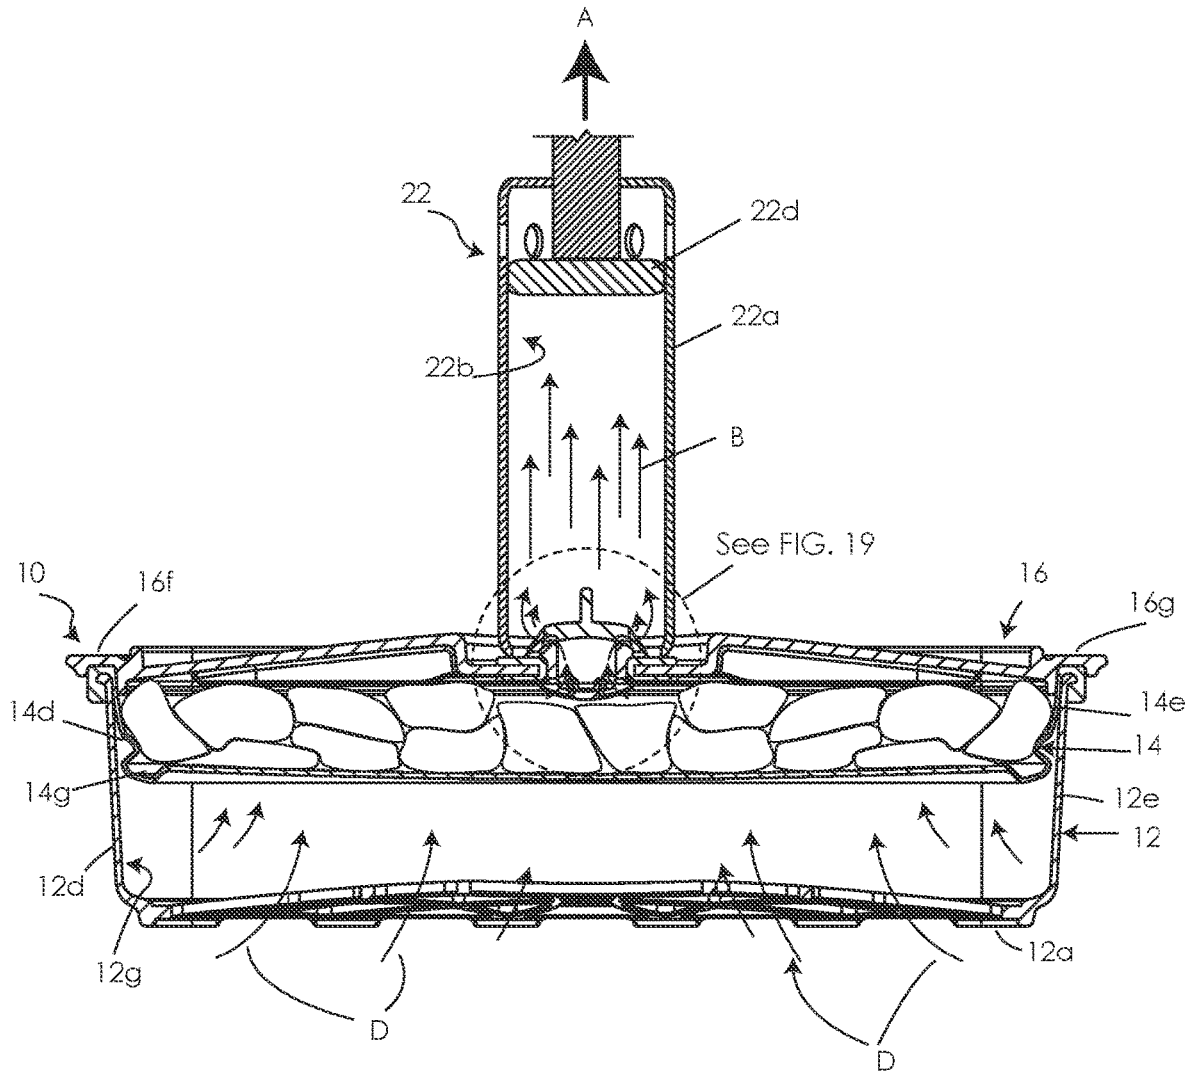


FIG. 18

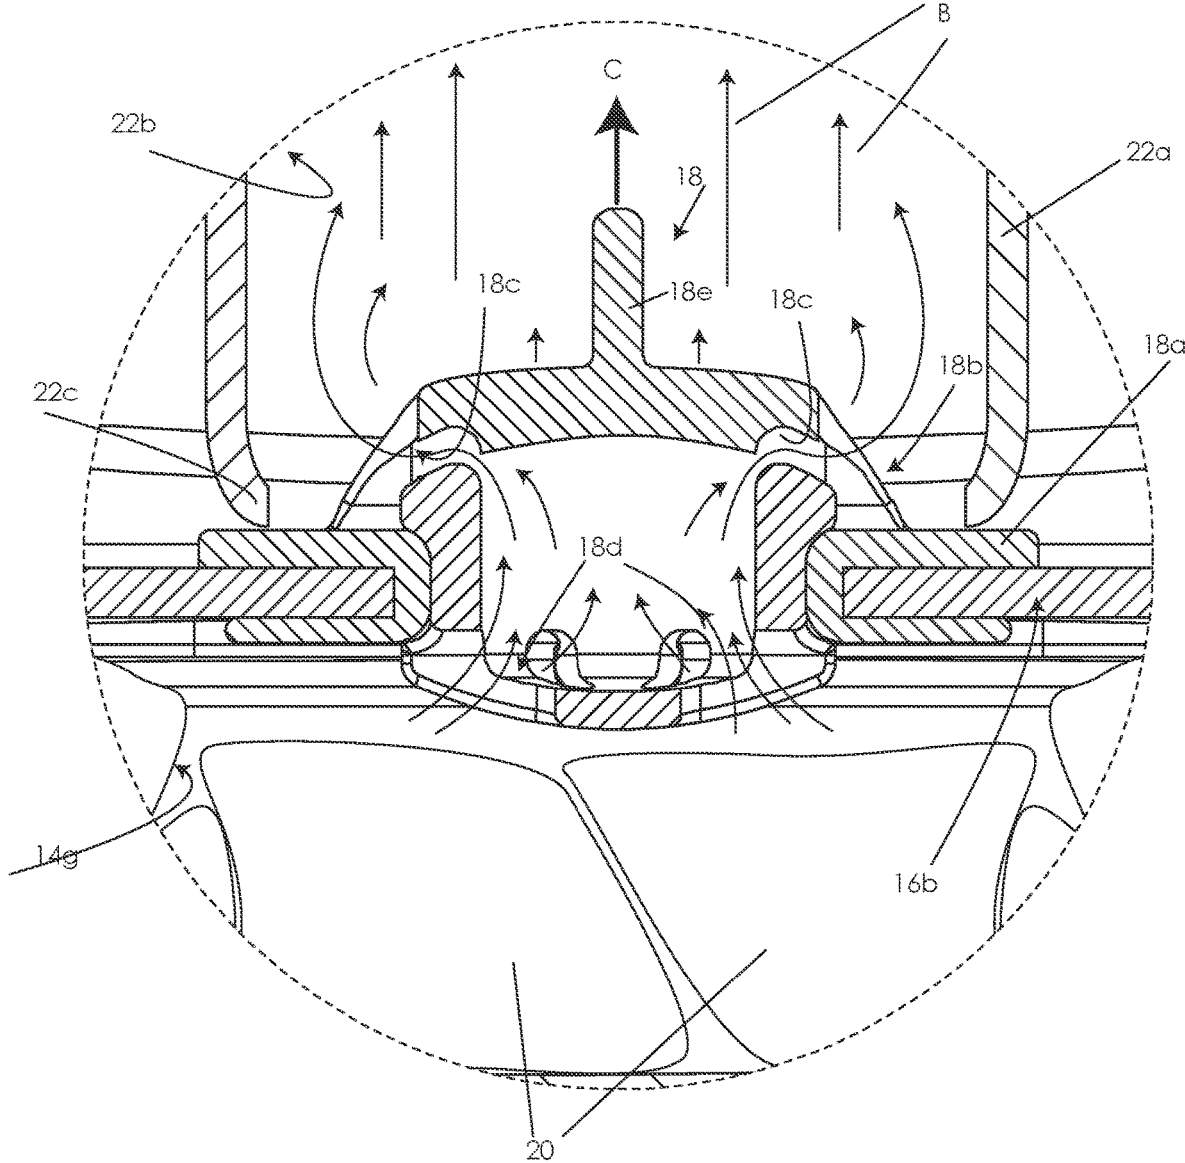


FIG. 19

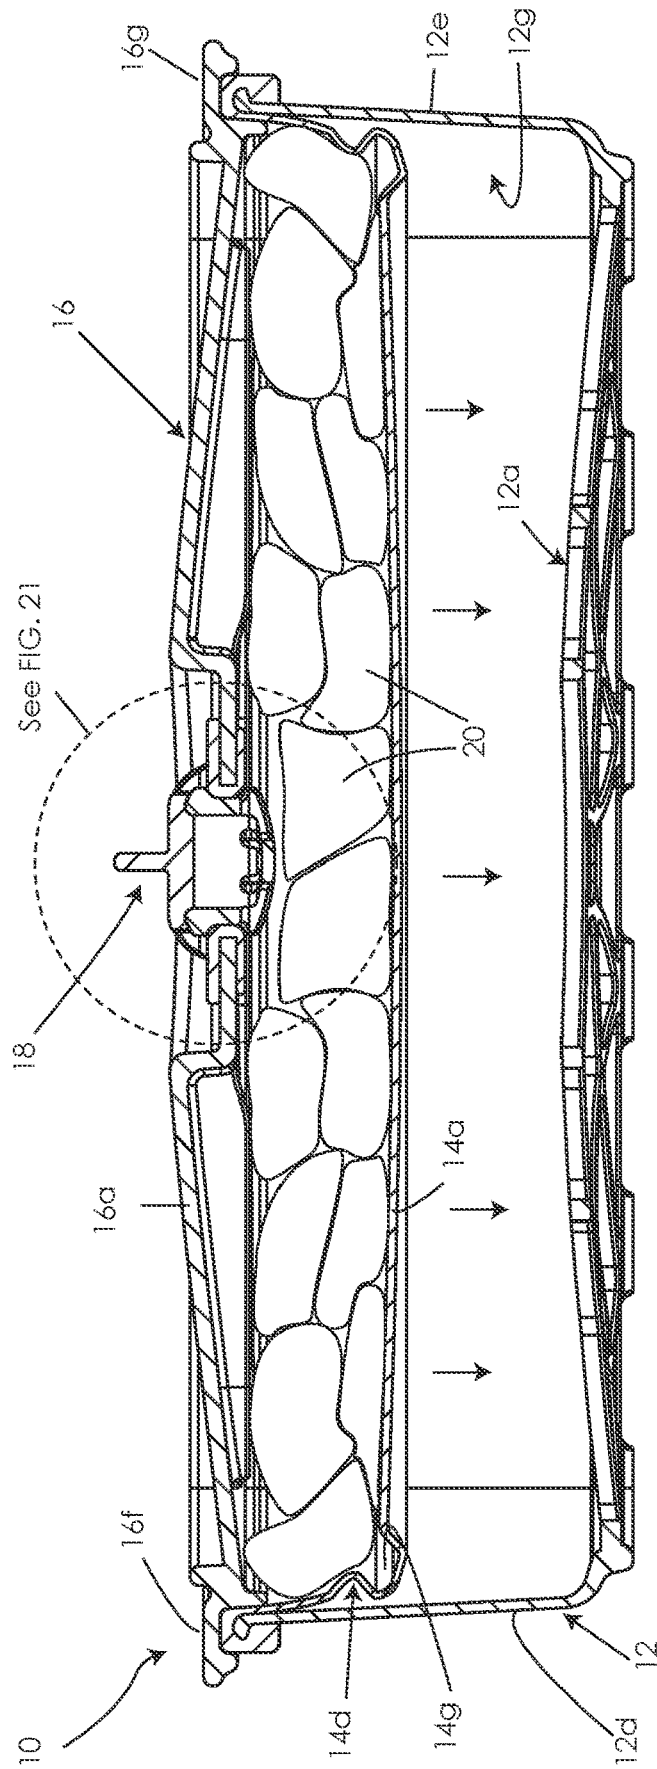


FIG. 20

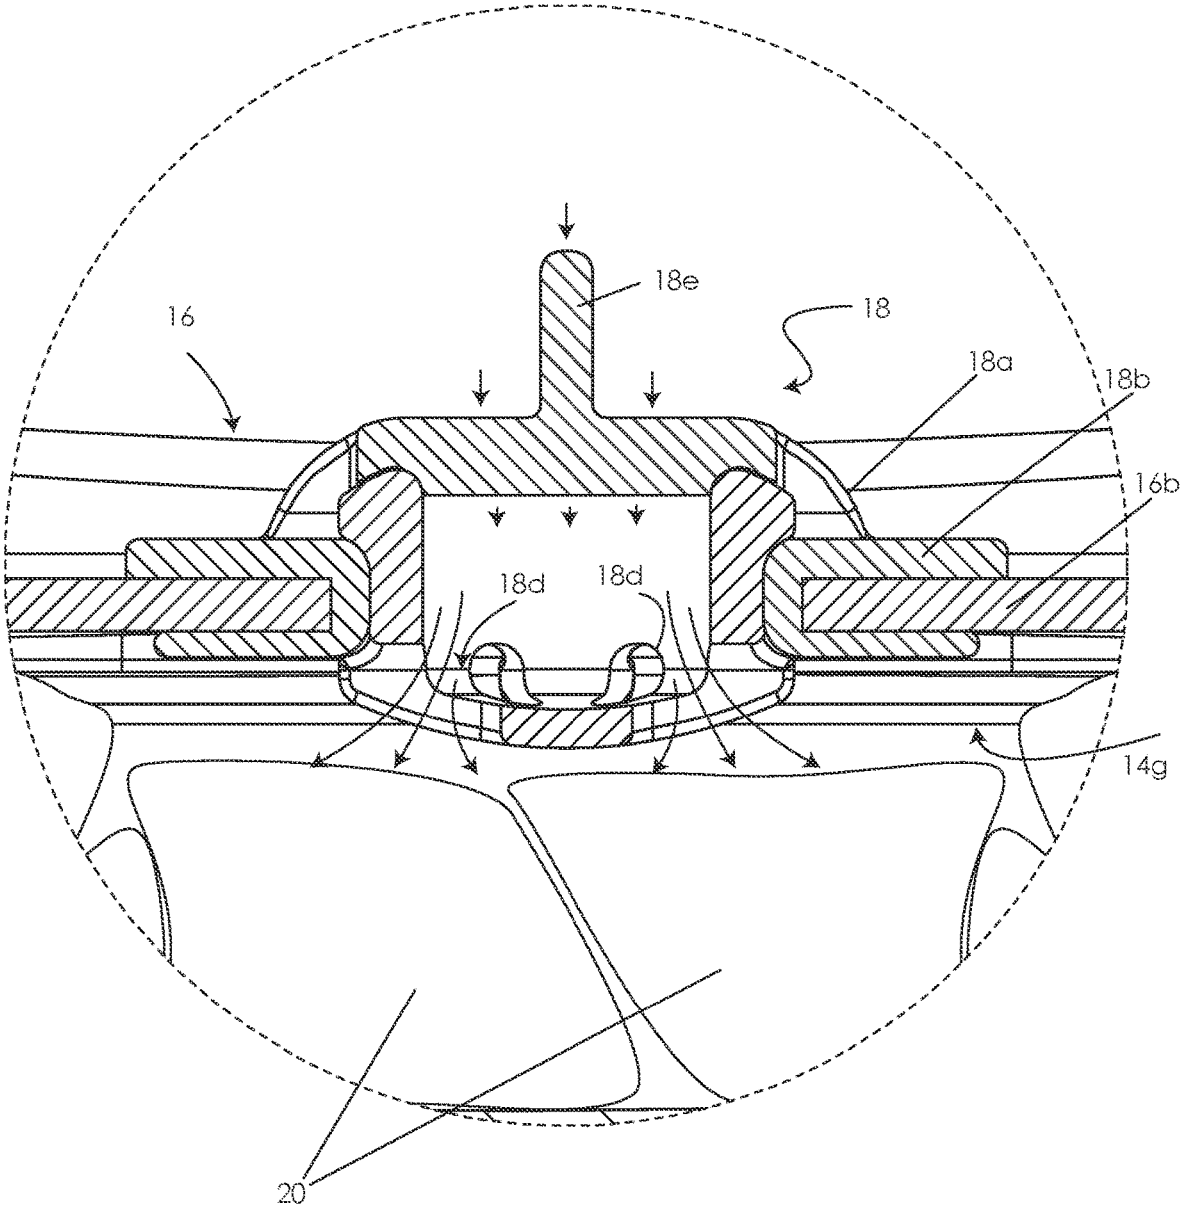


FIG. 21

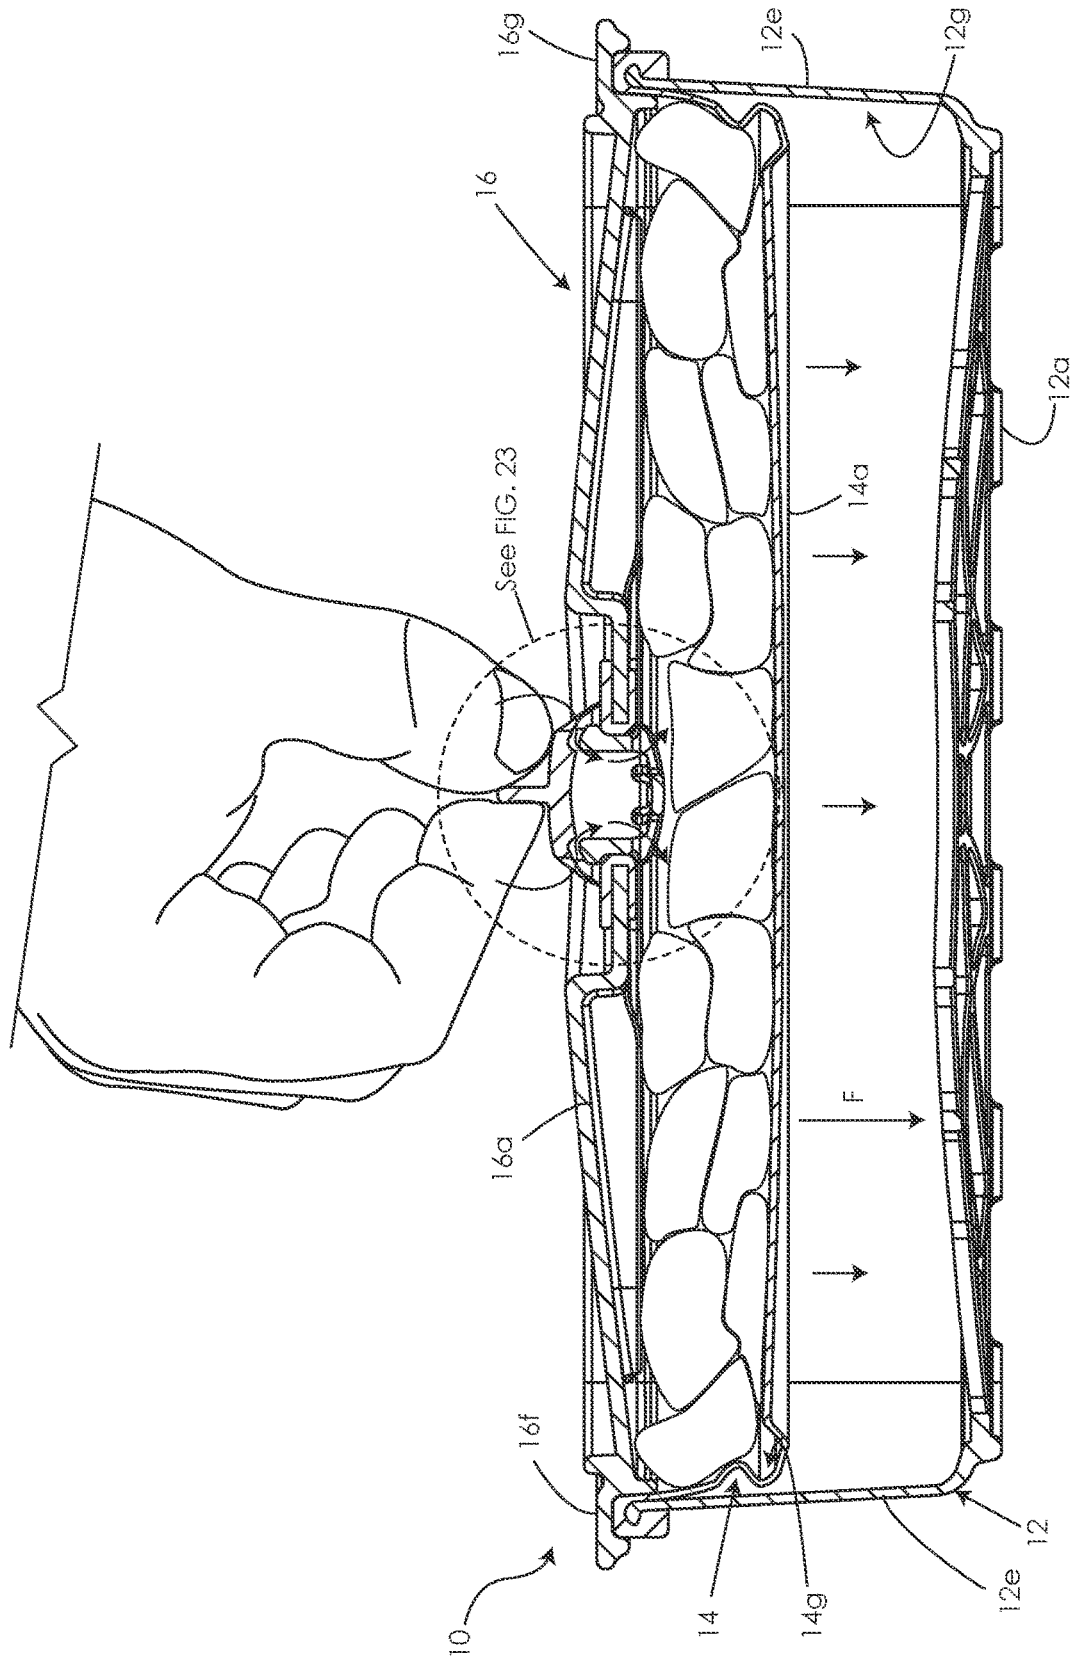


FIG. 22

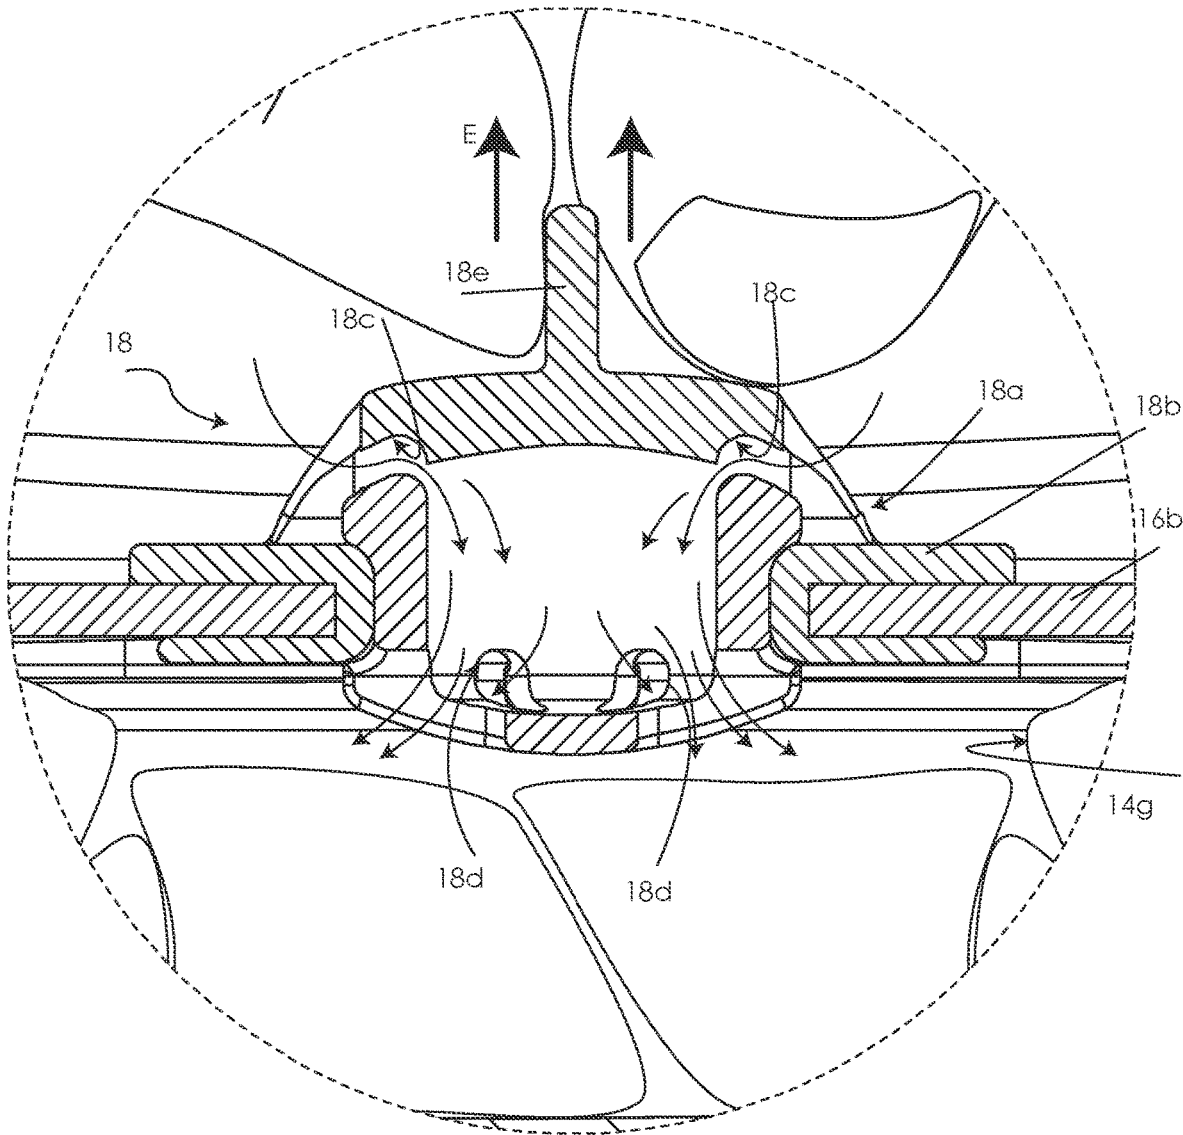


FIG. 23

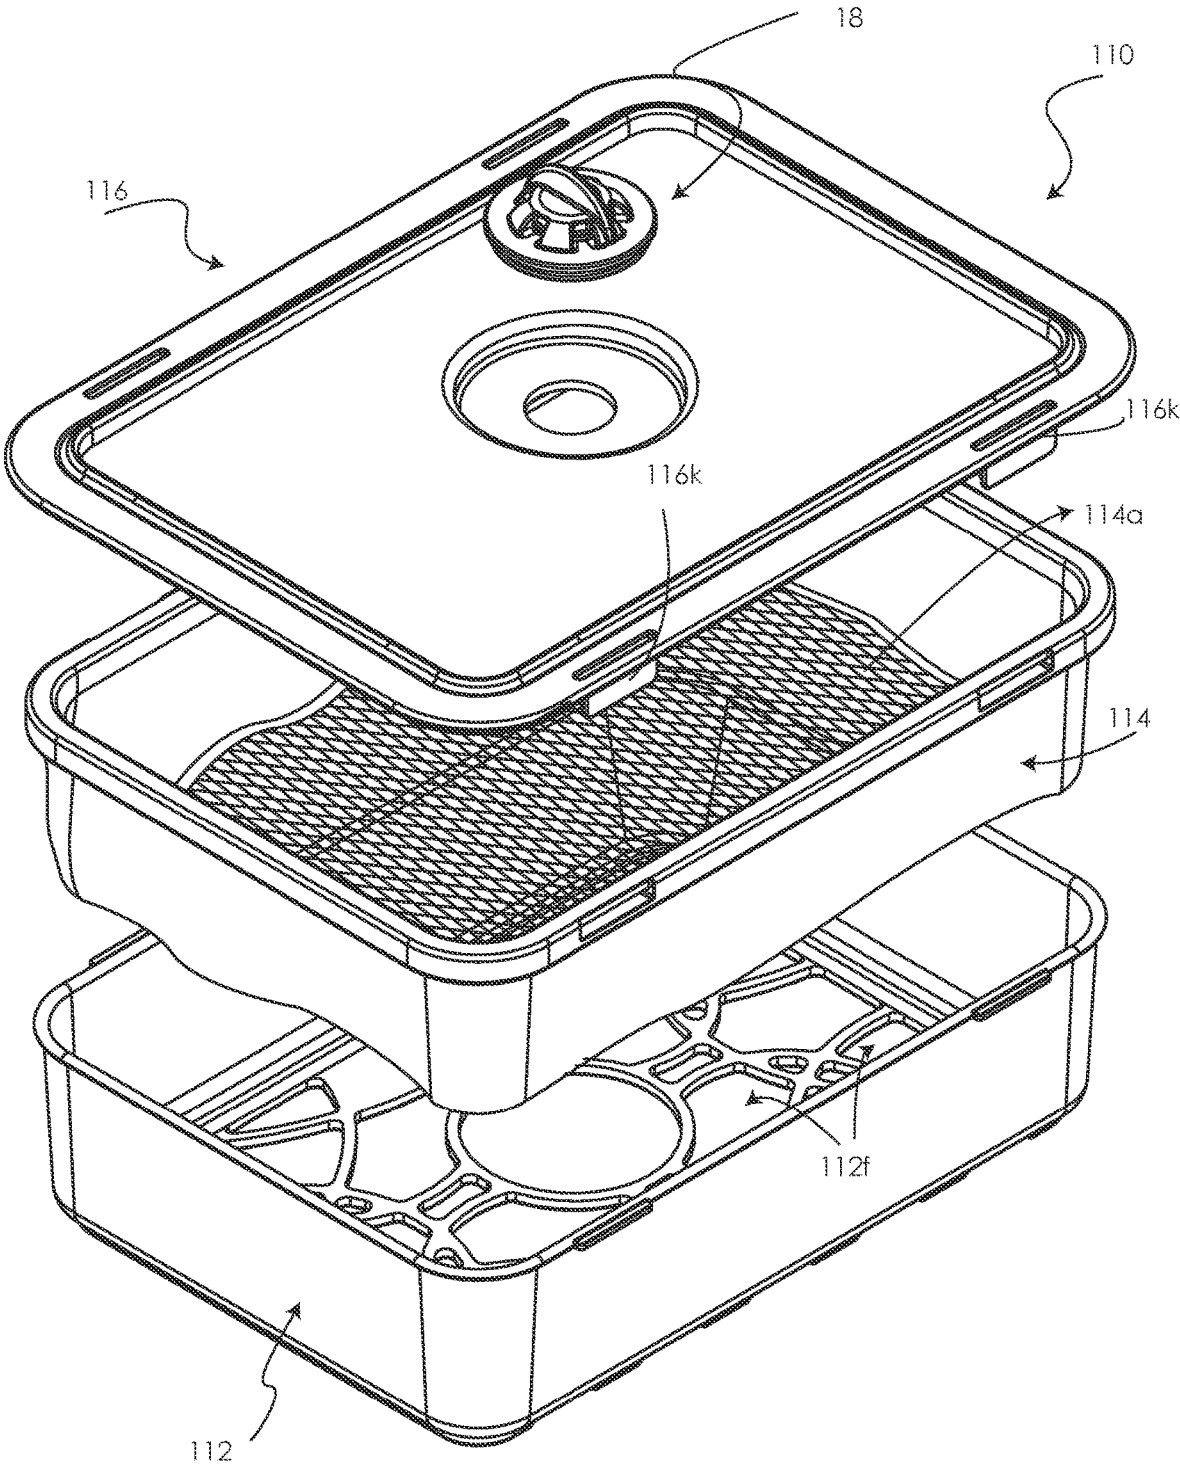


FIG. 24

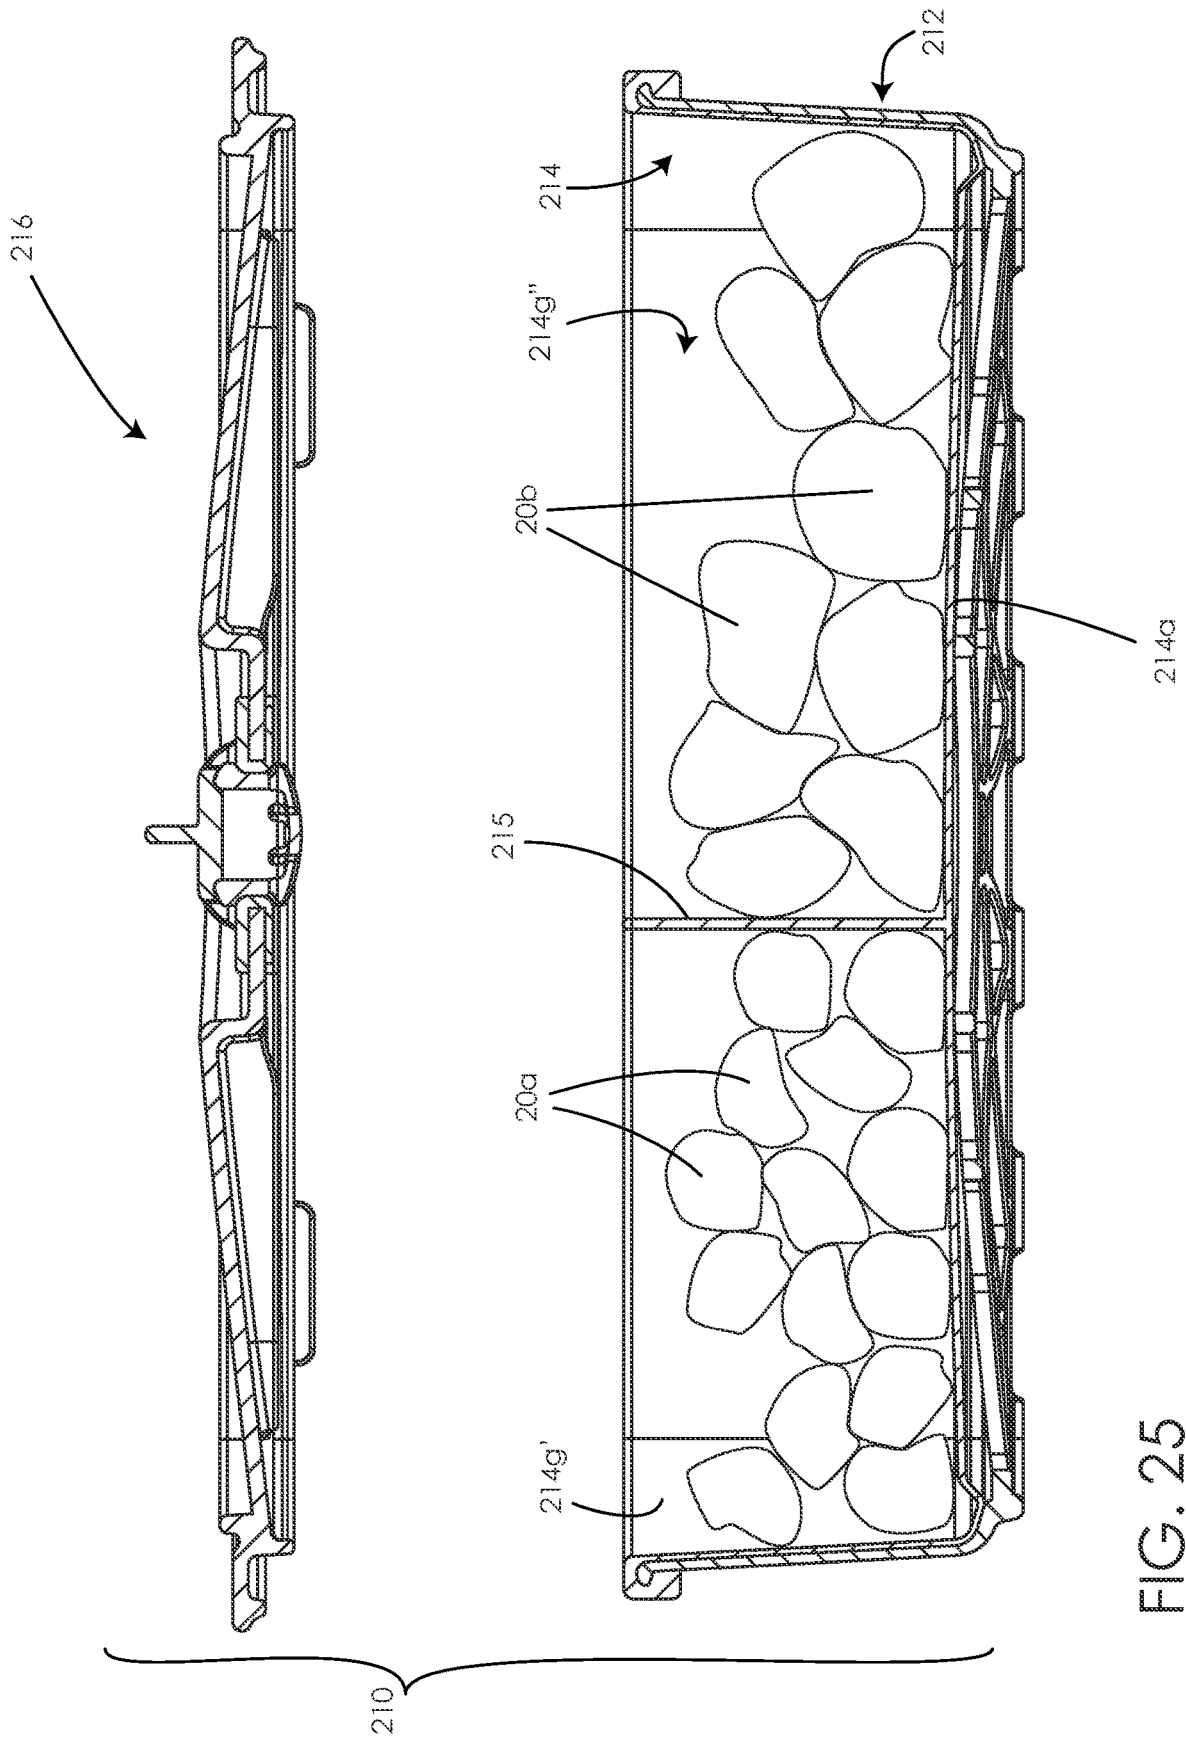


FIG. 25

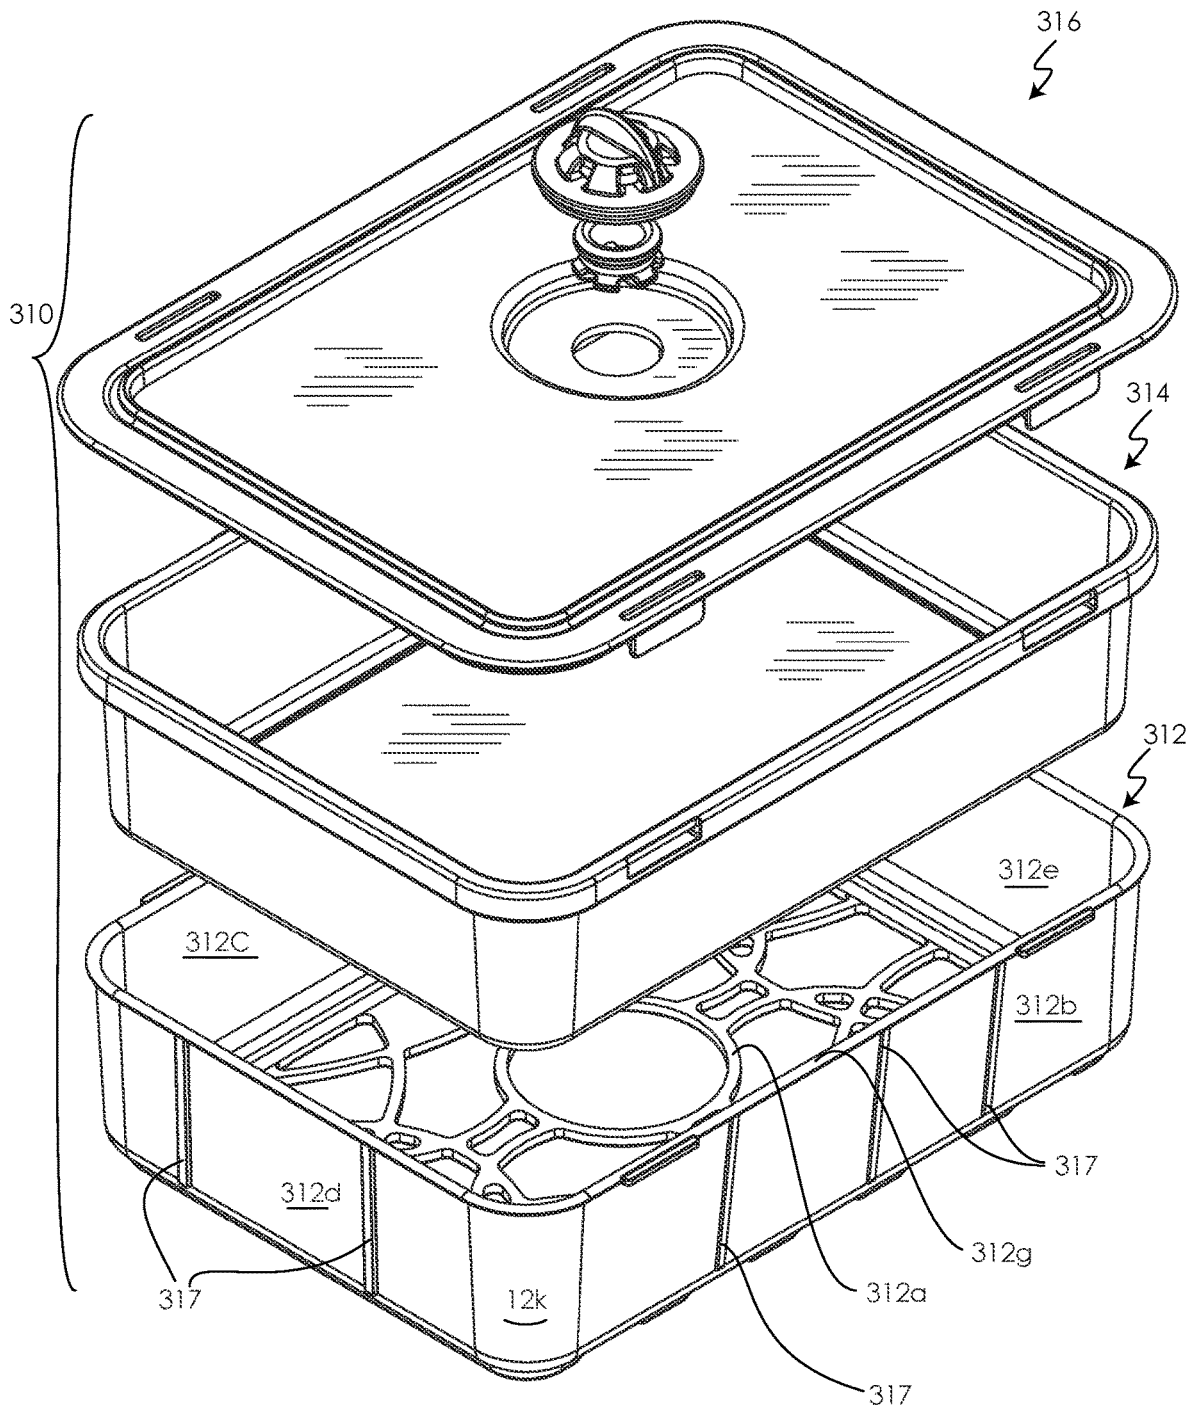


FIG. 26

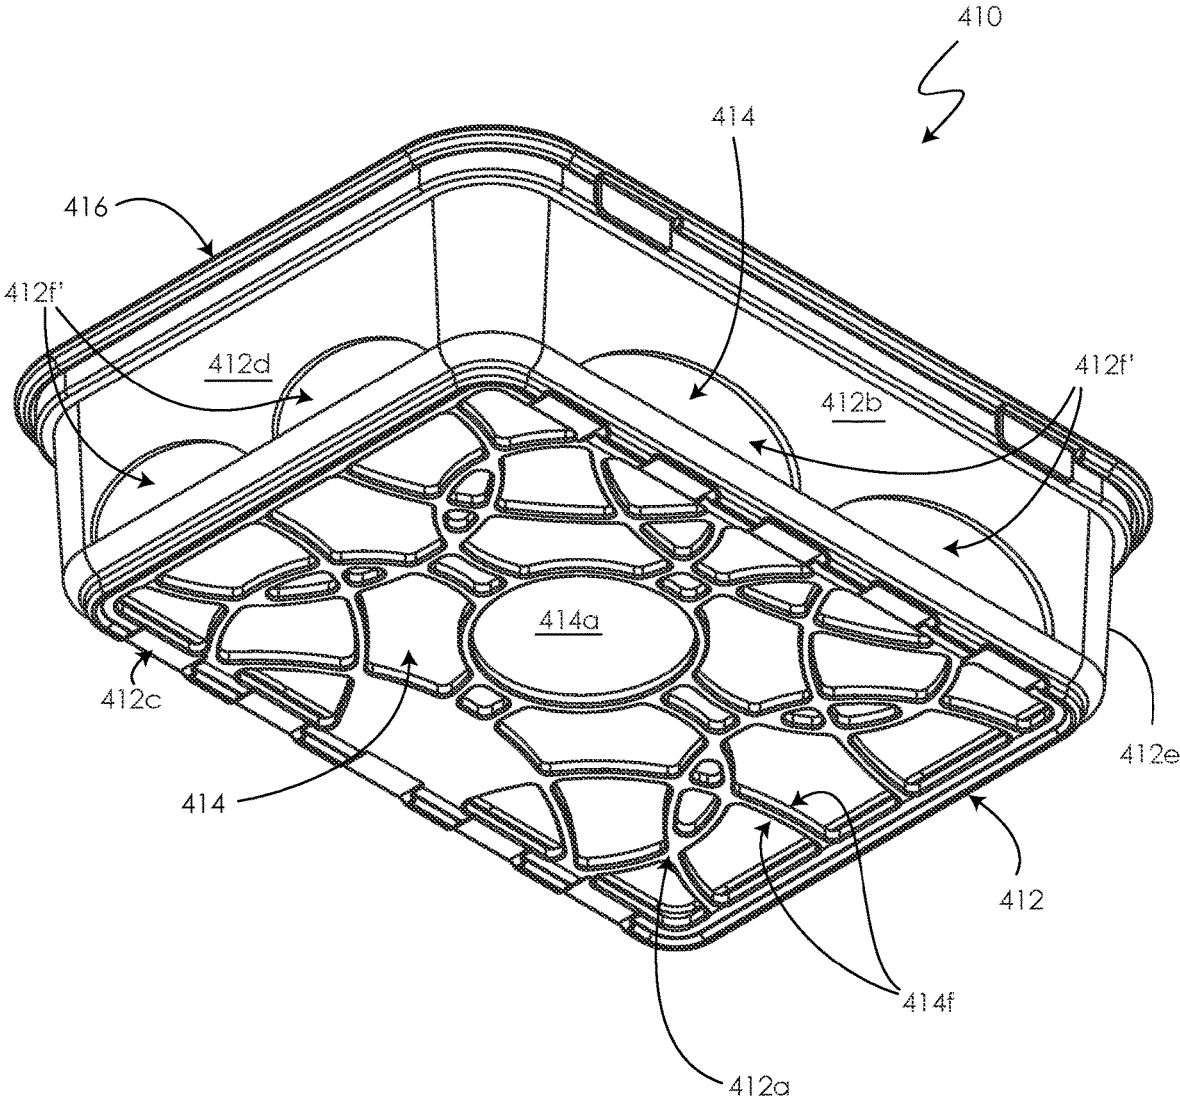
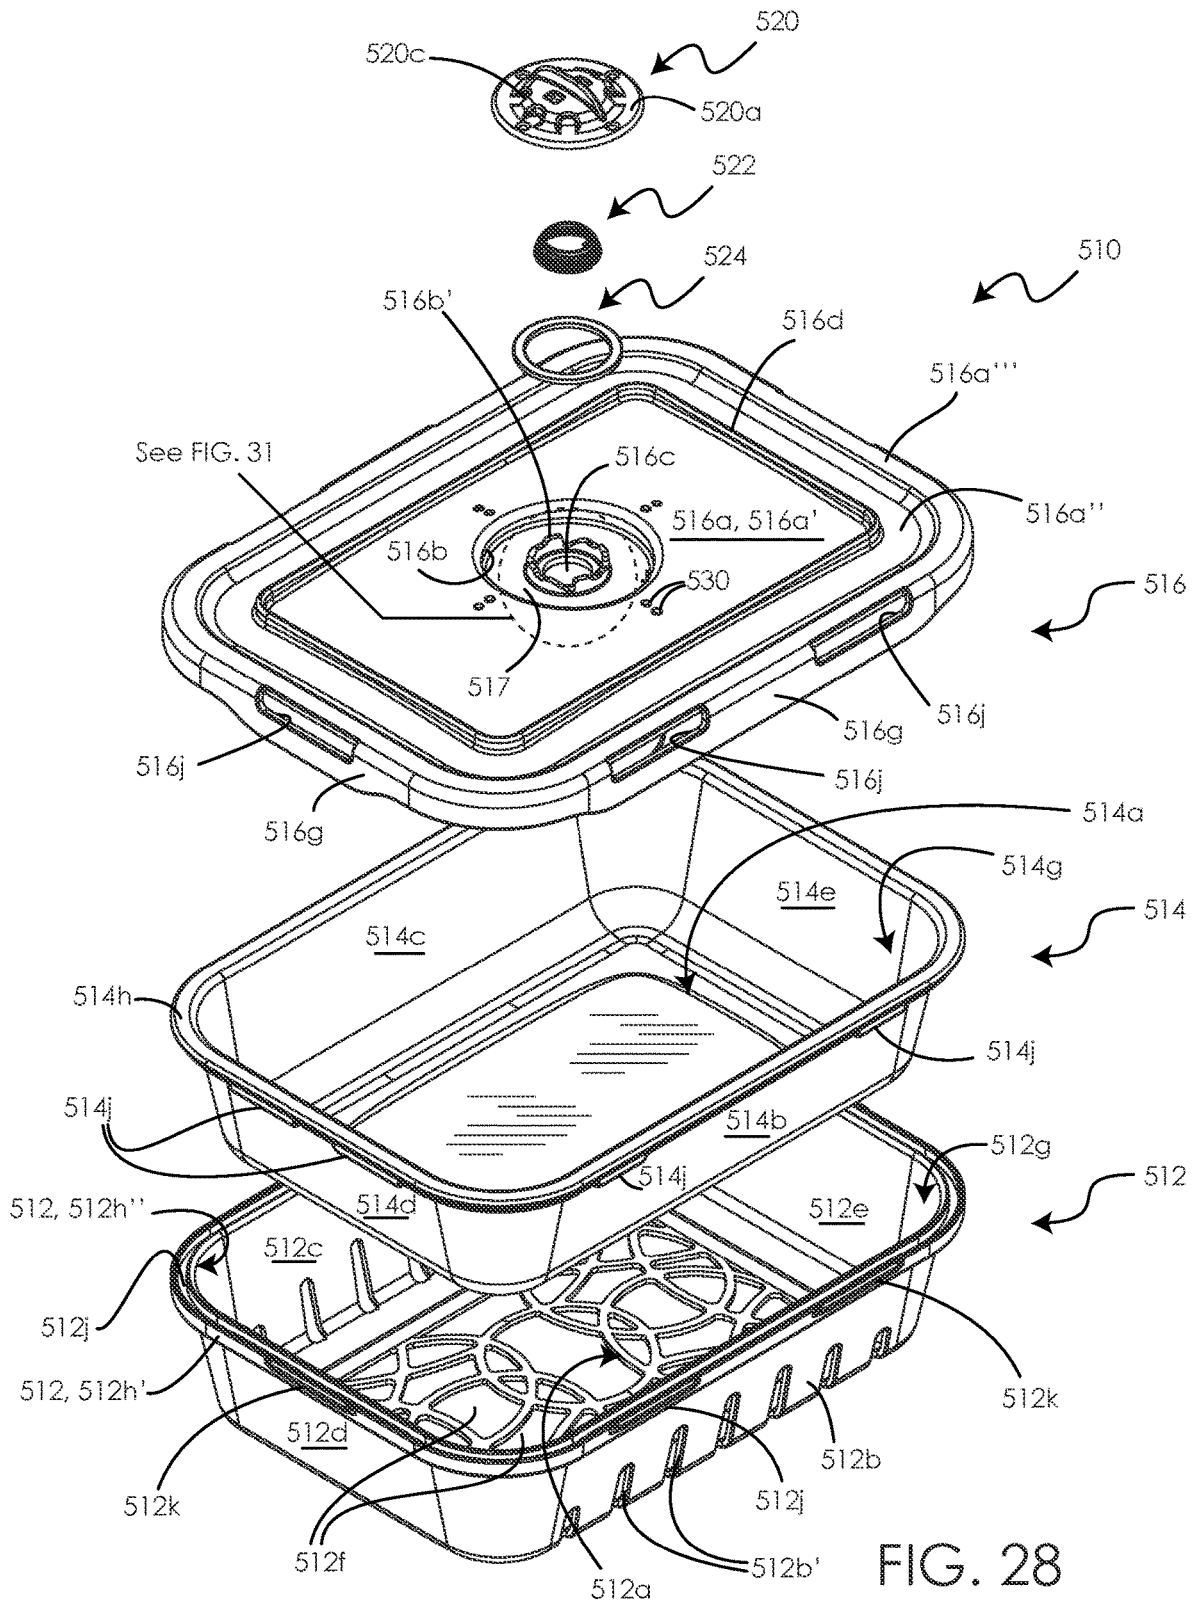


FIG. 27



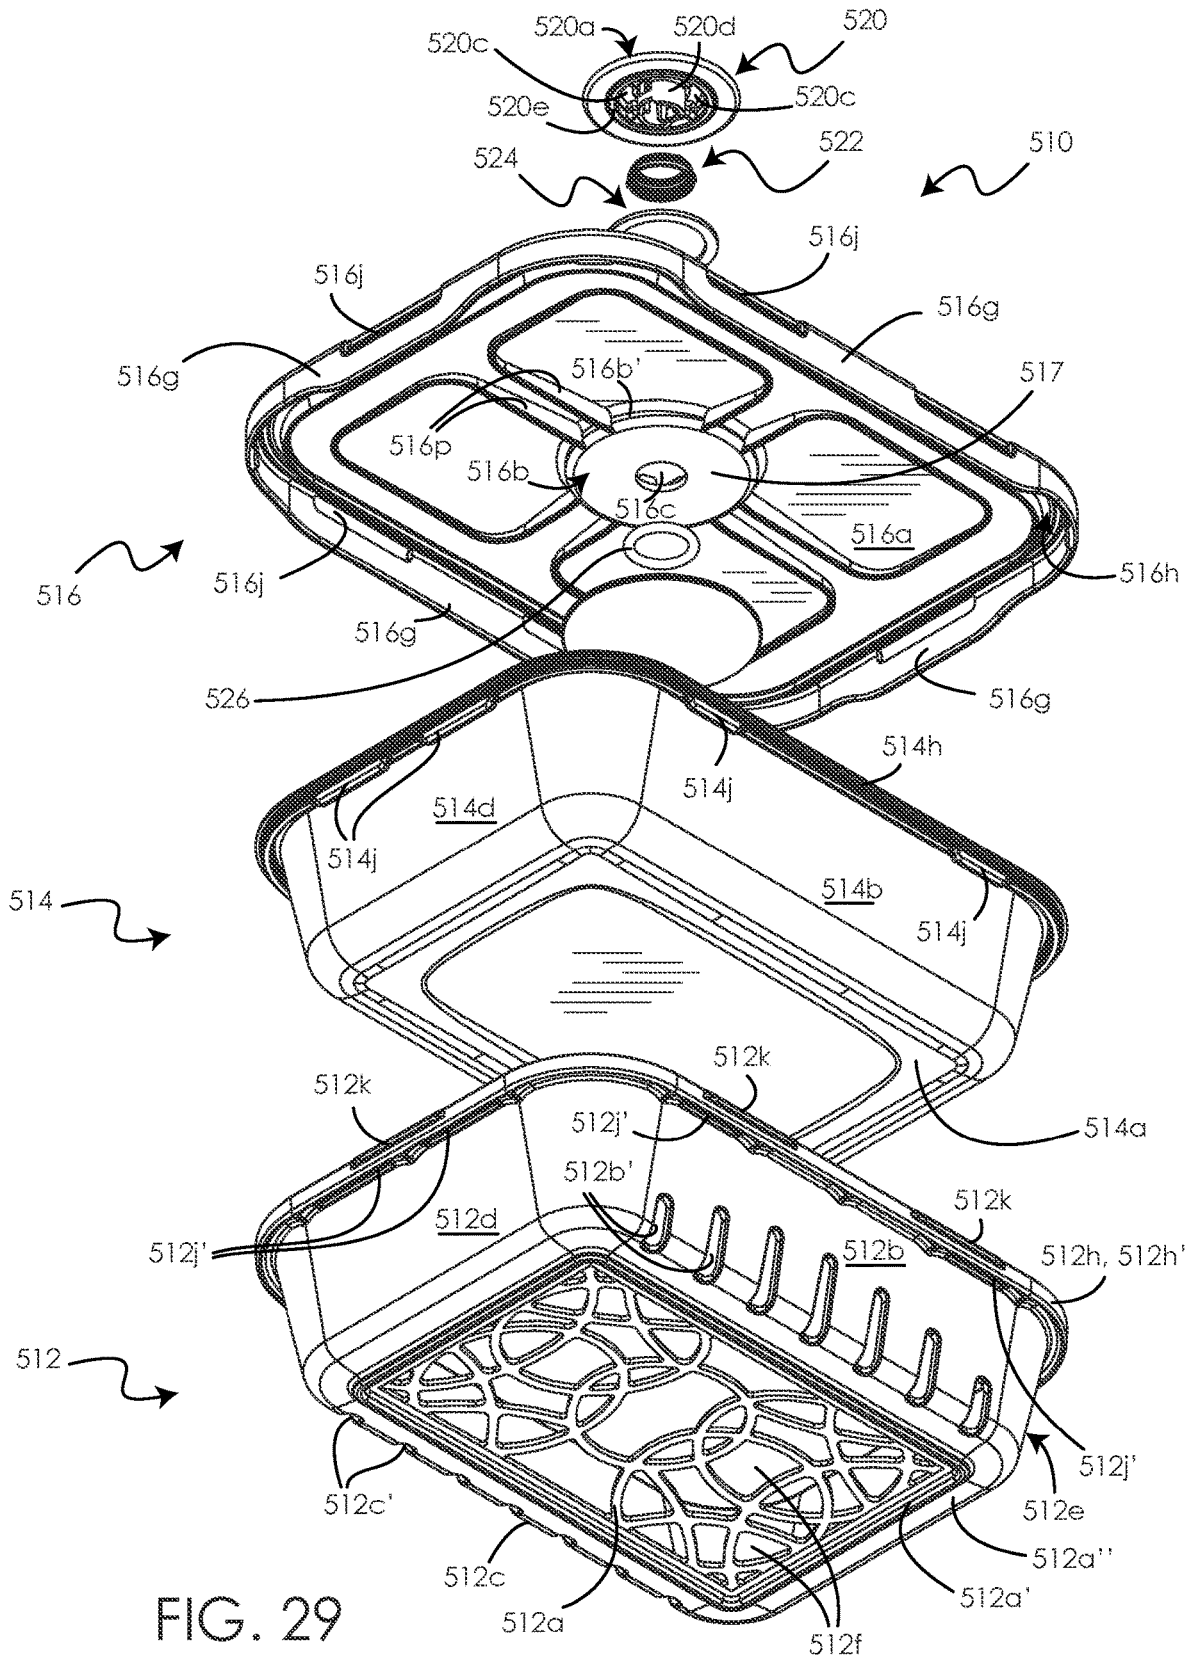


FIG. 29

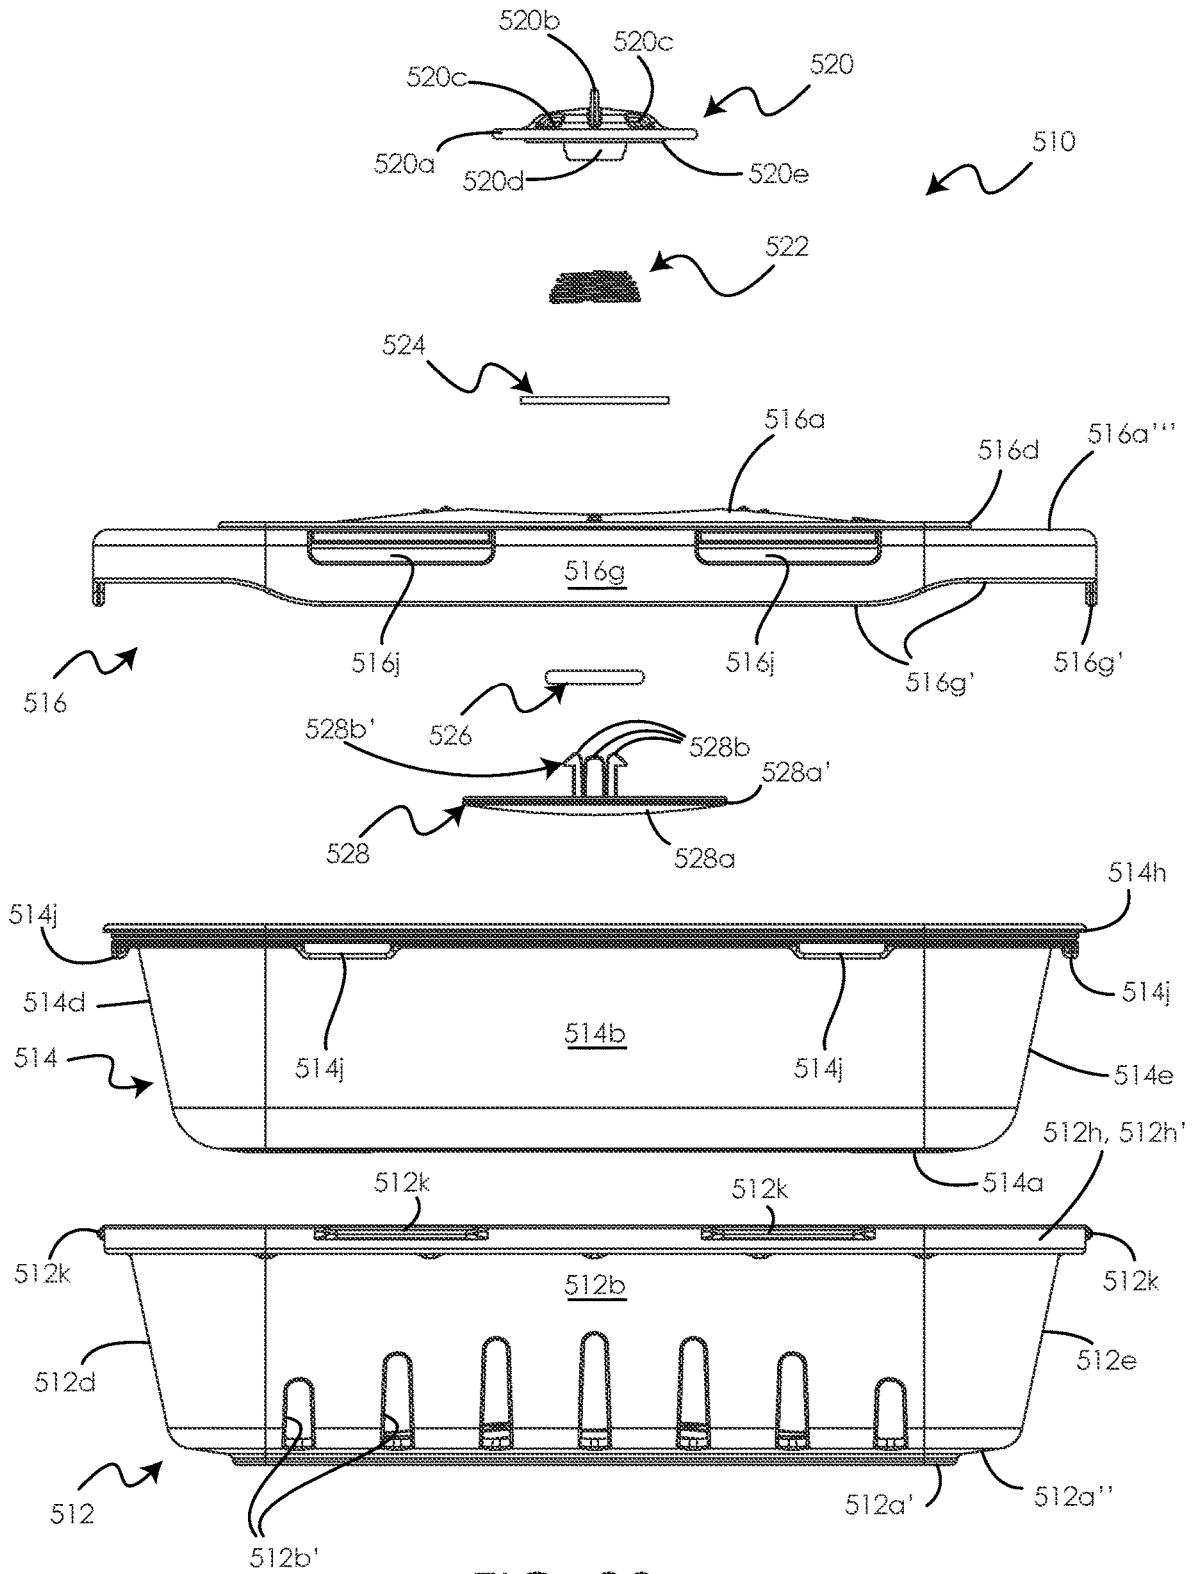
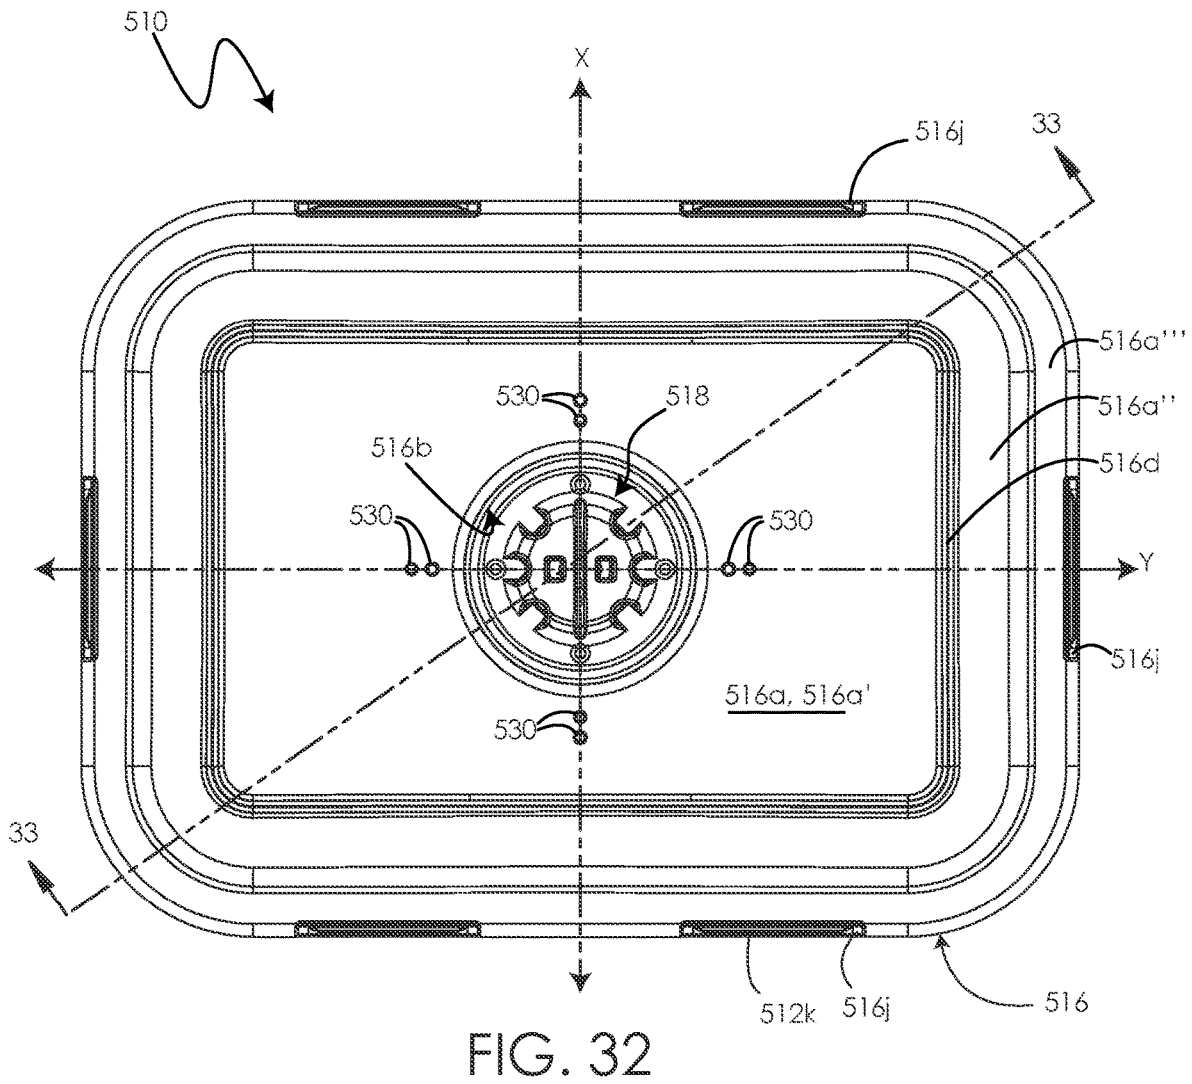
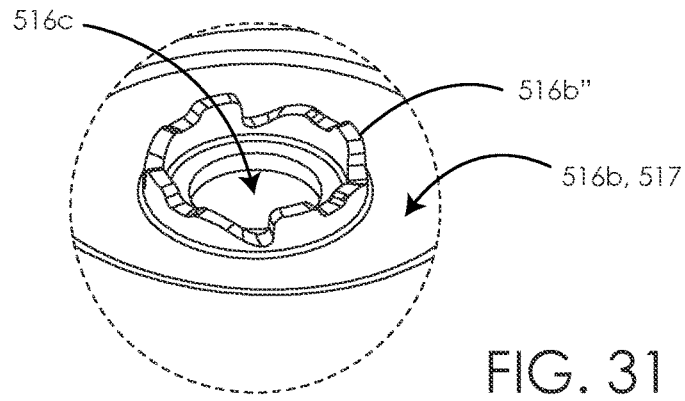
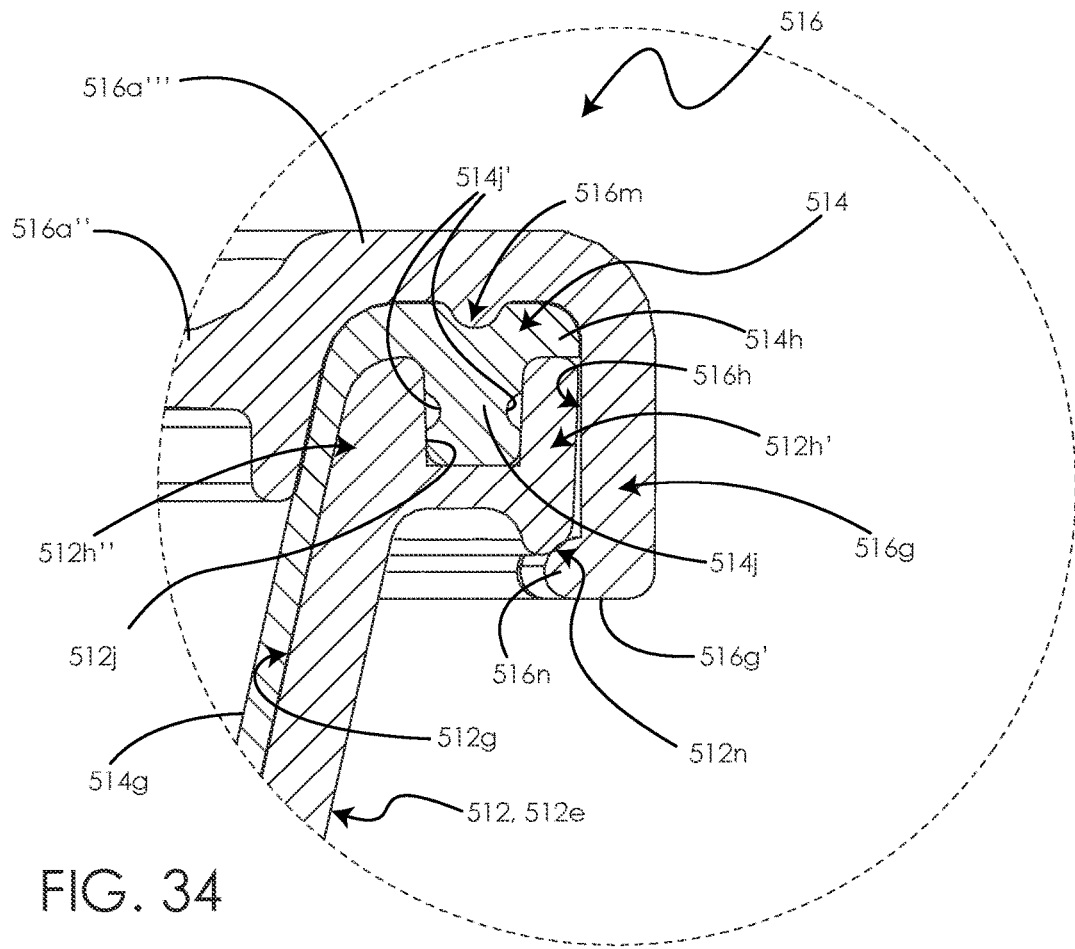
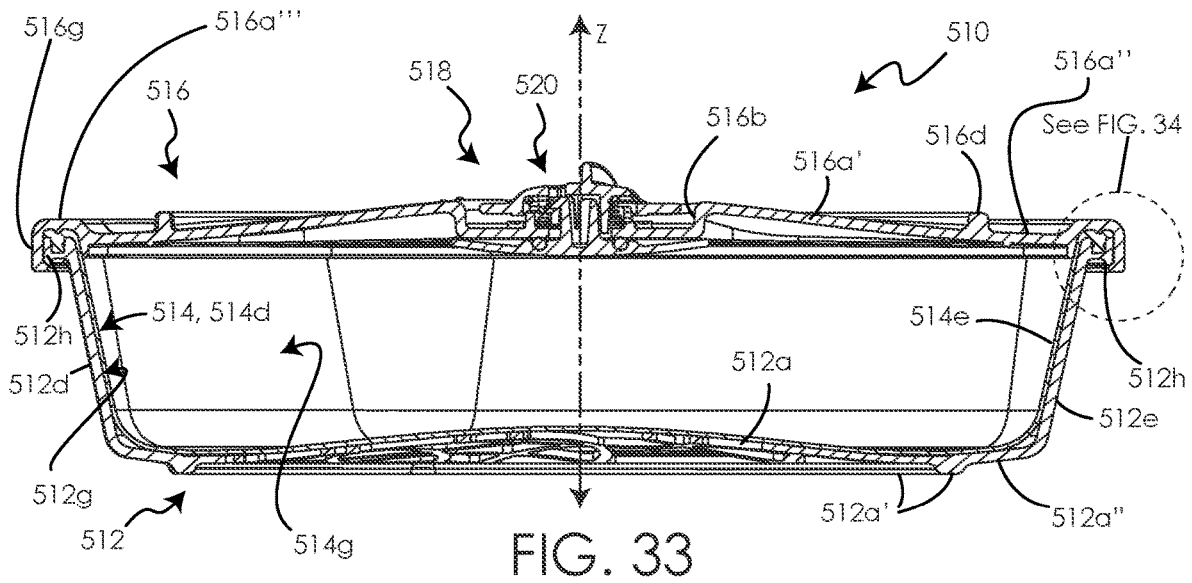


FIG. 30





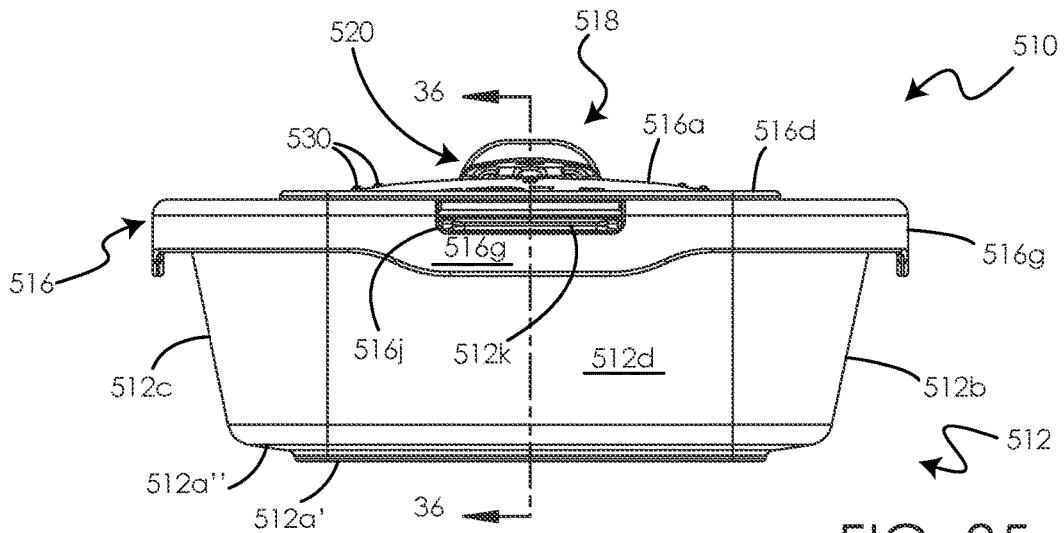


FIG. 35

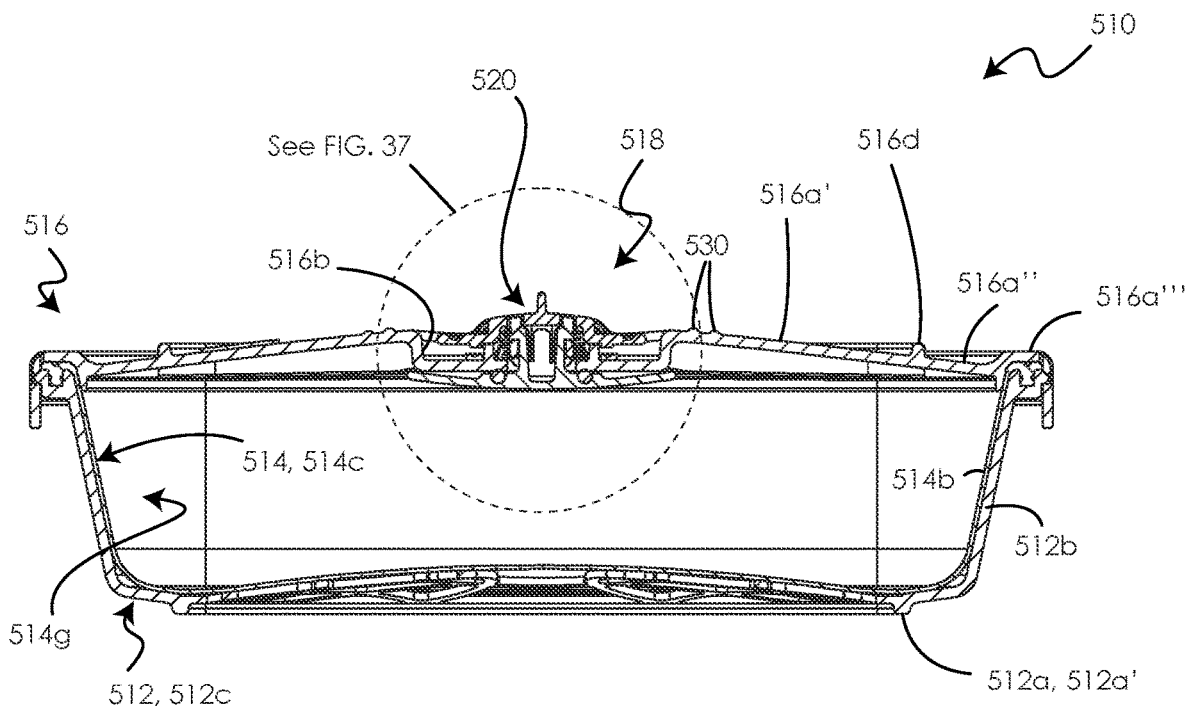


FIG. 36

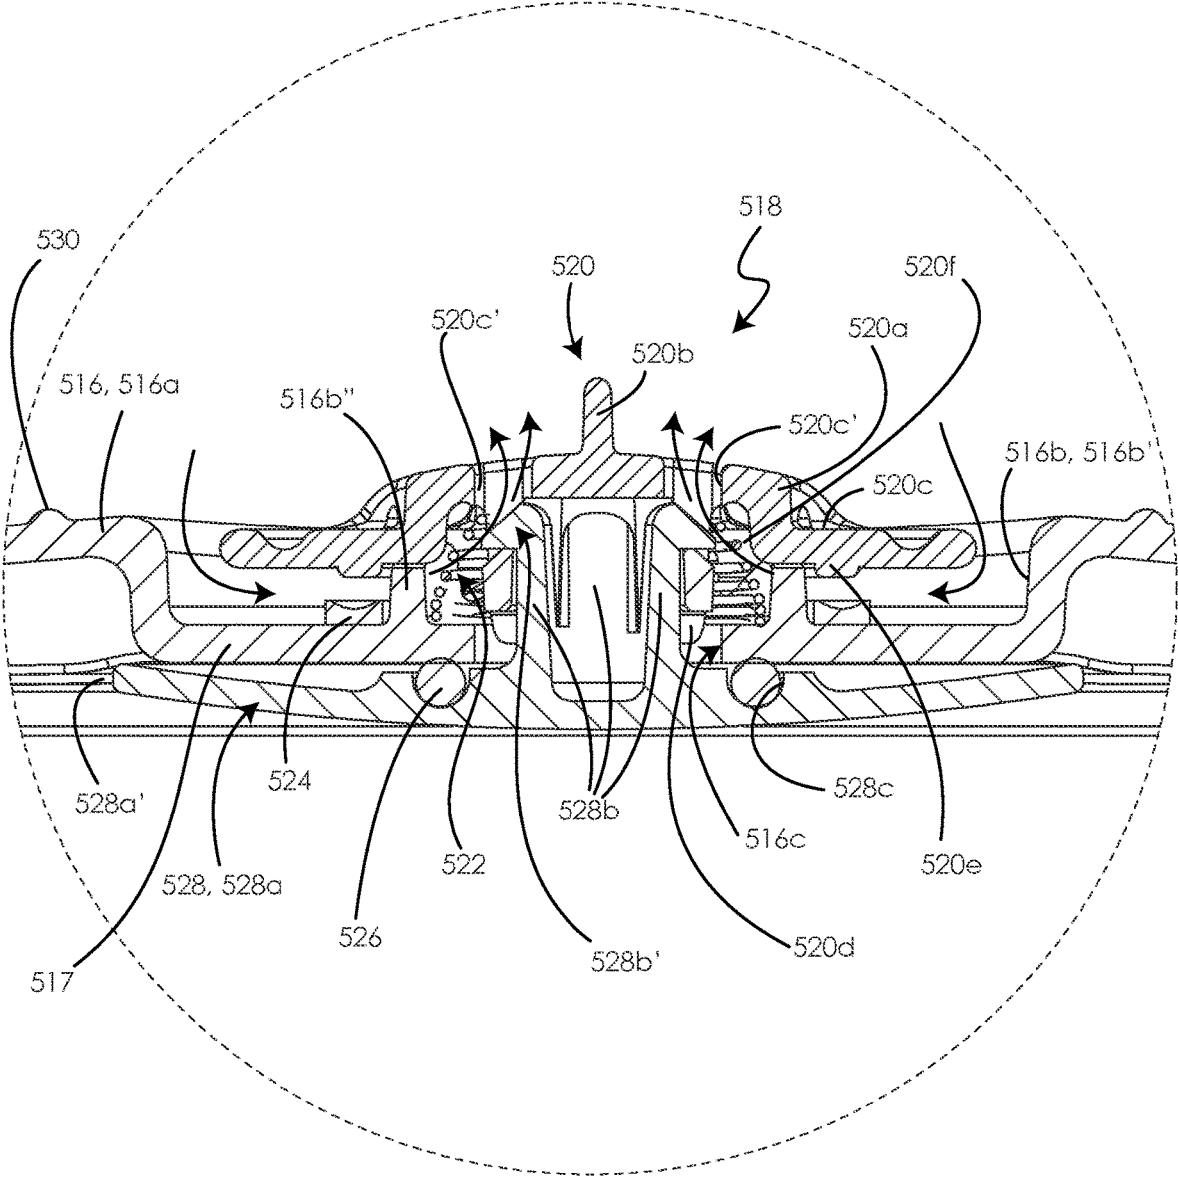


FIG. 37

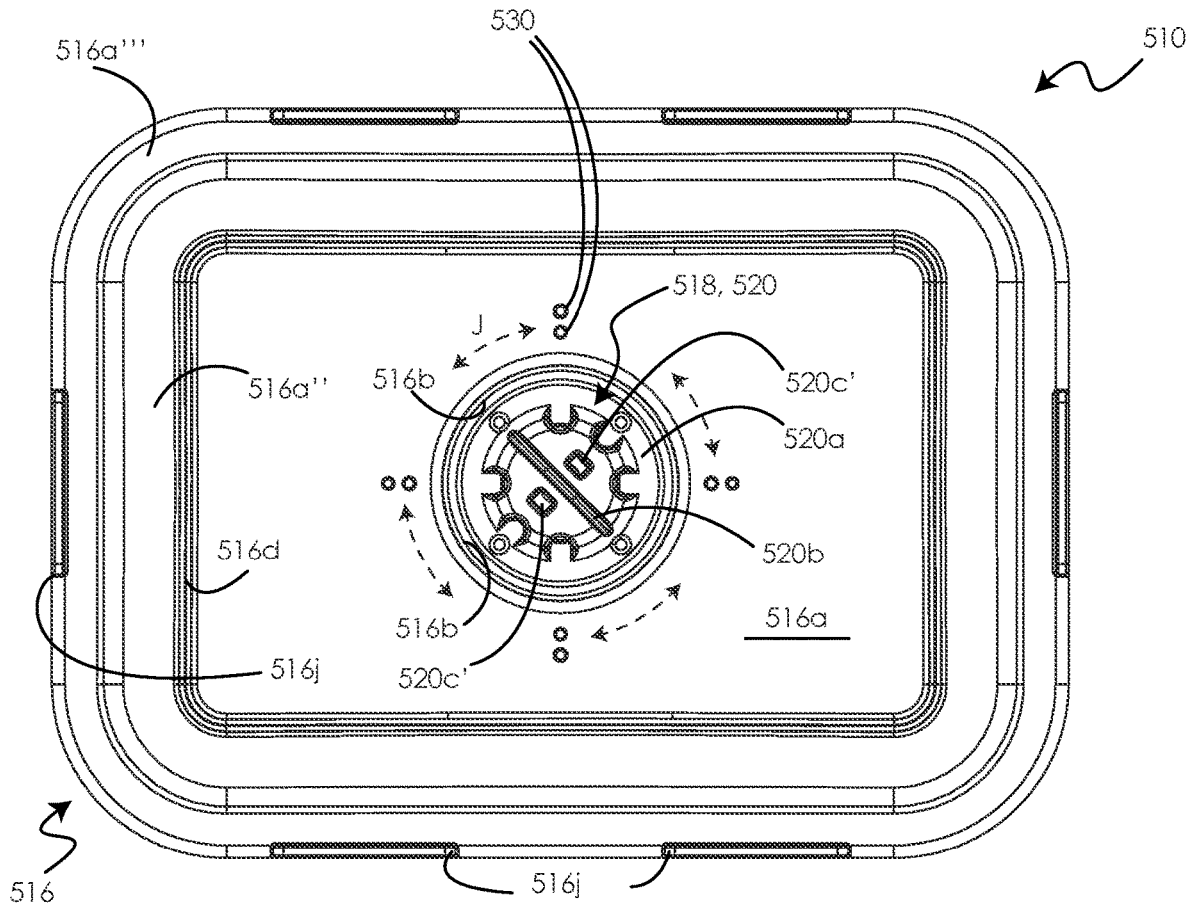


FIG. 38

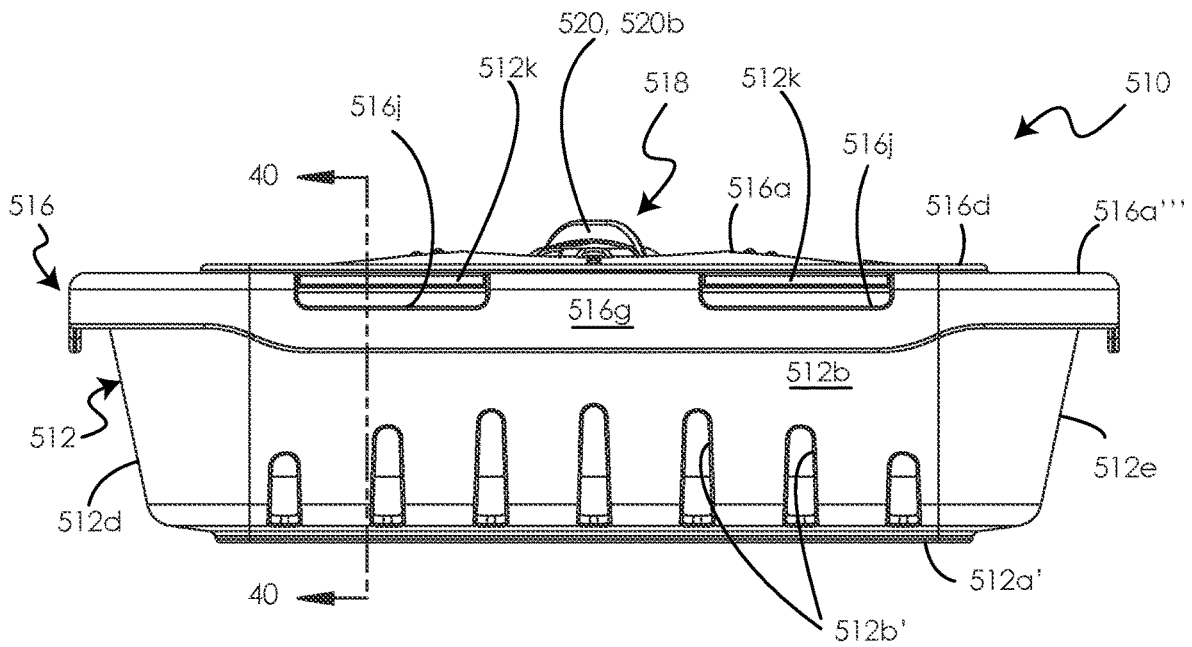


FIG. 39

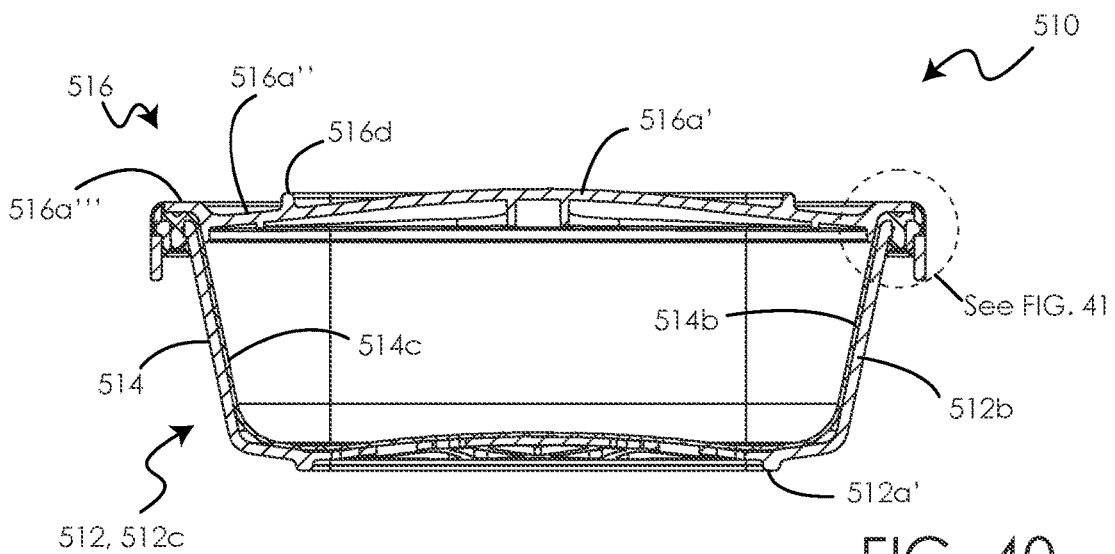
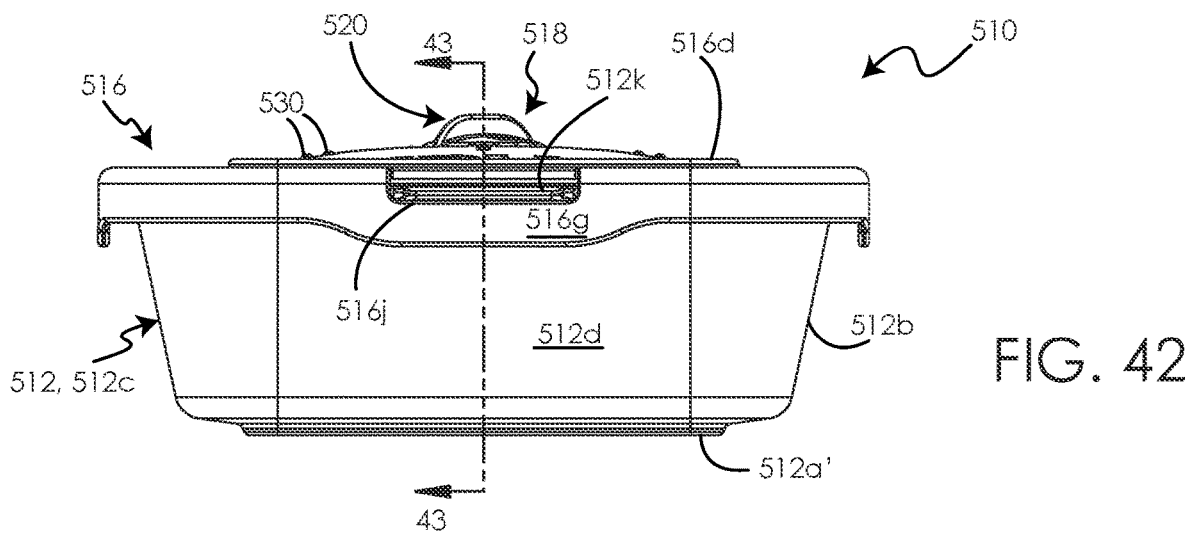
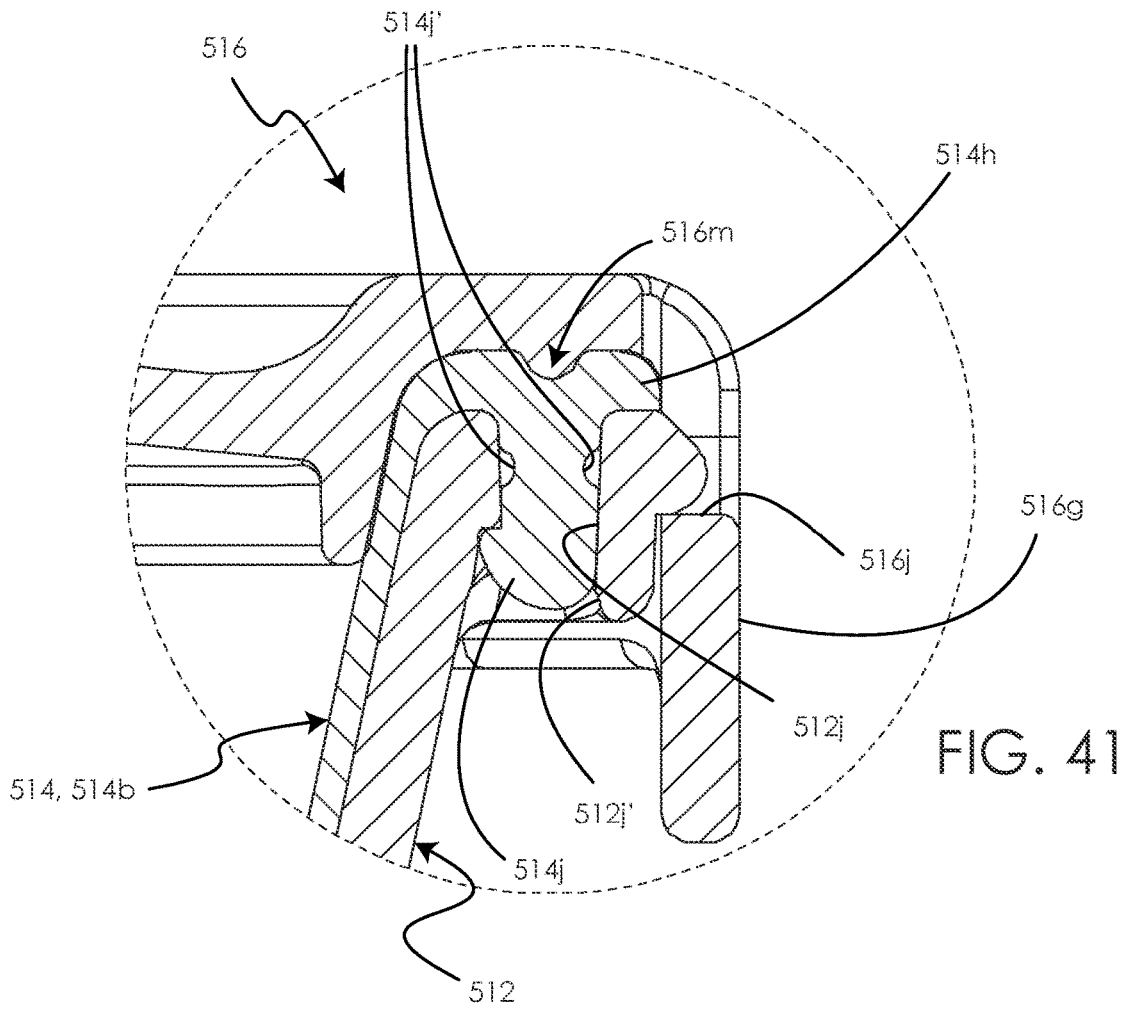


FIG. 40



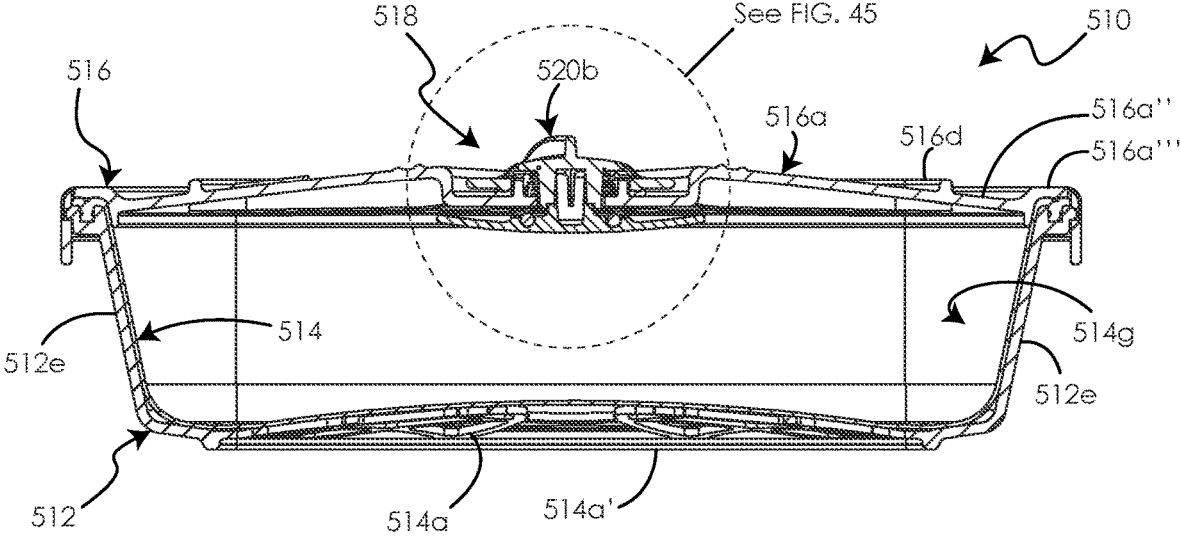


FIG. 43

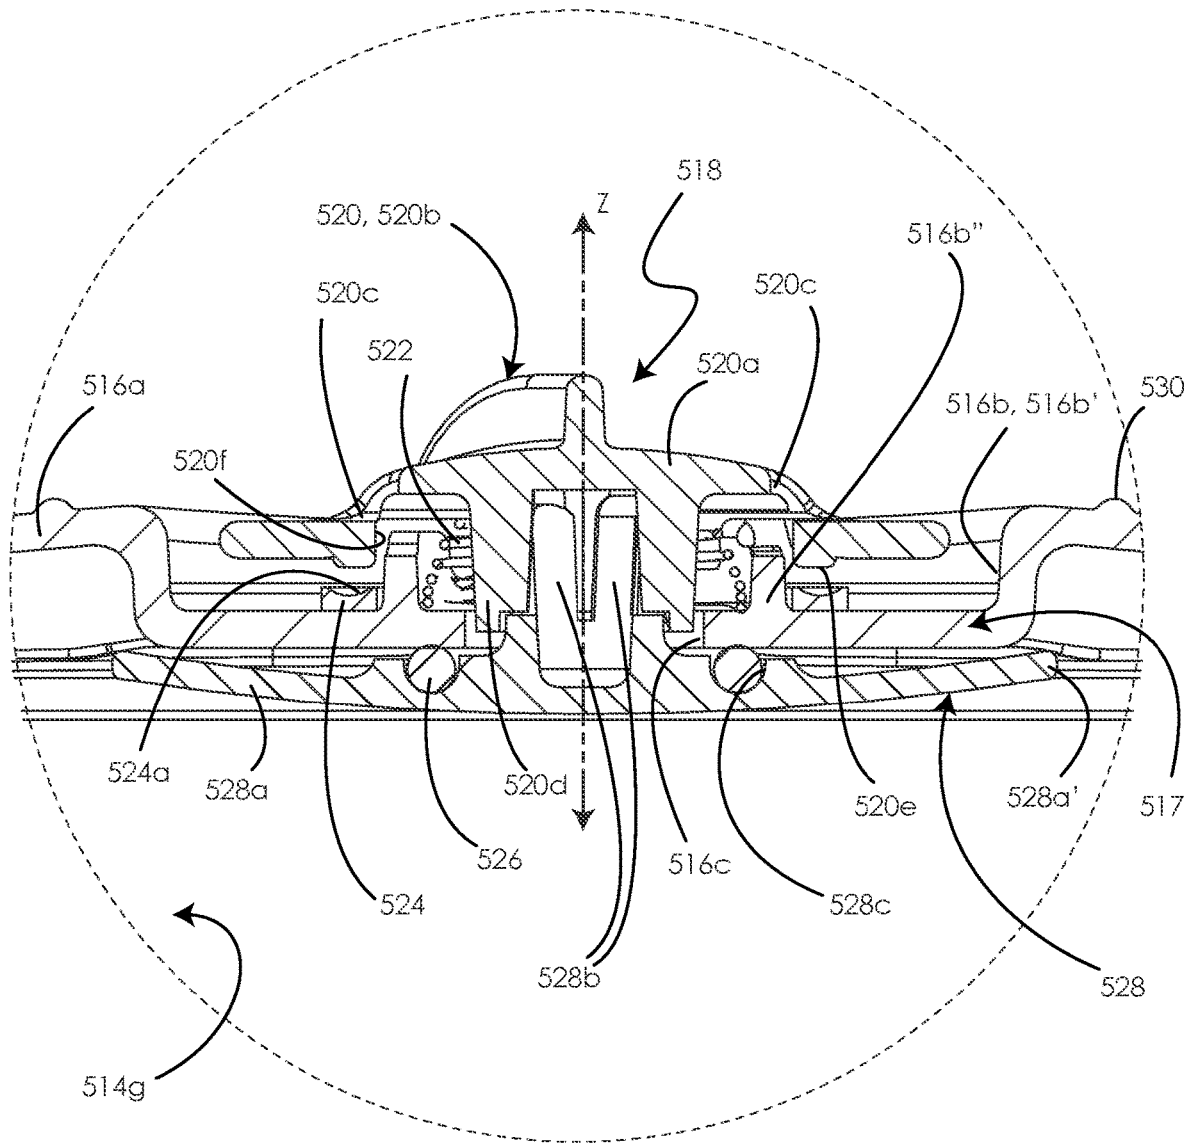


FIG. 44

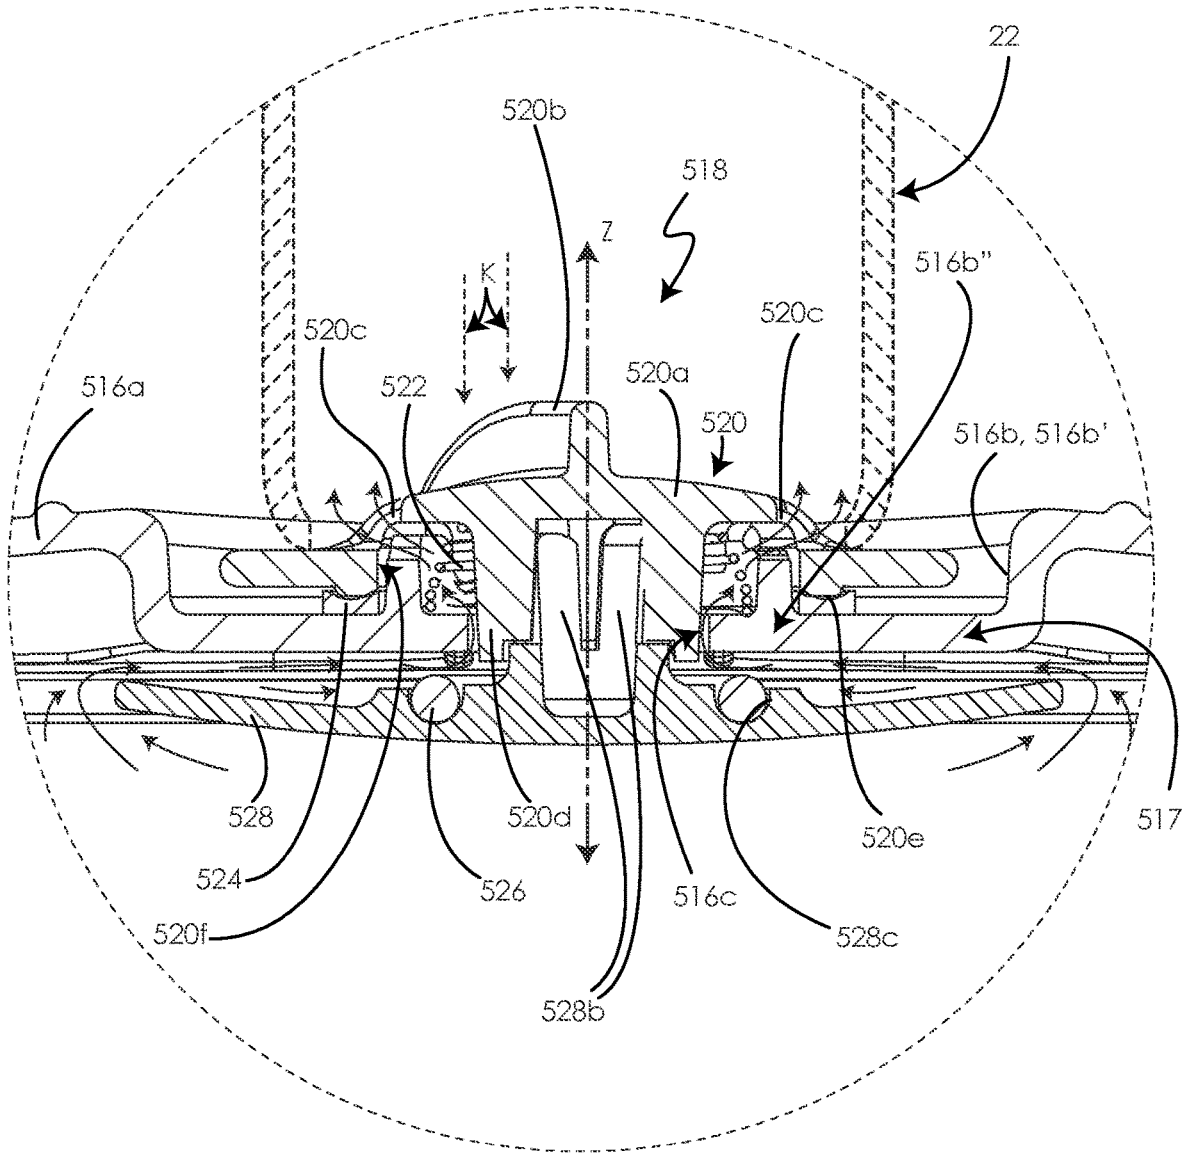


FIG. 45

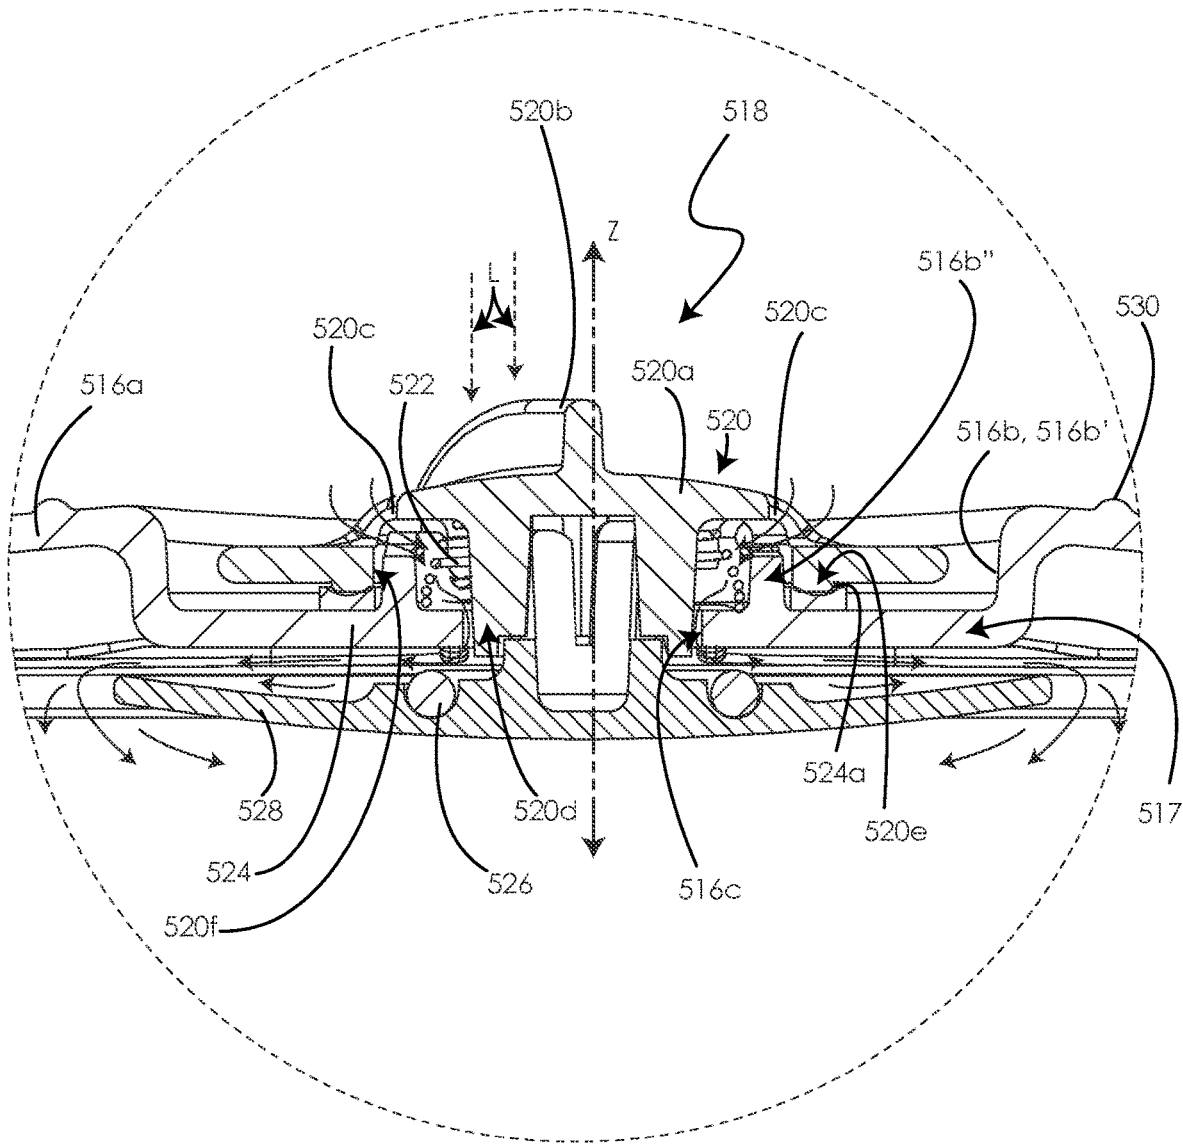


FIG. 46

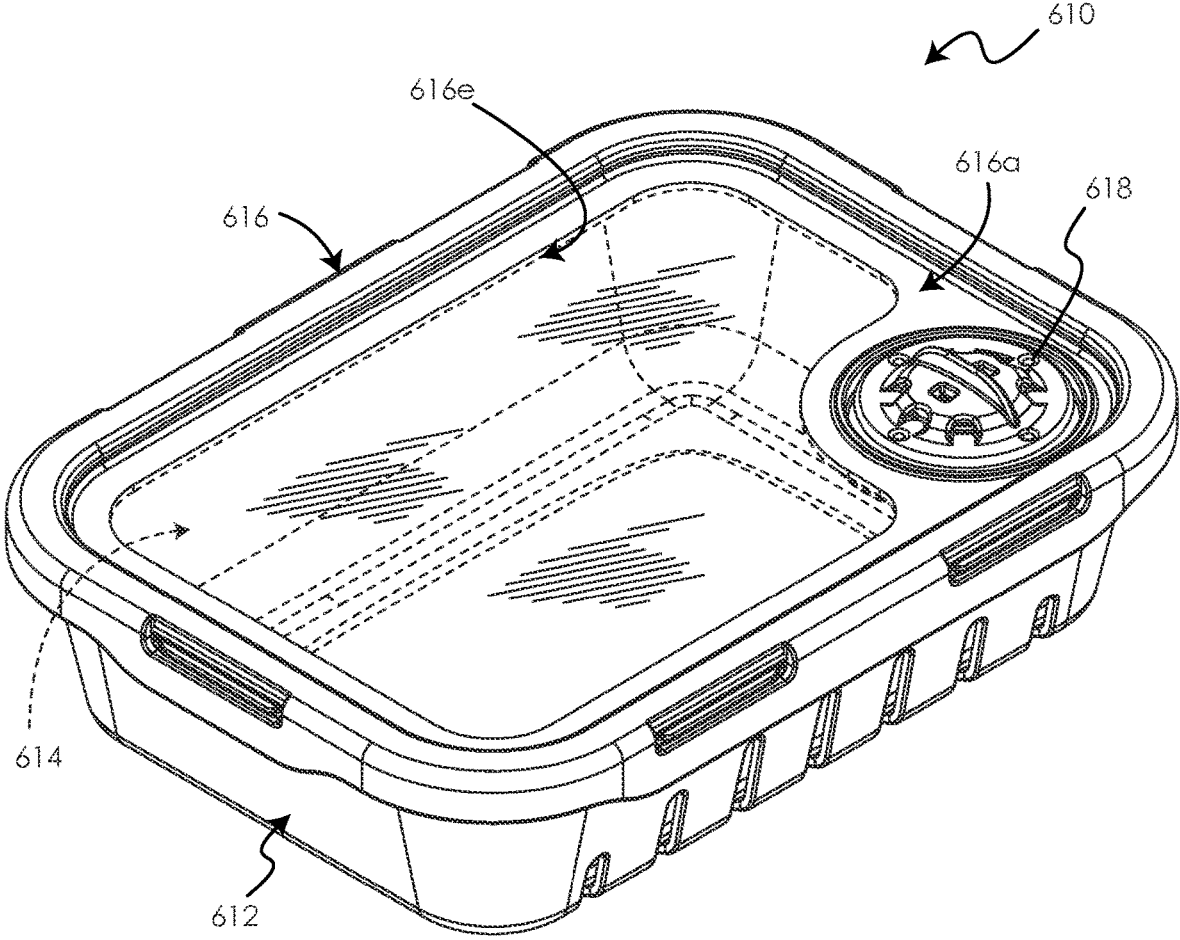


FIG. 47

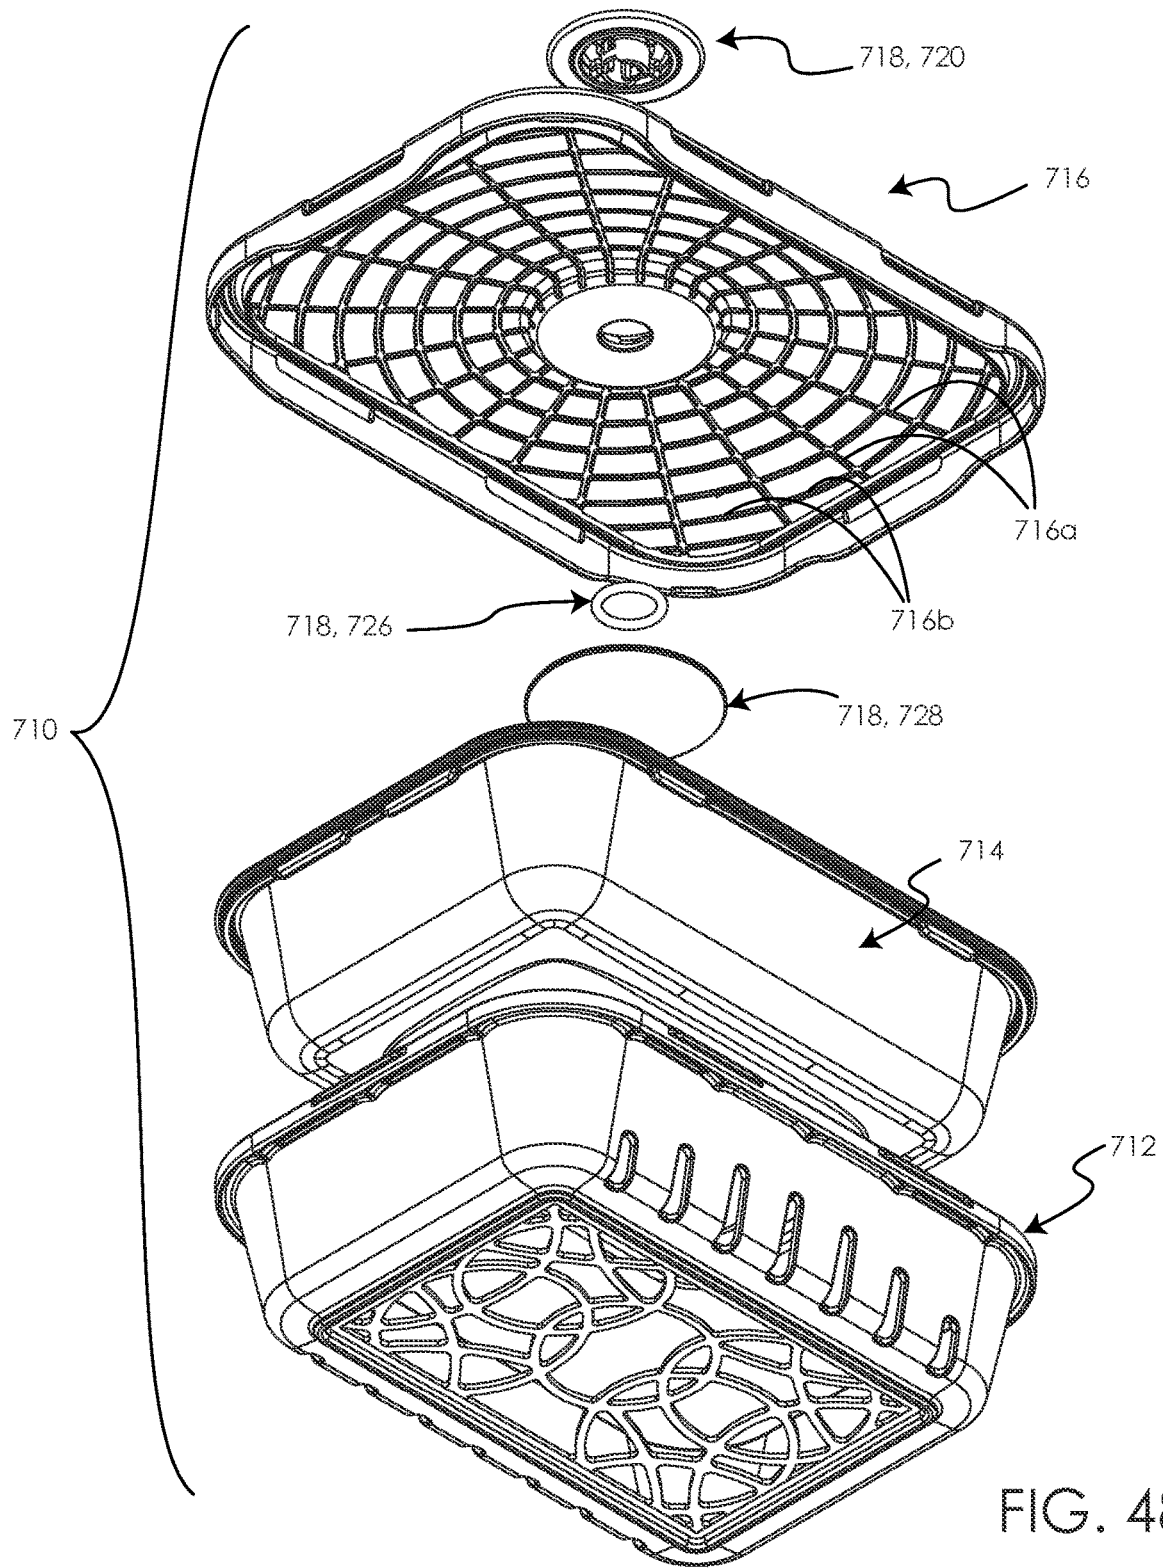


FIG. 48

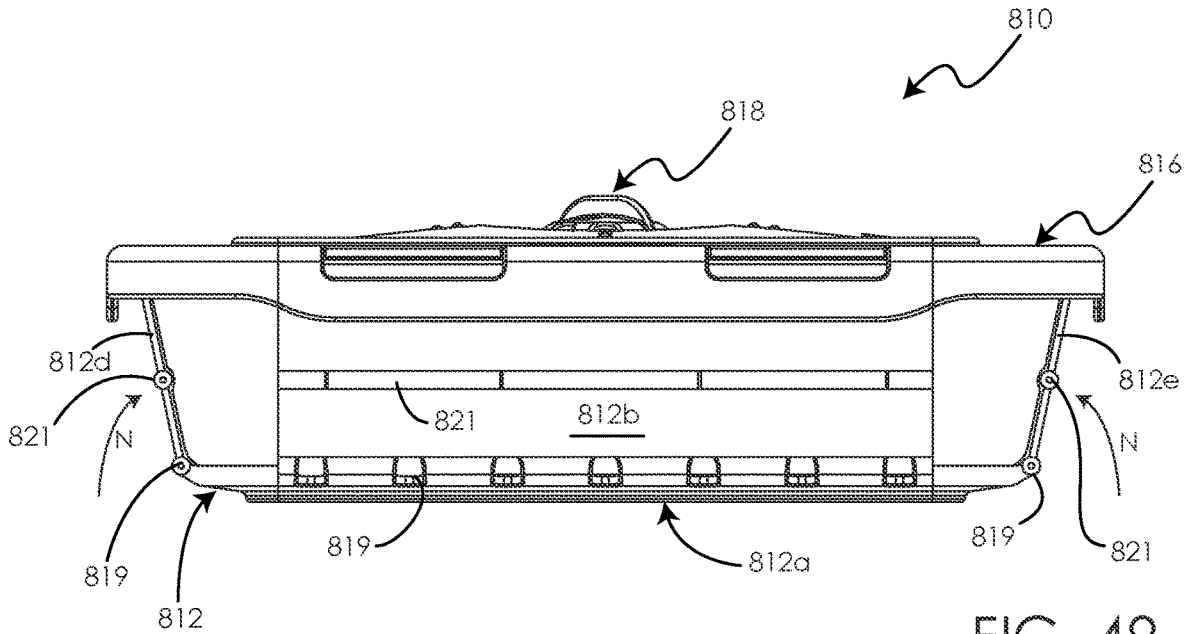


FIG. 49

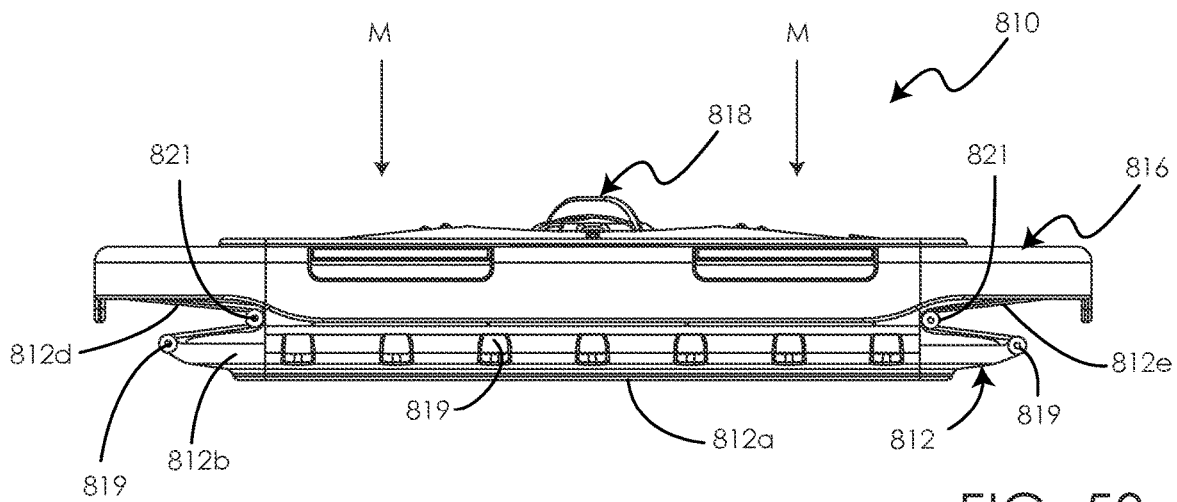


FIG. 50

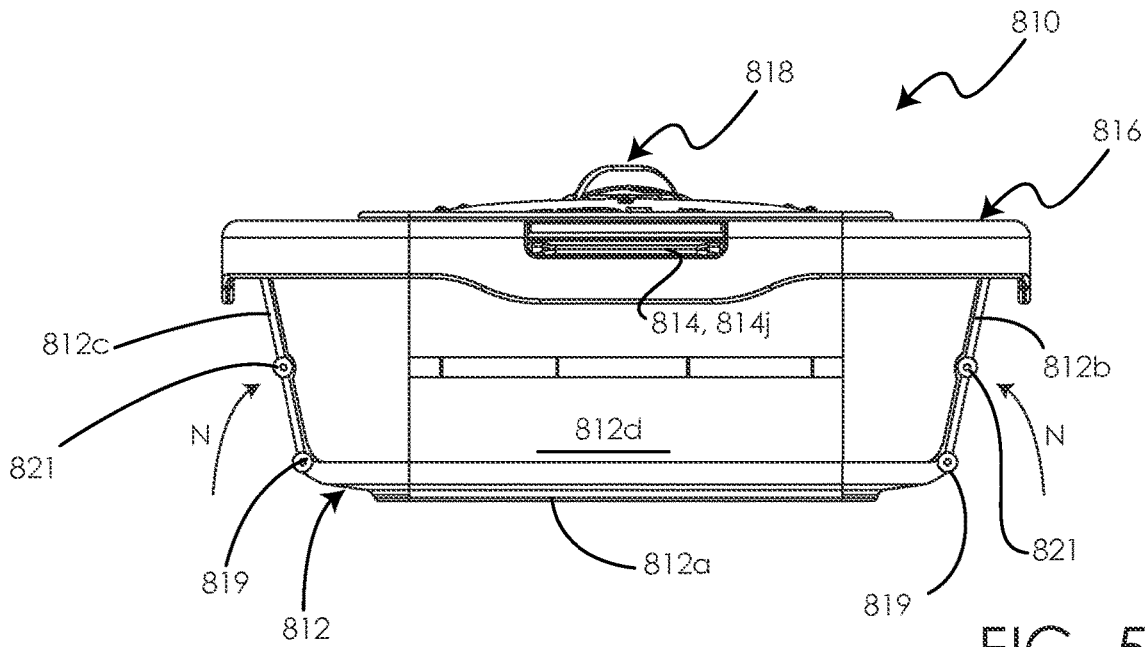


FIG. 51

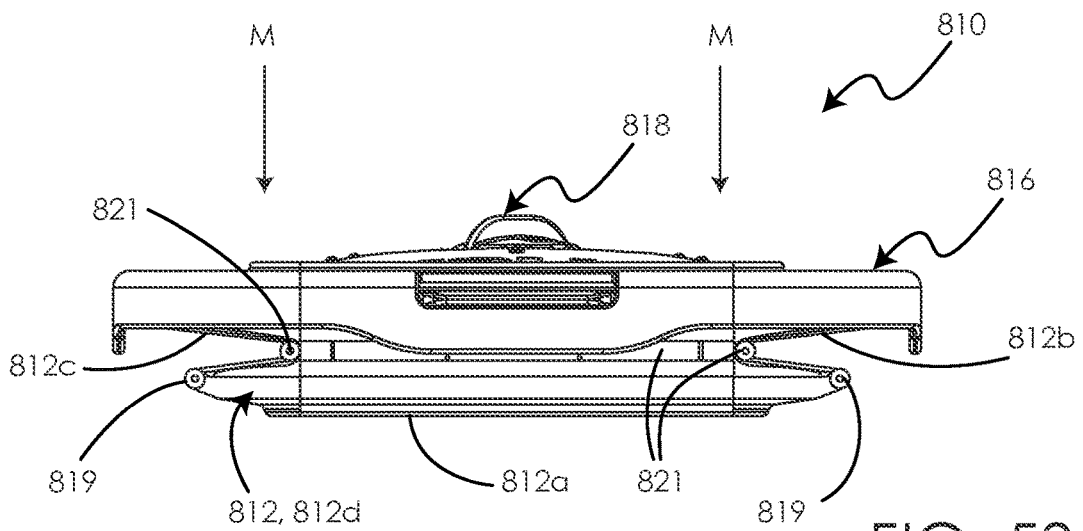


FIG. 52

1

**METHOD AND APPARATUS FOR STORING
FOOD****CROSS-REFERENCE TO RELATED
APPLICATIONS**

This application claims the benefit of U.S. Patent Application Ser. No. 63/086,849, filed Oct. 2, 2020, the entire disclosure of which is incorporated herein by reference.

TECHNICAL FIELD

This disclosure is directed to kitchenware. In particular, the present disclosure relates to a storage container for food. Specifically, the storage container of the present disclosure includes a base, a pliable and resilient liner that nests inside a compartment defined by the base, and a lid that interlockingly engages with the liner and/or base. The liner defines a compartment within which food may be placed. A valve is provided in the lid and a hand-pump is utilized to evacuate air from inside the liner's compartment. The liner is drawn upwardly towards the lid and reduces in overall size as it is placed under vacuum condition. The base and lid maintain their shape and so the storage container is easily stack in a fridge, freezer, or on a shelf of a cupboard.

BACKGROUND**Background Information**

People have been freezing food for many years. In some instances, the food is placed inside a rigid container or a plastic bag which is then placed into the freezer. The problem with this process is that air surrounding the food is trapped inside the container or bag. This air tends to contain moisture that will crystallize around the food and can lead to spoilage of the food over time. In order to address this issue, vacuum sealing bags and vacuum sealing containers have been offered to the consumer.

Vacuum sealing bags are typically sold to the consumer on a roll and comprises a tube of plastic that is heat sealed along its left and right side edges. The consumer will unroll a length of plastic tube that is suitable for the quantity of food they wish to vacuum seal into the bag and will slice a length of the plastic tubing from the roll. The consumer will then insert one end of the section of plastic tube they have cut off the roll into a heat-sealing aperture provided on a powered vacuum sealing machine. The machine will apply heat and pressure to the inserted end and will form a seam. The length of plastic tube is then sealed along a bottom edge and the side edges to form a bag with one open end. The consumer will place the food into the compartment defined by the upper and lower walls of the bag and will then insert the open end into a vacuum and sealing slot provided on the machine. The machine will evacuate the air from the compartment of the bag and will then heat seal the open end to form an enclosed pouch that surrounds the food. The pouch with the food therein is then able to be placed inside the freezer. Since there is little to no air left inside the pouch, the frozen food will tend to last longer in the freezer and will be less prone to becoming freezer burned. Because there is little to no air in the pouch, the pouch will tend to take up less freezer space.

While this manner of freezing foods causes less space to be taken up inside the freezer, evacuating of the air from the pouch tends to cause physical distortion of the pouch and its contents. This distortion tends to make the frozen pouches of

2

food pieces very difficult to stack one on top of another inside the freezer. Additionally, when the consumer later decides to use the food, the pouch has to be cut open in order to access the food therein. The pouch is therefore a single use plastic that must be discarded after accessing the contents thereof.

Another solution offered to consumers is vacuum containers that are comprised of a substantially rigid base and lid. The lid includes a valve that enables air to be evacuated from the base. The food to be frozen or stored is placed within a compartment defined by the base, the lid is engaged with the base, and, using a hand pump or a powered vacuum pump, at least some of the air is evacuated from the base through the valve. Evacuating the air from the compartment of the base will help keep the lid securely engaged with the base. One of the problems with these containers is that because the base and lid are fabricated from substantially rigid materials, it is not possible to evacuate all of the air from the compartment defined by the base. As a consequence, some of the air and some of the moisture in that air is still in direct contact with the food. Over time this contact between the air and the food can lead to possible food spoilage and/or reduce the amount of time the food may remain frozen in the container.

SUMMARY

The present disclosure is directed to a storage container that is capable of being reused multiple times and is therefore a more environmentally-friendly choice for consumers. Additionally, the storage container is able to be readily stacked in a fridge, a freezer, or on a shelf, and has the advantage of the food being able to be vacuum sealed into a reusable liner. The configuration of the storage container also makes it possible to defrost frozen food easily because the container is able to be placed directly into water without removing the liner therefrom. These and other advantages of the storage container will be described herein.

A system, apparatus, and method of storing food is disclosed herein. The apparatus and system includes a storage container having a base; a resilient liner that nests with the base, and a lid that interlockingly engages with the liner and/or base to close off access to foodstuffs retained in a compartment defined by the liner. A valve assembly in the lid is actuated by a pump to evacuate air from the liner's compartment and create a vacuum or near-vacuum condition therein. Apertures defined in the wall of the base allow air to flow into a compartment of the base as the resilient liner shrinks around the food. The closed storage container is placed in a freezer to freeze the food therein. For defrosting, the base of the closed storage container is placed in a volume of water, some of which flows through the apertures in the base's wall and comes into direct contact with the liner.

In one aspect, an exemplary embodiment of the present disclosure may provide a storage container for objects, said storage container comprising a base defining a compartment; a liner received within the compartment of the base; wherein the liner is pliable; a compartment defined by the liner and adapted to receive one or more objects therein; a lid configured to interlockingly engage with one or both of the liner and the base; and a valve assembly provided in the lid; said valve assembly being configured to be utilized to evacuate air from the compartment of the liner.

In one embodiment, the liner may be complementary in shape and dimensions to the base and is configured to be nestingly engaged with the base. In one embodiment, at least a portion of the liner may overlap a rim of the base, and the

3

overlapping portion of the liner forms a seal between the base and the lid when the lid is engaged with the base. In one embodiment, the base may define one or more apertures therein that extend from an interior surface of the base to an exterior surface thereof, and wherein the one or more apertures may place the compartment of the base in fluid communication with air surrounding the exterior surface of the base. In one embodiment, one or both of the base and lid may be fabricated from a rigid material or a semi-rigid material. In one embodiment, the liner may be fabricated from a resilient material. In one embodiment, the resilient material may be silicone. In one embodiment, the storage container may further comprise a locking mechanism for securing the lid to the base and the liner.

In another aspect, an exemplary embodiment of the present disclosure may provide a storage system for extending a life of foodstuffs, the storage system comprising a storage container comprising a base defining a compartment; a liner nestingly received within the compartment of the base; wherein the liner is flexible and resilient; a compartment defined by the liner and adapted to receive foodstuffs therein; a lid configured to interlockingly engage with the liner and the base and seal off access to the compartment; a valve assembly provided in the lid; and a pump operably engageable with the valve assembly to evacuate air from the compartment of the liner.

In one embodiment, the pump may be operable to create a vacuum condition in the compartment of the liner. In one embodiment the pump may be a hand pump while in other embodiments, an electrical or powered pump may be utilized. In one embodiment the storage system may further comprise one or more apertures that extend from an interior surface of the base to an exterior surface thereof, and wherein the one or more apertures place the compartment of the base in fluid communication with air surrounding the exterior surface of the base. In one embodiment the storage system may further comprise one or more ridges extending downwardly from a lower surface of the lid and into the compartment of the liner. In one embodiment, the storage system may further comprise one or more additional liners that are each selectively engageable with the base and lid instead of the liner, and wherein each of the one or more additional liners is made from a differently colored material, and wherein the color of each differently colored material is selected to indicate a different foodstuff to be received within the one or more additional liners.

In another aspect, and exemplary embodiment of the present disclosure may provide a method of freezing food comprising placing a pliable liner inside a compartment defined by a base of a storage container; placing food inside a compartment of the pliable liner; engaging a lid with the base to form a closed storage container and thereby closing off access to the compartment of the pliable liner; positioning a pump adjacent a valve assembly defined in the lid; evacuating air from the compartment of the pliable liner; removing the pump; and placing the closed storage container in a freezer; and freezing the food inside the closed storage container.

In one embodiment, the method may further comprise clampingly retaining a rim of the liner between a rim of the base and the lid. In one embodiment the method may further comprise shrinking the pliable liner about the food as air is removed from the compartment by the pump. In one embodiment the method may further comprise drawing air from outside the base through apertures defined between an interior surface and an exterior surface of the base as the pliable liner shrinks. In one embodiment, the method may

4

further comprise creating a vacuum condition or a near-vacuum condition within the compartment of the pliable liner as air is removed from the compartment by the pump. In one embodiment, the method may further comprise placing the base of the closed food storage container with frozen food therein into a volume of water; allowing some of the water to flow into the compartment of the base through apertures defined between an interior surface and an exterior surface of the base; directly contacting the liner with the some of the water; and defrosting the frozen foodstuffs. In one embodiment the method may further comprise opening the valve assembly; and allowing air to flow into the compartment of the pliable liner either before the defrosting of the frozen food or after the defrosting of the frozen food.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

A sample embodiment of the disclosure is set forth in the following description, is shown in the drawings and is particularly and distinctly pointed out and set forth in the appended claims. The accompanying drawings, which are fully incorporated herein and constitute a part of the specification, illustrate various examples, methods, and other example embodiments of various aspects of the disclosure. It will be appreciated that the illustrated element boundaries (e.g., boxes, groups of boxes, or other shapes) in the figures represent one example of the boundaries. One of ordinary skill in the art will appreciate that in some examples one element may be designed as multiple elements or that multiple elements may be designed as one element. In some examples, an element shown as an internal component of another element may be implemented as an external component and vice versa. Furthermore, elements may not be drawn to scale.

FIG. 1 is a top, front, left side perspective view of a first embodiment of a storage container in accordance with the present disclosure;

FIG. 2 is an exploded top, front, left side, perspective view of the storage container shown in FIG. 1;

FIG. 3 is a bottom, front, left side perspective view of the storage container of FIG. 1;

FIG. 4 is an exploded bottom, front, left side perspective view of the storage container shown in FIG. 3;

FIG. 5 is a top plan view of the storage container of FIG. 1;

FIG. 6 is bottom plan view thereof;

FIG. 7 is a left side elevation view thereof;

FIG. 8 is a longitudinal cross-section of the storage container taken along line 8-8 of FIG. 7;

FIG. 8A is an enlargement of a first highlighted region of FIG. 8;

FIG. 9 is an enlargement of a second highlighted region of FIG. 8;

FIG. 10 is a front elevation view of the storage container; and the rear elevation view is substantially identical thereto;

FIG. 11 is a transverse cross-section of the storage container taken along line 11-11 of FIG. 10;

FIG. 12 is a transverse cross-section of the storage container taken along line 12-12 of FIG. 10;

FIG. 13 is an enlargement of the highlighted region of FIG. 12;

FIG. 14 is a left side elevation view of the storage container showing the lid removed from the rest of the storage container;

5

FIG. 15 is a longitudinal cross-section of the storage container shown in FIG. 14 and showing pieces of food placed into the compartment of the container's liner;

FIG. 16 is a longitudinal cross-section of the storage container with the lid operatively engaged and locked together with the liner and base, and showing a hand pump in a position ready for use in evacuating the air from the compartment of the liner;

FIG. 17 is an enlargement of the highlighted region of FIG. 16;

FIG. 18 is longitudinal cross-section of the storage container showing the hand pump evacuating air from the liner and showing the liner rising upwardly within the base and air being drawn from the environment through the apertures defined in the base and the liner collapses under vacuum pressure;

FIG. 19 is an enlargement of the highlighted region of FIG. 18;

FIG. 20 is a longitudinal cross-section of the storage container showing the liner under vacuum pressure and retained a distance above the interior surface of the bottom wall of the base;

FIG. 21 is an enlargement of the highlighted region of FIG. 20 showing the flapper valve being sucked inwardly into a closed position by the vacuum conditions within the liner;

FIG. 22 is a longitudinal cross-section of the storage container showing the valve assembly in the lid being moved to the open position to allow air to flow back into the liner;

FIG. 23 is an enlargement of the highlighted region of FIG. 22;

FIG. 24 is a top, front, left side perspective view of a second embodiment of a storage container in accordance with the present disclosure, showing an alternative embodiment the liner used therewith, where the liner includes a mesh bottom;

FIG. 25 is a longitudinal cross-section of a third embodiment of a storage container in accordance with the present disclosure similar to FIG. 15, showing an alternative embodiment of the liner used therewith, wherein the liner includes at least one partition;

FIG. 26 is an exploded top, front, left side, perspective view of a fourth embodiment of a storage container in accordance with the present disclosure showing a further alternative base used therein, where the base includes a plurality of grooves that allow for improved airflow around the exterior surface thereof;

FIG. 27 is a bottom, front, left side perspective view of a fifth embodiment of a storage container in accordance with the present disclosure, showing another embodiment of a base used therein, where the side walls of the base are at least partially formed to have a pattern of apertures therein that is similar to the pattern of apertures in the bottom wall of the base.

FIG. 28 is an exploded top, front, left side perspective view of a sixth embodiment of a storage container in accordance with the present disclosure, showing an alternative embodiment a base, liner, and lid, along with a different embodiment of a valve assembly relative to FIG. 1;

FIG. 29 is an exploded bottom, front, left side perspective view of the storage container shown in FIG. 28;

FIG. 30 is an exploded front elevation view of the storage container shown in FIG. 28;

FIG. 31 is an enlargement of the highlighted region of FIG. 28;

6

FIG. 32 is a top plan view of the storage container of FIG. 28 in an assembled condition and showing the valve assembly in a closed position;

FIG. 33 is a cross-section of the assembled storage container taken along line 33-33 of FIG. 32;

FIG. 34 is an enlargement of the highlighted region of FIG. 33;

FIG. 35 is a left side elevation view of the assembled storage container of FIG. 32;

FIG. 36 is a cross-section of the storage container taken along line 36-36 of FIG. 35;

FIG. 37 is an enlargement of the highlighted region of FIG. 36 showing the valve assembly in the closed position;

FIG. 38 is a top plan view of the storage container in an assembled condition and showing the valve assembly in an open position;

FIG. 39 is a front elevation view of the storage container shown in FIG. 38 showing the valve assembly moved to the open position;

FIG. 40 is a cross-section of the storage container taken along line 40-40 of FIG. 39;

FIG. 41 is an enlargement of the highlighted region of FIG. 40;

FIG. 42 is a left side elevation view of the storage container shown in FIG. 38;

FIG. 43 is a cross-section of the storage container taken along line 43-43 of FIG. 42;

FIG. 44 is an enlargement similar to the highlighted region of FIG. 43 showing the valve assembly in the open position but prior to the storage container being engaged by a vacuum pump;

FIG. 45 is an enlargement of the highlighted region of FIG. 43 showing the valve assembly in the open position but after a vacuum pump is engaged with the storage container and showing air being evacuated from the liner;

FIG. 46 is an enlargement of the highlighted region of FIG. 43 showing the valve assembly in the open position and with the actuator thereof being depressed to allow air to flow back into the compartment of the liner;

FIG. 47 is a top, front, left side perspective view of a seventh embodiment of a storage container in accordance with the present disclosure, shown in an assembled condition with the valve assembly in a location proximate a corner of the lid;

FIG. 48 is an exploded bottom, front, left side perspective view of an eighth embodiment of a storage container in accordance with the present disclosure, showing a differently configured bottom surface of the lid;

FIG. 49 is a front elevation view of an eighth embodiment of a storage container in accordance with the present disclosure, shown in an assembled closed position, wherein the base of the storage container includes collapsible walls;

FIG. 50 is a front elevation view of the storage container of FIG. 49, showing the base in a collapsed condition;

FIG. 51 is a left side elevation view of the storage container of FIG. 49 in an expanded condition; and

FIG. 52 is a left side elevation view of the storage container of FIG. 49 in the collapsed condition.

Similar numbers refer to similar parts throughout the drawings.

DETAILED DESCRIPTION

Referring to FIGS. 1 through 13, there is shown a first embodiment of a storage container in accordance with the present disclosure, generally indicated at 10. In particular, storage container 10 is utilized to store food but the con-

tainer 10 may be utilized for any of a number of other applications. More specifically, storage container 10 is particularly useful for freezing food and for subsequently defrosting food that has been previously frozen therein.

FIGS. 1-13 show storage container 10 comprises a base 12, a liner 14, and a lid 16.

Base 12 and lid 16 may be fabricated from any suitable semi-rigid material or rigid material. If the storage container is to be used around foodstuffs, then the suitable material will be a material that is food grade. The term "food grade" is used to denote any material that has chemical resistance of a type that ensures the material is safe to use with foodstuffs for human or animal consumption. The material selected for base 12 and lid 16 preferably is dishwasher safe. Suitable material for fabrication of base 12 and/or lid 16 are, for example, a thermoplastic polymer such as propylene or high density polyethylene. Another suitable material for fabrication of the base and/or lid is a metal such as stainless steel. A further suitable material for the base or lid is any type of composite material.

As shown in FIGS. 1-4, base 12 comprises a bottom wall 12a, a front wall 12b, a rear wall 12c, a left side wall 12d, and a right side wall 12e. Bottom wall 12a defines a plurality of apertures 12f therein that extend between an upper surface of bottom wall 12a and a lower surface thereof. The apertures 12f are of various shapes and sizes and adjacent apertures are separated from each other by differently shaped ridges 12a' of bottom wall 12a. The pattern of ridges 12a' and apertures 12f is best seen in FIG. 3, 4 or 6. Bottom wall 12a, front wall 12b, rear wall 12c, left side wall 12d, and right side wall 12e bound and define a compartment 12g (FIG. 2). Apertures 12f place compartment 12g (FIGS. 2 and 18) in fluid communication with the environment outside of the base 12.

While base 12 has been illustrated and described herein as defining one or more apertures 12f in the bottom wall 12a, it should be understood that in other embodiments, one or more apertures may be defined in one or more of the front wall 12b, rear wall 12c, left side wall 12d, and right side wall 12e. In these other embodiments, the bottom wall 12a may be substantially continuous and unbroken and free of apertures. In other embodiments, the bottom wall 12a and any of the one or more of the front wall 12b, rear wall 12c, left side wall 12d, and right side wall 12e may include one or more apertures therein. Each aperture extends from an interior surface of the base to an exterior surface thereof and places the compartment 12g of the base 12 in fluid communication with the air in the environment surrounding base 12.

As best seen in FIG. 2, an upper edge of each of the front wall 12b, rear wall 12c, left side wall 12d, and right side wall 12e defines a rim 12h that extends for a distance outwardly beyond the exterior surface of the associated wall 12b, 12c, 12d, 12e. A pair of longitudinally spaced apart projections 12j extend outwardly beyond the rim 12h on each of the front wall 12b and rear wall 12c of base 12.

Bottom wall 12a may be fabricated to have a slight convex curvature as can be seen in FIGS. 8 and 18. In particular, a central region of bottom wall 12a may be slightly closer to rim 12h than are the portions of bottom wall 12a that join front wall 12b, rear wall 12c, left side wall 12d, and right side wall 12e. The purpose of the slight curvature of bottom wall 12a will be described later herein.

FIG. 5 shows that storage container 10 is generally rectangular in shape and has a longitudinal axis "Y" and a lateral axis "X" that are oriented at right angles to each other. The longitudinal axis "Y" effectively extends from the left side wall 12d of base 12 to right side wall 12e thereof and

the longitudinal axis "Y" is oriented at right angles to the walls 12d, 12e. Lateral axis "X" is oriented at right angles to longitudinal axis "Y" and effectively extends from front wall 12b of base 12 to rear wall 12c thereof. Lateral axis "X" is oriented at right angles to front and rear walls 12b, 12c.

Base 12 has a length "L" from left side wall 12d to right side wall 12e, a width "W" from front wall 12b to rear wall 12c, and a height "H" from bottom wall 12a to rim 12h. It will be understood that base 12 of storage container 10 may be fabricated to be of desired length "L", width "W", and height "H". The length "L" and width are slightly smaller proximate bottom wall 12a than proximate rim 12h. As a consequence base flare outwardly to a slight degree moving from bottom wall 12a to rim 12h.

Base 12 defines rounded corners 12k where front wall 12b meets left side wall 12d and right side wall 12e; and where rear wall 12c meets left side wall 12d and right side wall 12e. The corners 12k help to ensure that base 12 does not present any sharp edges that may accidentally hurt a user while handling storage container 10 or may damage other containers with which container 10 may come into contact.

It will be understood that in other embodiments, storage container 10 may be fabricated to be square, or circular, or triangular, or any other desired shape.

Referring to FIGS. 2 and 3, liner 14 is configured to be nestingly engaged within the compartment 12g defined by base 12. In particular, liner 14 is of a shape and size (length, width, and height) that is complementary to the shape and dimensions of the interior surface of the base 12 that bounds and defines the compartment 12g. The exception with respect to the dimensions of the liner 14 and base 12 is the height of the peripheral side walls of the liner 14 that extend upwardly from a bottom wall, as will be described below. The height of the peripheral side walls of the liner 14 are slightly longer than the height of the peripheral side walls of the base 12 (i.e., front wall 12b, rear wall 12c, left side wall 12d, and right side wall 12e). A portion of the peripheral side walls of the liner 14 overlap the rim 12h of the base 12 and effectively form a seal between the base 12 and lid 16. The portions of the peripheral walls that overlaps the rim 12h forms the rim 14h of the liner 14.

Liner 14 is fabricated from a pliable material. In other words, the material is flexible and supple and will readily bend and fold and is capable of collapsing in upon itself when air is evacuated from a compartment defined by the material. The suitable material is also resilient. In other words, the material will rebound and return to its original shape when air is re-introduced into the compartment thereof. If the storage container 10 is to be used to store foodstuffs, then liner 14 will be fabricated from a material that is food grade. One suitable material for fabricating liner 14 is silicone. The silicone liner 14 is fabricated to be of a wall thickness that makes the liner 14 pliable and resilient, and strong enough to stand vacuum conditions.

Liner 14 includes a bottom wall 14a, a front wall 14b, a rear wall 14c, a left side wall 14d, and a right side wall 14e. Bottom wall 14a is slightly recessed inwardly and upwardly relative to where bottom wall 14a meets front wall 14b, rear wall 14c, left side wall 14d, and right side wall 14e. A lip 14f (FIG. 4) circumscribes bottom wall 14a. Bottom wall 14a, front wall 14b, rear wall 14c, left side wall 14d, and right side wall 14e bound and define a compartment 14g.

An upper end of each of the front wall 14b, rear wall 14c, left side wall 14d, and right side wall 14e forms a rim 14h that extends laterally outwardly beyond the exterior surface of the associated one of the front wall 14b, rear wall 14c, left side wall 14d, and right side wall 14e. The rim 14h includes

a first leg that extends outwardly from the associated wall **14b-14e** and is oriented generally parallel to the rim **12h** of base **12** when liner **14** is received within compartment **12g** defined by base. Rim **14h** includes a second leg that extends downwardly for a short distance from first leg and in a direction towards bottom wall **14a**. The second leg is generally parallel to the associated one of the front, rear, left side and right side wall **14b, 14c, 14d, 14e**.

The length and width of liner **14** are substantially complementary to the length “L” and width “W” of base **12**. Liner **14** is configured to be received in the compartment **12g** of base **12**. When this occurs, bottom wall **14a** of liner **14** is located proximate an upper surface of bottom wall **12a** of base **12**. Front wall **14b** is located proximate an inner surface of front wall **12b**, rear wall **14c** is located proximate an inner surface of rear wall **12c**; left side wall **14d** is located proximate an inner surface of left side wall **12d**; and right side wall **14e** is located proximate an inner surface of right side wall **12e**. When liner **14** nests within base **12**, the rim **14h** of liner **14** rests upon the rim **12h** of base **12**. At least part of the second leg of rim **14h** extends for a distance downwardly below the rim **12h** of base **12**. This can be seen in FIG. 8. Because of this relationship, it will be understood that the height of liner **14** may be slightly greater than the height “H” of base **12**.

As best seen in FIGS. 2 and 4, the rim **14h** of liner **14** proximate front wall **14b** defines a pair of longitudinally-spaced apart slots **14j** therein. The slots **14j** extend from an exterior surface of the second leg of rim **14h** to an interior surface of the second leg. The slots **14j** are positioned to align with the projections **12j** provided on base **12** and are configured to interlockingly engage the same, as will be later described herein. A similar pair of longitudinally-spaced apart slots **14j** is defined in the portion of rim **14h** proximate rear wall **14c** and is configured to interlockingly engage with the projections **12j** on the rear wall **12c** of base **12**.

Liner **14** defines rounded corners **14k** where front wall **14b** meets left side wall **14d** and right side wall **14e**; and where rear wall **14c** meets left side wall **14d** and right side wall **14e**. The curvature of corners **14k** is complementary to the curvature of corners **12k** on base **12**.

Turning now to FIGS. 2, 4, and 8, lid **16** is shown in greater detail. Lid **16** is configured to be interlockingly engaged and locked to both liner **14** and base **12**, as will be described hereafter. As discussed earlier herein, lid **16** is fabricated from a similar material to base **12**. Lid **16** includes a wall **16a** that has an upper surface and a lower surface. A recessed hub **16b** is defined in wall **16a** and a hole **16c** is defined within the hub **16b**. A shoulder wall **16b'** extends generally vertically between hub **16b** and wall **16a**. Wall **16a** is circumscribed by a flange that includes a front section **16d**, a rear section **16e**, a left side section **16f**, and a right side section **16g**. The front section **16d**, rear section **16e**, left side section **16f**, and right side section **16g** are elevated relative to wall **16a** such that a substantially vertical shoulder **16h** circumscribes wall **16a**. The front section **16d**, rear section **16e**, left side section **16f**, and right side section **16g** are oriented generally at right angles to shoulder **16h**. As is best seen in FIG. 8, wall **16a** slopes radially outwardly and downwardly from a high point proximate the shoulder wall **16b'** of hub **16b** to shoulder **16h**.

A pair of longitudinally-spaced slots **16j** are defined in each of the front section **16d** and rear section **16e** of lid **16**. This can be seen in FIG. 1. Additionally a pair of longitudinally-spaced tabs **16k** extend downwardly from front section **16d**. A similar pair of longitudinally-spaced tabs **16k** extend downwardly from rear section **16e**. Slots **16j** and tabs

16k are located so that they will be aligned with the slots **14j** and the projections **12j** in the liner **14** and base **12**, respectively. The tabs **16k**, slots **14j**, and projections **12j**, together, form a locking mechanism for securing locking lid **16**, liner **14**, and base **12** together, as will be described later herein.

As best seen in FIG. 8A, lid **16** is configured such that a first annular flange **16m** and a second annular flange **16n** extend downwardly from a lower surface of the lid **16**. In particular, the first and second flanges **16m, 16n** extend generally vertically downwardly from front section **16d**, rear section **16e**, left side section **16f**, and right side section **16g**. The flange **16m** is of a shorter length than is the flange **16n**. A generally U-shaped channel **16p** is defined between flanges **16m** and **16n** and the rims **12h, 14h** of the base **14** and liner **14** are snap-fittingly received in the channel **16p**.

FIG. 8A shows a groove **16q** is defined in an upper surface of right side section **16g** a distance inwardly from the outermost edge of right side section **16g**. Similar grooves are provided in each of the front section **16d**, rear section **16e**, left side section **16f** and right side section **16g**. Groove **16q** thins a portion of the lid **16** and creates a living hinge that makes it easier to remove lid **16** from base **12**.

As best seen in FIG. 4, the lower surface of lid **16** includes a plurality of downwardly extending ridges **16r** that will project for a distance downwardly into the compartment **14g** of the liner **14** when lid **16** is engaged with liner **14** and base **12**. As illustrated, ridges **16r** are arranged to form four generally rectangular regions that terminate in the downwardly extending portion of the bottom wall that defines the perimeter of the hub **16b**. The purpose of ridges **16r** will be described later herein.

FIG. 13 shows an enlarged cross-section through the lid **16**, liner **14**, and base **12** where the rear section **16e** of the lid **16** engages with the rims **12h, 14h** of the base **12**, and liner **14**. FIG. 13, together with FIG. 8A, shows that when base **12** and liner **14** are engaged with each other, the rim **14h** of liner **14** rests on the rim **12h** of base **12**. In the vicinity of the projections **12j** and slots **14j**, the projection **12j** is received through the slot **14j**, as is illustrated in FIG. 13. Additionally, the rim **12h** of base **12** forms a bead **12h'** that is received in a complementary groove **14h'** defined by rim **14h** of liner **14**. The interlocking bead **12h'** and groove **14h'** help the liner **14** and base **12** to interlockingly engage one another. Furthermore, when lid **16** is placed over liner **14**, the interlocked rims **12h, 14h** are received in the channel **16p** defined by the lid **16**. The downwardly extending tab **16k** of lid **16** includes a protuberance **16k'** that is received in a region of the slot **14j** that is immediately beneath the projection **12j**, thereby locking the lid **16**, liner **14**, and base **12** together. If it is later decided to disengage lid **16** from liner **14** and base **12**, the tab **16k** is pulled, with a fingertip, outwardly away from the exterior surface of the base **12**. The slots **16j** defined in lid **16** allow the tabs **16k** to be rotated slightly relative to the local region of the lid **16** in order to enable disengagement of the tabs **16k** from the slot **14j**. Rotating the tab **16k** will cause the protuberance **16k'** to be removed from the region of the slot **14j** beneath the projection **12j**. The lid **16** is then free to be removed from the interlocked liner **14** and base **12** by lifting the lid **16** vertically. The liner **14** may then be lifted vertically upwardly to separate the liner **14** from the base **12**.

Referring to FIGS. 2, 4, and 9, a valve assembly **18** is operatively engaged with lid **16**. Valve assembly **18** may be any suitable valve that is able to be selectively activated to move between an open position and a closed position, as will be described later herein. Valve assembly **18** may be a one-way valve that is activated to allow airflow in a single

11

direction when air is evacuated from the compartment 14g of liner 14, as will be described later herein. As illustrated, valve assembly 18 includes a bayonet mount seat 18a (FIG. 9) and a flapper valve 18b that is operatively engaged with seat 18a. When base 12, liner 14 and lid 16 are operatively engaged with each other and valve assembly 18 is in the closed position (FIG. 9), air cannot flow into or out of the compartment 14g defined by liner 14. Valve assembly 18 is selectively movable to the open position (FIG. 19) in order to evacuate air from compartment 14g or to allow air to flow back into compartment 14g (as shown in FIG. 23). The operation of valve assembly 18 will be described further later herein. Valve assembly 18 defines one or more passageways 18c, 18d (FIG. 19) which allow air to flow therethrough. Flapper valve 18b is provided with a finger grip 18e that is able to be used to selectively move the flapper valve 18b to the open position.

It will be understood, as an alternative, that the lid may be provided with a rotating bayonet engagement between the valve and lid. In this instance, the valve may simply be rotated to allow air to flow back into the compartment of the storage container.

Having described the basic structure of storage container 10, the manner in which container 10 is used will now be described with reference to FIGS. 14 to 23. As shown in FIGS. 14 and 15, liner 14 may be operatively engaged with base 12 as has been previously described herein. Lid 16 is initially separate from the engaged liner and base in order to allow a user access to the compartment 14g of the liner 14. The user places a plurality of pieces of food 20 (FIG. 15) within the compartment 14g. Lid 16 is then placed over the engaged liner 14 and base 12 in such a way that the rim 14h of the liner is received within the channel 16p defined by lid 16. Tabs 16k are pushed inwardly toward the exterior surface of base 12 so that tabs 16k are moved into interlocking engagement with the slots 14j and projections 12j of the liner 14 and base 12 as previously described herein and illustrated in FIG. 13. The tabs 16k snap into locking engagement with slots 14j and projections 12j and thereby ensure a good vacuum seal between lid 16 and liner 14.

FIG. 16 shows the lid 16, liner 14 and base 12 in the closed and locked position with the pieces of food 20 retained within the compartment 14g of the liner 14. A pump 22 is then utilized to evacuate air from the compartment 14g of liner 14. The attached figures illustrate a hand pump being utilized to evacuate air from compartment 14g but it will be understood that an electric pump may be used instead. Any method of removing air from compartment 14g may be utilized. The illustrated pump 22 includes a tubular shaft 22a having an interior bore 22b that is accessible through an opening defined by a free end 22c of shaft 22a. Pump 22 further includes a plunger 22d that is movable upwardly or downwardly within bore 22b by pulling on a handle 22e or pushing downwardly on the handle 22e.

When it is desired to evacuate air from compartment 14g of liner 14, free end 22c of shaft 22a is placed on seat 18a of valve assembly 18 as illustrated in FIG. 17. Handle 22e is drawn upwardly in the direction of arrow "A" (FIG. 18) and this motion draws plunger 22d upwardly in the direction "A" creating a suction force within bore 22b. This suction force is illustrated by the arrows "B" in FIGS. 18 and 19. The suction force causes flapper valve 18b to be lifted upwardly in the direction "C", moving the flapper valve 18b to an open position where air is able to flow through the opened passageways 18c in flapper valve 18b. Continued movement of the plunger in the direction "B" causes air from compartment 14g to be drawn through passageways

12

18d, through passageways 18c and into bore 22b of pump 22. The airflow from the compartment 14g through the passageways 18d, 18c, and into bore 22b is illustrated by the unnumbered arrows in FIG. 19. As can be seen from FIG. 18, as air is evacuated from the compartment 14g of liner 14, the bottom wall 14a of liner 14 is drawn upwardly toward lid 16 and the side walls 14b to 14d collapse inwardly. The upward movement of bottom wall 14a with compartment 12g of base 12 causes air to be drawn into the compartment 12g through the apertures 12f in bottom wall 12a, as indicated by the arrows "D" in FIG. 18. As the bottom wall 14a moves upwardly towards lid 16, the food 20 will tend to contact regions of the downwardly extending ridges 16r. The ridges 16r act as spacers that will ensure that passageways 18d will not become blocked by food 20 and therefore air can continue to be evacuated until vacuum conditions, or near vacuum conditions are established within liner 14.

Once the air is evacuated from the compartment 14g of liner 14 to a sufficient degree, the pump 22 is removed from its engagement with lid 16. FIGS. 20 and 21 show that flapper valve 18 drops back into a closed position once pump 22 is removed and flapper valve 18 is kept seated in the closed position by a suction force provided by the collapsed liner 14. The downward forces provided by liner 14 are shown by the arrows in FIGS. 20 and 21. The user is then able to label the storage container 10 by either attaching a label to the lid 16 or to the base 12, or by using a marker to mark appropriate information anywhere on the exterior surface of lid 16 or base 12. In some embodiments, a specially designated labeling or marking area may be defined on the lid 16 or on the base 12. The label or marking may be useful to indicate what type of food 20 is retained within the container 10 and what date that food 20 was frozen. After labeling or marking, storage container 10 is placed in a freezer to freeze the food 20 therein. Because of the configuration of storage container 10, multiple storage containers 10 are able to be stacked one on top of another in the freezer when it is desired to freeze the food 20.

When the user later desires to eat food 20, he or she will remove storage container 10 from the freezer and will defrost the frozen food 20 therein. In order to defrost food 20, the storage container 10 may be placed in a fridge for a period of time, or on a counter, or in a microwave. Alternatively, storage container 10 may be placed in a body of water, such as in a sink, to allow for more rapid thawing of the food 20. In this latter instance, water is able to flow into the compartment 12g of storage container 12 by flowing from the sink and into the compartment 12g through the apertures 12f defined in bottom wall 12a. The water is then able to contact the exterior surface of the liner 14 and thereby more rapidly defrost the frozen food 20 held therein. The defrosting of food 20 is able to occur while the liner 14 is still vacuum sealed.

It should be noted that because liner 14 is still under vacuum conditions while the food 20 defrosts, the liner 14 remains in the compressed condition shown in FIG. 20 until the user lifts the flapper valve 18 as illustrated in FIGS. 22 and 23. The user will grasp the finger grip 18e of the flapper valve 18b between finger and thumb, and will pull the finger grip 18e upwardly in the direction indicated by arrows "E" (FIG. 23). This upward motion of finger grip 18e breaks the vacuum seal between flapper valve 18b and seat 18a and opens the passageways 18c. Air will flow from the environment outside flapper valve 18b and into the passageways 18c, through the passageways 18d, and into the compartment 14g of liner 14. The airflow is shown by the unnumbered arrows in FIGS. 22 and 23. As air flows into com-

13

partment **14g**, the liner **14** begins to decompress and the bottom wall **14a** thereof will start to move downwardly in the direction indicated by arrows "F" (FIG. 22) and towards bottom wall **12a** of base **12**.

After the vacuum seal has been broken by pulling finger grip **18e** upwardly as shown in FIG. 23, lid **16** may be disengaged from liner **14** and base **12** by placing a fingertip under the bottom end of each tab **16k** (FIG. 13) and moving the bottom end of each tab **16k** away from the exterior surface of the base. This motion is indicated by the arrow "G" in FIG. 13. The interlocking engagement of lid **16**, liner **14**, and base **12** is broken and lid **16** may then be lifted off liner **14** and base **12**. The food **20** may be removed from liner **14** and then the base **12**, liner **14**, and lid **16** may be washed for subsequent reuse. At least the base **12** and lid **16** may be placed in the dishwasher. In some instances, the liner **14** may also be placed in the dishwasher for cleaning. It will be understood, that multiple containers **10** may be stacked one on top of another in a freezer, or in a fridge for defrosting purposes, or in a drawer or on a shelf in a cupboard. When the storage containers are not in use, multiple containers are able to be nested one within another to take up less storage space.

As will be understood from reading the above, there is no need for a user to cut the liner in order to break the vacuum seal; instead, opening of the valve assembly **18** effectively breaks the vacuum seal, leaving the liner **14** undamaged and available for reuse.

It will be understood that storage container **10** may be sold with a plurality of liners **14**. In other words, a single base **12** and a single lid **16** are sold as a kit with a one or more of each of a number of different liners **14**. The liners **14** all function in exactly the same manner but may be color-coded to help the user identify the types of foodstuffs frozen and stored therein. For example, a first liner in the kit may be transparent (i.e., colorless) so that the food **20** frozen and stored therein is readily visible to the eye. A second liner may be provided in the kit where the liner has a greenish tint and is used for freezing and storing vegetables therein. The greenish tint will help the user readily identify that the food frozen in the storage container is vegetable in nature. A third liner may be provided in the kit where the liner has a reddish tint to indicate that beef is frozen and stored therein, for example. A fourth liner may be provided with a yellowish tint to indicate that chicken is frozen and stored therein, for example. A fifth liner may be provided with a bluish tint to indicate that fish is frozen and stored therein, for example. Other different colors or markings may be provided on a plurality of liners to assist the user. For example, the liners may have words or images of vegetables, cows, pigs, sheep, chicken, fish, etc. printed thereon in various places so that the user is able to readily see the words or images through the side walls of the base **12** or through the apertures **12f** in the bottom wall thereof.

FIG. 24 shows a second embodiment of the storage container **10** illustrated in FIGS. 1-23. The storage container, generally indicated at **110**, includes a base **112** and a lid **116** that are substantially identical to the base **12** and lid **16** of storage container **10** and therefore will not be further described herein. Storage container **110** includes an alternative embodiment of the flexible liner, generally indicated at **114**. Liner **114** is substantially identical to the flexible liner **14** in all aspects except that instead of a substantially solid bottom wall like bottom wall **14a**, liner **114** has a bottom wall **114a** that is a mesh instead of being solid. Storage container **110** is used in a slightly different manner to storage container **10** in that vacuum conditions cannot be generated

14

inside liner **114** but the storage container **110** is able to be used to rinse and store foodstuffs in one and the same box. An example of how storage container **110** is used is that food (not shown) may be placed inside of liner **114** and the liner **114** can be moved to under a faucet so that the food can be rinsed. The liner **114** is engaged with base **112** either before or after the rinsing and then water is allowed to drain through the mesh of bottom wall **114a** and out of the apertures **112h** in base **112**. Lid **116** is engaged with liner **114** and the tabs **116k** are snap-locked into place to secure lid **116**, liner **114** and base **112** to one another. The base **112** gives the liner **114** a substantially rigid form so that the walls of the liner don't collapse inwardly. The locked storage container **110** may then be placed in a fridge, for example, for storage of the food. The lid **116** is unlocked removed when a user wishes to gain access to the food within liner **114**.

FIG. 25 shows a third embodiment of the storage container **10** illustrated in FIGS. 1-23. The storage container, generally indicated at **210**, includes a base **212** and a lid **216** that are substantially identical to the base **12** and lid **16** of storage container **10** and therefore will not be further described herein. Storage container **210** includes a further alternative embodiment of the flexible liner, generally indicated at **214**. Liner **214** is substantially identical to the flexible liner **14** in all aspects except that it includes at least one vertical partition **215** that divides the compartment into more than one compartment. As illustrated, a single vertically-oriented partition **215** extends upwardly from the bottom wall **214a** of liner **214** and this partition **215** divides the compartment into a first compartment **214g'** and a second compartment **214g''**. This configuration makes it possible for a user to place a different foods into each of the first and second compartments. For example, a first food **20a** is placed inside the first compartment **214g'** and a second food **20b** is placed inside the second compartment **214g''**. Storage container **210** is then used in exactly the same manner as storage container **10**. It will be understood that more than one partition **215** may be provided in liner **214**.

FIG. 26 shows a fourth embodiment of the storage container **10** illustrated in FIGS. 1-23. The storage container, generally indicated at **310**, includes a liner **314** and a lid **316** that are substantially identical to the liner **14** and lid **16** of storage container **10** and therefore will not be further described herein. An alternative embodiment of the base is provided in storage container **310**, generally indicated at **312**. Base **312** has a bottom wall **312a**, a front wall **312b**, a rear wall **312c**, a left side wall **312d**, and a right side wall **312e** that bound and define a compartment **312g** into which liner **314** is received. Bottom wall **312a**, front wall **312b**, rear wall **312c**, left side wall **312d** and right side wall **312e** are all substantially identical to the walls **12a** through **12e** of base **12** except that a plurality of grooves **317** is defined in an exterior surface of one or more of the front wall **312b**, rear wall **312c**, left side wall **312d** and right side wall **312e**. It may be desired to stack a plurality of bases **312** together when one or more storage containers **310** are not in use. Bases **312** are configured to nest one inside the other so as to occupy less storage space on a shelf. Grooves **317** allow for improved airflow between the exterior surface of base **312** and an interior surface of another base within which base **312** is nested. The improved airflow provided by grooves **317** helps to ensure that it is easy to remove base **312** from a stack of nested bases. Grooves **317** are illustrated as being spaced-apart from each other and vertically oriented. It will be understood, however, that any configuration of grooves **317** and any placement of grooves **317** may be

15

utilized in base 312 that will provide this improved airflow. Storage container 310 is used in substantially the same manner as storage container 10.

It will be understood that instead of providing grooves 317 on the exterior surfaces of the walls of base 312, ridges may be provided on the exterior surface. The ridges will then contact the interior surface of the other base within which base 312 nests and allow for improved airflow between the two nested bases. If ridges are provided instead of grooves 317, those ridges may be provided in any shape, size, and placement that will improve airflow around the exterior of base 312.

It will be understood that instead of the grooves or ridges being provided on the exterior surface of base 312, grooves or ridges may be provided on the interior surfaces of the walls of base 312 for the same purpose.

FIG. 27 shows a fifth embodiment of the storage container 10 illustrated in FIGS. 1-23. The storage container, generally indicated at 410, includes a liner 414 and a lid 416 that are substantially identical to the liner 14 and lid 16 of storage container 10 and therefore will not be further described herein. A further alternative embodiment of the base is provided in storage container 410, generally indicated at 412. Base 412 has a bottom wall 412a, a front wall 412b, a rear wall 412c, a left side wall 412d, and a right side wall 412e that bound and define a compartment 412g into which liner 414 is received. (The bottom wall 414a of liner 414 is visible through the apertures defined in base 412.) Bottom wall 412a of base 410 is substantially identical to bottom wall 12a of base 12 and defines a pattern of openings 414f therein. The apertures 414f place the compartment defined by base 412 in communication with the environment surrounding storage container 410. Base 412 differs from base 12 in that one or more of front wall 412b, rear wall 412c, left side wall 412d and right side wall 412e also defines a pattern of openings therein, with those openings being indicated at 412f. The openings 412f may be provided on only part of the vertical height of the one or more walls 412b through 412e or may be provided for the entire height of the one or more walls 412b through 412e. Providing apertures 412f and 414f provides for improved airflow and water flow from the environment outside of storage container 410 into the compartment defined by base 412. This improved airflow or water flow will tend to shorten any time for defrosting the frozen contents of liner 414.

Referring now to FIGS. 28 through 44, there is shown a sixth embodiment of a storage container in accordance with the present disclosure, generally indicated at 510. Storage container 510 comprises a base 512, a liner 514, and a lid 516. Lid 516 is configured to interlockingly engage with one or both of liner 514 and base 512 in such a way that a portion of liner 514 forms a seal between base 512 and lid 516 when lid 516 is engaged with the base 512.

As is the case with all previously disclosed embodiments, base 512, and lid 516 may be fabricated from any suitable semi-rigid material or rigid material. If storage container 510 is to be used to hold foodstuffs, then the suitable material may be any food grade material. In some embodiments, base 512 and lid 516 may be fabricated from material that is preferably dishwasher safe.

As is the case with all previously disclosed embodiments, liner 514 may be fabricated from a pliable material, i.e., a material that is flexible and supple and will readily bend and fold. The material is furthermore capable of collapsing in upon itself when air is evacuated from a compartment defined by the liner 514. The suitable material is also preferably resilient, i.e., will rebound and return to its

16

original shape when air is re-introduced into the compartment of liner 514. If the storage container 510 is to be used to store foodstuffs, then liner 514 will also be fabricated from a material that is food grade.

As shown in FIGS. 28-44, base 512 comprises a bottom wall 512a, a front wall 512b, a rear wall 512c, a left side wall 512d, and a right side wall 512e. Rounded corners (not numbered) are provided in the regions where front and rear walls 512b, 512c intersect with the left and right side walls 512d, 512e. Storage container 510 is illustrated as being generally rectangular in shape and having a longitudinal axis "Y" (FIG. 32) and a lateral axis "X" that are oriented at right angles to one another. The longitudinal axis "Y" extends from left side wall 512d of base 512 to right side wall 512e thereof and the longitudinal axis "Y" is oriented at right angles to the walls 512d, 512e. Lateral axis "X" is oriented at right angles to longitudinal axis "Y" and extends from front wall 512b of base 512 to rear wall 512c thereof. Lateral axis "X" is oriented at right angles to front and rear walls 512b, 512c.

As best seen in FIGS. 30 and 34, the front, rear, left side, and right side walls 512b, 512c, 512d, and 512e angle outwardly from one another moving upwardly in a direction away from bottom wall 512a, terminating in a rim 512h. Bottom wall 512a is therefore of smaller width (measured from front wall 512b to rear wall 512c) and length (measured from left side wall 512d to right side wall 512e) than is rim 512h. It will be understood that in other embodiments, the front, rear, left side, and right side walls may not taper outwardly away from one another.

Bottom wall 512a may be slightly convexly curved as shown in FIG. 33. Bottom wall 512a defines a plurality of passageways 512f therein that extend between an upper surface and a lower surface of bottom wall 512a. The regions of bottom wall 512a located between passageways 512f and the passageways 512f themselves may be of various shapes, sizes, and patterns. Referring to FIGS. 20 and 30, bottom wall 512a may be fabricated to include a downwardly extending ridge 512a' which circumscribes the region of bottom wall that defining the plurality of passageways 512f therein. Ridge 512a' is provided to enable better stacking of a plurality of storage containers 510 one above the other, as will be described later herein. A region 512a" of bottom wall circumscribes ridge 512a' and is continuous with and curves upwardly into the front wall 512b, rear wall 512c, left side wall 512d, and right side wall 512e. This can best be seen in FIG. 30.

Bottom wall 512a, front wall 512b, rear wall 512c, left side wall 512d, and right side wall 512e bound and define a compartment 512g that is accessible through an opening that is bounded and defined by the rim 512h of the various walls 512b through 512e. The opening bounded by rim 512h and passageways 512f place compartment 512g in fluid communication with the air in the environment outside of the base 512, i.e., with the ambient air.

Each of the front wall 512b and rear wall 512c define a plurality of through-holes 512b' and 512c', respectively, therein. The through-holes 512b' and 512c' extend between an exterior surface and an interior surface of front wall 512b or rear wall 512c, respectively, and place compartment 512g in fluid communication with the ambient air outside of base 512. In the illustrated embodiment, the through-holes 512b' and 512c' each originate proximate bottom wall 512a and extend upwardly for a distance towards rim 512h of the associated front wall 512b or rear wall 512c, but terminate a distance downwardly from rim 512h. The through-holes 512b', 512c' are spaced longitudinally apart from one

another and are laterally aligned with one another in pairs (see FIGS. 28 and 29). In the illustrated embodiment, the through-holes 512b', 512c' are widest proximate bottom wall 512a and taper in width moving in a direction towards the rim 512h. In the illustrated embodiment, through-holes 512b', 512c' are arranged in a pattern with the shortest through-holes being located proximate the first side wall 512d and the second side wall 512e. The through-holes progressively increase in length towards a central region of the associated front wall 512b or rear wall 512c. It will be understood that the number of through-holes 512b', 512c', their specific location on the associated front wall 512 or rear wall 512c, the configuration of these through-holes, and their relationship and orientation relative to one another, may be other than illustrated in the attached figures. It will further be understood that first side wall 512d and second side wall 512e may additionally or alternatively be provided with through-holes which extend between the interior surface and exterior surface of the base 512.

As best seen in FIGS. 29 and 34, the upper end of each of the front wall 512b, rear wall 512c, left side wall 512d, and right side wall 512e forms a rim 512h that extends for a distance outwardly beyond the exterior surface of the associated wall 512b, 512c, 512d, 512e. FIG. 28 shows that the rim 512h is comprised of two upstanding and spaced-apart parallel walls, 512h' and 512h'', which are separated from each other by a channel 512j.

An outermost vertical surface of wall 512h' provided on the upper end of each of front wall 512b and rear wall 512d includes a pair of elongate projections 512k (FIG. 28) that are longitudinally spaced-apart from one another and extend outwardly from the wall 512h'. Furthermore, an outermost vertical surface of 512h' on the upper end of each of the left side wall 512d and right side wall 512e includes one elongate projection 512k thereon. Slots 512j' (FIGS. 29 and 41) are defined at intervals in the portion of the upper end of the front, rear, left side, and right side walls 512b, 512c, 512d, and 512e which define channel 512j. It will be understood that the number and location of projections 512k and slots 512j' may be varied as desired.

Referring to FIGS. 28 to 30, liner 514 is configured to be nestingly received within the compartment 512g defined by base 512. Liner 514 includes a bottom wall 514a, a front wall 514b, a rear wall 514c, a left side wall 514d, and a right side wall 514e. Front and rear walls 514b, 514c intersect left and right side walls 514c, 514d at curved corners (not numbered). The contours of bottom wall 514a, front wall 514b, rear wall 514c, and left and right side walls 514d and 514e are generally complementary to the contours of bottom wall 512a, front wall 512b, rear wall 512c, and left and right side walls 512d and 512e of base 512. Bottom wall 514a, front wall 514b, rear wall 514c, left side wall 514d, and right side wall 514e bound and define a compartment 514g (FIG. 28).

Liner 514 is of a shape and size (length, width, and height) that is complementary to the shape and dimensions of the interior surface of base 512 which bounds and defines compartment 512g. An exception with respect to the relative dimensions of the liner 514 and base 512 is the height of liner 514, which may be slightly taller than the height of base 512. Liner 514 is configured to be nestingly received in the compartment 512g of base 512 an when this occurs, bottom wall 514a of liner 514 is located proximate an upper surface of bottom wall 512a of base 512. Front wall 514b of line 514 is located proximate an inner surface of front wall 512b of base 512, rear wall 514c of liner 514 is located proximate an inner surface of rear wall 512c of base 512; left side wall

514d of liner 514 is located proximate an inner surface of left side wall 512d of base 512; and right side wall 514e of liner 514 is located proximate an inner surface of right side wall 512e of base 512.

An upper end of each of the front wall 514b, rear wall 514c, left side wall 514d, and right side wall 514e forms a rim 514h that extends laterally outwardly beyond the exterior surface of the associated one of the front wall 514b, rear wall 514c, left side wall 514d, and right side wall 514e of liner 514. A plurality of discrete tabs 514j (FIGS. 29 and 30) extends downwardly from a lower surface of the rim 514h. Each tab 514j is configured to align with one of the slots 512j' defined in channel 512j of base 512. When liner 514 nests within compartment 512g of base 512, the rim 514h of liner 514 overlaps and rests upon the rim 512h of base 512 and rim 514h of liner 514 extends to an outermost edge of wall 512h' of base 512. A lower surface of rim 514h of liner 514 projects downwardly into the channel 512j defined in rim 512h of base 512. Tabs 514j of liner 514 are aligned with slots 512j' defined in base 512. Rim 514h of liner 514 is pressed into engagement with rim 512h of base 512 and when this happens, tabs 514j of liner 514 are received into slots 512j' of base 512, interlocking liner 514 and base 512 to one another. Tabs 514j may have one or two longitudinally-oriented grooves 514j' (FIG. 41) formed therein to enable tabs 514j to flex during insertion of tabs 514j into slots 512j' or removal therefrom.

Turning now to FIGS. 28 through 44, lid 516 is shown in greater detail. Lid 516 is configured to be interlockingly engaged with and secured to both liner 514 and base 512. Lid 516 includes a wall 516a having an upper surface and a lower surface. Wall 516a may be slightly domed (i.e., convex in shape) as shown in FIGS. 30 and 33. A hub 516b is defined generally centrally in wall 516a. Hub 516b includes a bottom wall 517 and a shoulder wall 516b' which extends between bottom wall 517 and wall 516a. A hole 516c is defined generally centrally within bottom wall 517 and extends between upper and lower surfaces of bottom wall 517. An annular wall 516b'' (FIG. 31) circumscribes hole 516c and is spaced a short distance radially outwardly from hole 516c and inwardly of shoulder wall 516b'. As best seen in FIG. 31, an uppermost edge of the annular wall 516b'' undulates and forms a series of ridges and valleys of varying height relative to bottom wall 517.

Referring again to FIG. 28, a first region 516a' of wall 516a of lid is circumscribed by a ridge 516d that projects upwardly for a distance beyond the upper surface of wall 516a. Ridge 516d is circumscribed by a second region 516a'' of wall 516a and a third region 516a''' circumscribes the second region 516a''. As a result, ridge 516d, second region 516a'' and third region 516a''' of lid 516 together bound and define a channel (not numbered) in an upper surface of lid 516 which is shaped and sized to be generally complementary to the exterior surface of the region 512a'' (FIG. 29) of base 512. When two similar or identical storage containers 510 are stacked one on top of the other, the region 512a'' on the base 512 of an upper storage container 510 is seated within the channel defined in the upper surface of the lid 516 of a lower storage container 510.

Third region 516a''' of lid 516 angles downwardly and forms a skirt 516g which extends for a distance downwardly below the lower surface of wall 516a. This can best be seen in FIG. 34. The configuration of this edge region of lid 516 is such that a groove 516h is defined in an underside of lid 516. The groove 516h is configured to receive the interlocked rims 514h, 512h of the liner 514 and base 512 therein and to seal base 512, liner 514, and lid 516 to one another.

The lowermost edge **516g'** of skirt **516g** may be configured so that not all sections of the edge **516g'** lie in the same plane. This can be seen in FIG. 30.

Slots **516j** (FIGS. 28 and 41) are defined in sections of skirt **516g** that will extend over the interlocked rims **514h**, **512h** of liner **512** and base **514** when lid **516** is engaged therewith. Each slot **516j** extends between an outer surface of the skirt **516g** and an inner surface thereof. A pair of slots **516j** is defined in skirt **516g** in order to align with the projections **512k** extending outwardly from front and rear walls **512b**, **512c** of base **512**. Projections **512k** are received through these slots **516j**. Similarly, slots **516j** are provided in skirt **516g** to align with the projections **512k** on side walls **512d**, **512e** of base **512**, and to receive those projections **512k** therethrough. When projections **512k** are received through slots **516j**, lid **516** is secured to base **512**.

Referring to FIGS. 34 and 41, an underside of the wall **516a** of lid **516** proximate skirt **516g** includes a bead **516m** that extends around substantially the entire circumference of lid **516** and projects downwardly from the underside of wall **516a**. When lid **516** is pushed downwardly into engagement with the interlocked liner **514** and base **512**, bead **516m** on wall **516a** of lid **516** impinges on the pliable silicone of the liner's rim **514h**, depressing a region thereof such that the silicone deforms around bead **516m**. This arrangement enables a tighter seal between wall **516a** of lid **516** and rim **514h** of liner **514**, cutting down on possible airflow therebetween. An inner surface of skirt **516g** on lid **516** proximate bottom edge **516g'** may include an inwardly projecting annular ridge **516n** that extends inwardly under the lowermost edge **512n** of rim **512h** of base. The annular ridge **516n** interlocks with the lowermost edge **512n** of base **512**, and thereby secures lid **516** to base **512**. In other embodiments ridge **516h** may be omitted.

As best seen in FIG. 29, the lower surface of wall **516a** of lid **516** includes a plurality of downwardly extending ridges **516p** that will project for a distance downwardly into the compartment **514g** of the liner **514** when lid **516** is engaged with liner **514** and base **512**. As illustrated, ridges **516p** are arranged to form four generally rectangular regions that terminate in shoulder wall **516b'** which defines a perimeter of hub **516b**. Ridges **516p** are provided to contact foodstuffs received within liner **514** and to keep the same a distance away from the rest of the underside of lid **516**. The ridges **516p** help to ensure that foodstuffs do not block off valve assembly **518** and thereby interfere with air being able to flow out of storage container **510** or back into storage container **510**.

Referring to FIGS. 28 through 44, a valve assembly **518** is operatively engaged with lid **516**. Valve assembly **518** may be any suitable valve that is able to be selectively moved between an open position and a closed position, as will be described later herein. Valve assembly **518** may be a one-way valve that is actuated to allow airflow in a single direction when air is evacuated from the compartment **514g** of liner **514**, as will be described later herein.

Valve assembly **518**, as illustrated, includes an actuator **520**, a spring **522**, a gasket **524**, an O-ring **526**, and a flapper **528**. As best seen in FIG. 44, actuator **520** comprises a housing **520a** having a finger grip **520b** which extends upwardly away from an exterior surface of the housing **520a**. A plurality of passageways **520c**, **520c'** extend between the exterior surface of the housing **520a** and an interior surface thereof. An annular boss **520d** extends downwardly from the interior surface of the housing **520a** in an opposite direction to the finger grip **520b**. Annular boss **520d** defines a central compartment **520d'** (FIG. 44) therein,

the purpose of which will be described later herein. Actuator **520** further includes an annular projection **520e** (FIG. 44) which is spaced radially outwardly from boss **520d**. The purpose of the annular projection **520e** will be described later herein. As shown in FIGS. 44 through 46, an annular channel **520f** is defined in the interior surface of actuator **520** and channel **520f** circumscribes boss **520d**. Channel **520f** is in communication with passageways **520c** and **520c'**.

Finger grip **520b** provides a way for a user to grasp the actuator **520** and rotate the same about a vertical axis. "Z" in order to allow air to be evacuated from compartment **514g** or allow air to flow into a previously-evacuated compartment **514g**, or maintain the compartment **514g** in a vacuum condition. As will be described in greater detail later herein, when actuator **520** is rotated in a first direction about the vertical axis "Z", the passageways **520c**, **520c'** place compartment **514g** of liner **514** in fluid communication with the ambient air. When actuator **520** is rotated in an opposite second direction about vertical axis "Z", passageways **520c** are arranged so that they no longer place compartment **514g** of liner **514** in fluid communication the ambient air surrounding storage container **510**.

Spring **522** is configured to be seated on bottom wall **517** and circumscribe the annular wall **516b''** which extends upwardly and outwardly from bottom wall **517**. Boss **520d** of actuator **520** is concentric with annular wall **516b''** and is located a distance inwardly therefrom as best seen in FIG. 44. Spring **522** is received in channel **520f** defined by actuator **520** and will be located between annular wall **516b''** and boss **520d**. As best seen in FIG. 30, Spring **522** may be configured so that it is of a smaller diameter proximate an upper end that will contact actuator **520** and of a great diameter proximate a lower end that will contact flapper **528**.

Flapper **528** includes a concave body **528a** having a circumferential outer edge **528a'**. A plurality of bayonets **528b** extends upwardly from a central region (not numbered) of an upper surface of the body **528a**. Each bayonet **528b** terminates in a hook **528b'** at its outermost end as can be seen in FIG. 30. FIG. 44 shows that the central region of the upper surface of the body **528a** is configured to be interlockingly engaged within a recess (not numbered) defined by annular boss **520d** of actuator **520** where the recess extends radially outwardly from a lower end of compartment **520d'** defined by boss **520d**. When central region of body **528a** is engaged within the lower recess of boss **520d**, bayonets **528b** are received into the compartment **520d'** defined by annular boss **520d**. When bayonets **528b** are so received, the hook **528b'** of each bayonet **528b** is received into an associated individual through-hole (not numbered) defined in annular boss **520d**. The engagement of bayonet hooks **528b'** in the through-holes keeps flapper **528** interlockingly engaged with actuator **520**.

Body **528a** of flapper **528** also defines an annular groove **528c** (FIG. 44) in an upper surface thereof. Annular groove **528c** is spaced radially inwardly from circumferential edge **528a'** of the body **528a** and is generally vertically aligned with a portion of the channel **520f** defined in actuator **520**. Annular groove **528c** is configured to receive O-ring **526** therein. O-ring **526** will selectively contact the underside of bottom wall **517** of hub **516b** of lid **516** in certain circumstances, as will be described later herein.

Storage container **510** is used in a substantially similar manner to storage container **10** except for the manner in which the base **512**, liner **514**, and lid **516** interlockingly engage one another. The manner of securing base **512**, liner **514**, and lid **516** to one another has been described earlier

herein. Another difference between storage container **510** and storage container **10** is the manner of operation of valve assembly **18**.

When it is desired to evacuate air from compartment **514g** of liner **514**, actuator **520** is rotated from an "Off" position (FIGS. **32** and **37**) to an "On" position (FIGS. **38** and **44**) as described hereafter. FIGS. **32** and **38** show that the upper surface of wall **516a** of lid **516** is provided with indicia **530** to allow a user to determine if the actuator **520** is in the "Off" position or the "On" position. When the actuator **520** is in the "Off" position, finger grip **520b** is aligned with an aligned pair of indicia **530**. FIG. **32** shows a pair of indicia **530** is aligned and oriented parallel to the transverse axis "X" and FIG. **37** shows the actuator **520** in the "Off" position. Another pair of indicia is aligned and oriented parallel to the longitudinal axis "Y". FIG. **32** shows finger grip **520b** aligned the pair of indicia **530** oriented parallel to transverse axis "X". The user will grasp the finger grip **520b** and rotate actuator **520** from the "Off" position shown in FIG. **32** to the "On" position shown in FIG. **38**. When actuator **520** is in the "On" position, the finger grip **520b** will no longer be aligned with an aligned pair of indicia **530** but will, instead, be located generally equidistant between two adjacent pairs of indicia **520**, as illustrated in FIG. **38**. FIG. **44** shows actuator **520** in the "On" position. The dashed arrows "J" in FIG. **38** show the possible "Off"/"On" rotation of actuator **520**.

As indicated above, FIG. **44** shows actuator **520** moved to the "On" position but valve assembly **518** is illustrated prior to engagement of a vacuum pump with storage container **510**. It can be seen that O-ring **526** of valve assembly **518** is in contact with the underside of bottom wall **517** of hub **516b** in lid **516**. As a consequence, air cannot flow into or out of compartment **514g** of liner **514**.

FIG. **45** shows actuator **520** in the "On" position and with a lower end of a vacuum pump **22** contacting the upper surface of actuator **520**. The vacuum pump **22**, its construction, purpose, and use has been described earlier herein with respect to storage container **10**. FIG. **45** shows a downward force "K" being applied to actuator **520**. The downward force **520** pushes flapper **528** away from bottom wall **517** of lid **516** and, as a result, a gap (not numbered) opens up between O-ring **526** and bottom wall **517**. The downward movement of actuator **520** also causes annular projection **520e** of actuator **520** to become seated in a groove **524a** (FIG. **44**) defined in gasket **524** of valve assembly **518**, thereby closing off a space (not numbered) defined between projection **520e** and gasket **524**. The space between projection **520e** and gasket **524** is readily seen in FIG. **44** but disappears when actuator **520** moves downwardly as in FIG. **45**.

When valve assembly **518** is in the condition shown in FIG. **45**, The user will activate vacuum pump **22** and begin to evacuate air from compartment **514g** of liner **514**. Air will flow out of the compartment **514g** around the circumferential edge **528a'** of body **528a** of flapper **528**, between the upper surface of flapper **518** and the underside of bottom wall **517**, through a gap (not numbered) defined between the tapered flange **520d** and bottom wall **517** of hub **516b**, into channel **520f** and ultimately out of passageways **520c** and into the environment surrounding storage container **510**. The evacuating airflow is illustrated by various unnumbered arrows in FIG. **45**. The flexible liner **514** will be drawn upwardly towards the bottom of lid **516**, in a similar fashion to liner **14** shown in FIG. **18**.

Once all possible air has been evacuated from liner **514** by pump **22**, pump is lifted off actuator **520** and this causes the

downward force "K" on actuator **520** to cease. Flapper **528** returns to its original position in contact with bottom wall **517** shown in FIG. **44** and, as a consequence, O-ring **526** again closes off fluid communication between passageways **520c** and compartment **514g**. The user may then rotate actuator **520** back into the "Off" position shown in FIG. **32**. In the "Off" position, it is not possible for ambient air to flow back from the environment surrounding storage container **510** and into compartment **514g**. The vacuum condition or near vacuum condition within liner **514** keeps base **512**, liner **514**, and lid **516** secured to one other in a sealed fashion. The user is then able to put storage container **510** in a fridge, freezer, cupboard etc. until he or she wishes to access the articles or foodstuffs retained within liner **514**.

FIG. **37** shows that air is able to flow through the passageways of actuator **520** via the valleys of the undulating annular wall **516b'** of lid **516**, whether the actuator **520** is in the "Off" position or the "On" position. However, it is only possible for air to flow into compartment **514g** or out of compartment **514g** when actuator **520** is depressed downwardly towards bottom wall **517** of lid **516**.

FIG. **46** shows a situation where the user now wishes to access the contents of liner **514**. The actuator **520** will first be rotated to the "On" position as described above and then the user will apply a downward force, indicated by arrow "L", to actuator **520**. The user does not need to use pump **22** for this purpose but can simply apply finger-pressure to actuator **520**. Downward movement of actuator **520** will cause the flapper **528** to be forced downwardly in the direction indicated by arrow "L", breaking the contact between O-ring **526** and bottom wall **517** of hub **516b**. As described earlier herein, downward movement of actuator **520** will cause projection **520e** to become seated in groove **524a** of gasket **524**. Air will then readily flow through passageways **520c**, through channel **520f**; between flange **520d** and bottom wall **517** of hub **516b**, between the underside of bottom wall **517** of lid **516** and the upper surface of flapper **528**, around the circumferential edge **528a'** of body **528a**, and into the compartment **514g** of liner **514**. Liner **514** will therefore return to its original expanded condition. Lid **516** can be disengaged from base **512** because the suction on lid from liner **520** is broken. The user is then able to access the contents of liner **514**.

Referring now to FIG. **47**, there is shown a seventh embodiment of a storage container in accordance with an aspect of the present disclosure, generally indicated at **610**. Storage container comprises a base **612**, a liner **614**, and a lid **616**. Base **612** is substantially identical in structure and function to base **512** and liner **614** is substantially identical in structure and function to liner **514**. Lid **616** is substantially identical in structure and function to lid **516** except that the wall **616a** of lid **616** includes a section **616e** which is transparent. The transparent section **616e** enables a user to view the contents of liner **614** (not shown in this figure) therethrough. In one embodiment, lid **616** includes a silicone transparent section **616e** that is bordered by a plastic, non-transparent section. Lid **616** also differs from lid **516** in the location of valve assembly **618**. Instead of being generally centrally located in wall **616a**, valve assembly **618** is located proximate one corner of wall **616a**. Valve assembly **618** is substantially identical in structure and function to valve assembly **518**. When air is evacuated from storage container **610**, in a similar manner to what has been described above with reference to storage container **510**, the silicon of the transparent section **616e** and the pliable resilient liner **614** will both be drawn inwardly towards one another. All other features of storage container **616** are

substantially identical in structure and function to storage container 516 and therefore will not be discussed in any further detail herein.

FIG. 48 illustrates an eighth embodiment of a storage container in accordance with an aspect of the present disclosure, generally indicated at 710. Storage container 710 comprises a base 712, a liner 714, a lid 716, and a valve assembly 718. Base 712 is substantially identical in structure and function to base 512. Liner 714 is substantially identical in structure and function to liner 514. Valve assembly 718 is substantially identical in structure and function to valve assembly 518. Lid 716 is substantially identical in structure and function to lid 516 except the lower surface of the lid 716 is provided with a series of radial grooves 716a and a series of circumferential grooves 716b that intersect radial grooves 716a. Radial grooves 716a radiate outwardly away from the shoulder wall of the hub 716b that is equivalent to hub 516b. The grooves 716a and 716b direct air inwardly towards hub 716b when air is being evacuated from storage container 710 and direct air outwardly away from hub 716b when air is permitted to flow back into the compartment defined by liner 714.

Referring now to FIGS. 49 through 52, there is shown an eighth embodiment of a storage container in accordance with the present disclosure, generally indicated at 810. As with the previous embodiment disclosed herein, storage container comprises a base 812, a liner 814, a lid 816, and a valve assembly 818. In these figures, only the projections 814j (FIGS. 51 and 52) of the liner 814 are shown but it will be understood that the liner 814 may be identical to any of the liners 14 through 714 described herein.

Storage container 810 is substantially identical to storage container 510 except for the features indicated hereafter. In particular, base 812 is substantially identical to base 512 and comprises a bottom wall 812a, a front wall 812b, a rear wall 812c, a left side wall 812d, and a right side wall 812d. Front and rear walls 812b and 812c do not define a plurality of apertures therein similar to apertures 512b' and 512c'.

Additionally, unlike base 512, base 812 includes a first hinge 819 and a second hinge 821 in each of the front wall 812b, rear wall 812c, left side wall 812d, and right side wall 812e. The hinges 819 and 821 make it possible for the storage container 810 to be moved between an expanded condition (FIGS. 49 and 51) and a collapsed condition (FIGS. 50 and 52). The provision of hinges 819, 821 makes it easy for a user to reduce the overall height of the storage container 810 when not in use for storing food or other objects or articles. The user will take the storage container 812 and push gently downwardly on the lid 816 as indicated by arrows "M" in FIGS. 50 and 52. The pushing force will cause the sections of the walls 812b through 812e to fold about the hinges 819, 821 as illustrated in FIGS. 50 and 52. The overall height of storage container 810 is thereby reduced while the width and length thereof remains the same. The collapsed storage container 810 may then be stored away for use at a later time.

When it is later desired to put storage container 810 to use storing food or other articles, the user will grasp the lid 816 and gently pull upwardly as indicated by arrows "N" in FIGS. 49 and 51. The sections of the walls 812b through 812e will move about the hinges 819 and 821 and return to the original expanded condition. In the original expanded condition, the overall height (measured from bottom wall 812a to the upper rim (not shown) of base 812 will increase relative to when the storage container is in the collapsed condition. The user will then be able to use storage container

810 in a similar manner to what is described above with respect to the other embodiments of the disclosure.

In some embodiments, the front, rear, left side and right side walls 812b through 812e of base 812 may be fabricated from a flexible material to aid in more easily collapsing storage container 810 as discussed above.

It will be understood that all embodiments of the storage container disclosed herein may be fabricated in any of a variety of different dimensions, being of various desired lengths, widths, and heights so as to be useable for holding different quantities and types of food or other objects. Furthermore, any of the disclosed embodiments of the storage container may be fabricated in any desired different shape, such as rectangular, square, triangular, circular, irregular, etc. A kit may be fabricated and sold that includes a plurality of storage containers of various shapes and sizes.

It will be understood that a storage container kit may be sold that includes one or more of any of the different of bases, liners, and lids disclosed herein. Liners such as liners 14, 214, 314, 414, 514, 614, and 714 may be used with any of the disclosed bases or lids when it is desired to vacuum-seal food or other articles or objects within the storage container. Liner 114 may be used with any of the disclosed bases or lids when there is no need to vacuum seal food or other articles or objects within the storage container. Of course liners 14, 214, 314, 414, 514, 614, and 714 may be used in circumstances when there is not need to vacuum seal food or other articles or objects within the storage container but in these circumstances the user simply will not use a vacuum to evacuate air from the liner. The kit may also include the pump 22 shown in FIG. 16 or any other suitable pump.

In summary, an exemplary method of using storage container 10 (or any of the other embodiments of storage container in accordance with the present disclosure) in a method of freezing food comprises placing a pliable liner 14 inside a compartment 12g defined by a base 12 of storage container 10; placing a foodstuff 20 inside a compartment 14g of the pliable liner 14; engaging a lid 16 with the base 12 to form a closed storage container and thereby closing off access to the compartment 14g of the pliable liner 14; positioning a pump 22 adjacent a valve assembly 18 defined in the lid 16; evacuating air from the compartment 14g of the pliable liner 14; removing the pump 22; and placing the closed storage container 10 in a freezer; and freezing the food 20 inside the closed storage container 10.

The method further comprises clampingly retaining a rim 14h of the liner 14 between a rim 12h of the base 12 and the lid 16. The clamped rim 14h of the liner 14 acts as a flexible seal between the base 12 and lid 16. The method further comprises shrinking the pliable liner 14 about the food 20 as air is removed from the compartment 14g by the pump 22. This can be seen in FIG. 18. The method further comprises drawing air from outside the base 12 through apertures 12f defined between an interior surface and an exterior surface of the base 12 as the pliable liner 14 shrinks when air is evacuated therefrom. The method includes creating a vacuum condition or a near-vacuum condition within the compartment 14g of the pliable liner 14 as the air is removed from the compartment 14g by the pump 22. The method further comprises placing the base 12 of the closed food storage container 10 with frozen foodstuffs 20 therein into a volume of water (in a kitchen sink, for example); allowing some of the water in the sink to flow into the compartment 12g of the base 12 through apertures 12f defined between an interior surface and an exterior surface of the base 12; directly contacting the liner 14 with the some of the water

within the compartment 12g of the base 12; and defrosting the frozen foodstuffs 20. The method further comprises opening the valve assembly 18 and allowing air to flow back into the compartment 14g of the pliable liner 14 either before the defrosting of the frozen food 20 or after the defrosting of the frozen food.

While the storage container in accordance with the present disclosure has been described and illustrated as including a locking mechanism comprising a plurality of interacting tabs 16k, slots 14j, and projections 12j, it will be understood that any other type of locking mechanism may be provided on storage container 10, 110 to securely retain the lid 16, liner 14, and base 12 together.

While the pump described and illustrated herein is a hand-operable pump 22 it will be understood that in other embodiments, the pump may be a powered or mechanized pump that evacuates air from the liner and creates a vacuum condition or a near vacuum condition in the compartment of the liner.

It should be understood that while the storage container of the present disclosure has been illustrated and described herein as being useful for storing and preserving foodstuffs, and particularly for freezing foodstuffs, it will be understood that the storage container may be useful for retaining and storing dried foodstuffs therein. Alternatively, a variety of other objects may be received and retained within storage container and this disclosure should not be considered as being limited to the storage container to only being usable with foodstuffs. Any use to which previously known storage containers may be employed apply equally to the storage container in accordance with the present disclosure.

Various inventive concepts may be embodied as one or more methods, of which an example has been provided. The acts performed as part of the method may be ordered in any suitable way. Accordingly, embodiments may be constructed in which acts are performed in an order different than illustrated, which may include performing some acts simultaneously, even though shown as sequential acts in illustrative embodiments.

While various inventive embodiments have been described and illustrated herein, those of ordinary skill in the art will readily envision a variety of other means and/or structures for performing the function and/or obtaining the results and/or one or more of the advantages described herein, and each of such variations and/or modifications is deemed to be within the scope of the inventive embodiments described herein. More generally, those skilled in the art will readily appreciate that all parameters, dimensions, materials, and configurations described herein are meant to be exemplary and that the actual parameters, dimensions, materials, and/or configurations will depend upon the specific application or applications for which the inventive teachings is/are used. Those skilled in the art will recognize, or be able to ascertain using no more than routine experimentation, many equivalents to the specific inventive embodiments described herein. It is, therefore, to be understood that the foregoing embodiments are presented by way of example only and that, within the scope of the appended claims and equivalents thereto, inventive embodiments may be practiced otherwise than as specifically described and claimed. Inventive embodiments of the present disclosure are directed to each individual feature, system, article, material, kit, and/or method described herein. In addition, any combination of two or more such features, systems, articles, materials, kits, and/or methods, if such features, systems, articles,

materials, kits, and/or methods are not mutually inconsistent, is included within the inventive scope of the present disclosure.

All definitions, as defined and used herein, should be understood to control over dictionary definitions, definitions in documents incorporated by reference, and/or ordinary meanings of the defined terms.

The articles “a” and “an,” as used herein in the specification and in the claims, unless clearly indicated to the contrary, should be understood to mean “at least one.” The phrase “and/or,” as used herein in the specification and in the claims (if at all), should be understood to mean “either or both” of the elements so conjoined, i.e., elements that are conjunctively present in some cases and disjunctively present in other cases. Multiple elements listed with “and/or” should be construed in the same fashion, i.e., “one or more” of the elements so conjoined. Other elements may optionally be present other than the elements specifically identified by the “and/or” clause, whether related or unrelated to those elements specifically identified. Thus, as a non-limiting example, a reference to “A and/or B,” when used in conjunction with open-ended language such as “comprising” can refer, in one embodiment, to A only (optionally including elements other than B); in another embodiment, to B only (optionally including elements other than A); in yet another embodiment, to both A and B (optionally including other elements); etc. As used herein in the specification and in the claims, “or” should be understood to have the same meaning as “and/or” as defined above. For example, when separating items in a list, “or” or “and/or” shall be interpreted as being inclusive, i.e., the inclusion of at least one, but also including more than one, of a number or list of elements, and, optionally, additional unlisted items. Only terms clearly indicated to the contrary, such as “only one of” or “exactly one of,” or, when used in the claims, “consisting of,” will refer to the inclusion of exactly one element of a number or list of elements. In general, the term “or” as used herein shall only be interpreted as indicating exclusive alternatives (i.e. “one or the other but not both”) when preceded by terms of exclusivity, such as “either,” “one of,” “only one of,” or “exactly one of.” “Consisting essentially of,” when used in the claims, shall have its ordinary meaning as used in the field of patent law.

As used herein in the specification and in the claims, the phrase “at least one,” in reference to a list of one or more elements, should be understood to mean at least one element selected from any one or more of the elements in the list of elements, but not necessarily including at least one of each and every element specifically listed within the list of elements and not excluding any combinations of elements in the list of elements. This definition also allows that elements may optionally be present other than the elements specifically identified within the list of elements to which the phrase “at least one” refers, whether related or unrelated to those elements specifically identified. Thus, as a non-limiting example, “at least one of A and B” (or, equivalently, “at least one of A or B,” or, equivalently “at least one of A and/or B”) can refer, in one embodiment, to at least one, optionally including more than one, A, with no B present (and optionally including elements other than B); in another embodiment, to at least one, optionally including more than one, B, with no A present (and optionally including elements other than A); in yet another embodiment, to at least one, optionally including more than one, A, and at least one, optionally including more than one, B (and optionally including other elements); etc.

When a feature or element is herein referred to as being “on” another feature or element, it can be directly on the other feature or element or intervening features and/or elements may also be present. In contrast, when a feature or element is referred to as being “directly on” another feature or element, there are no intervening features or elements present. It will also be understood that, when a feature or element is referred to as being “connected”, “attached” or “coupled” to another feature or element, it can be directly connected, attached or coupled to the other feature or element or intervening features or elements may be present. In contrast, when a feature or element is referred to as being “directly connected”, “directly attached” or “directly coupled” to another feature or element, there are no intervening features or elements present. Although described or shown with respect to one embodiment, the features and elements so described or shown can apply to other embodiments. It will also be appreciated by those of skill in the art that references to a structure or feature that is disposed “adjacent” another feature may have portions that overlap or underlie the adjacent feature.

Spatially relative terms, such as “under”, “below”, “lower”, “over”, “upper”, “above”, “behind”, “in front of”, and the like, may be used herein for ease of description to describe one element or feature’s relationship to another element(s) or feature(s) as illustrated in the figures. It will be understood that the spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. For example, if a device in the figures is inverted, elements described as “under” or “beneath” other elements or features would then be oriented “over” the other elements or features. Thus, the exemplary term “under” can encompass both an orientation of over and under. The device may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein interpreted accordingly. Similarly, the terms “upwardly”, “downwardly”, “vertical”, “horizontal”, “lateral”, “transverse”, “longitudinal”, and the like are used herein for the purpose of explanation only unless specifically indicated otherwise.

Although the terms “first” and “second” may be used herein to describe various features/elements, these features/elements should not be limited by these terms, unless the context indicates otherwise. These terms may be used to distinguish one feature/element from another feature/element. Thus, a first feature/element discussed herein could be termed a second feature/element, and similarly, a second feature/element discussed herein could be termed a first feature/element without departing from the teachings of the present invention.

An embodiment is an implementation or example of the present disclosure. Reference in the specification to “an embodiment,” “one embodiment,” “some embodiments,” “one particular embodiment,” “an exemplary embodiment,” or “other embodiments,” or the like, means that a particular feature, structure, or characteristic described in connection with the embodiments is included in at least some embodiments, but not necessarily all embodiments, of the invention. The various appearances “an embodiment,” “one embodiment,” “some embodiments,” “one particular embodiment,” “an exemplary embodiment,” or “other embodiments,” or the like, are not necessarily all referring to the same embodiments.

If this specification states a component, feature, structure, or characteristic “may”, “might”, or “could” be included, that particular component, feature, structure, or characteris-

tic is not required to be included. If the specification or claim refers to “a” or “an” element, that does not mean there is only one of the element. If the specification or claims refer to “an additional” element, that does not preclude there being more than one of the additional element.

As used herein in the specification and claims, including as used in the examples and unless otherwise expressly specified, all numbers may be read as if prefaced by the word “about” or “approximately,” even if the term does not expressly appear. The phrase “about” or “approximately” may be used when describing magnitude and/or position to indicate that the value and/or position described is within a reasonable expected range of values and/or positions. For example, a numeric value may have a value that is $\pm 0.1\%$ of the stated value (or range of values), $\pm 1\%$ of the stated value (or range of values), $\pm 2\%$ of the stated value (or range of values), $\pm 5\%$ of the stated value (or range of values), $\pm 10\%$ of the stated value (or range of values), etc. Any numerical range recited herein is intended to include all sub-ranges subsumed therein.

Additionally, the method of performing the present disclosure may occur in a sequence different than those described herein. Accordingly, no sequence of the method should be read as a limitation unless explicitly stated. It is recognizable that performing some of the steps of the method in a different order could achieve a similar result.

In the claims, as well as in the specification above, all transitional phrases such as “comprising,” “including,” “carrying,” “having,” “containing,” “involving,” “holding,” “composed of,” and the like are to be understood to be open-ended, i.e., to mean including but not limited to. Only the transitional phrases “consisting of” and “consisting essentially of” shall be closed or semi-closed transitional phrases, respectively, as set forth in the United States Patent Office Manual of Patent Examining Procedures.

In the foregoing description, certain terms have been used for brevity, clearness, and understanding. No unnecessary limitations are to be implied therefrom beyond the requirement of the prior art because such terms are used for descriptive purposes and are intended to be broadly construed.

Moreover, the description and illustration of various embodiments of the disclosure are examples and the disclosure is not limited to the exact details shown or described.

What is claimed:

1. A storage container for objects, said storage container comprising:

- a base defining a compartment;
- a liner received within the compartment of the base; wherein the liner is resilient;
- a compartment defined by the liner and adapted to receive one or more objects therein;
- a lid configured to interlockingly engage with one or both of the liner and the base;
- wherein lid includes:
 - a first region fabricated from a flexible material; and
 - a second region fabricated from a rigid or semi-rigid material;
 - wherein the second region circumscribes the first region;
- a valve assembly provided in the second region of the lid, said valve assembly being configured to be activated to evacuate air from the compartment of the liner; and
- wherein when air is evacuated from the compartment of the liner, the liner and the first region of the lid are drawn inwardly towards one another.

2. The storage container according to claim 1, wherein the liner is complementary in shape and dimensions to the interior surface of the base which defines the compartment and wherein the liner is nestingly received within the compartment of the base.

3. The storage container according to claim 2, wherein at least a portion of the liner overlaps a rim of the base, and the overlapping portion of the liner forms a seal between the base and the lid when the lid is engaged with the base.

4. The storage container according to claim 1, wherein the base defines one or more apertures that extend from an interior surface of the base to an exterior surface thereof, and wherein the one or more apertures place the compartment of the base in fluid communication with air surrounding the exterior surface of the base.

5. The storage container according to claim 1, wherein the base is fabricated from a rigid material or a semi-rigid material.

6. The storage container according to claim 1, wherein the liner is fabricated from a resilient material.

7. The storage container according to claim 1, further comprising a locking mechanism for securing lid to the base and liner.

8. The storage container according to claim 1, wherein the first region of the lid is fabricated from a transparent silicone material.

9. The storage container according to claim 1, wherein the base includes a front wall, a rear wall, a left side wall, and a right side wall which together form a perimeter wall which extends upwardly from a bottom wall; and wherein the perimeter wall is movable between a collapsed condition and an expanded condition.

10. The storage container as defined in claim 1, wherein the liner further comprises at least one vertical partition which divides the compartment of the liner into more than one compartment.

11. A storage system for extending a life of foodstuffs, the storage system comprising:

- a storage container comprising:
 - a base defining a compartment;
 - a separate detached liner nestingly received within the compartment of the base; wherein the liner is flexible and resilient, and is selectively removable from within the compartment of the base;
 - a compartment defined by the liner, wherein an opening provides access to the compartment and the compartment is adapted to receive foodstuffs therein through the opening;
 - a lid configured to removably interlockingly engage with the liner and the base and seal off access to the compartment opening;
 - a valve assembly provided in the lid;
 - one or more ridges extending downwardly from the lid and towards the opening to the compartment defined by the liner;
 - a pump operably engageable with the valve assembly to evacuate air from the compartment of the liner; and wherein the one or more ridges are located radially outwardly from the valve assembly and are positioned so that when contacted by foodstuffs in the compartment of the liner, the one or more ridges will prevent the foodstuffs from blocking the valve assembly.

12. The storage system according to claim 11, wherein the pump is operable to create a vacuum condition in the liner.

13. The storage system according to claim 11, wherein the pump is a hand pump.

14. The storage system according to claim 11, further comprising one or more apertures that extend from an interior surface of the base to an exterior surface thereof, and wherein the one or more apertures place the compartment of the base in fluid communication with air surrounding the exterior surface of the base.

15. The storage container according to claim 11, wherein the base includes a front wall, a rear wall, a left side wall, and a right side wall which together form a perimeter wall which extends upwardly from a bottom wall; and wherein the perimeter wall is movable between a collapsed condition and an expanded condition.

16. The storage container as defined in claim 11, wherein the liner further comprises at least one vertical partition which divides the compartment of the liner into more than one compartment.

17. A storage system for extending a life of foodstuffs, the storage system comprising:

- a storage container comprising:
 - a base defining a compartment;
 - a liner nestingly receivable within the compartment of the base; wherein the liner is flexible and resilient;
 - a compartment defined by the liner and adapted to receive foodstuffs therein;
 - a lid configured to interlockingly engage with the liner and the base and seal off access to the compartment;
 - a valve assembly provided in the lid;
 - a pump operably engageable with the valve assembly to evacuate air from the compartment of the liner; and one or more additional liners that are each selectively engageable with the base and lid instead of the liner, and wherein each of the one or more additional liners is made from a differently colored material, and wherein a color of each differently colored material is selected to indicate a different foodstuff to be received within the one or more additional liners.

18. The storage container according to claim 17, wherein the base includes a front wall, a rear wall, a left side wall, and a right side wall which together form a perimeter wall which extends upwardly from a bottom wall; and wherein the perimeter wall is movable between a collapsed condition and an expanded condition.

19. The storage container as defined in claim 17, wherein the liner further comprises at least one vertical partition which divides the compartment of the liner into more than one compartment.

- 20. A method of freezing food comprising:
 - placing a pliable liner inside a compartment defined by a base of a storage container;
 - placing the food inside a compartment of the pliable liner; engaging a lid with the base to form a closed storage container and thereby closing off access to the compartment of the pliable liner;
 - positioning a pump adjacent a valve assembly provided in the lid;
 - extending one or more ridges downwardly from a lower surface of the lid and toward an opening to the compartment of the pliable liner;
 - arranging the one or more ridges radially outwardly from the valve assembly;
 - preventing the food in the compartment from obstructing the valve assembly with the one or more ridges;
 - allowing air to flow unobstructed to the valve assembly;
 - evacuating the air from the compartment of the pliable liner;
 - removing the pump; and
 - placing the closed storage container in a freezer; and freezing the food inside the closed storage container.