

(19) **United States**

(12) **Patent Application Publication**  
**Hsu**

(10) **Pub. No.: US 2022/0187426 A1**  
(43) **Pub. Date: Jun. 16, 2022**

(54) **DISTANCE DETECTION SYSTEM AND DISTANCE DETECTION METHOD**

*G05D 1/02* (2006.01)  
*G01S 7/4861* (2006.01)  
*G01S 17/89* (2006.01)

(71) Applicant: **PEGATRON CORPORATION, TAIPEI CITY (TW)**

(52) **U.S. Cl.**  
CPC ..... *G01S 7/4815* (2013.01); *G01S 17/931* (2020.01); *G01S 17/89* (2013.01); *G01S 7/4861* (2013.01); *G05D 1/0242* (2013.01)

(72) Inventor: **Po-Ching Hsu, Taipei City (TW)**

(73) Assignee: **PEGATRON CORPORATION, TAIPEI CITY (TW)**

(57) **ABSTRACT**

(21) Appl. No.: **17/510,159**

The disclosure provides a distance detection method and a distance detection system. The distance detection method includes: capturing multiple image frames at multiple timing points based on a field of view, in which the field of view includes an object, and each image frame includes a pixel corresponding to the object; obtaining a first and a second modulation presented by the pixel at the timing points; finding a first specific light-emitting unit and a second specific light-emitting unit based on the first modulation and the second modulation, respectively; and estimating a specific distance between the distance detection system and the object based on the first specific light-emitting unit and the second specific light-emitting unit.


(22) Filed: **Oct. 25, 2021**

(30) **Foreign Application Priority Data**

Dec. 15, 2020 (TW) ..... 109144212

**Publication Classification**

(51) **Int. Cl.**  
*G01S 7/481* (2006.01)  
*G01S 17/931* (2006.01)

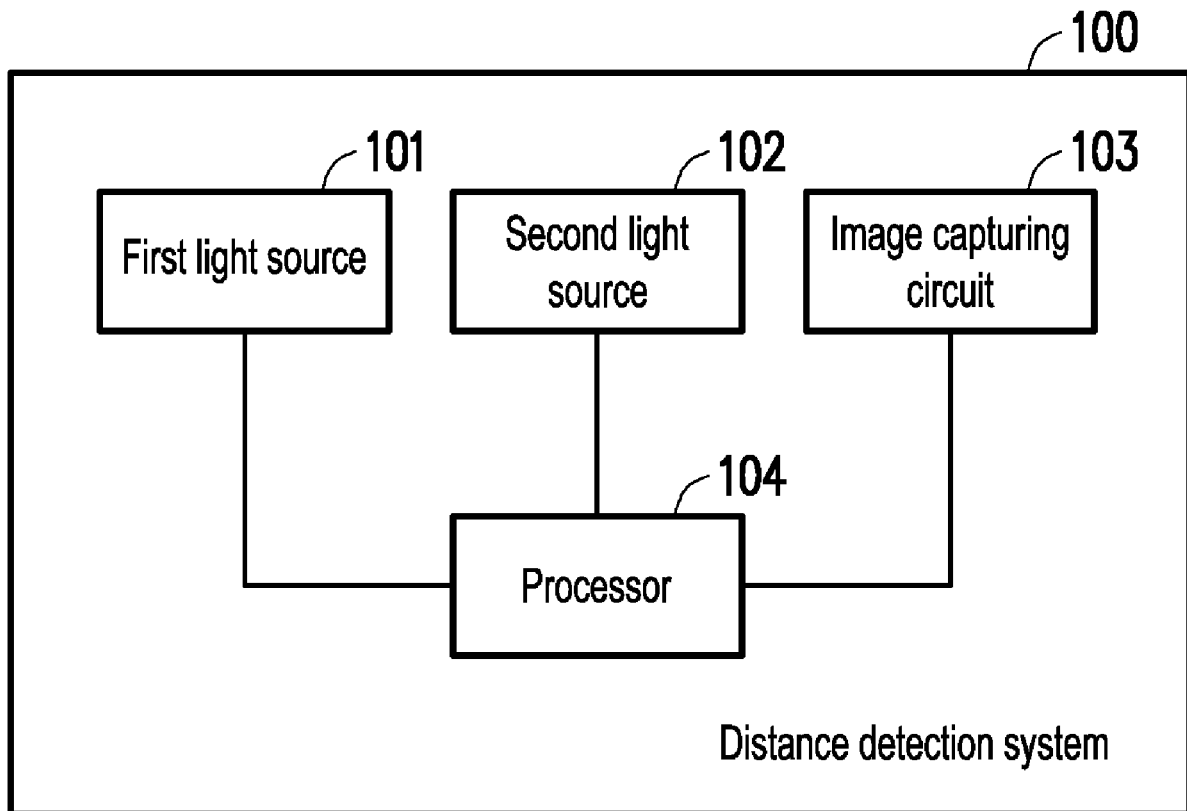

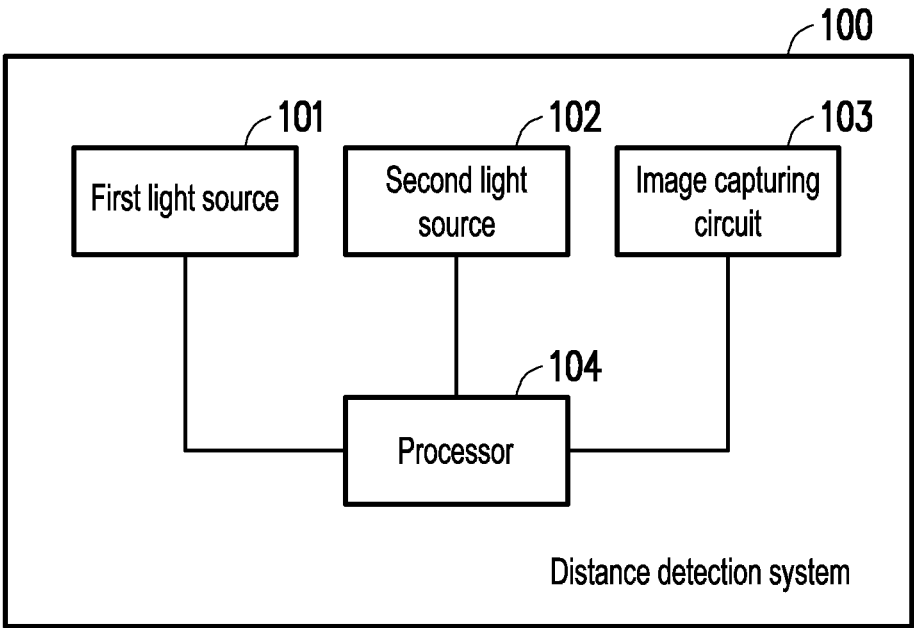


FIG. 1

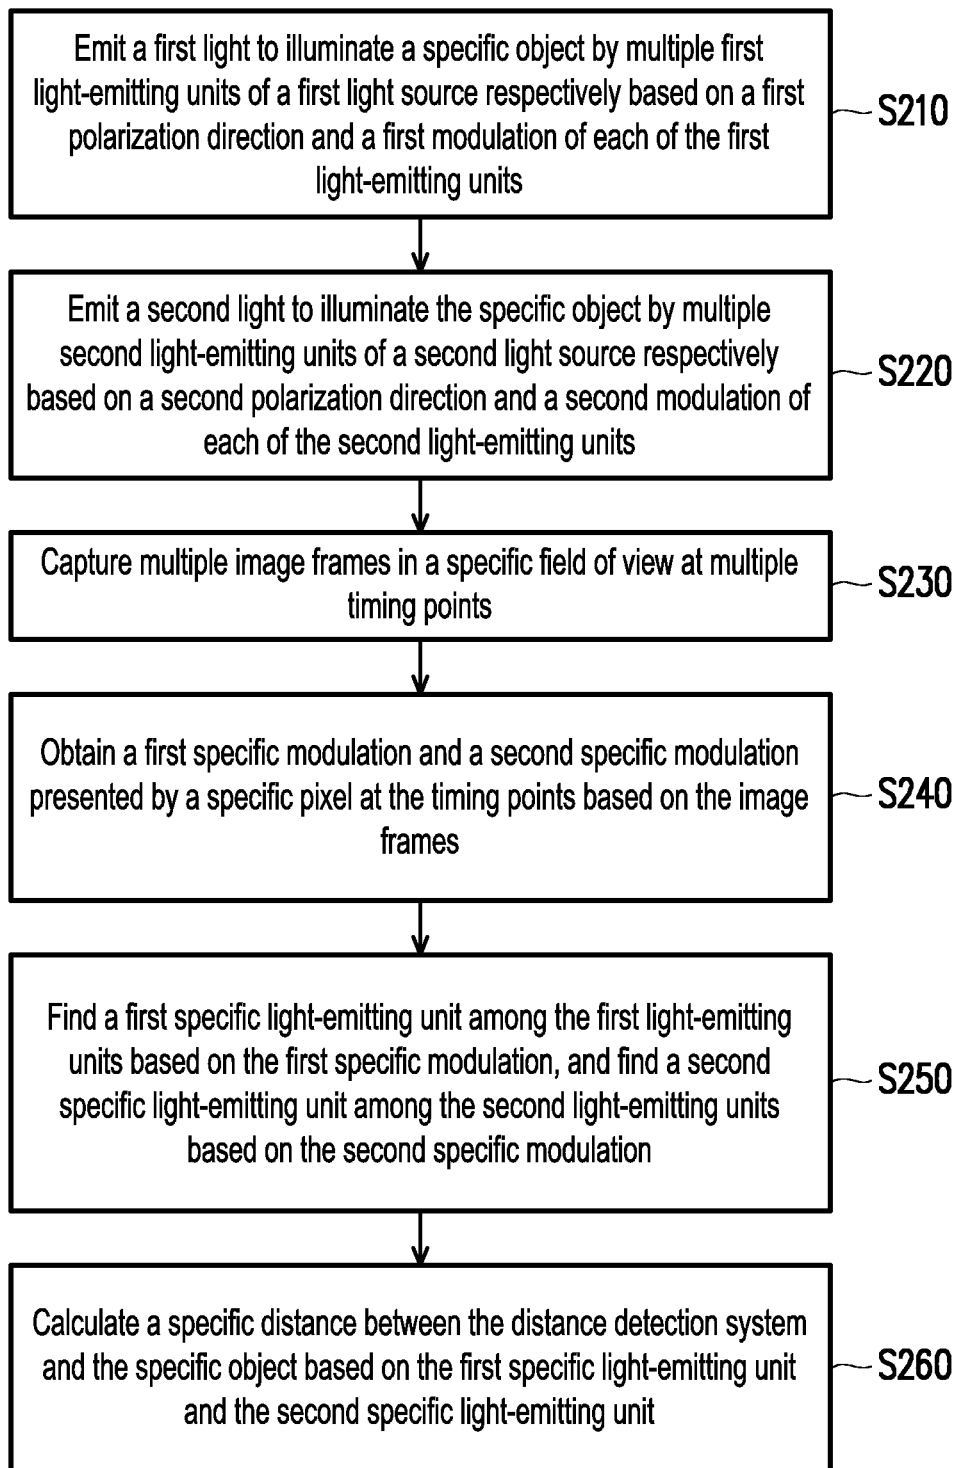


FIG. 2



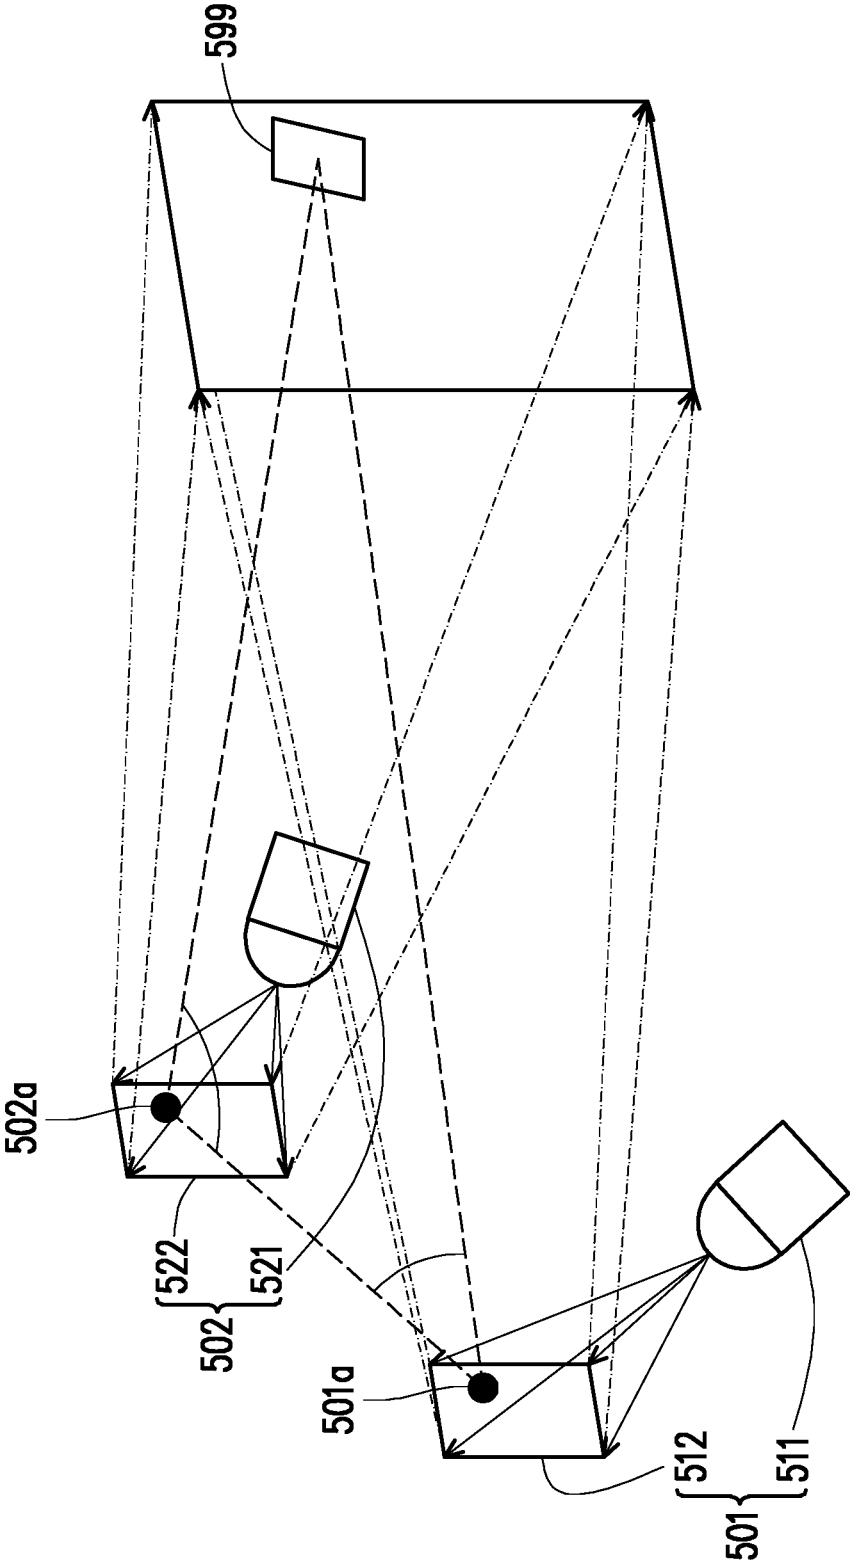


FIG. 4

## DISTANCE DETECTION SYSTEM AND DISTANCE DETECTION METHOD

### CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims the priority benefit of Taiwan application serial no. 109144212, filed on Dec. 15, 2020. The entirety of the above-mentioned patent application is hereby incorporated by reference herein and made a part of this specification.

### BACKGROUND

#### Technical Field

[0002] The disclosure relates to a technique for distance detection, and in particular, to a distance detection system and a distance detection method.

#### Description of Related Art

[0003] In current technology, there are automotive vision systems which can be used to assist driving. These automotive vision systems, however, may not exhibit good recognition performance in some cases. For example, in an environment with strong sunlight, there may be shadows of shelters such as bridges and trees. Here, if a contrast between the shadow on a road surface and the strong sunlight on the road surface is too sharp, the image recognition function of the conventional automotive vision systems may not be able to determine a distance between a vehicle and an object such as a road marking or an obstacle, which may lead to collisions or car accidents.

[0004] Similarly, in a dim environment, since it is not easy for the conventional automotive vision systems to recognize a road marking, a vehicle, or an outline of an object, collisions or car accidents may occur due to a failure to correctly recognize a distance.

### SUMMARY

[0005] The disclosure is directed to a distance detection system and a distance detection method.

[0006] The disclosure provides a distance detection system, the distance detection system including a first light source, a second light source, an image capturing circuit, and a processor. The first light source has a first polarization direction and includes multiple first light-emitting units. Each of the first light-emitting units emits a first light to illuminate a specific object based on the first polarization direction and a first modulation of each of the first light-emitting units. The second light source has a second polarization direction and includes multiple second light-emitting units. Each of the second light-emitting units emits a second light to illuminate the specific object based on the second polarization direction and a second modulation of each of the second light-emitting units. The image capturing circuit is configured to capture multiple image frames in a specific field of view of the image capturing circuit at multiple timing points. The specific object is within the specific field of view. Each of the image frames includes a specific pixel corresponding to the specific object. The processor is coupled to the first light source, the second light source, and the image capturing circuit, and is configured to execute the following. A first specific modulation and a second specific modulation presented by the specific pixel at the multiple

timing points based on the image frames are obtained. The first specific modulation corresponds to the first polarization direction, and the second specific modulation corresponds to the second polarization direction. A first specific light-emitting unit among the multiple first light-emitting units is found based on the first specific modulation, and a second specific light-emitting unit among the multiple second light-emitting units is found based on the second specific modulation. A specific distance between the distance detection system and the specific object is calculated based on the first specific light-emitting unit and the second specific light-emitting unit.

[0007] The disclosure provides a distance detection method which is adapted for a distance detection system. The distance detection method includes the following. A first light is emitted to illuminate a specific object by multiple first light-emitting units of a first light source respectively based on a first polarization direction and a first modulation of each of the first light-emitting units. A second light is emitted to illuminate the specific object by multiple second light-emitting units of a second light source respectively based on a second polarization direction and a second modulation of each of the second light-emitting units. Multiple image frames are captured by an image capturing circuit in a specific field of view at multiple timing points. The specific object is within the specific field of view. Each of the image frames includes a specific pixel corresponding to the specific object. A first specific modulation and a second specific modulation presented by the specific pixel at the multiple timing points are obtained by a processor based on the image frames. A first specific light-emitting unit among the multiple first light-emitting units is found based on the first specific modulation by the processor, and a second specific light-emitting unit among the multiple second light-emitting units is found based on the second specific modulation by the processor. A specific distance between the distance detection system and the specific object is calculated based on the first specific light-emitting unit and the second specific light-emitting unit by the processor.

[0008] Therefore, even in a bright light/dim light environment, the specific distance between the distance detection system and the specific object can still be accurately determined by the method of the disclosure. As a result, the chances of collisions and car accidents are reduced.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0009] FIG. 1 is a schematic diagram of a distance detection system according to an embodiment of the disclosure.

[0010] FIG. 2 is a flow chart of a distance detection method according to an embodiment of the disclosure.

[0011] FIG. 3 is an application scenario diagram according to an embodiment of the disclosure.

[0012] FIG. 4 is a schematic diagram of a light source adopting a digital micro-mirror device technology according to an embodiment of the disclosure.

### DESCRIPTION OF THE EMBODIMENTS

[0013] Referring to FIG. 1, FIG. 1 is a schematic diagram of a distance detection system according to an embodiment of the disclosure. In different embodiments, a distance detection system 100 may be configured to measure a distance between the distance detection system 100 and an

object located in a field of view (FOV) of the distance detection system **100** in various devices/scenarios. For the ease of description of the concept of the disclosure, it is assumed below that the distance detection system **100** is disposed on a vehicle and is configured to measure a distance between the vehicle and an object located in front of the vehicle; however, the disclosure is not limited thereto.

**[0014]** As shown in FIG. 1, the distance detection system **100** may include a first light source **101**, a second light source **102**, an image capturing circuit **103**, and a processor **104**. In the embodiments of the disclosure, the first light source **101** and the second light source **102** may respectively be a left headlight and a right headlight of the vehicle which may be configured to illuminate forward of the vehicle. In different embodiments, the first light source **101** and the second light source **102** may be each realized as a pixel light device adopting digital light processing (DLP)/digital micro-mirror device (DMD) technology, a matrix light device adopting a light-emitting diode (LED), and/or a scan light device. However, the disclosure is not limited thereto.

**[0015]** In the embodiments of the disclosure, the first light source **101** may have a first polarization direction and include multiple first light-emitting units. Each of the first light-emitting units may emit a first light to illuminate a specific object based on the first polarization direction and a first modulation of each of the first light-emitting units. Similarly, the second light source **102** may have a second polarization direction and include multiple second light-emitting units. Each of the second light-emitting units may emit a second light to illuminate the specific object based on the second polarization direction and a second modulation of each of the second light-emitting units.

**[0016]** In an embodiment, the first light source **101** includes a polarization device/component (e.g. a polarizer) corresponding to the first polarization direction so that each of the first light-emitting units may emit the first light in the first polarization direction. Similarly, the second light source **102** includes another polarization device/component corresponding to the second polarization direction so that each of the second light-emitting units may emit the second light in the second polarization direction.

**[0017]** In the embodiments of the disclosure, a first combination composed of the first modulation of each of the first light-emitting units and the first polarization direction is unique in the distance detection system **100**, and a second combination composed of the second modulation of each of the second light-emitting units and the second polarization direction is unique in the distance detection system **100**.

**[0018]** For convenience of description, it is assumed below that the first polarization directions respectively corresponding to the first light-emitting units are all the same (e.g. all being a horizontal polarization direction), and the first modulations respectively corresponding to the first light-emitting units are all different. In addition, it is assumed that the second polarization directions respectively corresponding to the second light-emitting units are all the same (e.g. all being a vertical polarization direction), and the second modulations respectively corresponding to the second light-emitting units are all different. Furthermore, in some embodiments, the first polarization direction may be orthogonal to the second polarization direction; however, the disclosure is not limited thereto.

**[0019]** In an embodiment, the first light source **101** includes N1 first light-emitting units, and a single horizontal

polarizer may be disposed in front of the N1 first light-emitting units so that the first polarization directions of the first light emitted by each of the first light-emitting units are all horizontal polarization directions. Furthermore, the first modulations of the N1 first light-emitting units may be pulse-amplitude modulations (PAMs) corresponding to different amplitudes. In this case, the first lights respectively emitted by the N1 first light-emitting units have the same first polarization direction (e.g. horizontal polarization direction) but different pulse-amplitude modulations.

**[0020]** In addition, the second light source **102** includes N2 second light-emitting units, and a single vertical polarizer may be disposed in front of the N2 second light-emitting units so that the second polarization directions of the second light emitted by each of the second light-emitting units are all vertical polarization directions. Furthermore, the second modulations respectively corresponding to the N2 second light-emitting units may be pulse-amplitude modulations corresponding to different amplitudes. In this case, the second lights respectively emitted by the N2 second light-emitting units have the same second polarization direction (e.g. vertical polarization direction) but different pulse-amplitude modulations.

**[0021]** In addition, in other embodiments, the first modulation corresponding to each of the first light-emitting units and/or the second modulation corresponding to each of the second light-emitting units may also be realized by other modulations (e.g. pulse width modulation (PWM)); however, the disclosure is not limited thereto.

**[0022]** In the embodiments of the disclosure, the image capturing circuit **103** is, for example, any type of polarization image capturing device. For example, in a first embodiment, the image capturing circuit **103** may include a first lens and a second lens respectively corresponding to the first polarization direction and the second polarization direction. The first lens includes a first polarizer corresponding to the first polarization direction, and the second lens includes a second polarizer corresponding to the second polarization direction. In this case, the first lens may capture multiple first image frames having the first polarization direction in a specific field of view through the first polarizer at multiple timing points. The second lens may capture multiple second image frames having the second polarization direction in the specific field of view through the second polarizer at the multiple timing points.

**[0023]** In a second embodiment, a polarization component array may be disposed in the image capturing circuit **103**. The polarization component array may include multiple polarization component sets, and each of the polarization component sets may correspond to one of image capturing pixels of the image capturing circuit **103**. In addition, each of the polarization component sets may include a first polarization component and a second polarization component respectively corresponding to the first polarization direction and the second polarization direction. In this case, each of the image frames captured by the image capturing circuit **103** includes multiple pixels. Each of the pixels may include a first sub-pixel and a second sub-pixel respectively corresponding to the first polarization direction and the second polarization direction; however, the disclosure is not limited thereto.

**[0024]** In an embodiment, the image capturing circuit **103** may be designed to photograph/capture image frames forward of the vehicle. That is, a field of view (hereinafter

referred to as a specific field of view) of the image capturing circuit **103** capturing the image frames extends forward of the vehicle; however, the disclosure is not limited thereto.

**[0025]** In different embodiments, the processor **104** may be coupled to the first light source **101**, the second light source **102**, and the image capturing circuit **103**. The processor **104** may be a general-purpose processor, a special-purpose processor, a conventional processor, a digital signal processor (DSP), multiple microprocessors, one or more microprocessors, controllers or microcontrollers integrated with a DSP core, an application specific integrated circuit (ASIC), a field programmable gate array (FPGA), any other type of integrated circuit, a state machine, an advanced RISC machine (ARM)-based processor or the like.

**[0026]** In the embodiments of the disclosure, the processor **104** may access a required module or program code to realize a method for determining a distance based on polarization vision provided by the disclosure. The method is described in detail below.

**[0027]** Referring to FIG. 2, FIG. 2 is a flow chart of a distance detection method according to an embodiment of the disclosure. The method of the embodiment may be executed by the distance detection system **100** in FIG. 1, and the details of each step in FIG. 2 are described below with reference to the elements shown in FIG. 1. Furthermore, in order to make the disclosure more comprehensible, further descriptions will be provided below with reference to FIG. 3. FIG. 3 is an application scenario diagram according to an embodiment of the disclosure.

**[0028]** First, in step S210, multiple first light-emitting units **101a** of the first light source **101** may respectively emit a first light to illuminate a specific object **499** based on a first polarization direction and a first modulation of each of the first light-emitting units **101a**. As shown in FIG. 3, the multiple first light-emitting units **101a** may be arranged in a matrix. A polarizer P1 (e.g. a horizontal polarizer) may be disposed in front of the matrix. Furthermore, the first modulation corresponding to each of the first light-emitting units **101a** may be one of multiple pulse width modulations MM as shown. The first modulation corresponding to each of the first light-emitting units **101a** is different from each other; however, the disclosure is not limited thereto.

**[0029]** In this case, the first lights respectively emitted by the first light-emitting units **101a** (the first polarization direction is, for example, a horizontal polarization direction) may integrally form a first illumination range **411**. The first illumination range **411** may include a first illumination sub-range **411a** corresponding to each of the first light-emitting units **101a**.

**[0030]** In addition, in step S220, multiple second light-emitting units **102a** of the second light source **102** may respectively emit a second light to illuminate the specific object **499** based on a second polarization direction and a second modulation of each of the second light-emitting units **102a**. As shown in FIG. 3, the multiple second light-emitting units **102a** may be arranged in a matrix. A polarizer P2 (e.g. a vertical polarizer) may be disposed in front of the matrix. Furthermore, the second modulation corresponding to each of the second light-emitting units **102a** may be one of the multiple pulse width modulations MM as shown. The second modulation corresponding to each of the second light-emitting units **102a** is different from each other; however, the disclosure is not limited thereto.

**[0031]** In this case, the second lights respectively emitted by the second light-emitting units **102a** (the second polarization direction is, for example, a vertical polarization direction) may integrally form a second illumination range **412**. The second illumination range **412** may include a second illumination sub-range **412a** of each of the second light-emitting units **102a**.

**[0032]** Next, in step S230, the image capturing circuit **103** may capture multiple image frames in a specific field of view at multiple timing points. The specific object **499** illuminated by the first light source **101** and the second light source **102** is present in the specific field of view. In this case, each of the image frames captured by the image capturing circuit **103** includes an image area (including at least one specific image pixel) corresponding to the specific object **499**. In other words, each of the image frames includes at least one specific image pixel corresponding to the specific object **499**.

**[0033]** In the embodiments of the disclosure, based on a degree of polarization of a specific image pixel (hereinafter referred to as specific pixel) corresponding to the specific object **499** in each of the image frames, the processor **104** may learn which of the first light-emitting units **101a** emits the first light and which of the second light-emitting units **102a** emits the second light that contribute to the light corresponding to the specific pixel. For example, the specific pixel is a pixel of the specific object **499** located at the center in each of the image frames; however, the disclosure is not limited thereto. Any pixel which may represent the specific object **499** falls in the scope of the disclosure.

**[0034]** Next, in step S240, the processor **104** may obtain a first specific modulation and a second specific modulation presented by the specific pixel at the timing points based on the image frames.

**[0035]** For example, in an embodiment, the image frames may include the multiple first image frames (corresponding to the first polarization direction) and the second image frames (corresponding to the second polarization direction) of the first embodiment. In this case, the processor **104** may obtain the first specific modulation presented by the specific pixel at the timing points based on the first image frames and obtain the second specific modulation presented by the specific pixel at the timing points based on the second image frames.

**[0036]** In another embodiment, the image capturing circuit **103** obtains the image frames through a method described in the second embodiment above. In this case, the processor **104** obtains first sub-pixels and second sub-pixels respectively corresponding to the first polarization direction and the second polarization direction among the pixels of each of the image frames. The processor **104** combines the first sub-pixels into multiple first image frames and combines the second sub-pixels into multiple second image frames.

**[0037]** Specifically, with regard to an *i*th (*i* being a positive integer) image frame among the image frames, the processor **104** may combine the first sub-pixels of each pixel in the *i*th image frame into a first image frame corresponding to the *i*th image frame and combine the second sub-pixels of each pixel in the *i*th image frame into a second image frame corresponding to the *i*th image frame. Furthermore, the processor **104** may analyze the first image frame corresponding to each of the image frames to obtain the first specific modulation presented by the specific pixel at the timing points. Similarly, the processor **104** may obtain the



second specific modulation presented by the specific pixel at the timing points based on the second image frame corresponding to each of the image frames.

**[0038]** In addition, in step S250, the processor 104 may find a first specific light-emitting unit among the first light-emitting units 101a based on the first specific modulation and find a second specific light-emitting unit among the second light-emitting units 102a based on the second specific modulation.

**[0039]** For example, a first light-emitting unit A1 of the first light source 101 is modulated to emit the first light (e.g. having a horizontal polarization direction) by the first modulation having a bright-dark-bright-dark pattern. In this case, after the processor 104 analyzes the specific pixel of the first image frame and discovers that the degree of polarization of the specific pixel in the first image frame is presented in the first specific modulation of the bright-dark-bright-dark pattern, the processor 104 may determine that the light of the specific pixel is contributed by at least the first light of the first light-emitting unit A1. Accordingly, the processor 104 may determine that the first light-emitting unit A1 is the first specific light-emitting unit. Furthermore, a second light-emitting unit B1 in the second light source 102 is modulated to emit the second light (e.g. having a vertical polarization direction) by the second modulation having a dark-dark-bright-bright pattern. In this case, after the processor 104 analyzes the specific pixel of the second image frame and discovers that the degree of polarization of the specific pixel of the second image frame is presented in the second specific modulation of the dark-dark-bright-bright pattern, the processor 104 may determine that the light of the specific pixel is also contributed by the second light of the second light-emitting unit B1. Accordingly, the processor 104 may determine that the second light-emitting unit B1 is the second specific light-emitting unit.

**[0040]** Then, in step S260, the processor 104 may calculate a specific distance LL between the distance detection system 100 and the specific object 499 based on the first specific light-emitting unit and the second specific light-emitting unit.

**[0041]** In an embodiment, the processor 104 may obtain a predetermined distance between the first specific light-emitting unit and the second specific light-emitting unit. Then, the processor 104 may execute a triangulation location method based on a first emission direction of the first specific light-emitting unit, a second emission direction of the second specific light-emitting unit, and the predetermined distance to calculate the specific distance LL between the distance detection system 100 and the specific object 499.

**[0042]** For example, in the scenario in FIG. 3, the first specific light-emitting unit and the second specific light-emitting unit found by the processor 104 after the execution of step S250 are respectively a first light-emitting unit 401a and a second light-emitting unit 402a as shown. Hence, the processor 104 may estimate the specific distance LL. Specifically, in the embodiments of the disclosure, the locations of each first light-emitting unit 101a in the first light source 101 and each second light-emitting unit 102a in the second light source 102 are known. A distance between any first light-emitting unit 101a and any second light-emitting unit 102a may be measured in advance and thus considered to be known. In other words, a distance (hereinafter referred to as

predetermined distance DD) between the first light-emitting unit 401a and the second light-emitting unit 402a is also known.

**[0043]** Furthermore, the first emission direction in which each of the first light-emitting units 101a emits the first light may be fixed, and the second emission direction in which each of the second light-emitting units 102a emits the second light may also be fixed.

**[0044]** Therefore, after it is determined that the first specific light-emitting unit and the second specific light-emitting unit are respectively the first light-emitting unit 401a and the second light-emitting unit 402a, the processor 104 may obtain the predetermined distance DD (having a value of, for example, d) between the first light-emitting unit 401a and the second light-emitting unit 402a. Then, the processor 104 may execute the triangulation location method based on a first emission direction D1 of the first light-emitting unit 401a, a second emission direction D2 of the second light-emitting unit 402a, and the predetermined distance DD to calculate the specific distance LL (having a value of, for example, l) between the distance detection system 100 and the specific object 499.

**[0045]** In FIG. 3, an included angle AN1 (having a value of, for example,  $\alpha$ ) is formed between a connecting line between the first light-emitting unit 401a and the second light-emitting unit 402a, and the first emission direction D1, and an included angle AN2 (having a value of, for example,  $\beta$ ) is formed between a connecting line between the first light-emitting unit 401a and the second light-emitting unit 402a, and the second emission direction D2. In this case, the specific distance LL may be, for example, calculated by the processor 104 as

$$l = d \times \frac{\sin \alpha \times \cos \beta}{\sin(\alpha + \beta)},$$

but is not limited thereto.

**[0046]** Based on the above, in the method of the disclosure, the specific distance LL between the distance detection system 100 and the specific object 499 may be determined in a different manner from that of the current technology. Even in a bright light/dim light environment, the specific distance LL between the distance detection system 100 and the specific object 499 can still be accurately determined by the method of the disclosure. Therefore, the chances of collisions and car accidents are reduced.

**[0047]** In other embodiments, when multiple specific objects are present in the specific field of view of the image capturing circuit 103, the method of the disclosure may still be employed to determine a distance between the distance detection system 100 and each of the specific objects. The disclosure is not limited thereto.

**[0048]** In addition, the disclosure further provides a mechanism below to improve the efficiency of finding the first specific light-emitting unit and the second specific light-emitting unit. Specifically, in the scenario of FIG. 3, the first light source 101 may be, for example, considered located on the left side of the distance detection system 100, and the second light source 102 may be, for example, considered located on the right side of the distance detection system 100. In this case, the first illumination range 411 of the first light source 101 corresponds to a first image area located on the left side in each of the image frame, and the

second illumination range **412** of the second light source **102** corresponds to a second image area located on the right side in each of the image frame.

**[0049]** For example, assuming that an image frame IM is one of the image frames, the image frame IM may include a first image area IM1 and a second image area IM2 respectively corresponding to the first illumination range **411** and the second illumination range **412**. As shown in FIG. 3, the first image area IM1 and the second image area IM2 have an overlapping area OR, and the specific pixel corresponding to the specific object **499** may be located in the overlapping area OR.

**[0050]** As shown in FIG. 3, among the first light-emitting units **101a** of the first light source **101**, only a part of the first light-emitting units **101a** located near the right side are more likely to contribute to the first light for the specific pixel. Similarly, among the second light-emitting units **102a** of the second light source **102**, only a part of the second light-emitting units **102a** located near the left side are more likely to contribute to the second light for the specific pixel. Therefore, the processor **104** may find the first specific light-emitting unit among the first light-emitting units **101a** near the right side and find the second specific light-emitting unit among the second light-emitting units **102a** near the left side.

**[0051]** In other words, the processor **104** may find the first specific light-emitting unit/the second specific light-emitting unit within a relatively small range. Therefore, the efficiency of finding the first specific light-emitting unit and the second specific light-emitting unit may be improved.

**[0052]** Referring to FIG. 4, FIG. 4 is a schematic diagram of a light source adopting a digital micro-mirror device technology according to an embodiment of the disclosure. In FIG. 4, a first light source **501** of the distance detection system **100** may include a sub-light source **511** and a micro-mirror array **512**. The micro-mirror array **512** may include multiple micro-mirrors. Each of the micro-mirrors may emit a first light by reflecting a light of the sub-light source **511**. In other words, the micro-mirrors in the micro-mirror array **512** may be understood as the first light-emitting units of the embodiment. In addition, a second light source **502** of the distance detection system **100** may include a sub-light source **521** and a micro-mirror array **522**. The micro-mirror array **522** may include multiple micro-mirrors. Each of the micro-mirrors may emit a second light by reflecting a light of the sub-light source **521**. In other words, the micro-mirrors in the micro-mirror array **522** may be understood as the second light-emitting units of the embodiment.

**[0053]** In the embodiment, assuming that the first specific light-emitting unit and the second specific light-emitting unit found are respectively a micro-mirror **501a** and a micro-mirror **502b**, the processor **104** may still calculate the specific distance between the distance detection system **100** and a specific object **599** based on the teaching above. The details thereof are not repeated here.

**[0054]** In summary of the above, each of the first light-emitting units in the first light source emits the first light based on the first polarization direction and the corresponding first modulation, and each of the second light-emitting units in the second light source emits the second light based on the second polarization direction and the corresponding second modulation. Therefore, in the method of the disclosure, after the first specific modulation and the second

specific modulation presented by the specific pixel in multiple image frames are determined, the first specific light-emitting unit and the second specific light-emitting unit can be found accordingly. Then, in the method of the disclosure, the specific distance between the distance detection system and the specific object corresponding to the specific pixel can be estimated based on relative positions of the first specific light-emitting unit and the second specific light-emitting unit. Accordingly, even in a bright light/dim light environment, the specific distance between the distance detection system and the specific object can still be accurately determined by the method of the disclosure. Therefore, the chances of collisions and car accidents are reduced. **[0055]** Although the disclosure has been described with reference to the above embodiments, they are not intended to limit the disclosure. It will be apparent to one of ordinary skill in the art that modifications to the described embodiments may be made without departing from the spirit and the scope of the disclosure. Accordingly, the scope of the disclosure will be defined by the attached claims and their equivalents and not by the above detailed descriptions.

What is claimed is:

1. A distance detection system, comprising:

a first light source having a first polarization direction and comprising a plurality of first light-emitting units, wherein each of the first light-emitting units emits a first light to illuminate a specific object based on the first polarization direction and a first modulation of the each of the first light-emitting units;

a second light source having a second polarization direction and comprising a plurality of second light-emitting units, wherein each of the second light-emitting units emits a second light to illuminate the specific object based on the second polarization direction and a second modulation of the each of the second light-emitting units;

an image capturing circuit configured to capture a plurality of image frames in a specific field of view at a plurality of timing points, wherein the specific object is within the specific field of view, and each of the image frames comprises a specific pixel corresponding to the specific object; and

a processor coupled to the first light source, the second light source and the image capturing circuit and configured to:

obtain a first specific modulation and a second specific modulation presented by the specific pixel at the timing points based on the image frames, wherein the first specific modulation corresponds to the first polarization direction, and the second specific modulation corresponds to the second polarization direction;

find a first specific light-emitting unit among the first light-emitting units based on the first specific modulation and find a second specific light-emitting unit among the second light-emitting units based on the second specific modulation; and

calculate a specific distance between the distance detection system and the specific object based on the first specific light-emitting unit and the second specific light-emitting unit.

2. The distance detection system according to claim 1, wherein the image capturing circuit comprises a first lens and a second lens respectively corresponding to the first

polarization direction and the second polarization direction, the image frames comprise a plurality of first image frames captured by the first lens and a plurality of second image frames captured by the second lens, and in obtaining the first specific modulation and the second specific modulation, the processor is further configured to:

obtain the first specific modulation presented by the specific pixel at the timing points based on the first image frames; and

obtain the second specific modulation presented by the specific pixel at the timing points based on the second image frames.

3. The distance detection system according to claim 1, wherein in obtaining the first specific modulation and the second specific modulation, the processor is further configured to:

obtain, among a plurality of pixels of each of the image frames, a plurality of first sub-pixels and a plurality of second sub-pixels respectively corresponding to the first polarization direction and the second polarization direction;

combine the first sub-pixels into a plurality of first image frames and combine the second sub-pixels into a plurality of second image frames;

obtain the first specific modulation presented by the specific pixel at the timing points based on the first image frames; and

obtain the second specific modulation presented by the specific pixel at the timing points based on the second image frames.

4. The distance detection system according to claim 1, wherein in calculating the distance between the distance detection system and the specific object, the processor is further configured to:

obtain a predetermined distance between the first specific light-emitting unit and the second specific light-emitting unit; and

execute a triangulation location method based on a first emission direction of the first specific light-emitting unit, a second emission direction of the second specific light-emitting unit, and the predetermined distance to calculate the specific distance between the distance detection system and the specific object.

5. The distance detection system according to claim 1, wherein the first modulations respectively corresponding to the first light-emitting units are all different, and the second modulations respectively corresponding to the second light-emitting units are all different.

6. The distance detection system according to claim 1, wherein the first polarization direction and the second polarization direction are orthogonal to each other.

7. A distance detection method adapted for a distance detection system, comprising:

emitting a first light to illuminate a specific object by a plurality of first light-emitting units of a first light source respectively based on a first polarization direction and a first modulation of each of the first light-emitting units;

emitting a second light to illuminate the specific object by a plurality of second light-emitting units of a second light source respectively based on a second polarization direction and a second modulation of each of the second light-emitting units;

capturing a plurality of image frames in a specific field of view at a plurality of timing points by an image capturing circuit, wherein the specific object is within the specific field of view comprises, and each of the image frames comprises a specific pixel corresponding to the specific object;

obtaining a first specific modulation and a second specific modulation presented by the specific pixel at the timing points by a processor based on the image frames, wherein the first specific modulation corresponds to the first polarization direction, and the second specific modulation corresponds to the second polarization direction;

finding a first specific light-emitting unit among the first light-emitting units based on the first specific modulation by the processor and finding a second specific light-emitting unit among the second light-emitting units based on the second specific modulation by the processor; and

calculating a specific distance between the distance detection system and the specific object based on the first specific light-emitting unit and the second specific light-emitting unit by the processor.

8. The distance detection method according to claim 7, wherein capturing the image frames by the image capturing circuit comprises:

capturing a plurality of first image frames having the first polarization direction in the specific field of view at the timing points by a first lens of the image capturing circuit; and

capturing a plurality of second image frames having the second polarization direction in the specific field of view at the timing points by a second lens of the image capturing circuit;

wherein obtaining the first specific modulation and the second specific modulation by the processor comprises: obtaining the first specific modulation presented by the specific pixel at the timing points based on the first image frames; and

obtaining the second specific modulation presented by the specific pixel at the timing points based on the second image frames.

9. The distance detection method according to claim 7, wherein obtaining the first specific modulation and the second specific modulation by the processor comprises:

obtaining, among a plurality of pixels of each of the image frames, a plurality of first sub-pixels and a plurality of second sub-pixels respectively corresponding to the first polarization direction and the second polarization direction;

combining the first sub-pixels into a plurality of first image frames and combining the second sub-pixels into a plurality of second image frames;

obtaining the first specific modulation presented by the specific pixel at the timing points based on the first image frames; and

obtaining the second specific modulation presented by the specific pixel at the timing points based on the second image frames.

10. The distance detection method according to claim 7, wherein calculating the specific distance between the distance detection system and the specific object by the processor comprises:

obtaining a predetermined distance between the first specific light-emitting unit and the second specific light-emitting unit; and

executing a triangulation location method based on a first emission direction of the first specific light-emitting unit, a second emission direction of the second specific light-emitting unit, and the predetermined distance to calculate the specific distance between the distance detection system and the specific object.

**11.** The distance detection method according to claim 7, wherein the first polarization direction and the second polarization direction are orthogonal to each other.

\* \* \* \* \*