



US011718811B2

(12) **United States Patent
Craig**

(10) **Patent No.:** US 11,718,811 B2

(45) **Date of Patent:** Aug. 8, 2023

(54) **EXTRACTING ESSENTIAL OILS**

(71) Applicant: **Scott E. Craig**, Pensacola, FL (US)

(72) Inventor: **Scott E. Craig**, Pensacola, FL (US)

(73) Assignee: **Scott E. Craig**, Pensacola, FL (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 142 days.

(21) Appl. No.: **17/322,460**

(22) Filed: **May 17, 2021**

(65) **Prior Publication Data**

US 2021/0269738 A1 Sep. 2, 2021

Related U.S. Application Data

(62) Division of application No. 16/997,625, filed on Aug. 19, 2020, now Pat. No. 11,060,047.
(Continued)

(51) **Int. Cl.**
B04C 5/08 (2006.01)
B04C 5/10 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **C11B 1/10** (2013.01); **B01D 11/02** (2013.01); **B01D 11/0207** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC . C11B 1/10; C11B 3/001; C11B 3/006; C11B 3/008; C11B 9/02; B01D 11/02;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,877,299 A * 9/1932 Gordon C08C 1/02
524/277

1,921,446 A 8/1933 Andrews et al.

(Continued)

FOREIGN PATENT DOCUMENTS

CN 1161056 A * 10/1997 B01D 11/02

CN 103041614 A * 4/2013 B01D 11/02

WO WO2019000042 A1 * 1/2019 B01D 11/04

OTHER PUBLICATIONS

English translation of Fukuyo et al patent publication CN1161056A, published Oct. 1997 (Year: 1997).*

(Continued)


Primary Examiner — Joseph W Drodge

(74) *Attorney, Agent, or Firm* — Christensen O'Connor Johnson Kindness PLLC

(57) **ABSTRACT**

A system and method for extracting essential oils from organic material is provided. One embodiment places organic material into an extraction chamber that is a cylindrical wall of rigid material, wherein a diameter and a height of the extraction chamber is sized to define an interior that accommodates a desired amount of an organic material having essential oils; fills the extraction chamber with a solvent after the organic matter has been placed into the extraction chamber; and moves a vortex plunger disposed over the surface of the organic material in a repeated upward and downward motion during an agitation process so that the vortex vanes generate a fluid vortex in the solvent, wherein the fluid vortex causes the solvent to be drawn upward into the organic material and then to be pushed downward through the organic material so that the solvent extracts essential oils from the organic material.

16 Claims, 8 Drawing Sheets

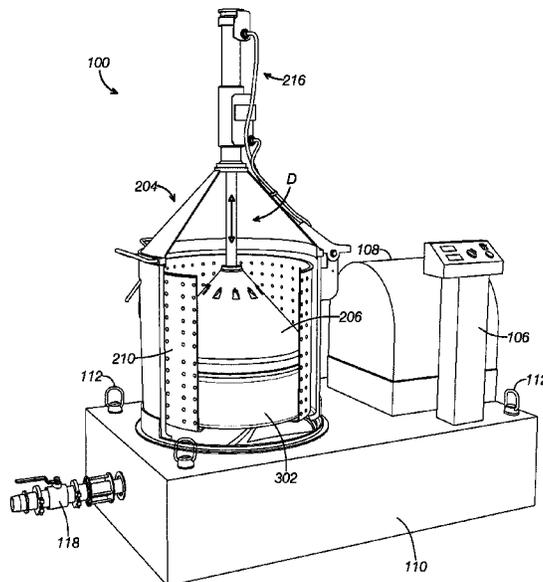

Related U.S. Application Data

(60) Provisional application No. 62/889,157, filed on Aug. 20, 2019.

(51) **Int. Cl.**

B01D 11/02 (2006.01)
C11B 1/10 (2006.01)
B04C 5/081 (2006.01)
B04C 5/103 (2006.01)

(52) **U.S. Cl.**

CPC *B01D 11/0257* (2013.01); *B01D 11/0273* (2013.01); *B04C 5/081* (2013.01); *B04C 5/10* (2013.01); *B04C 5/103* (2013.01)

(58) **Field of Classification Search**

CPC B01D 11/0207; B01D 11/0223; B01D 11/0226; B01D 11/0234; B01D 11/0238; B01D 11/0257; B01D 11/0273; B01D 11/0276; B01D 21/26; B01D 21/262; B01D 29/23; B01D 29/25; B01D 29/35; B01D 29/356; B01D 36/04; B01D 36/045; B01D 11/0219; B01D 11/0269; B04B 3/00; B04B 3/02; B04B 7/02; B04B 7/16; B04B 7/18; B04B 9/02; B04B 9/10; B04B 11/04; B04B 13/00; B30B 9/06; B30B 9/08; B30B 9/20; B30B 9/205; B30B 9/26; B30B 9/267; B30B 15/30; B30B 15/32; B04C 5/081; B04C 5/10; B04C 5/103; B01F 31/441; B01F 31/449

USPC 100/104, 110, 111, 116, 117, 126, 127, 100/130; 210/360.1, 377, 380.1, 383, 210/511, 634

See application file for complete search history.

(56)

References Cited

U.S. PATENT DOCUMENTS

2,170,547	A	8/1939	Christian	
2,776,305	A	1/1957	Lojo	
2,817,288	A	12/1957	Peters	
3,168,033	A	2/1965	Hansen	
3,438,500	A	4/1969	Pico	
3,939,065	A	2/1976	Einarsson Ahlfors	
4,253,390	A	3/1981	Hunt et al.	
5,041,245	A	8/1991	Benado	
11,060,047	B2 *	7/2021	Craig B01D 11/0219
2009/0223875	A1	9/2009	Asal et al.	
2012/0301800	A1	11/2012	Carew	
2016/0184735	A1	6/2016	Wardle	
2018/0030372	A1	2/2018	Maki et al.	
2018/0214792	A1	8/2018	Balass	
2019/0016989	A1	1/2019	Steele	
2019/0151771	A1	5/2019	Thomas	
2019/0240593	A1	8/2019	Murphy	
2020/0222830	A1	7/2020	Carew	
2020/0269170	A1	8/2020	Vette	
2020/0376056	A1 *	12/2020	Xie B01D 11/0257

OTHER PUBLICATIONS

English translation of Zhao et al patent publication CN 103041614A, published Apr. 2013 (Year: 2013).*
 International Search Report dated Jan. 5, 2021, issued in corresponding International Patent Application No. PCT/US2020/047052, filed Aug. 19, 2020, 9 pages total.

* cited by examiner

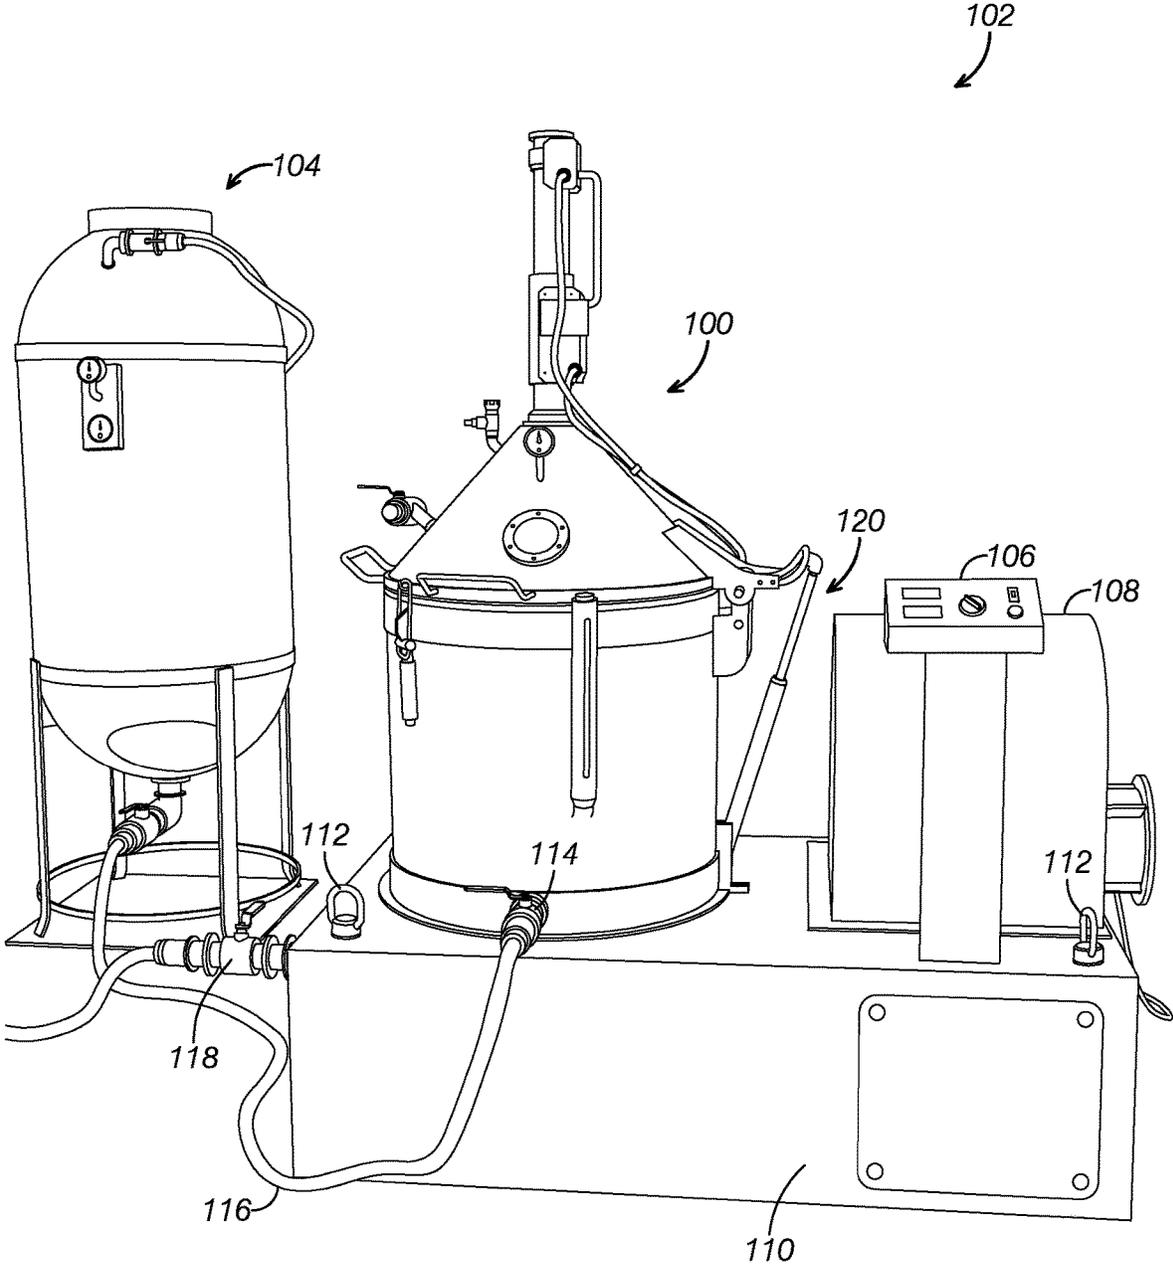


FIG. 1

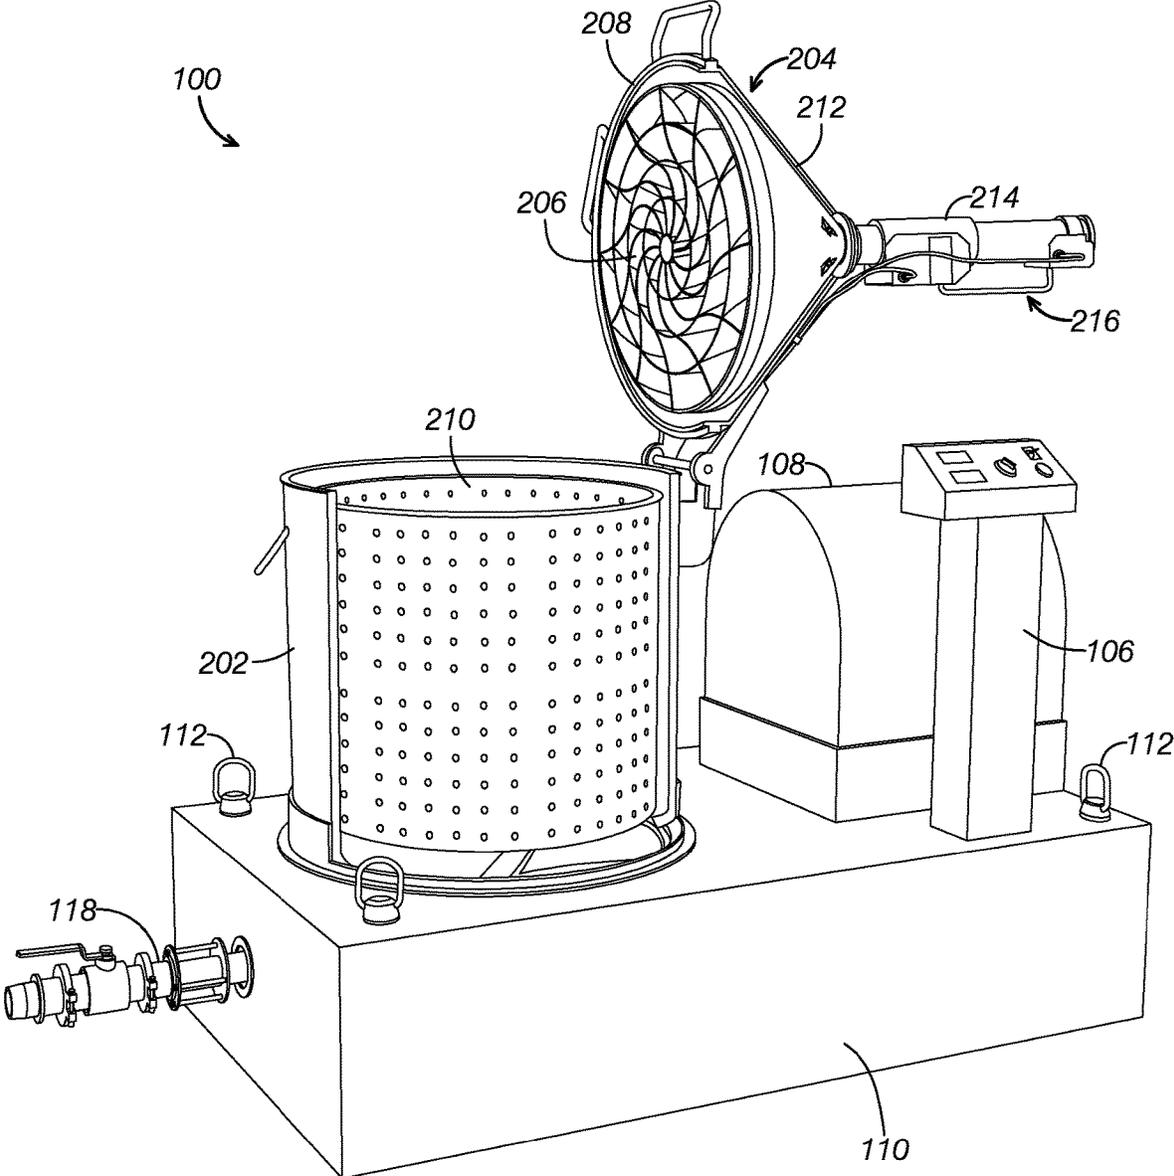


FIG. 2

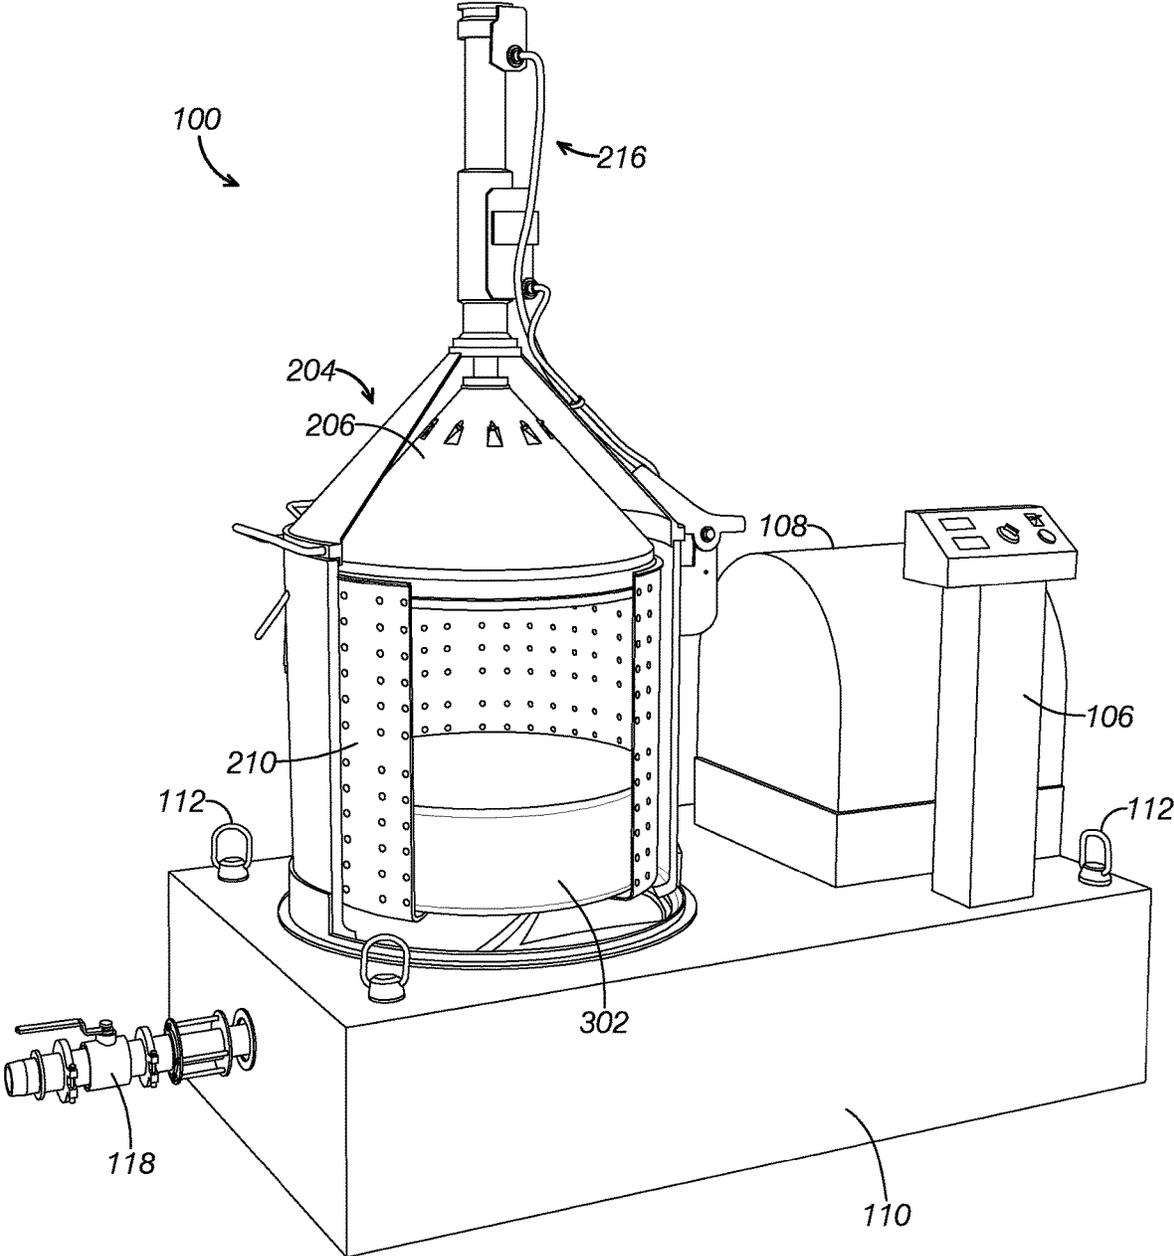


FIG. 3

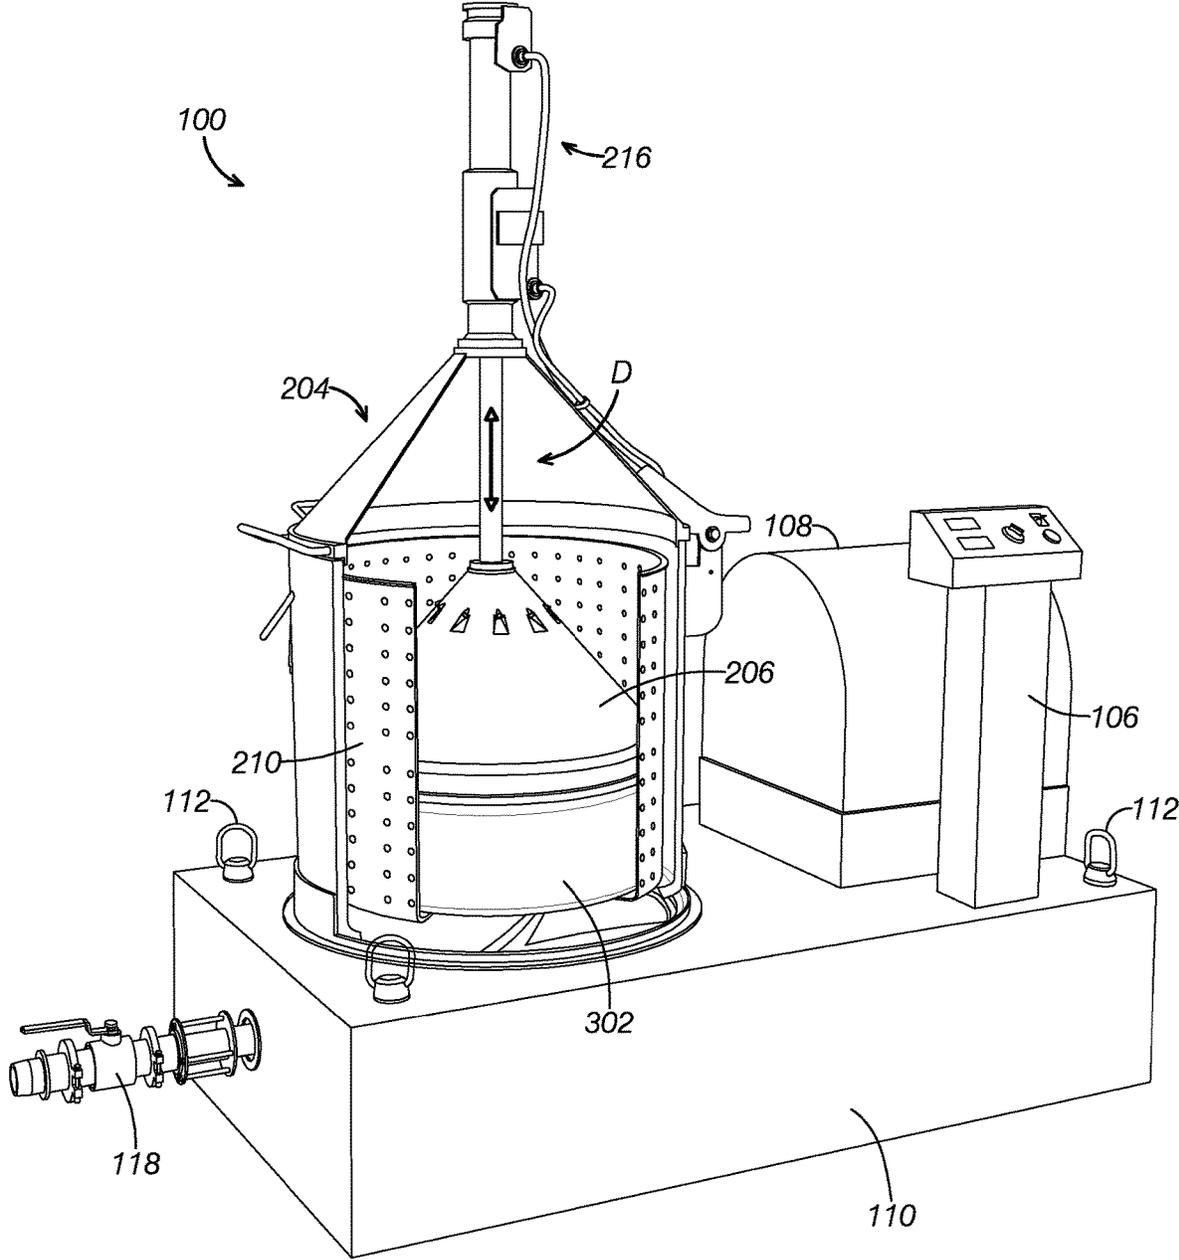


FIG. 4

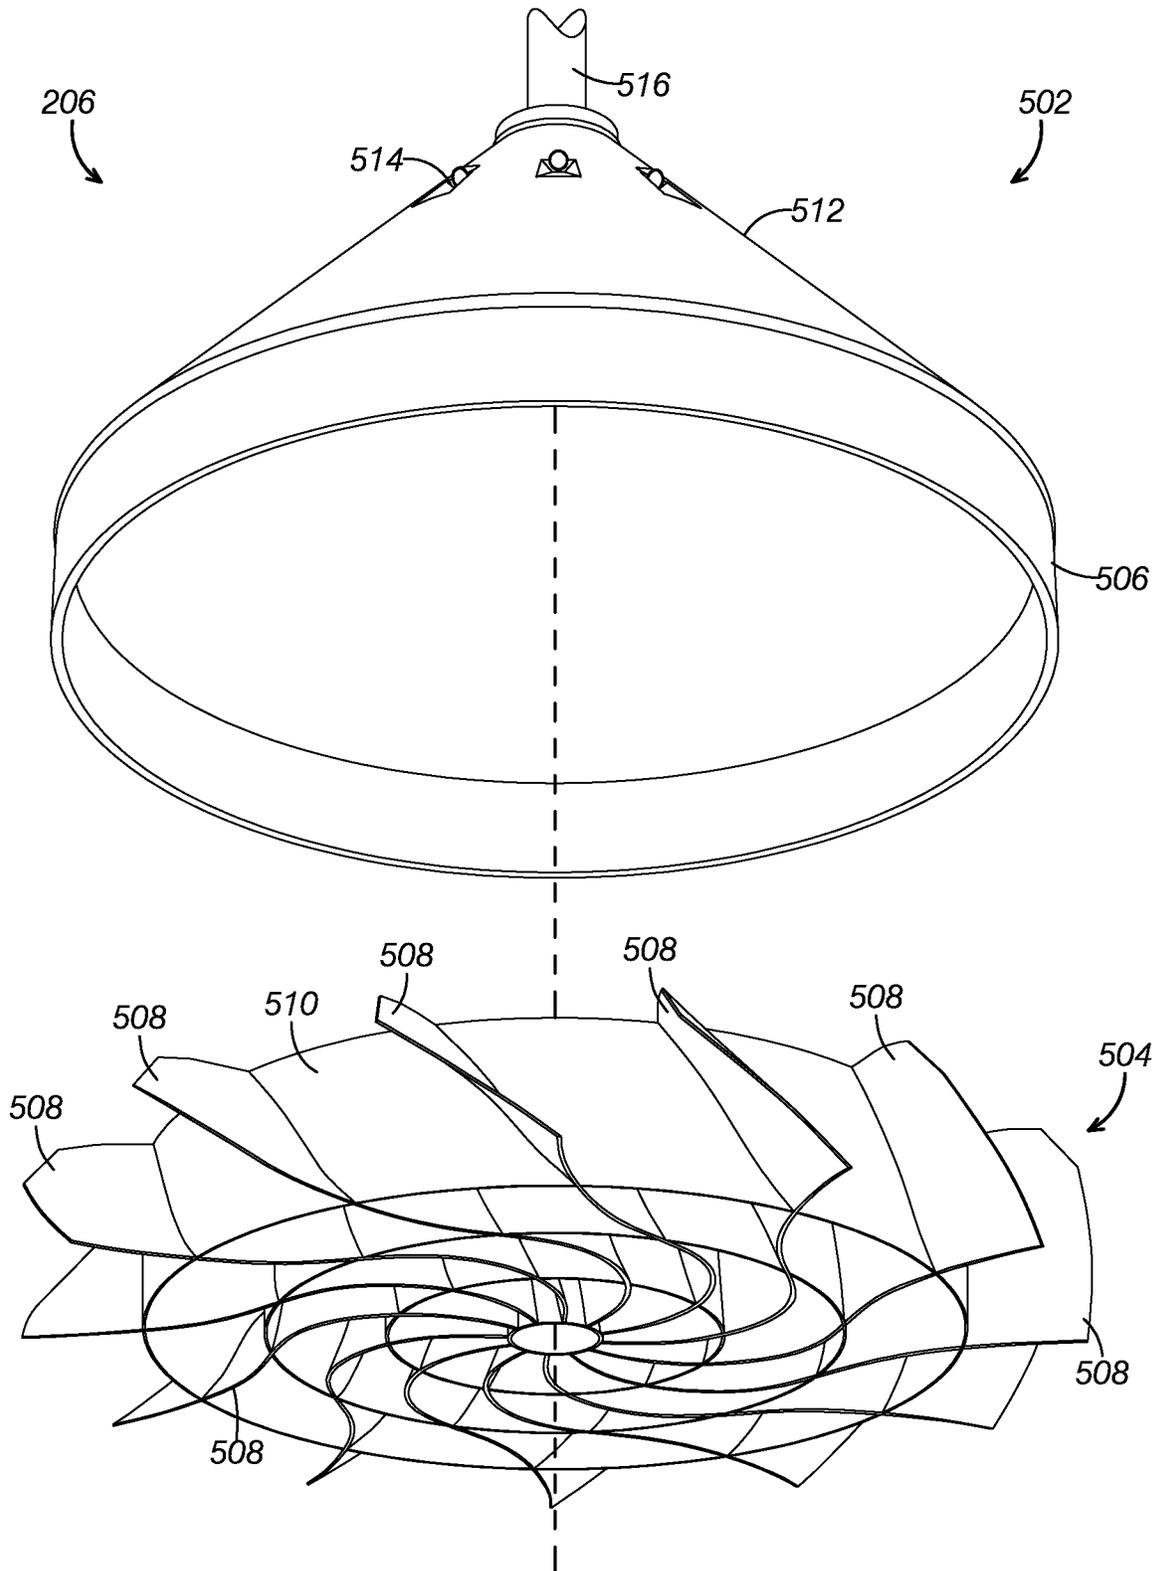


FIG. 5

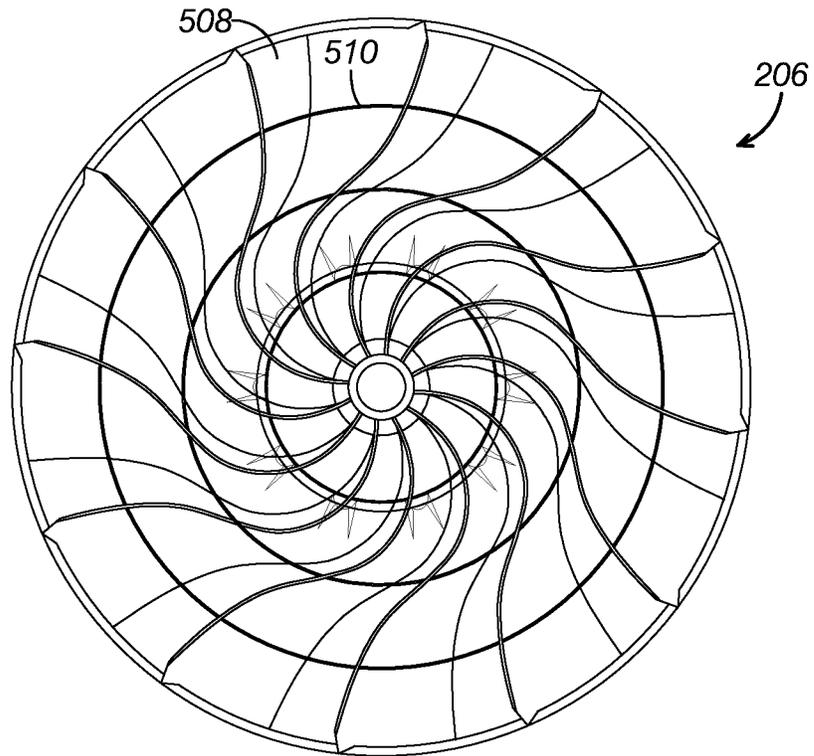


FIG. 6

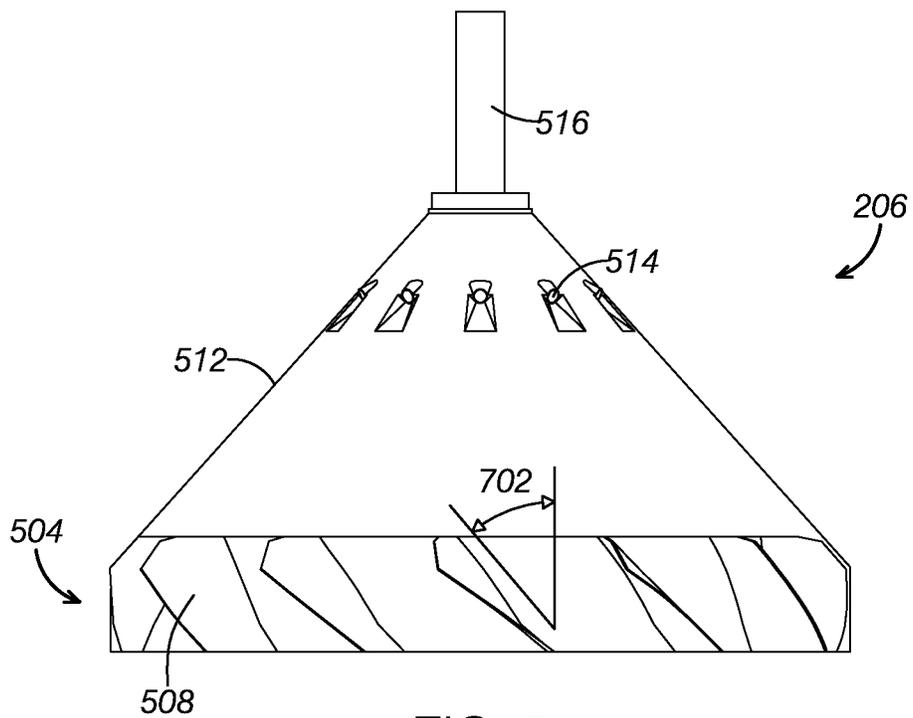


FIG. 7

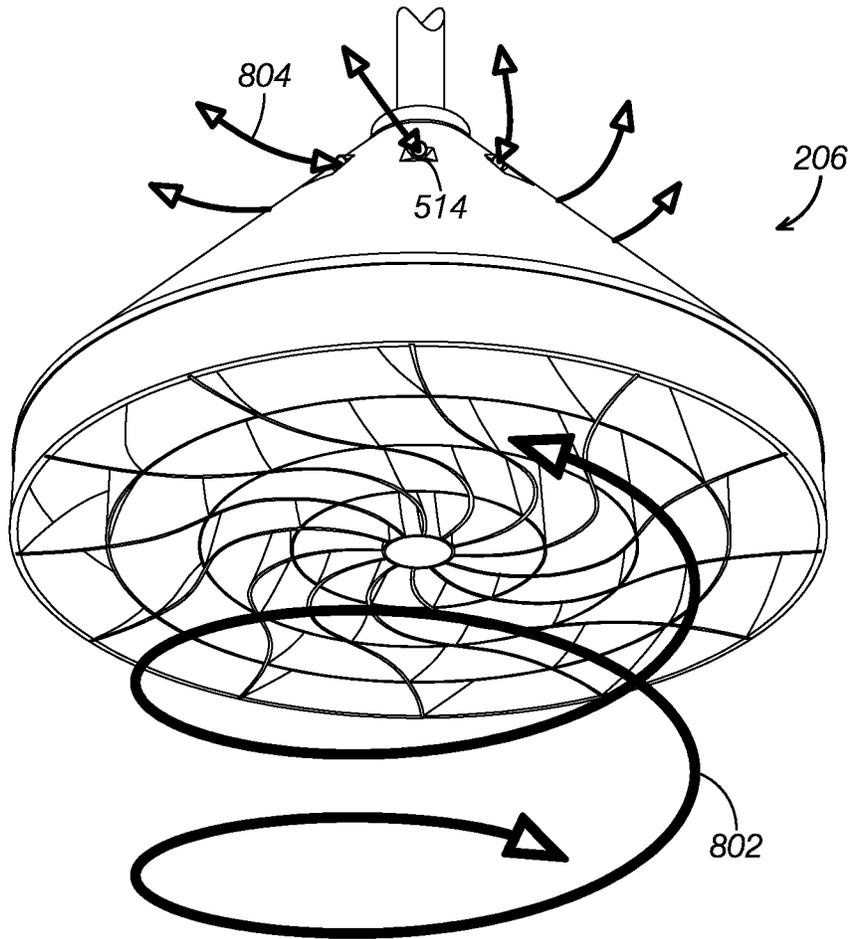


FIG. 8

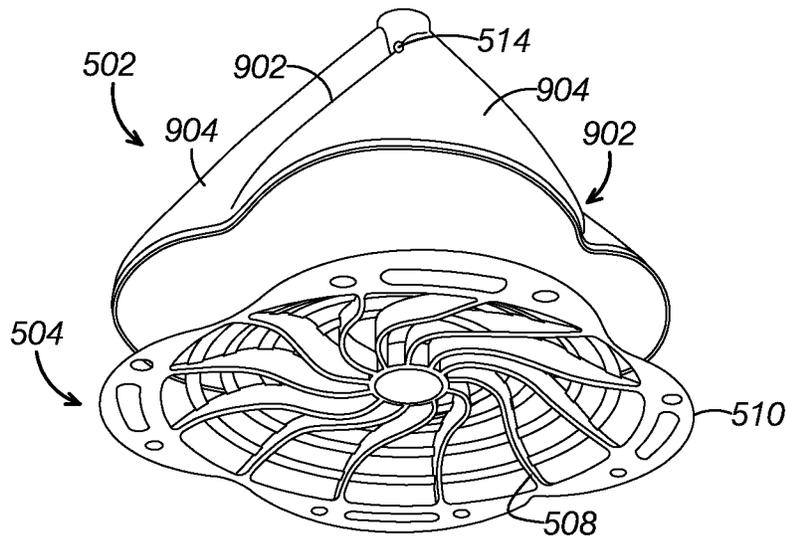


FIG. 9

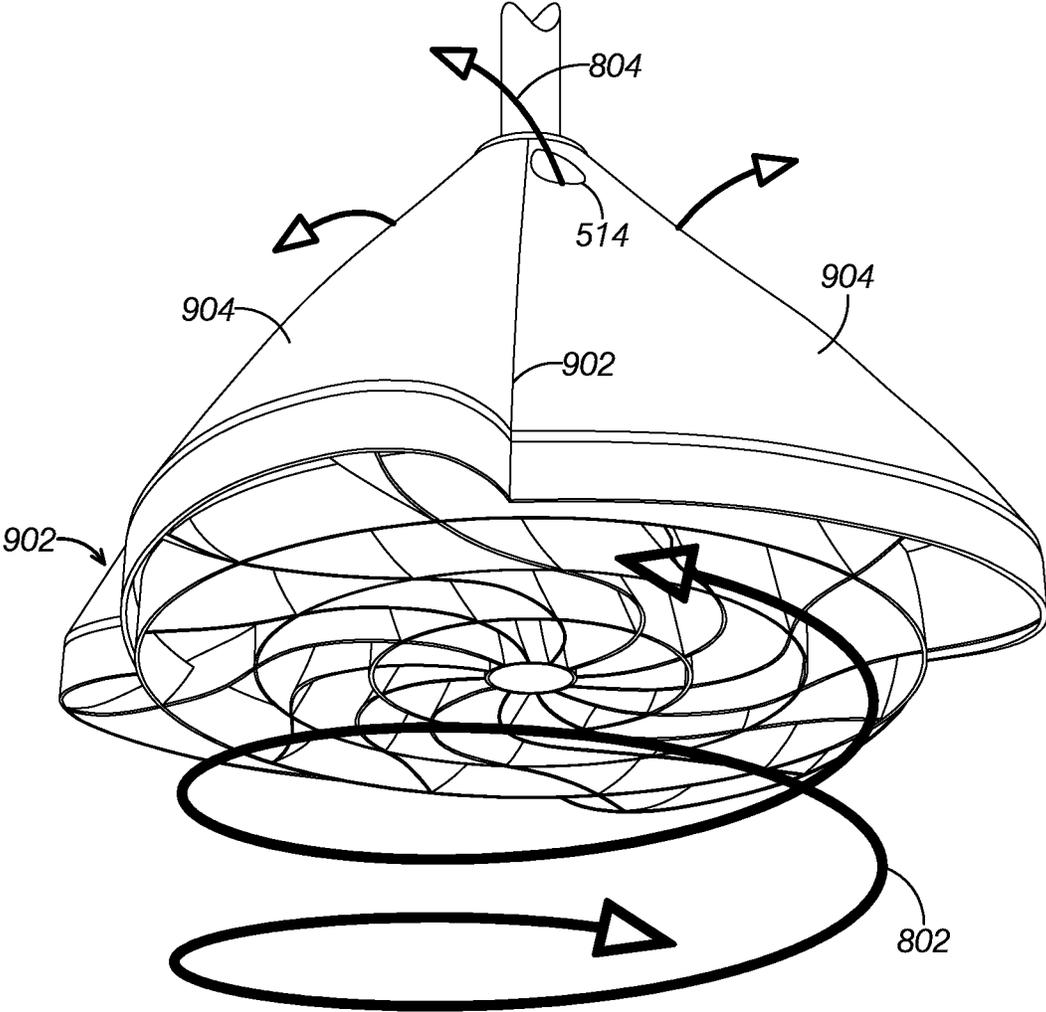


FIG. 10

EXTRACTING ESSENTIAL OILS

PRIORITY CLAIM

This application is a divisional application of co-pending U.S. application Ser. No. 16/997,625, filed on Aug. 19, 2020, entitled Apparatus and Method For Extracting Essential Oils, which claims priority to U.S. Provisional Application No. 62/889,157, filed on Aug. 20, 2019, entitled Systems and Methods For Extracting Oils From Biomass, all applications of which are hereby incorporated by reference for all purposes.

BACKGROUND OF THE INVENTION

Essential oils may denote a group of native substances which are obtainable from organic and/or inorganic material. For example, essential oils may include hydrocarbons, such as terpenes and the oxygenated compounds. Many essential oils that have applications in the food industry, the tobacco industry, the perfume industry, and the pharmaceutical industry. For example, essential oils are widely used as ingredients for fragrances, flavoring mixtures, and medicinal remedies. To put the essential oils in a usable form, the essential oils are extracted from the organic or inorganic materials.

The essential oils are obtained by extracting the oils from the organic materials and/or inorganic materials using an extraction processes. Legacy extraction processes may include steam distillation, solvent extraction, or mechanical separation such as pressing of the essential oils from the plant material. For steam distillation, the essential oils may be separated or distilled by decantation of the essential oil from a steam distillate. For solvent extraction or mechanical separation or pressing, the essential oils may be filtered from a solvent or remnant materials using a filter

The legacy afore-mentioned processes, however, may be inefficient, time consuming, expensive, and may also degrade the organic and/or inorganic materials during the extraction process. In the case of solvent extraction, solvents may be applied to the organic material and/or the inorganic material. For example, butane may be used in solvent extraction to extract compounds from essential oil material or cannabis plant to essentially create an essential oil or cannabis concentrate.

Accordingly, in the arts of essential oils extraction there is a need in the arts for an improved methods, apparatus, and systems for extracting essential oils from organic materials and/or inorganic materials.

SUMMARY OF THE INVENTION

Embodiments of the disclosure provide a system and method for extracting essential oils from organic material. One embodiment places organic material into an extraction chamber that is a cylindrical wall of rigid material, wherein a diameter and a height of the extraction chamber is sized to define an interior that accommodates a desired amount of an organic material having essential oils; fills the extraction chamber with a solvent after the organic matter has been placed into the extraction chamber; and moves a vortex plunger disposed over the surface of the organic material in a repeated upward and downward motion during an agitation process so that the vortex vanes generate a fluid vortex in the solvent, wherein the fluid vortex causes the solvent to be drawn upward into the organic material and then to be

pushed downward through the organic material so that the solvent extracts essential oils from the organic material.

BRIEF DESCRIPTION OF THE DRAWINGS

The components in the drawings are not necessarily to scale relative to each other. Like reference numerals designate corresponding parts throughout the several views.

FIG. 1 is a view an essential oil extraction system.

FIG. 2 is a cutaway view of the essential oil extraction system.

FIG. 3 is a partial cutaway view of the essential oil extraction system with the chamber lid in a closed position and the vortex plunger in a partially retracted position.

FIG. 4 is a partial cutaway view of the essential oil extraction system with the chamber lid in a closed position and the vortex plunger in an extended position above the organic material filter bag.

FIG. 5 is an exploded view of an example embodiment of a vortex plunger.

FIG. 6 is a bottom view of the example vortex plunger.

FIG. 7 is a side view of the example vortex plunger.

FIG. 8 conceptually illustrates a generated fluid vortex that is created in the solvent by the repeated upward and downward motion of the vortex plunger.

FIG. 9 is an exploded view of an example alternative embodiment of a vortex plunger.

FIG. 10 conceptually illustrates a generated fluid vortex by this alternative embodiment of the vortex plunger.

DETAILED DESCRIPTION

FIG. 1 is a view an essential oil extraction system **100** implemented as part of an extractor **102**. The extractor **102** further includes a solvent source **104**, a controller **106**, a centrifuge motor system **108**, and an optional frame **110**. Embodiments of the essential oil extraction system **100** extract essential oils from organic material (interchangeably referred to herein as biomass), such as plants or selected parts of a plant.

In an example embodiment, the controller **106** includes a display and a plurality of user input devices. In some embodiments, the controller may be remotely located from the frame **110**, such as in a remote control room. Such embodiments of the controller **106** may be implemented in a desktop computer, laptop computer, tablet, personal device assistant, smart phone, handheld device, or the like.

The essential oil extraction system **100** is fluidly coupled to the solvent source **104**, is controllably coupled to the controller **106**, and is coupled to the centrifuge motor system **108**. In a nonlimiting example embodiment, the essential oil extraction system **100**, the controller **106**, and the centrifuge motor are mounted on the frame **110**. The optional frame **110** provides a stable operating platform for operation of the extraction system **100**, and facilitates moving of the essential oil extraction system **100** to a desired location by providing a plurality of optional hoist rings **112**. In other embodiment, a different structure may be used to secure the various components of the extractor **102**. Alternatively, or additionally, selected components of the extractor **102** may be secured to the floor surface or another suitable surface, and/or may freely rest on the floor surface or another suitable surface.

A solvent inlet valve **114** is coupled to a hose **116** that fluidly connects to the solvent source **104**. Prior to use, a solvent is transferred into the essential oil extraction system **100** via the hose **116**. A solvent outlet valve **118** provides a

means to retrieve the solvent with essential oils therein after completion of the operation of the essential oil extraction system **100**. The solvent with the essential oils therein is preferably transferred to a separate receiving container, tank, or the like (not shown).

An optional lid opening and closing actuator **120** may be used in some embodiments to open and close the top of the essential oil extraction system **100** so that organic material may be added into and be removed from the essential oil extraction system **100**. The actuator **120** may be a pneumatic solenoid, an air solenoid, or an electronic solenoid. In some embodiments, the actuator **120** may be controllably coupled to the controller **106**. In alternative embodiments, the user manually opens and closes the essential oil extraction system **100**.

The disclosed systems and methods for the essential oil extraction system **100** will become better understood through review of the following detailed description in conjunction with the figures. The detailed description and figures provide examples of the various inventions described herein. Those skilled in the art will understand that the disclosed examples may be varied, modified, and altered without departing from the scope of the inventions described herein. Many variations are contemplated for different applications and design considerations, however, for the sake of brevity, each and every contemplated variation is not individually described in the following detailed description.

Throughout the following detailed description, a variety of examples for systems and methods for essential oil extraction system **100** are provided. Related features in the examples may be identical, similar, or dissimilar in different examples. For the sake of brevity, related features will not be redundantly explained in each example. Instead, the use of related feature names will cue the reader that the feature with a related feature name may be similar to the related feature in an example explained previously. Features specific to a given example will be described in that particular example. The reader should understand that a given feature need not be the same or similar to the specific portrayal of a related feature in any given figure or example.

Those skilled in the art will appreciate that a wide variety of additional system components, such as, but not limited to, sensors, actuators, pumps, additional vessels, ports with sight glass, handles, or the like may be incorporated in embodiments of the essential oil extraction system **100** without deviating from the principals of operation described herein. Other embodiments may include suitable piping, valves and/or fluid control features.

The following definitions apply herein, unless otherwise indicated.

“Substantially” means to be more-or-less conforming to the particular dimension, range, shape, concept, or other aspect modified by the term, such that a feature or component need not conform exactly. For example, a “substantially cylindrical” object means that the object resembles a cylinder, but may have one or more deviations from a true cylinder.

“Comprising,” “including,” and “having” (and conjugations thereof) are used interchangeably to mean including but not necessarily limited to, and are open-ended terms not intended to exclude additional, elements or method steps not expressly recited.

Terms such as “first”, “second”, and “third” are used to distinguish or identify various members of a group, or the like, and are not intended to denote a serial, chronological, or numerical limitation.

“Coupled” means connected, either permanently or releasably, whether directly or indirectly through intervening components.

“Communicatively coupled” means that an electronic device is communicatively connected to another electronic device, either wirelessly or with a wire based connector, whether directly or indirectly through a communication network (not shown). “Controllably coupled” means that the electronic device is controls operation of the other electronic device.

FIG. **2** is a cutaway view of the essential oil extraction system **100** illustrating the interior region of an extraction chamber **202** (interchangeably referred to herein as a processing vessel), a chamber lid **204**, and a vortex plunger **206**. The extraction chamber **202** is a cylindrical wall of rigid material that is sized to accommodate a desired amount of organic material having the essential oils of interest and an amount of the solvent of choice. Any suitable material, such as metal, acrylic, glass, or the like may be used to fabricate the extraction chamber **202** and/or the chamber lid **204**. One skilled in the arts appreciates that the essential oil extraction system **100** size is scalable to any dimensions of interest. That is, the diameter and the height of the extraction chamber **202** may be defined based on the amount of organic material that is to be processed. For example, the size of the essential oil extraction system **100** may range from countertop systems suitable for home use to large scale industrial systems suitable for commercial and/or agricultural use.

The chamber lid **204** has a lower rim **208** that is defined by a diameter that corresponds to the diameter of the extraction chamber **202**. The lower rim **208** is mate with a top of the extraction chamber **202**. In a preferred embodiment, the lower rim **208** is pivotably attached to the top of the extraction chamber **202**. When closed, the chamber lid **204** sealably closes the extraction chamber **202** during the extraction process. In some embodiments, a gasket or other sealing material (not shown) may be disposed between the lower rim **208** and the top of the extraction chamber **202** to provide an improved seal. When the chamber lid **204** is open, a user may add the organic material with the essential oils that is to be extracted into the extraction chamber **202**, or the user may remove the processed organic material from the extraction chamber **202** after the extraction process has been completed.

A basket **210** (interchangeably referred to herein as a filter drum, centrifuge drum, or the like) fits within the extraction chamber **202**. The organic material is placed in the basket **210**. The bottom of the basket **210** is coupled to, or is removably coupled to, the centrifuge motor system **108** such that the basket **210** may be rotated so as to create a centrifugal force that extracts the solvent with the extracted essential oils from the organic material to facilitate the pumping of the solvent with essential oils therein into a separate receiving vessel, tank, or the like. Here, the centrifuge motor system **108** is coupled to the basket **210** through the bottom of the extraction chamber **202** in a sealable fashion such that when solvent is in the extraction chamber **202**, solvent is unable to leak out of the extraction chamber **202**. Some embodiments use a drive shaft system to couple the centrifuge motor system **108** to the basket **210**. Other embodiments may use a magnet system to couple the centrifuge motor system **108** to the basket **210**.

The outside diameter of the basket **210** is less than the inside diameter of the extraction chamber **202** so as to be able to freely rotate within the extraction chamber **202** when rotated by the centrifuge motor system **108**. Further, the inside diameter of the basket **210** is defined or designed to

provide sufficient space between the outside surface of the basket **210** and the inside wall of the extraction chamber **202**. This space provides spacing for the extracted solvent to flow through the extraction chamber **202** to the solvent outlet valve **118** after completion of the extraction process. In the various embodiments, a plurality of apertures are disposed in the wall of the basket **210** to permit the flow of the extracted solvent out from the organic material and into the space between the basket **210** and the extraction chamber **202**.

The middle portion **212** of the chamber lid **204** is generally conical in shape. The dimensions of the middle portion **212** are defined or designed to receive the retraction of the vortex plunger **206** into the middle portion **212** to facilitate opening and closing of the chamber lid **204**. This retraction may be interchangeably referred to herein as “parking” the vortex plunger **206**. Further, moving the vortex plunger **206** out of the space where the centrifuging process occurs avoids the vortex plunger **206** from interfering with moving or rotating components, and/or from disrupting the balance of the rotating basket **210**. In alternative embodiments, the vortex plunger **206** is designed to assist in the balancing of the rotating basket **210**.

The upper portion **214** of the chamber lid **204** secures a vortex plunger agitator system **216** that is controllably coupled to the controller **106**. The vortex plunger agitator system **216** is configured to extend the vortex plunger **206** downward into the interior of basket **210** residing in the extraction chamber **202**. Further, the vortex plunger agitator system **216** is configured to retract the vortex plunger **206** into the middle portion **212** of the chamber lid **204** to facilitate the opening of the chamber lid **204**. During the extraction process, the agitator system **216** is configured to move the vortex plunger **206** in the repeated upward and downward motion to move the solvent through the organic material during an agitation process.

In an example embodiment, agitator system **216** is communicatively coupled to the controller **106**. Preferably, the vortex plunger agitator system **216** is a pneumatic solenoid that is controlled by the controller **106**. In alternative embodiments, the vortex plunger agitator system **216** may be an air or fluid solenoid, or an electronic solenoid, controlled by the controller **106**. For example, a fluid solenoid may be a food grade hydraulic cylinder.

To facilitate cleaning or maintenance, the basket **210** may be removed from the extraction chamber **202**. Alternatively, or additionally, the cylindrical side wall of the extraction chamber **202** may be removable from the bottom portion of the extraction chamber **202**. Alternatively, or additionally, the entire basket **210** may be removeable from the extraction chamber **202**. Similarly, the chamber lid **204** may be optionally removable from the extraction chamber **202** to facilitate cleaning and/or maintenance. In a preferred embodiment, the vortex plunger **206** is removably secured to the agitator system **216** so that the vortex plunger **206** can be removed for cleaning, maintenance, and/or replacement with a different vortex plunger **206**.

FIG. 3 is a partial cutaway view of the essential oil extraction system **100** with the chamber lid **204** in a closed position and the vortex plunger **206** in a partially retracted position. In a preferred embodiment, an organic material filter bag **302** filled with the organic matter that is to be processed is placed into the bottom of the basket **210**.

The organic material filter bag **302** is made of a porous material, such as a fabric, fine mesh screen, or the like. The organic matter that is to be processed, in a preferred embodiment, is placed within the interior of the liquid permeably

organic material filter bag **302**. Prior to initiation of the extraction process, the user places the filled organic material filter bag **302**, or a plurality of filled organic material filter bags **302**, into the bottom of the basket **210** residing in the extraction chamber **202**. In some embodiments, the organic material filter bag **302** is not used.

The organic material filter bag **302** secures and retains the organic matter in the bottom portion of the basket **210** while solvent is being drawn through the organic matter during the extraction process. In some embodiments, the organic material filter bag **302** may move about and cavitate around the basket **210** to facilitate movement of the solvent through the organic material residing in the organic material filter bag **302**. After completion of the extraction process, the filtering provided by the organic material filter bag **302** provides the unexpected benefit of reducing the amount and size of particulate matter that is drawn out of the extraction chamber **202** via the solvent outlet valve **118**. In a preferred embodiment, the organic material filter bag **302** has sixty (60) to one hundred twenty (120) micron filter holes, though any suitable filtering holes and/or filtering material may be used.

Another unexpected advantage of using the optional organic material filter bag **302** is that a plurality of organic material filter bags **302** can be pre-filled with like organic materials, different organic materials, and/or a blend of different organic materials for later extraction. Accordingly, organic material filter bags **302** with extracted organic material can be quickly and conveniently removed from the basket **210** after the conclusion of the extraction process, and then be replaced with new filled organic material filter bag **302** so that a new extraction process can be initiated. Further, removal of the processed organic material filter bags **302** provides for an easy cleanup of the extractor **102**.

Further, a plurality of filled organic material filter bags **302** can be placed into the interior of the basket **210** residing in the extraction chamber **202**. Accordingly, different amounts of organic matter to be selectively processed during any particular extraction process.

FIG. 4 is a partial cutaway view of the essential oil extraction system **100** with the chamber lid **204** in a closed position and the vortex plunger **206** moved by the vortex plunger agitator system **216** to an extended position above an optional organic material filter bag **302**. In a preferred embodiment, the user may adjust the controller **106** to selectively define the travel length of the predefined distance that the vortex plunger agitator system **216** moves the vortex plunger **206** downward towards the top surface of the organic material filter bag **302**. This travel distance may be adjusted depending upon the thickness of the organic material filter bag **302** and/or depending upon the number of organic material filter bags **302** that are placed in the basket **210** residing in the extraction chamber **202**. Additionally, or alternatively, the travel distance may be adjusted based on the volume of solvent that is placed into the extraction chamber **202**.

In practice, after the filled organic material filter bag **302** is placed into the interior of the basket **210** residing in the extraction chamber **202**, the extraction chamber **202** is filled with the liquid solvent. Preferably, the solvent level extends well beyond to top surface of the organic material filter bag **302**. In some instances, the level of solvent may even be as high as, or even higher than, the top of the basket **210** residing in the extraction chamber **202**.

In a preferred embodiment, the solvent is chilled by the solvent source **104** or a chiller (not shown). For example, the temperature of the solvent may be chilled from 0° Celsius to

minus 100° degrees Celsius (32° Fahrenheit to minus 148° Fahrenheit), though any desired temperature may be used. In a preferred embodiment, the preferred temperature is between minus 35° Celsius to minus 60° Celsius (minus 31° Fahrenheit to minus 148° Fahrenheit). An unexpected benefit provided by embodiments of the essential oil extraction system **100** is that legacy winterization of the essential oil laden solvent is not needed. Maintaining a cold solvent temperature prevents, or at least mitigates, waxes and lipids from releasing from the organic material. Here, maintaining the cold temperature of the solvent negates the need to separately winterize the oil laden solution after completion of the extraction process.

After the organic material filter bag **302** has been placed into the basket **210** and the chamber lid **204** has been closed and secured to the top of the extraction chamber **202**, the solvent inlet valve **114** is opened to fill the extraction chamber **202** with a desired amount of solvent. After the desired amount of solvent has been added into the extraction chamber **202**, the solvent inlet valve **114** is closed. In a preferred embodiment, the solvent temperature, the opening and/or closing of the solvent inlet valve **114**, and/or the control of the amount of added solvent, is managed under the control of the controller **106**. Alternatively, or additionally, the solvent temperature, the opening and/or closing of the solvent inlet valve **114**, and/or the control of the volume of added solvent, is manually controlled. Preferably, the user may adjust the temperature of the solvent and/or the amount of added solvent using the controller **106**.

Under the control of the controller **106**, the vortex plunger **206** is then submerged into the solvent and is placed in proximity to the top surface of the organic material filter bag **302**. In some instances the vortex plunger **206** may be substantially, or completely, submerged below the level of the solvent.

Then, the vortex plunger agitator system **216** repeatedly moves the vortex plunger **206** in an upward motion and then in a downward motion by some predefined distance (D). In a preferred embodiment, the user may adjust the controller **106** to selectively specify the travel length of the predefined distance D that the vortex plunger agitator system **216** moves the vortex plunger **206** in the upward and downward directions. In some embodiments, there may be an adjustable predefined delay between each successive upward and/or downward movement. Additionally, or alternatively, the rate at which the vortex plunger **206** is moved in the upward and downward rate may be adjustable by the controller **106** based on input by the user.

As the vortex plunger **206** is repeatedly moved in the upward and downward direction, a fluid vortex (fluid vortices) is generated within the extraction chamber **202** that draws the solvent upward through the organic material filter bag **302** (during the upward movement of the vortex plunger **206**), and then pushes the solvent downward through the organic material filter bag **302** (during the downward movement of the vortex plunger **206**). This generated vortex of fluid movement drawing the solvent through the organic material residing in the organic material filter bag **302** extracts the essential oils from the organic matter. An unexpected benefit of this extraction process facilitated by the generated vortex of solvent fluid passing through the organic material filter bag **302** is that well over 90% of the essential oils, even up to nearly 100% of the essential oils, are extracted from the organic material in a very short period of time. In some instances, substantially all of the essential oils may be extracted from the organic material in less than five minutes of agitation.

In a preferred embodiment, the user is able operate the controller **106** to selectively define duration (period of time) of the agitation process. The agitation duration may be varied depending upon characteristics of the organic matter and/or the amount of organic matter that is inside the extraction chamber **202**. Alternatively, or additionally, the agitation duration may be varied depending upon the volume of solvent. Further, the rate of the upward and downward movement of the vortex plunger **206** during the agitation process may be varied based on the above-described factors.

In some embodiments, the agitations process and/or the centrifuge spinning process may be conducted a plurality of different times. For example, it may be desirable to conduct a first agitation process, and then stop for some predefined rest period to permit the solvent to remain in contact with the organic matter for some duration while the solvent is extracting the essential oil. Then, after conclusion of the rest period, a second agitation process may be initiated to bring in new solvent into contact with the organic matter.

After the agitation process has been completed, in a preferred embodiment, the vortex plunger agitator system **216** retracts the vortex plunger **206** back up into the middle portion **212** of the chamber lid **204**. Then, the solvent with the extracted essential oils is drained out from the extraction chamber **202** via the solvent outlet valve **118**. In a preferred embodiment, the operation of the solvent outlet valve **118** and/or the pumping of the solvent by an optional pump (not shown) from the extraction chamber **202** is managed by the controller **106**.

In a preferred embodiment, after the agitation process has been completed and the solvent outlet valve **118** has been opened, the centrifuge motor system **108** is actuated to spin (rotate) the basket **210** to facilitate removal of the solvent with the extracted essential oils from the extraction chamber **202**. Here, the basket rapidly spins to create a centrifugal force that draws the solvent with the extracted essential oils out from the organic material residing within the organic material filter bag **302**. In some embodiments, the vortex plunger **206** may also be spun by the centrifuge motor system **108**.

In a preferred embodiment, the centrifugal spinning removes nearly all of the extracted solvent from the extraction chamber **202** and the organic material filter bag **302**, which is then recovered via the opened solvent outlet valve **118**. An unexpected advantage of this centrifugal spinning process is that the solvent with the extracted essential oils can be nearly completely removed from the organic material. Another unexpected advantage is that the solvent with the extracted essential oils can be drawn from the organic material in a very short time, such as just a few minutes. In a preferred embodiment, the user is able operate the controller **106** to selectively define the duration (period of time) of the centrifuge spinning process and/or the rotational speed of the centrifuge spinning of the basket **210**.

Summarizing, after the filled organic material filter bag **302** is placed in the extraction chamber **202** and the chamber lid **204** is closed and secured, the extraction chamber **202** is filled with solvent. The vortex plunger **206** is extended downward into the solvent so as to be in proximity to the top surface of the organic material filter bag **302**. After several minutes of agitation, the solvent draws all of, or nearly all of, the essential oils from the organic material secured within the organic material filter bag **302**. Then, several more minutes of centrifugal spinning drains all of, or nearly all of, the solvent with the extracted essential oils out from the extraction chamber **202**. Accordingly, compared to legacy essential oil extraction systems, the essential oils can be

extracted from the organic material in a fraction of the time and with a greater degree of efficiency. Thus, an unexpected benefit of embodiments of the essential oil extraction system **100** is that a larger amount of organic material can be processed in a relatively less amount of time and with a higher degree of efficiency as compared to legacy essential oil extraction systems.

FIG. 5 is an exploded view of an example embodiment of a vortex plunger **206**. FIG. 6 is a bottom view of the example vortex plunger **206**. FIG. 7 is a side view of the example vortex plunger **206**.

The example vortex plunger **206** comprises a head portion **502** and a grate **504**. The grate **504** of the vortex plunger **206** fits within, or partially within, and is secured to the lower interior region **506** of the head portion **502** of the vortex plunger **206**. In other embodiments, the top of the grate **504** of the vortex plunger **206** is secured to the lower portion **506**. In some embodiments, the grate **504** of the vortex plunger **206** is removably secured to the head portion **502**. Accordingly, the grate **504** of the vortex plunger **206** may be removed to facilitate cleaning.

The bottom portion **504** of the vortex plunger **206** comprises a plurality of vortex vanes **508** arranged in a substantially vertical orientation. The vortex vanes **508** may be made of a rigid, or semi rigid, material. Any suitable material may be used, such as plastic, metal, acrylic or the like. The vortex vanes **508** extend from the outer edge of the grate **504** towards the center of the grate **504** in a spiraling fashion. One or more spacer rings **510** hold and secure the vortex vanes **508** in a rigid and fixed position within the grate **504** of the vortex plunger **206**.

As the vortex plunger **206** is moved in the repeated upward and downward motion during the agitation process, the solvent is drawn upward and is then pushed downward by the vortex vanes **508**, thereby drawing solvent through the organic material filter bag **302**. The spiral arrangement of the vortex vanes **508** creates a fluid vortex within the extraction chamber **202** so that solvent swirls through the organic material filter bag **302** and through the organic material therein to improve the extraction efficiency of the solvent.

The pitch angle **702** (FIG. 7) of the vortex vanes **508** may be defined so as to achieve a desired amount of fluid vortex within the organic material filter bag **302** during the agitation process. Additionally, or alternatively, the width of the vortex vanes **508** may be defined so as to achieve a desired amount of fluid vortex within the organic material filter bag **302** during the agitation process. In embodiments of the vortex plunger **206** that employ a removeable grate **504** of the vortex plunger **206**, a plurality of different grates **504** having different, numbers, pitches and sizes of the vortex vanes **508** may be selected by the user based on the characteristics of the organic material and/or based on the number and/or size of the organic material filter bags **302** that are paced within the extraction chamber **202**.

The top region of the head portion **502** of the vortex plunger **206** is conical in shape. The conical shape is preferred to receive and expel solvent during the agitation process. Alternative embodiments employ other head shapes. The conical shape of the top of the head portion **502** of the vortex plunger **206** is sized to correspond to the shape of the chamber lid **204** so as to facilitate retraction of the vortex plunger **206** into the chamber lid **204**. Further, the head portion **502** of the vortex plunger **206** is sized to fit within the interior of the basket **210**.

The top region **512** of the head portion **502** of the vortex plunger **206** may optionally include a plurality of apertures

514 (fluid ports, holes, or the like). The fluid ports **514** permit the movement of air and/or solvent from the interior region of the vortex plunger **206** during the in the repeated upward and downward motion of the vortex plunger **206** during the agitation process. The number and/or size of the apertures may be defined to optimize the characteristics of fluid vortex that is created by the vortex plunger **206** during the agitation process.

The top of the head portion **502** of the vortex plunger **206** is secured to a proximal end of a coupling shaft **516**. A distal end of the coupling shaft **516** is coupled to the vortex plunger agitator system **216**. Accordingly, the vortex plunger agitator system **216**, via the coupling shaft **516**, may control the location of the vortex plunger **206** within the essential oil extraction system **100**, and control the travel distance **D** during the agitation process.

FIG. 8 conceptually illustrates a generated fluid vortex **802** that is created in the solvent by the repeated upward and downward motion of the vortex plunger **206**. The fluid vortex **802** is a spiraling upward fluid motion induced into the solvent as the vortex plunger **206** is moved in the upward direction during the agitation process. Accordingly, solvent is drawn or forced upward through the bottom of the organic material filter bag **302** and then through the top of the organic material filter bag **302** during this upward motion of the vortex plunger **206**. Conversely, the fluid vortex **802** becomes a spiraling downward fluid motion induced into the solvent as the vortex plunger **206** is moved in the downward direction during the agitation process. Accordingly, solvent is drawn or moved downward through the top of the organic material filter bag **302** and then through the bottom of the organic material filter bag **302** during this downward motion of the vortex plunger **206**.

Expelled air and/or solvent **804** is illustrated as exiting the apertures **514** at the top of the vortex plunger **206** as the swirling solvent is drawn upward into the interior of the vortex plunger **206**. Any movement of the head either above or below liquid solvent results in air or liquid solvent being taken in or expelled from the apertures **514**. An unexpected advantage of the "leak" caused by the apertures **514** also prevents too much pressure on the liquid solvent, thereby allowing the vortex plunger **206** move faster under the liquid solvent while requiring less force to move the vortex plunger **206** during the agitation process.

Accordingly, the repeated upward and downward motion of the vortex plunger **206** during the agitation process generates the fluid vortex **802** that draws the solvent through the organic matter residing in the organic material filter bag **302** to extract the essential oils from the organic matter.

FIG. 9 is an exploded view of an example alternative embodiment of a vortex plunger **902**. FIG. 10 conceptually illustrates a generated fluid vortex **802** by this alternative embodiment of the vortex plunger **902**. With this alternative embodiment, the surface of the head portion **502** of the vortex plunger **206** includes a plurality of shallow troughs **902** and a plurality of shallow ridges **904** (as contrasted with the smooth surface of the head portion **502** of the example vortex plunger **206** illustrated in FIGS. 5-8). The troughs **902** and ridges **904** create a slightly twisted conical profile with an aerodynamically lobed outer surface. The lobes are slightly twisted along a longitudinal axis of the vortex plunger **206**. The lobes affect the flow vortex of the solvent within the interior of the vortex plunger **206**. Accordingly, the lobes affect the characteristics of the fluid vortex **802**.

In some embodiments, baffles or other features may be included in the interior or exterior of the vortex plunger **206**

11

to impart dynamic forces on the solvent fluid as it moves through the vortex plunger 206.

In some embodiments, the vortex plunger 206 may be moved in a lateral direction (side to side), and/or may be moved in an angled direction. Alternatively, or additionally, the vortex plunger 206 may be rotated during the extraction process. In some embodiments, the coupling shaft 516 and the head portion 502 of the vortex plunger 206 are configured to rotate at an angle offset from the vertical about a vertical axis located at the end of the coupling shaft 516 distal the head portion 502. In such example where the coupling shaft 516 and the head portion 502 rotate about the vertical axis at an angle offset from vertical, the vortex plunger 206 traces a cone shaped path through the solvent fluid. Such additional or alternative movement directions may be used to modify the characteristics of the generated fluid vortex.

It should be emphasized that the above-described embodiments of the essential oil extraction system 100 are merely possible examples of implementations of the invention. Many variations and modifications may be made to the above-described embodiments. All such modifications and variations are intended to be included herein within the scope of this disclosure and protected by the following claims.

Furthermore, the disclosure above encompasses multiple distinct inventions with independent utility. While each of these inventions has been disclosed in a particular form, the specific embodiments disclosed and illustrated above are not to be considered in a limiting sense as numerous variations are possible. The subject matter of the inventions includes all novel and non-obvious combinations and subcombinations of the various elements, features, functions and/or properties disclosed above and inherent to those skilled in the art pertaining to such inventions. Where the disclosure or subsequently filed claims recite “a” element, “a first” element, or any such equivalent term, the disclosure or claims should be understood to incorporate one or more such elements, neither requiring nor excluding two or more such elements.

Applicant(s) reserves the right to submit claims directed to combinations and subcombinations of the disclosed inventions that are believed to be novel and non-obvious. Inventions embodied in other combinations and subcombinations of features, functions, elements and/or properties may be claimed through amendment of those claims or presentation of new claims in the present application or in a related application. Such amended or new claims, whether they are directed to the same invention or a different invention and whether they are different, broader, narrower, or equal in scope to the original claims, are to be considered within the subject matter of the inventions described herein.

What is claimed is:

1. A method of extracting essential oils from organic material, the method comprising:
 placing organic material having essential oils into an extraction chamber that comprises a substantially cylindrical wall of rigid material, wherein a diameter and a height of the extraction chamber is sized to define an interior that accommodates a desired amount of the organic material;
 filling the extraction chamber with a solvent such that the organic material within the extraction chamber is substantially covered; and
 moving a vortex plunger disposed within the interior of the extraction chamber in a repeated reciprocating

12

motion during an agitation process so that vortex vanes within the vortex plunger generate one or more fluid vortices in the solvent,

wherein the one or more fluid vortices cause the solvent to be drawn into the organic material and then to be pushed through the organic material so that the solvent extracts at least a substantial portion of the essential oils from the organic material.

2. The method of claim 1, wherein the extraction chamber further comprises:

a chamber lid at one end of the extraction chamber wherein the chamber lid has a rim that is defined by a diameter that corresponds to the diameter of the extraction chamber,

wherein the rim of the chamber lid is configured to mate with the one end of the extraction chamber, and wherein a middle portion of the chamber lid is shaped to receive the vortex plunger when the vortex plunger is in a retracted position; and

further comprising extending the vortex plunger from the retracted position received by the chamber lid to a location proximate to the organic material,

wherein the vortex plunger is moved in the repeated reciprocating motion during the agitation process after the vortex plunger has been extended to the location proximate to the organic material.

3. The method of claim 1, wherein the vortex plunger comprises:

a grate with a plurality of vortex vanes arranged in a substantially, but not exactly, vertical orientation relative to a direction of motion of the vortex plunger, and a plurality of spacer rings that secure the vortex vanes in a substantially fixed position within the grate;

a head portion, wherein the grate is secured to the head portion; and

a coupling shaft secured to and extending from the head portion.

4. The method of claim 3, wherein the vortex vanes are angled sufficiently away from the direction of motion of the vortex plunger to create a lateral force against the solvent during the reciprocating motion, thereby creating the one or more fluid vortices.

5. The method of claim 4, wherein the vortex vanes are secured in the grate at a predefined pitch angle, and wherein the pitch angle controls a characteristic of the one or more fluid vortices generated as the vortex plunger is moved in the repeated reciprocating motion during the agitation process.

6. The method of claim 1, further comprising: rotating a basket containing the organic matter, wherein the basket resides within the extraction chamber, and

wherein the rotation of the basket creates a centrifugal force that extracts the solvent with the extracted essential oils from the organic material.

7. The method of claim 1, further comprising: placing the organic material into an organic material bag prior to being placed into the extraction chamber.

8. The method of claim 1, wherein the reciprocating motion comprises an alternating upward and downward motion.

9. The method of claim 1, wherein the vortex plunger is further disposed above a surface of the organic material when the agitation process begins.

13

10. The method of claim 1, wherein the extraction chamber further comprises a basket, and further wherein the organic material resides within the basket during the agitation process.

11. A method of extracting essential oils from organic material, the method comprising:

placing organic material having essential oils into an extraction chamber that comprises a substantially cylindrical wall of rigid material, wherein a diameter and a height of the extraction chamber is sized to define an interior that accommodates a desired amount of the organic material;

filling the extraction chamber with a solvent after the organic material has been placed into the extraction chamber; and

moving a vortex plunger disposed over a surface of the organic material in a repeated substantially upward and substantially downward motion during an agitation process so that vortex vanes within the vortex plunger generate one or more fluid vortices in the solvent, wherein the one or more fluid vortices cause the solvent to be drawn upward into the organic material and then to be pushed downward through the organic material so that the solvent extracts at least a substantial portion of the essential oils from the organic material.

12. The method of claim 11, wherein the extraction chamber further comprises:

a chamber lid at one end of the extraction chamber wherein the chamber lid has a lower rim that is defined by a diameter that corresponds to the diameter of the extraction chamber,

wherein the lower rim of the chamber lid is configured to mate with a top of the extraction chamber, and

wherein a middle portion of the chamber lid is shaped to receive the vortex plunger when the vortex plunger is in a retracted position; and

further comprising

extending the vortex plunger from the retracted position received by the chamber lid to a location above a surface of the organic material,

wherein the vortex plunger is moved in the repeated substantially upward and substantially downward motion during the agitation process after the vortex plunger has been extended to the location above the organic material.

13. The method of claim 12, wherein the vortex plunger comprises:

a grate with a plurality of vortex vanes arranged in a substantially, but not exactly, vertical orientation and a plurality of spacer rings that hold and secure the vortex vanes in a substantially rigid and substantially fixed position within the grate;

a head portion, wherein the top of the grate is secured to the bottom of the head portion; and

a coupling shaft secured to and extending upward from a top of the head portion.

14

14. The method of claim 11, further comprising: rotating a basket containing the organic material, wherein the basket resides within the extraction chamber, and

wherein the rotation of the basket creates a centrifugal force that extracts the solvent with the extracted essential oils from the organic material.

15. The method of claim 14, further comprising: placing an organic material bag that is filled with the organic material into the basket prior to initiation of the agitation process.

16. A method of extracting essential oils from organic material, the method comprising:

placing an organic material bag that is filled with the organic material having essential oils into a basket within an extraction chamber, the extraction chamber comprising a substantially cylindrical wall of rigid material, wherein a diameter and a height of the extraction chamber is sized to define an interior that accommodates a desired amount of the organic material, wherein the extraction chamber further comprises a chamber lid having a lower rim defined by a diameter that corresponds to the diameter of the extraction chamber,

wherein the lower rim of the chamber lid is configured to mate with a top of the extraction chamber, and

wherein a middle portion of the chamber lid is shaped to receive a vortex plunger, the vortex plunger comprising:

a grate with a plurality of vortex vanes arranged in a substantially, but not exactly, vertical orientation and a plurality of spacer rings that hold and secure the vortex vanes in a rigid and substantially fixed position within the grate;

a head portion, wherein the top of the grate is secured to the bottom of the head portion; and

a coupling shaft secured to and extending upward from a top of the head portion;

filling the extraction chamber with a solvent after the organic material has been placed into the extraction chamber;

moving the vortex plunger disposed over a surface of the organic material in a repeated substantially upward and substantially downward motion during an agitation process so that the vortex vanes within the vortex plunger generate one or more fluid vortices in the solvent; and

rotating the basket containing the organic matter, wherein the one or more fluid vortices causes the solvent to be drawn upward into the organic material and then to be pushed downward through the organic material so that the solvent extracts at least a substantial portion of the essential oils from the organic material, and

wherein the rotation of the basket creates a centrifugal force that extracts the solvent with the extracted essential oils from the organic material.

* * * * *