



(43) International Publication Date
19 September 2013 (19.09.2013)

- (51) International Patent Classification:
B41M 3/00 (2006.01) *B41M 5/00* (2006.01)
- (21) International Application Number:
PCT/US2013/031135
- (22) International Filing Date:
14 March 2013 (14.03.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/422,045 16 March 2012 (16.03.2012) US
- (71) Applicant: EASTMAN KODAK COMPANY [US/US];
343 State Street, Rochester, NY 14650-2201 (US).
- (72) Inventors: HARRIS, Mark Anthony; 343 State Street,
Rochester, NY 14650-2201 (US). PAOLETTI, Richard,
S.; 343 State Street, Rochester, NY 14650-2201 (US).
BAUER JR., Richard William; 343 State Street,
Rochester, NY 14650-2201 (US).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))



WO 2013/138543 A1

(54) Title: PRINTING METHOD FOR REDUCING PRINTER ARTIFACTS

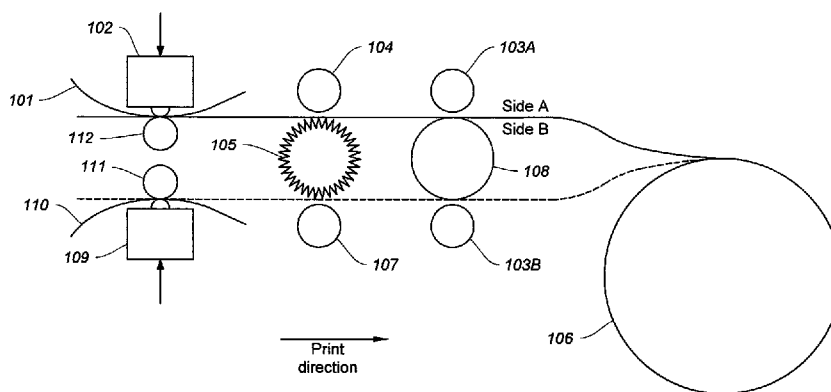


FIG. 2

(57) Abstract: A printing method comprising a printhead and rollers for printing. A page of a print job is printed which causes depressions in the non-printed side of the print medium. The print medium is heated to reduce the depressions before printing the non-printed side.

PRINTING METHOD FOR REDUCING PRINTER ARTIFACTS

FIELD OF THE INVENTION

The present invention is directed to thermal printing, in particular, to
5 heat treatment of a dye receiver layer surface exposed to a capstan roller to reduce
print density differential.

BACKGROUND OF THE INVENTION

It is a well known practice within dye diffusion thermal transfer
printers that, in order to controllably drive the paper and maintain traction for precise
10 image registration between color passes, an aggressively textured drive roller, and a
companion pinch roller that applies a load between the paper and drive roller, is
commonly used. This type of drive system does not result in any image artifacts on
the printed paper when printing only on one side, or simplex printing, because the
aggressively textured drive roller is not contacting the printed side of the paper. This
15 method does present a problem when printing a two-sided, or duplex print because
the aggressively textured drive roller must contact both sides of the printed sheet. For
two-sided or duplex printing, the paper surface that is in contact with the aggressively
textured surface of the drive roller may become compromised by the aggressively
textured surface. This compromised paper surface may not receive dye transfer as
20 readily, resulting in a visible density difference between the area of the paper that saw
contact with the drive roller's aggressive texture and the area that did not contact the
aggressive texture.

It is also common practice within the dye diffusion thermal transfer
printer firmware to incorporate compensation algorithms that correct for across the
25 page density variations, and/or down the page density variations. There may be
limitations within the printer hardware or printer firmware such that compensation
algorithms cannot completely compensate for printing artifacts generated by the drive
roller. Due to these limitations, it becomes important to minimize the deviations in a
print medium surface caused by the textured drive roller contacting the medium.

30 With respect to Fig. 1, for two-sided or duplex dye diffusion thermal
transfer printing, a common method is to use two thermal print heads 102, 109, by

first driving the rolled print medium 106 via drive roller (or capstan roller) 105 and pinch roller 104, in cooperation with a motor drive (not shown) on roll 106, to between platen roller 112 and one thermal print head 102 (print medium path of travel is shown in solid line), and printing on one side, Side A, of the print medium using dye donor 101. A length of print medium received from print medium roll 106 driven through the drive roller 105 and pinch roller 104 exposes Side B to come into contact with the drive roller's surface texture, compromising the Side B surface for subsequent printing. The Side B surface is compromised via the textured drive roller 105 perforating, forming depressions, pitting, or indenting the outermost layer, or more layers, of the Side B surface. The print media is then re-positioned by reversing drive roller 105 and pinch roller 104 in cooperation with the motor drive on roll 106, so that the lead edge of the paper is retracted toward the supply roll 106 and then diverted to the path represented by the dashed line. The rolled print medium 106 is driven via drive roller (or capstan roller) 105, pinch roller 107, in cooperation with the motor drive on roll 106, to between platen roller 111 and the second thermal print head 109. The non-printed surface, Side B, of the print medium is then printed using dye donor 110.

SUMMARY OF THE INVENTION

A preferred embodiment of the present patent application comprises a method of printing comprising receiving a two-sided medium in a printer, printing on a first side of the medium, smoothing a second side of the medium after printing the first side and, while the medium remains in the printer, printing on the second side of the medium. The smoothing is accomplished by heating the second side of the medium by compressing the medium against a heated surface which can be implemented as a heated roller. A plurality of rollers can be used wherein at least one of the plurality of rollers is heated and wherein the print medium is pressed against the heated roller. As in a fuser from an electrophotographic printer, a heated roller can be implemented similarly with an electric current passing through the roller for generating heat.

Another preferred embodiment of the present invention comprises a method of printing by receiving a duplex printing medium inside a printer,

including using a textured roller pressed against a first side of the duplex printing medium for drawing the printing medium into the printer. A second side of the printing medium is printed including using a thermal print head. Smoothing the first side of the duplex printing medium, after the step of printing on the second
5 side of the duplex printing medium, causes a size of indentations in the first side of the duplex printing medium to be reduced. After the depression reduction, the first side of the duplex printing medium is printed.

Another preferred embodiment of the present invention comprises a method of handling a printing medium comprising pulling the printing medium
10 through a nip formed between a pinch roller and a textured capstan roller, wherein the capstan roller compromises a capability of one side of the printing medium to receive donor dye applied by a thermal print head to the one side of the printing medium by forming a plurality of indentations thereon. The one side of the printing medium is smoothed after the step of pulling the printing medium by
15 heating the one side of the printing medium. This is accomplished by pulling the printing medium through a nip formed by a pinch roller and a heated roller.

These, and other, aspects and objects of the present invention will be better appreciated and understood when considered in conjunction with the following description and the accompanying drawings. It should be understood,
20 however, that the following description, while indicating preferred embodiments of the present invention and numerous specific details thereof, is given by way of illustration and not of limitation. For example, the summary descriptions above are not meant to describe individual separate embodiments whose elements are not interchangeable. In fact, many of the elements described as related to a
25 particular embodiment can be used together with, and possibly interchanged with, elements of other described embodiments. Many changes and modifications may be made within the scope of the present invention without departing from the spirit thereof, and the invention includes all such modifications. The figures below are intended to be drawn neither to any precise scale with respect to relative
30 size, angular relationship, or relative position nor to any combinational

relationship with respect to interchangeability, substitution, or representation of an actual implementation.

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the present invention will be more readily understood from the detailed description of exemplary embodiments presented below considered in conjunction with the attached drawings, of which:

FIG. 1 illustrates duplex printing in a thermal printer apparatus.

FIG. 2 illustrates a print medium positioned in a modified thermal printer apparatus.

FIG. 3 illustrates a print medium positioned in an alternative modified thermal printer apparatus.

FIG. 4 illustrates experimental conditions used in a test fuser and the corresponding observations of a dye receiving layer's surface quality.

FIG. 5 illustrates test results of dye receiving layer under heat treatment according to embodiments of the present invention.

FIG. 6 illustrates a duplex receiver layer structure with thicknesses.

DETAILED DESCRIPTION OF THE INVENTION

A preferred method and apparatus for printing is described in detail herein, and is illustrated in FIG. 2 wherein components common to FIG. 1 are operable as described above. After completion of printing on print medium Side A as described above, as the print media is being retracted toward the supply roll 106, the pressure roller 103a will press the print medium against heated roller 108 and the combination of heat and pressure will reduce a size of the depressed points of the Side B surface left by the drive roller 105. The printer is also operable in a reverse sequence as described herein wherein Side B is printed first and Side A depressions formed by drive roller 105 are reduced by compression between pressure roller 103b and heated roller 108. FIG. 2 shows pressure roller 103a forming a nip with heated roller 108, however, both pressure rollers 103a and 103b are moveable to and from a position against heated roller 108 to form a nip therewith as needed. The heating roller is similar to a fuser roller used in electrophotographic printers which uses an electric current passing through the

roller for heating or, in an alternative preferred embodiment (FIGs. 3A and 3B), the heating devices comprise two additional thermal print heads 208 and platen rollers 203 whose sole purpose is to smooth the printing medium surface. The heating devices are operable to heal the printing medium according to the present invention if disposed as illustrated in FIG. 3A or as illustrated in FIG. 3B.

With reference to FIG. 3B, after completion of printing on print medium Side A as described above, the print media is retracted toward the supply roll, as before, and then diverted along the pathway represented by the dashed line. The capstan and pinch roller drive the print medium between the printhead and platen roller such that a length of the print medium extends beyond the printhead. This is because the print medium is pulled from left to right, as shown in the Figures, during the thermal printing step. At this point, while the print medium is extended beyond the printhead and platen roller and is being pulled toward the printhead for printing, the pressure roller 303b will press the print medium against heated roller 308b and the combination of heat and pressure will reduce a size of the depressed points of the Side B surface left by the drive roller. The printer is also operable in a reverse sequence wherein Side B is printed first and Side A depressions formed by the drive roller are reduced by compression between pressure roller 303a and heated roller 308a prior to printing Side A.

It is known from experimentation that, during the printing operation described above, holes, depressions, perforations, or indentations are created by the capstan roller on the side opposite to the side being printed. These holes are crescent shaped indentations in the outer dye receiver layer (DRL). Depending on the type of media, these holes might penetrate the DRL resulting in perforations in the DRL. Because the DRL is a flexible layer, it may be indented or perforated by the drive roller. Whether the DRL is indented or perforated by the drive roller, the heating step improves the DRL surface for receiving the dye donor and results in improved print quality. It should be noted that some duplex thermal printer designs are envisioned without a textured drive roller. Rather, a smooth drive roller is used with increased pressure against the pinch roller to compensate for lost traction due to lack of an aggressive texture on the drive

roller. This increased pressure can also cause depressions or indentations, i.e. "tracks", in the duplex receiver resulting in across the page density variations. The embodiments of the invention disclosed herein also serve to correct for these variations.

5 With reference to FIG. 6, there is illustrated the thicknesses of various layers in the duplex receiver structure 601 contemplated by a preferred embodiment of the present invention. Other duplex receiver materials may be similarly improved with use of the embodiments of the present invention. The textured drive roller typically comprises protrusions extending from its cylindrical
10 surface at a distance of about 25 microns.

 When this compromised DRL surface is printed the print density at areas corresponding to the capstan roller is lower than the print density found in the rest of the print. It was hypothesized (and observed by microscopy) that the holes do not get filled up with dye as intended by a thermal printing step and
15 hence the half tone effect results in visibly lower print density. A two sided thermal receiver (medium) comprising a voided biaxially oriented polypropylene laminate was run through once for testing purposes. The one time run through means that the receiver was pulled or driven through the capstan rollers one time without printing. Experiments evaluated the effect of heat treatment on the
20 unprinted DRL surface exposed to the capstan roller. The heat treatment was applied using an electrophotographic fuser breadboard. This breadboard allows temperature and line speed to be changed at a constant pressure between the nip formed by the heated roller 108 and pressure roller 103a or 103b, which is an elastomer nip. The measured nip width using a pressure sensitive medium was 5
25 mm. This width is measured lengthwise along the print medium and is formed by the pressure of the heated roller against the compliant pressure roller with the print medium therebetween. Increased pressure increases the nip width as would a larger diameter heated roller, a larger diameter compliant pressure roller, or if either roller was made to be more compliant. Increased nip width increases an
30 amount of heat transferred to the print medium. Typical pressure rollers are steel

core with a thick silicone rubber layer, and a thin Teflon coating as an outer layer. The heated roller is similar in design to a fuser roller used in most electro-photographic printers.

Ten feet of each variation was created to enable testing the heated capstan roller exposed DRL side in the printer. Observations were recorded as illustrated in Fig. 4. For a given temperature and line speed condition (e.g., 150 C, 70 mm/sec) the print medium (receiver) was run twice and thrice through the nip. We consider running the medium twice through a 5 mm nip as equivalent to exposing the medium to a 10 mm nip width (though in a discontinuous manner, because the receiver cools in between the heating steps) and running thrice as equivalent to exposure to a 15 mm of nip width (though in a discontinuous manner, as above). Fig. 5 highlights difference in Delta L* (ΔL^*) between a capstan roller compromised area of the print medium and a capstan-untouched portion of the print medium. L* is an arbitrary relative measure of lightness and the changes in L* shown in the graph of Fig. 5 should be interpreted relative to the other measured magnitudes. The magnitudes are measured using a densitometer. It is observed that samples with heat treatment (150° C, 70 mm/s) shows lower ΔL^* , i.e. there is less visible difference between untouched medium and a capstan compromised medium.

Heat treatment shows promise in healing the capstan roller marks and minimizing ΔL^* . Improvements in this procedure could include the ability to change pressure in the nip to enable a healing process, or to use a thermal head to heal the holes (Fig. 3). Alternative heating methods include a heating zone located between the capstan roller and the supply roll. The heating zone could comprise a heated band which does not stick to DRL. The heating zone could also contain a non-contact heating source.

The thermal dye receiving medium can be manufactured by various well known techniques and materials for duplex thermal receivers. A preferred

method and materials are described in US Patent Application Publication 2011/0091667 A1, which is incorporated herein by reference in its entirety but for descriptions of a non-imaging reverse side of the print medium.

PARTS LIST:

- 101 Donor
- 102 Thermal Print Head
- 103a Compliant Pressure Roller
- 103b Compliant Pressure Roller
- 104 Pinch Roller
- 105 Capstan Roller
- 106 Paper (Medium) Roll
- 107 Pinch Roller
- 108 Heated Roller
- 109 Thermal Print Head
- 110 Donor
- 111 Platen Roller
- 112 Platen Roller
- 203 Platen Rollers
- 208 Thermal Heads

CLAIMS:

1. Method of printing comprising:
receiving a two-sided medium in a printer;
printing on a first side of the medium using the printer;
5 smoothing a second side of the medium; and
printing on the second side of the medium using the printer.
2. Method of claim 1 wherein the step of smoothing comprises
heating the second side of the medium after the step of printing on the first side
10 and while the medium remains in the printer.
3. Method of claim 2 wherein the step of heating comprises
compressing the medium against a heated surface.
- 15 4. Method of claim 3 wherein the step of compressing comprises
using a heated roller.
5. Method of claim 4 wherein the step of using a heated roller
comprises using a plurality of rollers wherein at least one of the plurality of rollers
20 is heated.
6. Method of claim 5 wherein the step of using a plurality of
rollers comprises compressing the medium between at least two of the plurality of
rollers wherein at least one of the at least two rollers is heated.
25
7. Method of claim 3 further comprising heating the heated surface
by passing an electric current therethrough.
8. Method of claim 7 further comprising passing the electric
30 current through the heated surface while the medium is being compressed against
the heated surface.

9. Method of printing comprising:
receiving a duplex printing medium inside a printer, including
using a textured roller pressed against a first side of the duplex printing medium
5 for drawing the printing medium into the printer;
printing on a second side of the duplex printing medium including
using a thermal print head;
smoothing the first side of the duplex printing medium, wherein a
size of indentations in the first side of the duplex printing medium caused by the
10 textured roller is reduced; and
printing on the first side of the duplex printing medium after the
step of smoothing.
10. Method of claim 9 wherein the step of smoothing comprises
15 heating the first side of the duplex printing medium after the step of printing on
the second side of the duplex printing medium.
11. Method of claim 10 wherein the step of heating comprises
compressing the duplex printing medium against a heated surface.
20
12. Method of claim 11 wherein the step of compressing
comprises using a heated roller.
13. Method of claim 12 wherein the step of using a heated roller
25 comprises using a plurality of rollers wherein at least one of the plurality of rollers
is heated.

14. Method of claim 11 further comprising heating the heated surface by passing an electric current therethrough.

5 15. Method of claim 14 further comprising passing the electric current through the heated surface while the duplex printing medium is being compressed against the heated surface.

16. A method of handling a printing medium comprising:
pulling the printing medium through a nip formed between a pinch
10 roller and a textured capstan roller, wherein the capstan roller comprises a capability of one side of the printing medium to receive donor dye applied by a thermal print head to the one side of the printing medium by forming a plurality of indentations thereon; and
smoothing the one side of the printing medium after the step of
15 pulling the printing medium .

17. Method of claim 16 wherein the step of smoothing comprises heating the one side of the printing medium.

20 18. Method of claim 17 wherein the step of heating comprises pulling the printing medium through a nip formed by a pinch roller and a heated roller.

25 19. Method of claim 18 wherein the heated roller is heated by passing an electric current therethrough.

30 20. Method of claim 19 further comprising passing the electric current through the heated roller during the step of pulling the printing medium through the nip formed by the pinch roller and the heated roller.

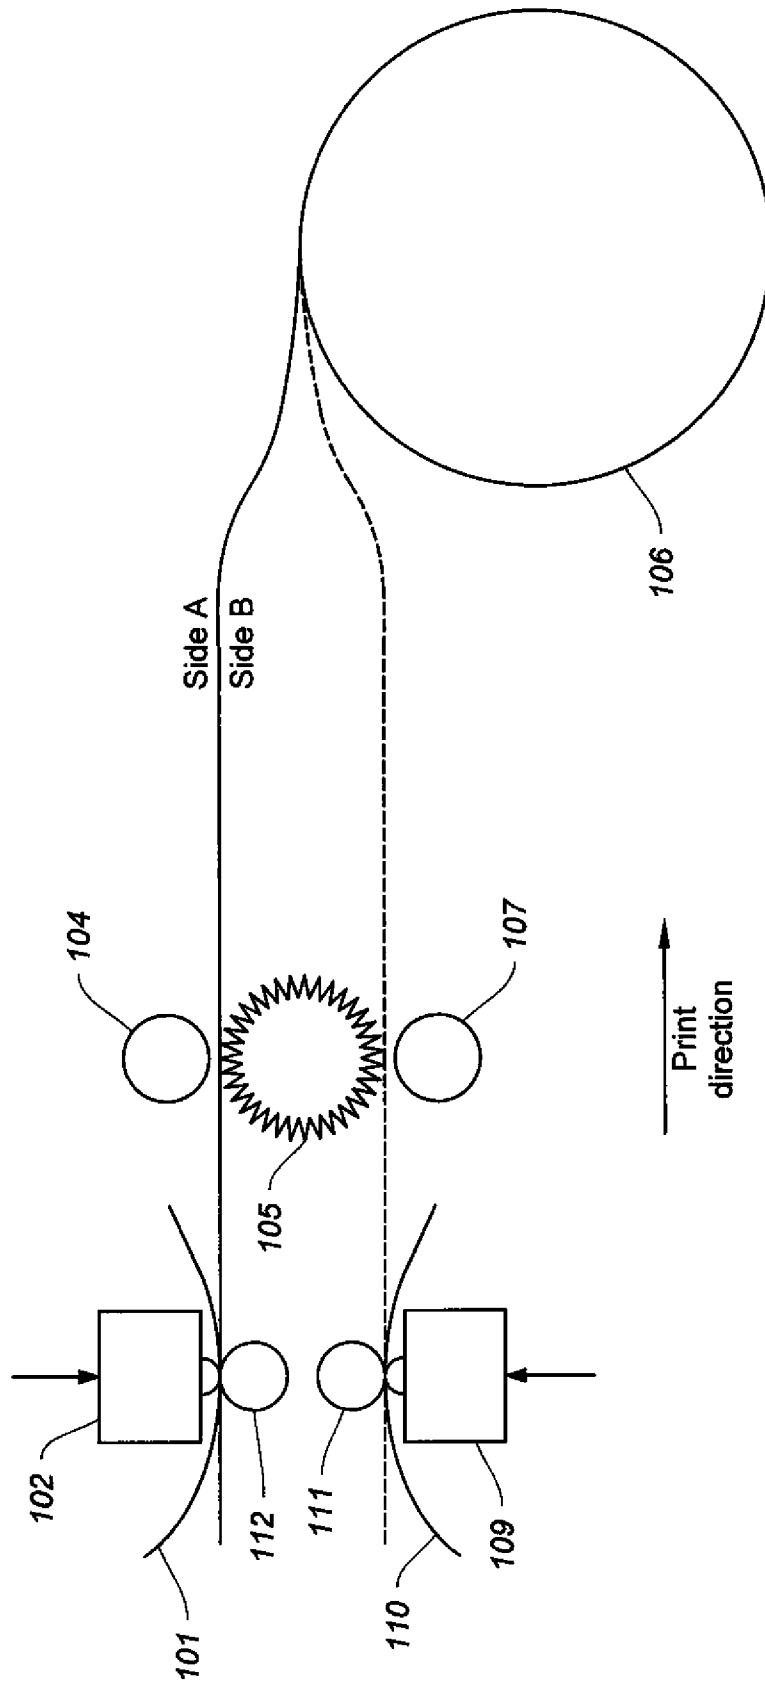


FIG. 1

2/7

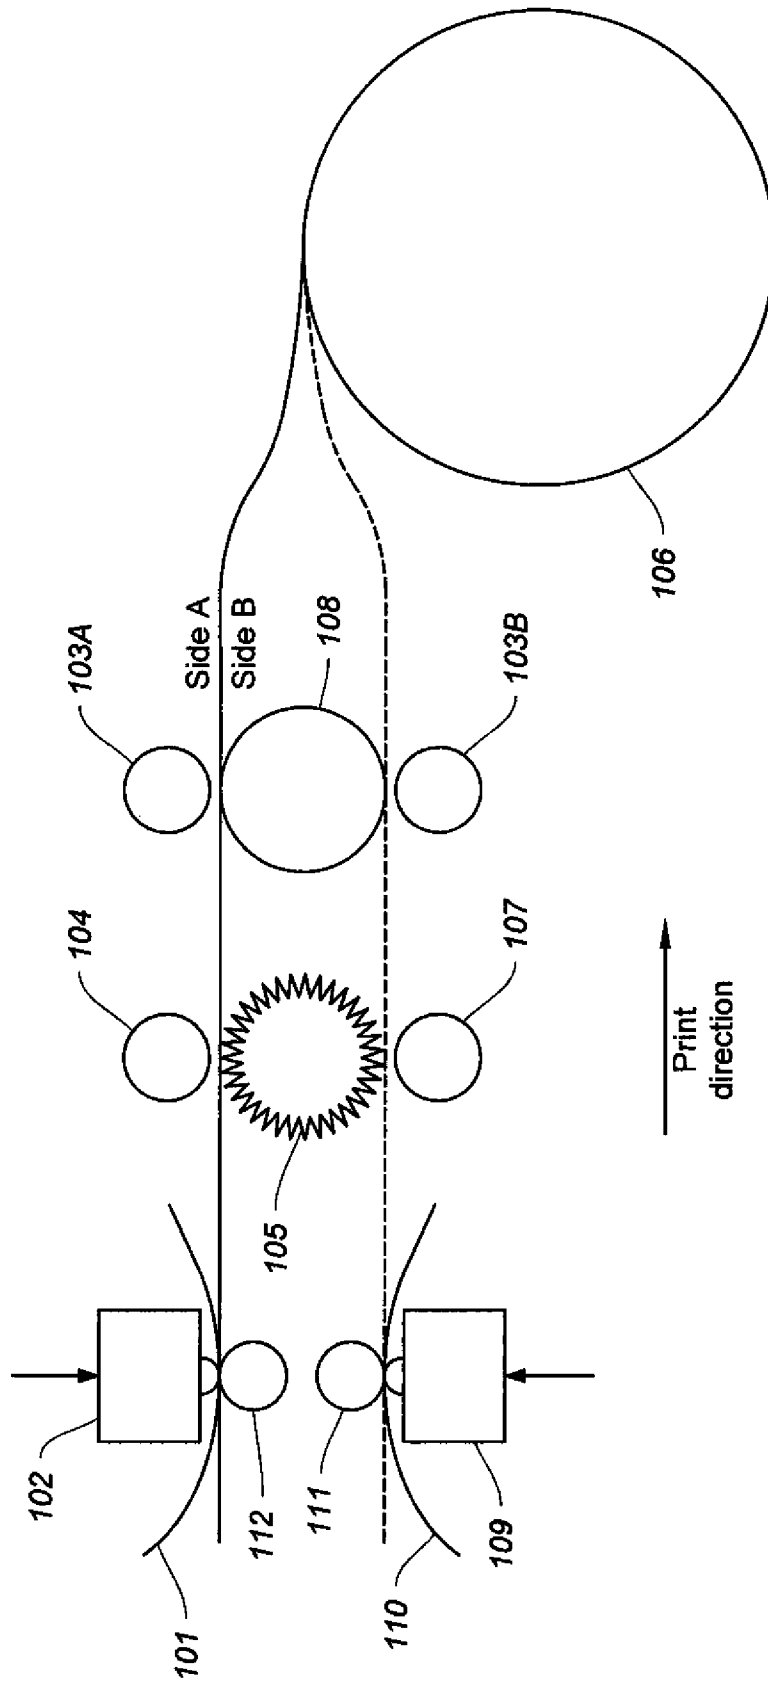


FIG. 2

3/7

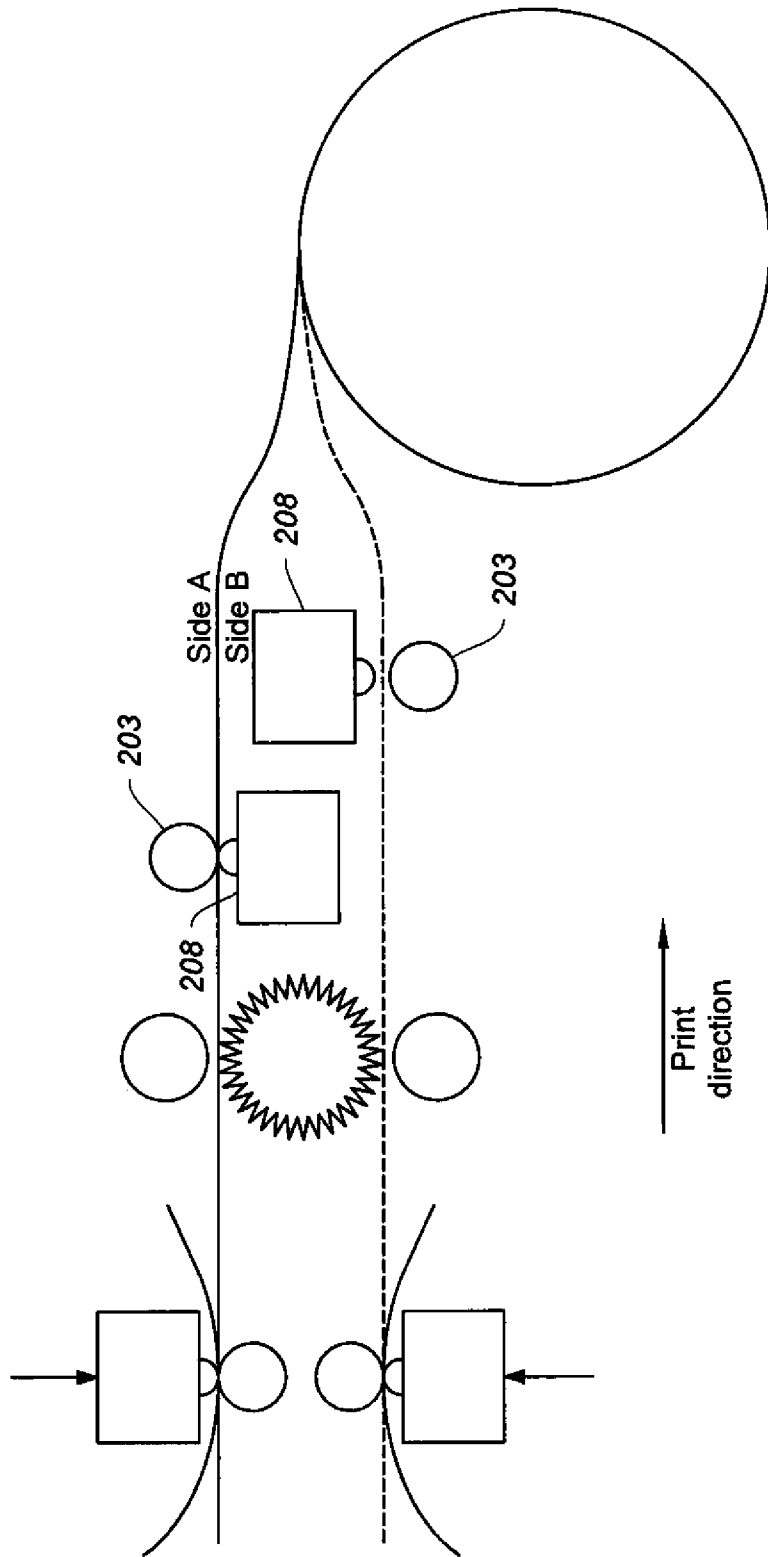


FIG. 3A

4/7

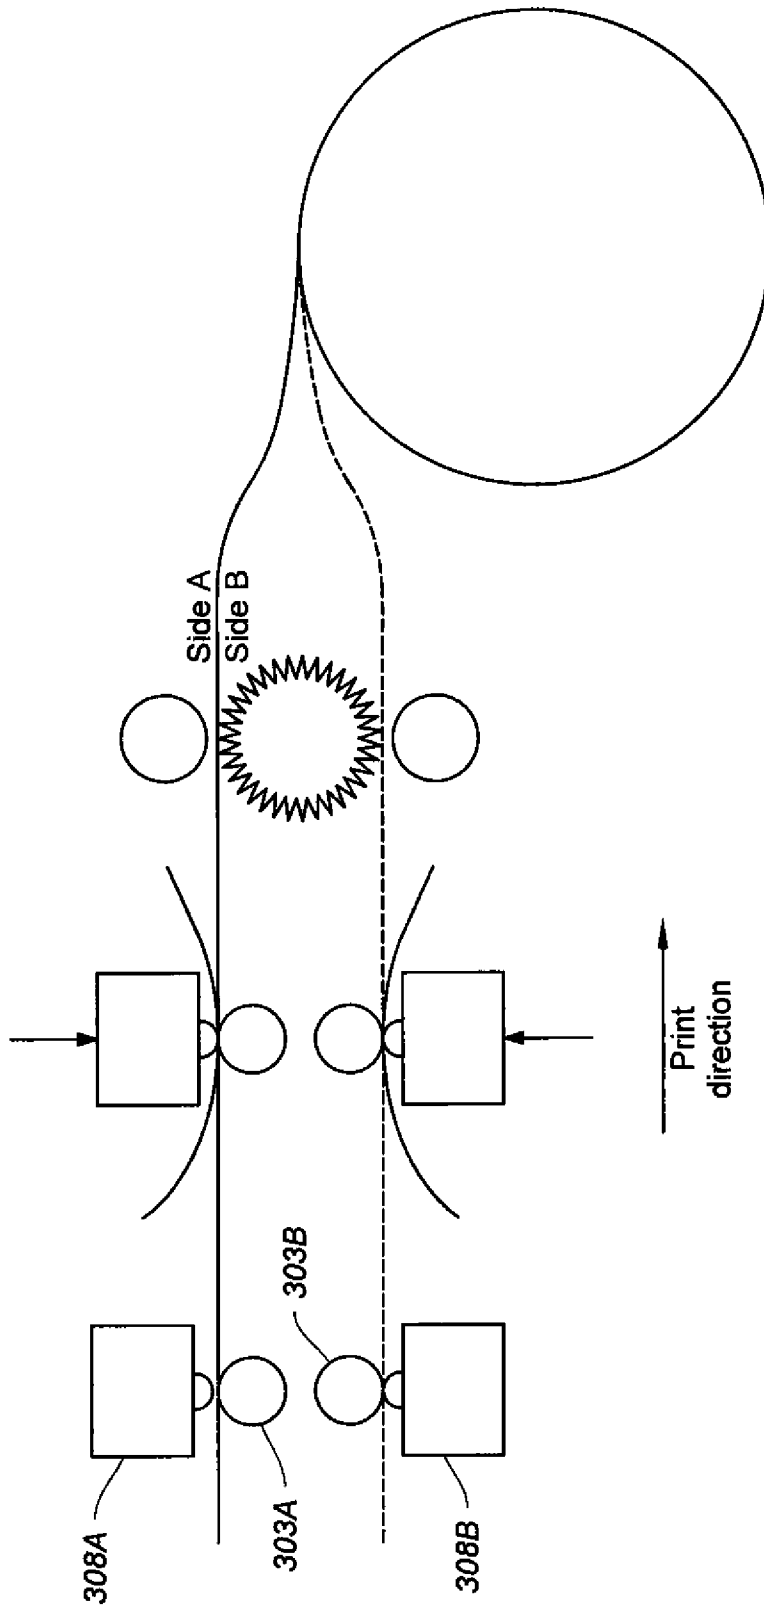


FIG. 3B

5/7

Fuser roller temperature (C°)	Line speed (mm/sec)	Acceptable surface after fusing	Observations
120	35	yes	
120	70	yes	
135	35	no	blisters on DRL
135	70	yes	
150	70	yes	
150	52	no	blisters on DRL
150	61	yes	

FIG. 4

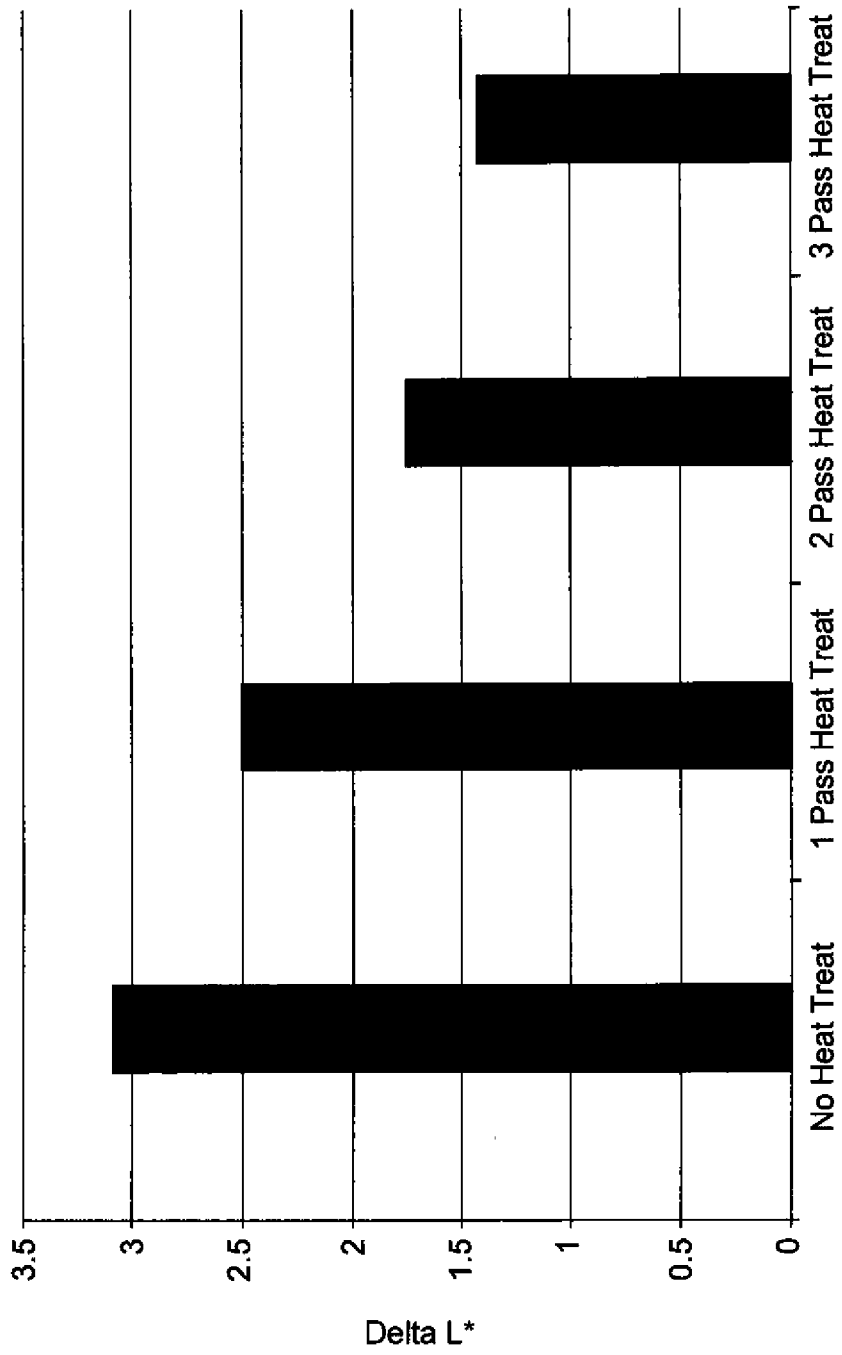


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/031135

A. CLASSIFICATION OF SUBJECT MATTER
INV. B41M3/00 B41M5/00
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
B41M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 2 357 087 A1 (DAINIPPON PRINTING CO LTD [JP]) 17 August 2011 (2011-08-17) paragraphs [0006], [0014], [0023]; claims 1-17; figures 1,6,7,8 -----	1-20
A	US 2009/015649 A1 (KEETON MARK E [US] ET AL) 15 January 2009 (2009-01-15) paragraphs [0003], [0004], [0031] - [0033], [0041] -----	1-20
A	US 2007/120942 A1 (VAN DEMARK MICHAEL J [US] ET AL) 31 May 2007 (2007-05-31) the whole document -----	1-20

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

25 July 2013

Date of mailing of the international search report

06/08/2013

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Giannitsopoulos, G

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2013/031135

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
EP 2357087	A1	17-08-2011	EP 2357087 A1	17-08-2011
			US 2011221855 A1	15-09-2011
			WO 2010055923 A1	20-05-2010

US 2009015649	A1	15-01-2009	US 2009015649 A1	15-01-2009
			WO 2009011758 A2	22-01-2009

US 2007120942	A1	31-05-2007	CN 101208204 A	25-06-2008
			CN 102152680 A	17-08-2011
			EP 1979169 A1	15-10-2008
			JP 2009517255 A	30-04-2009
			US 2007120942 A1	31-05-2007
			WO 2007064421 A1	07-06-2007
