



US 20080125947A1

(19) **United States**
(12) **Patent Application Publication**
Hattori

(10) **Pub. No.: US 2008/0125947 A1**
(43) **Pub. Date: May 29, 2008**

(54) **TIRE GROUND CONTACT PATTERN SPECIFYING METHOD AND APPARATUS THEREOF**

Publication Classification

(75) Inventor: **Yutaka Hattori, Kanagawa (JP)**

(51) **Int. Cl.**
G01P 15/18 (2006.01)
G01P 1/12 (2006.01)
(52) **U.S. Cl.** **701/70**

Correspondence Address:
KNOBBE MARTENS OLSON & BEAR LLP
2040 MAIN STREET, FOURTEENTH FLOOR
IRVINE, CA 92614

(57) **ABSTRACT**

(73) Assignee: **The Yokohama Rubber Co., Ltd,**
Tokyo (JP)

There is provided a tire ground contact pattern specifying method and an apparatus thereof for specifying a tire ground contact pattern usable to perform the stable control of a running vehicle. Using a sensor unit **100** mounted in each tire **2** of a vehicle **1**, accelerations generated in X, Y and Z directions are sensed and at the same time, a low frequency noise component and high frequency noise component added to the Z axis direction acceleration signal are extracted. Digital values being the sensing result are transmitted as digital information to a monitor device **200** by radio wave. The monitor device **200** compares many pieces of tire ground contact pattern information preliminarily stored with the digital information to thereby specify a tire ground contact pattern. A stability control unit **700** performs, based on the acceleration values and the information on tire ground contact pattern obtained, the correction control of driving of a sub-throttle actuator **412** or a brake drive actuator **640**.

(21) Appl. No.: **11/718,575**

(22) PCT Filed: **Nov. 4, 2005**

(86) PCT No.: **PCT/JP05/20281**

§ 371 (c)(1),
(2), (4) Date: **May 3, 2007**

(30) **Foreign Application Priority Data**

Nov. 5, 2004 (JP) 2004-322809
Feb. 4, 2005 (JP) 2005-028653

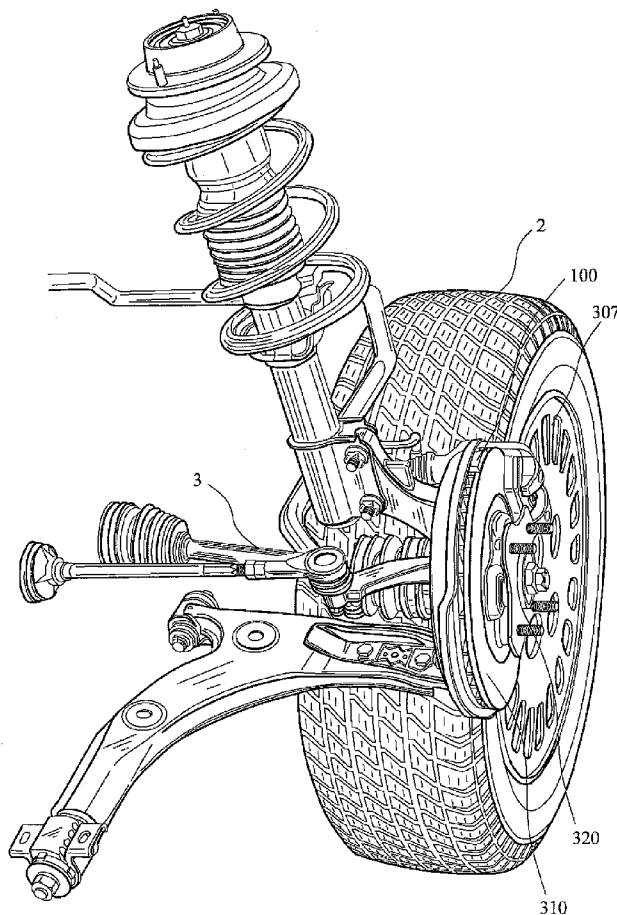


Fig. 1

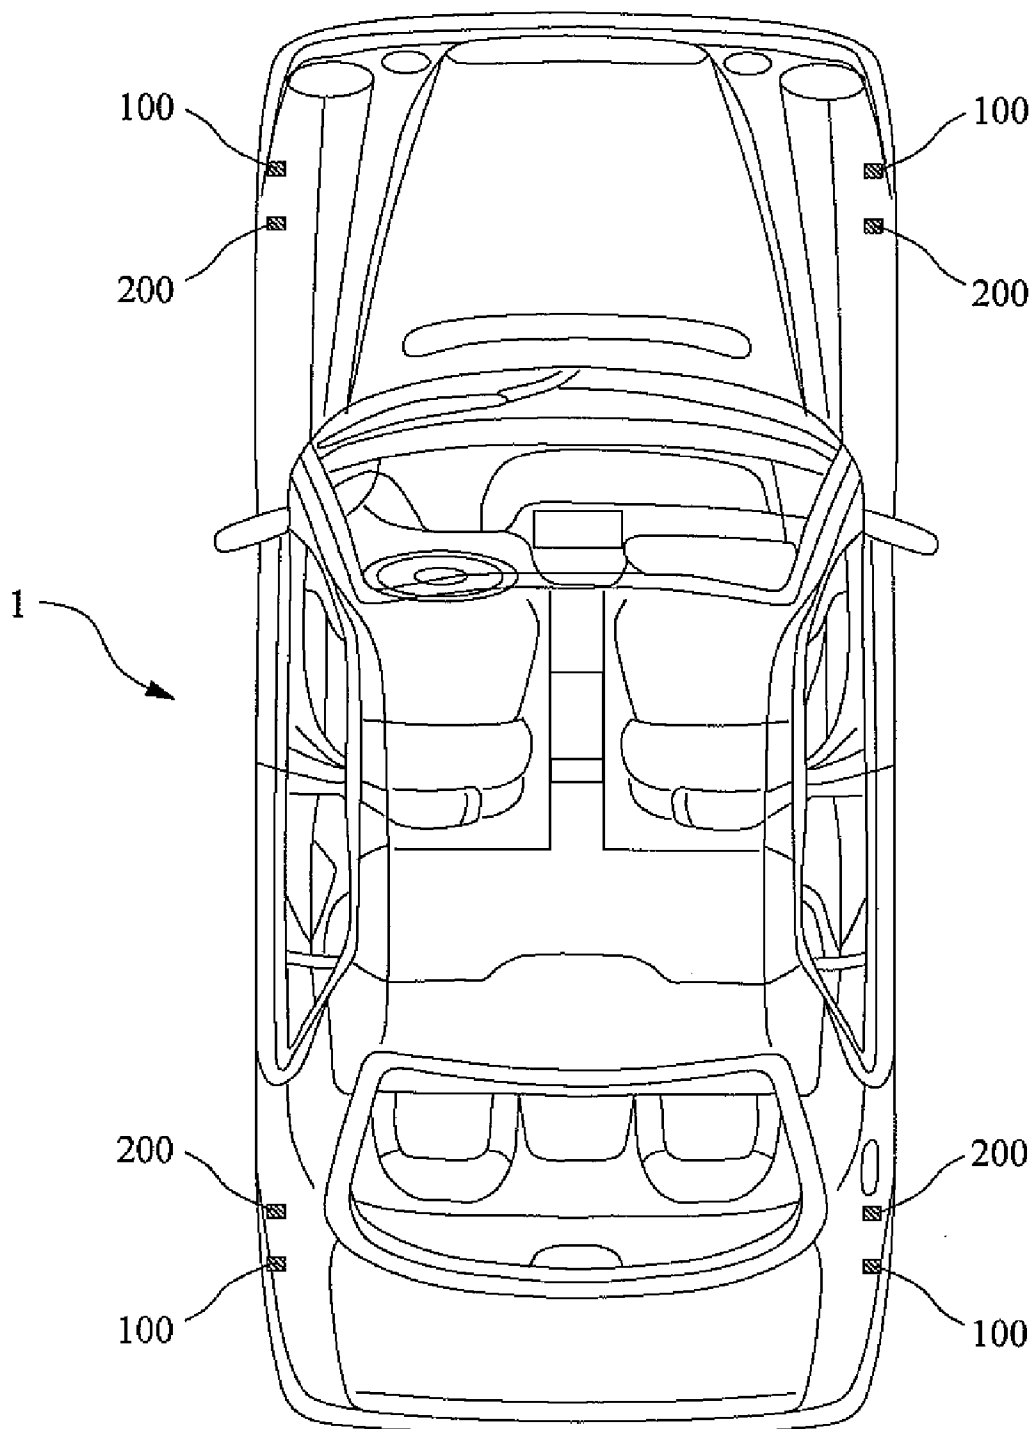


Fig. 2

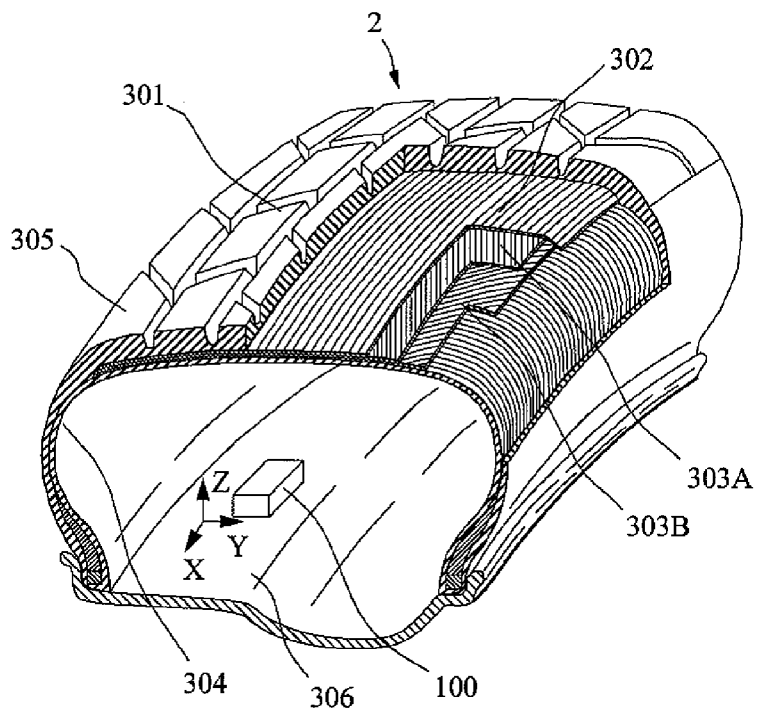


Fig. 3

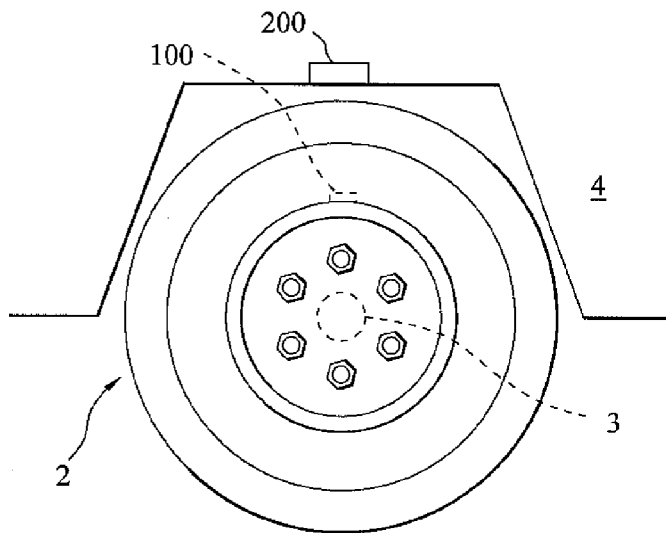


Fig. 4

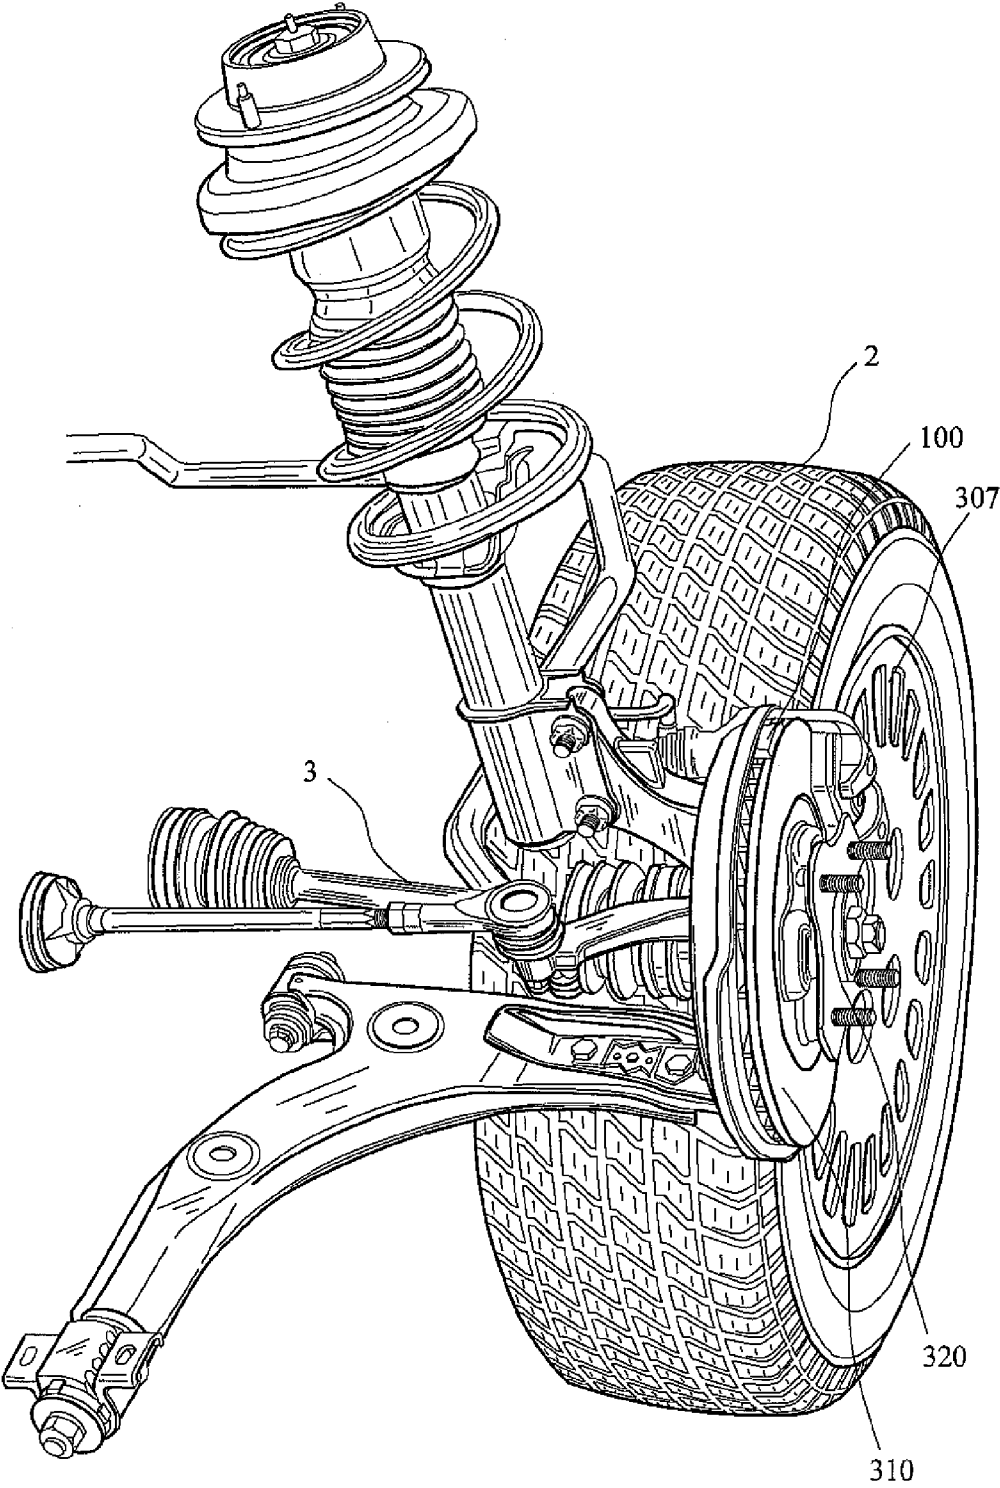


Fig. 6

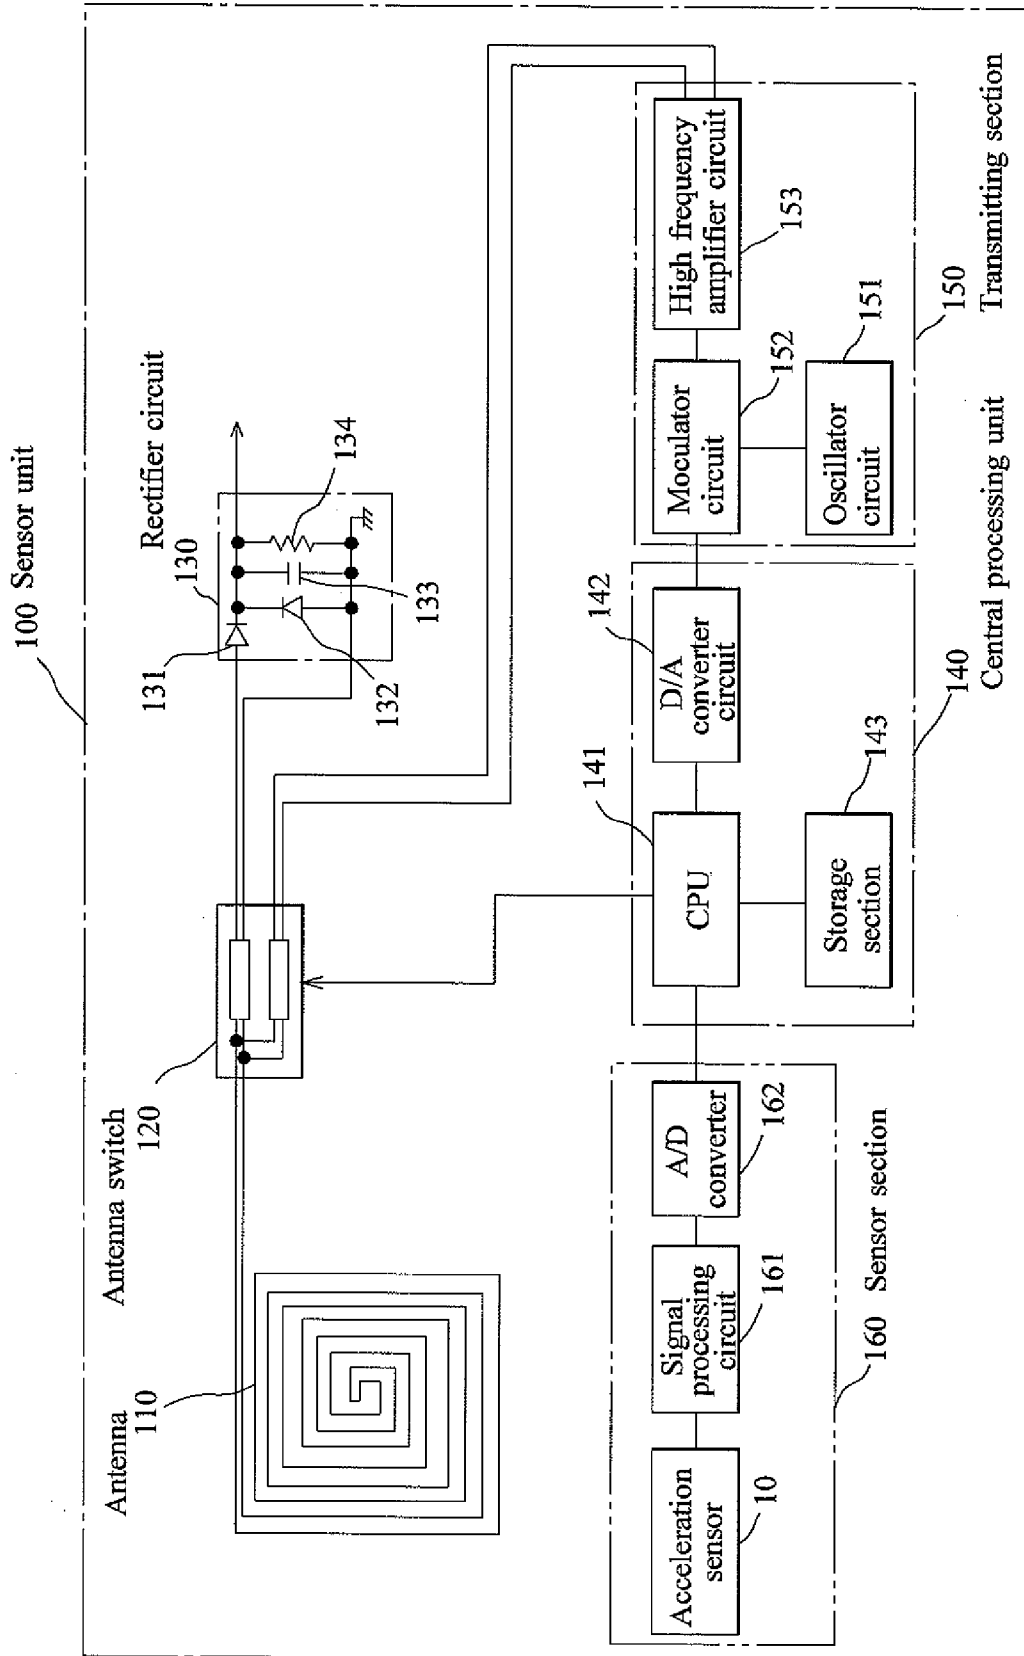


Fig. 7

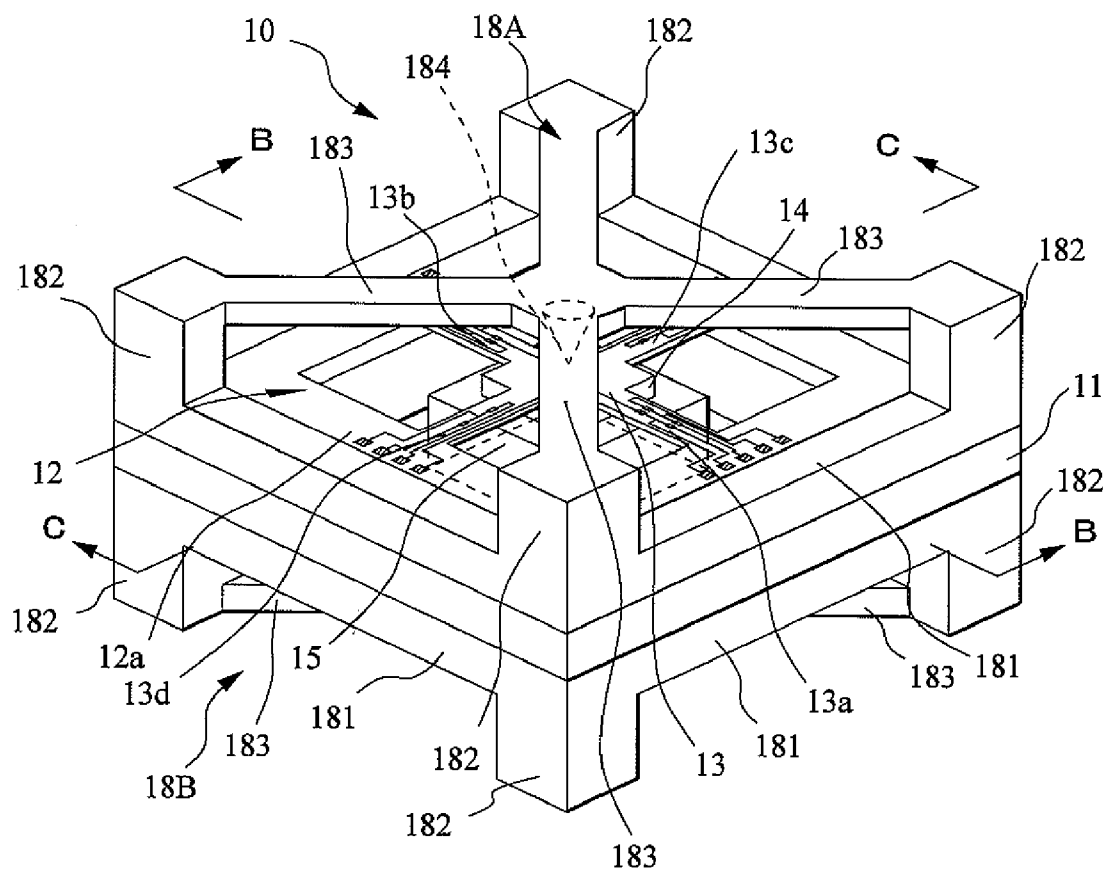


Fig. 8

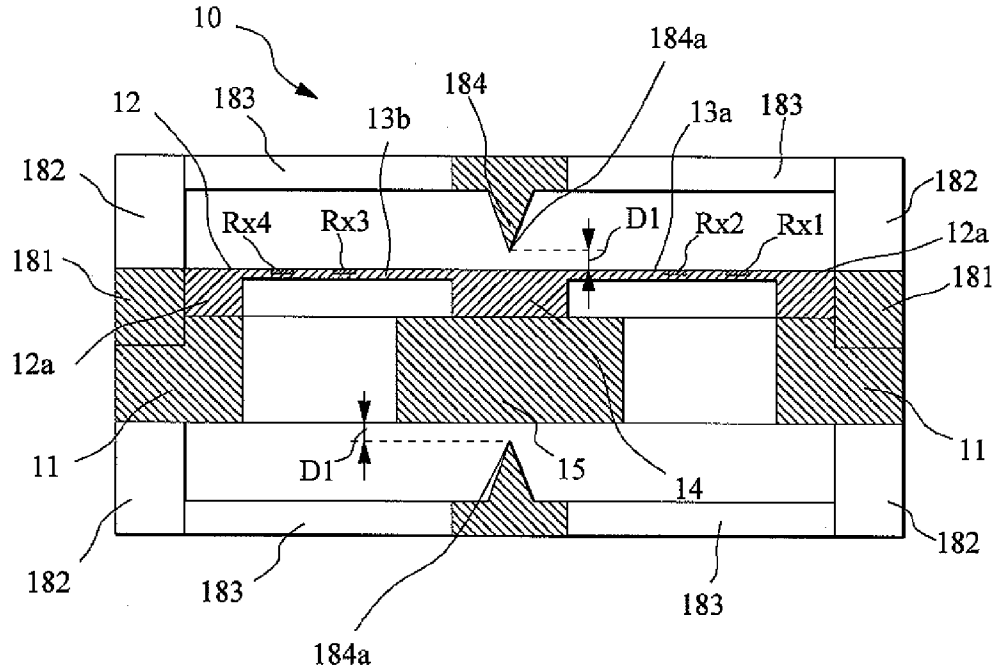


Fig. 9

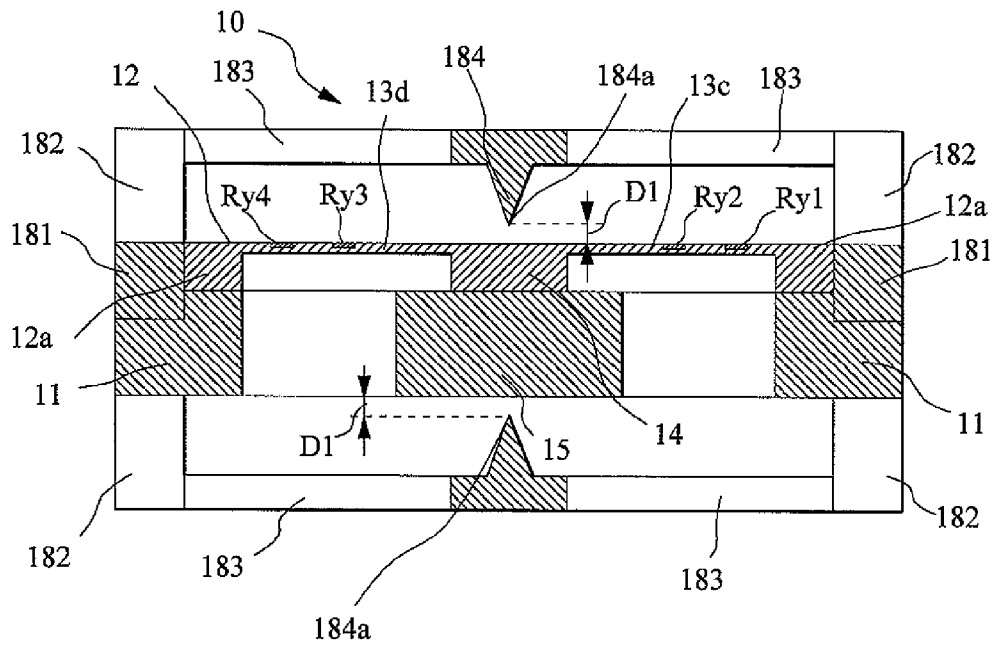


Fig. 10

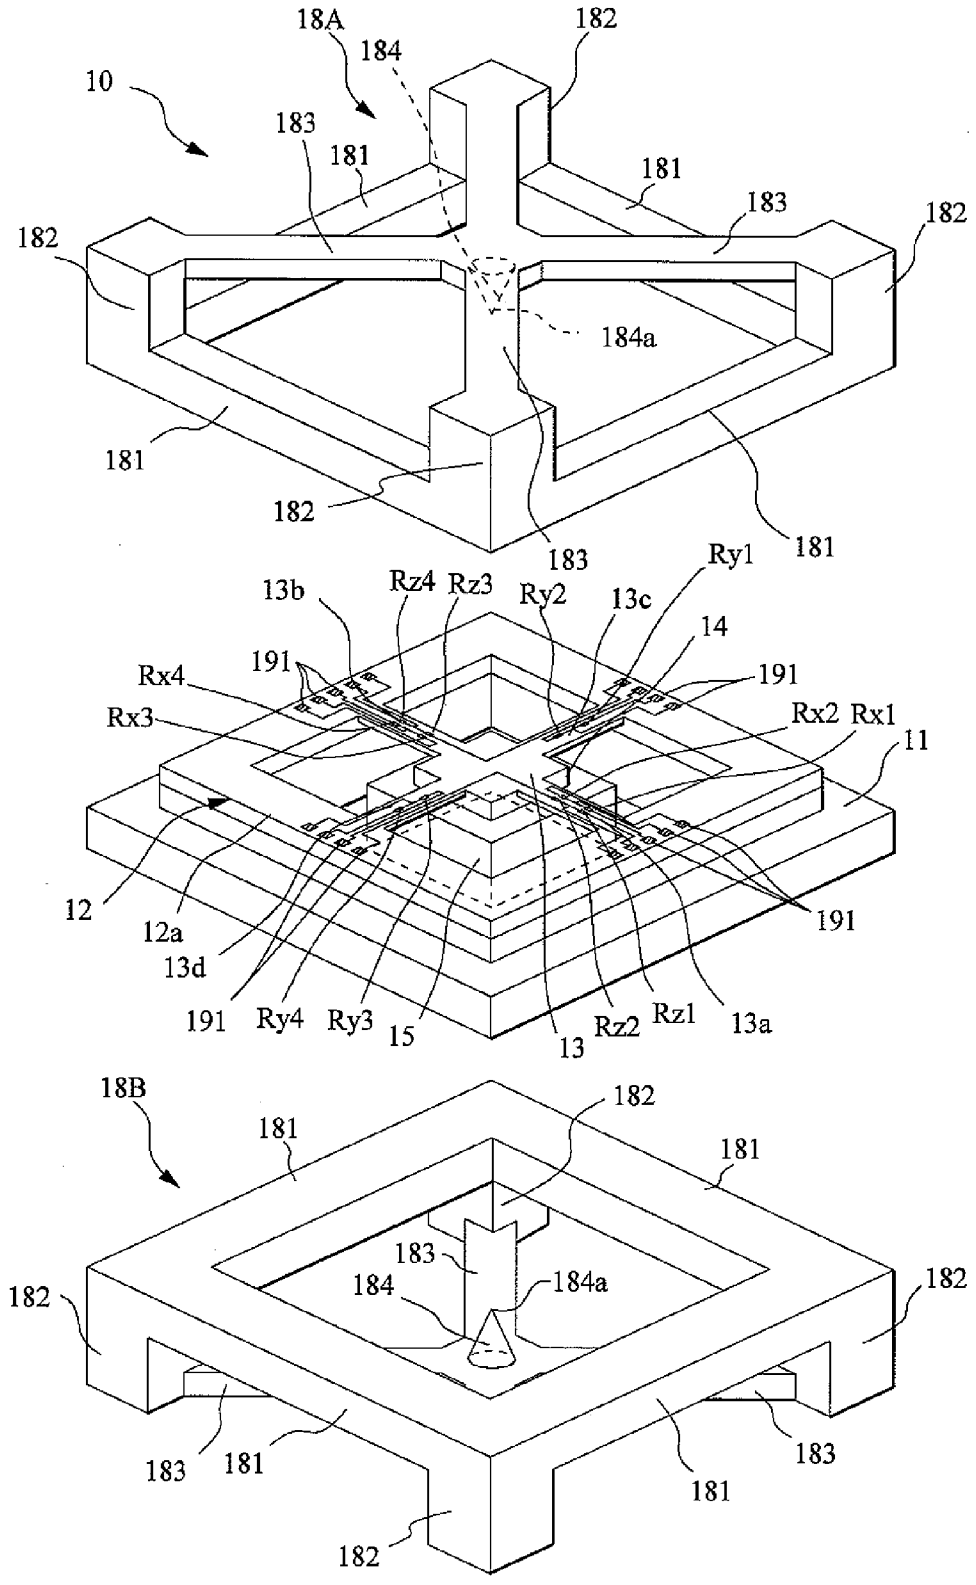


Fig. 11

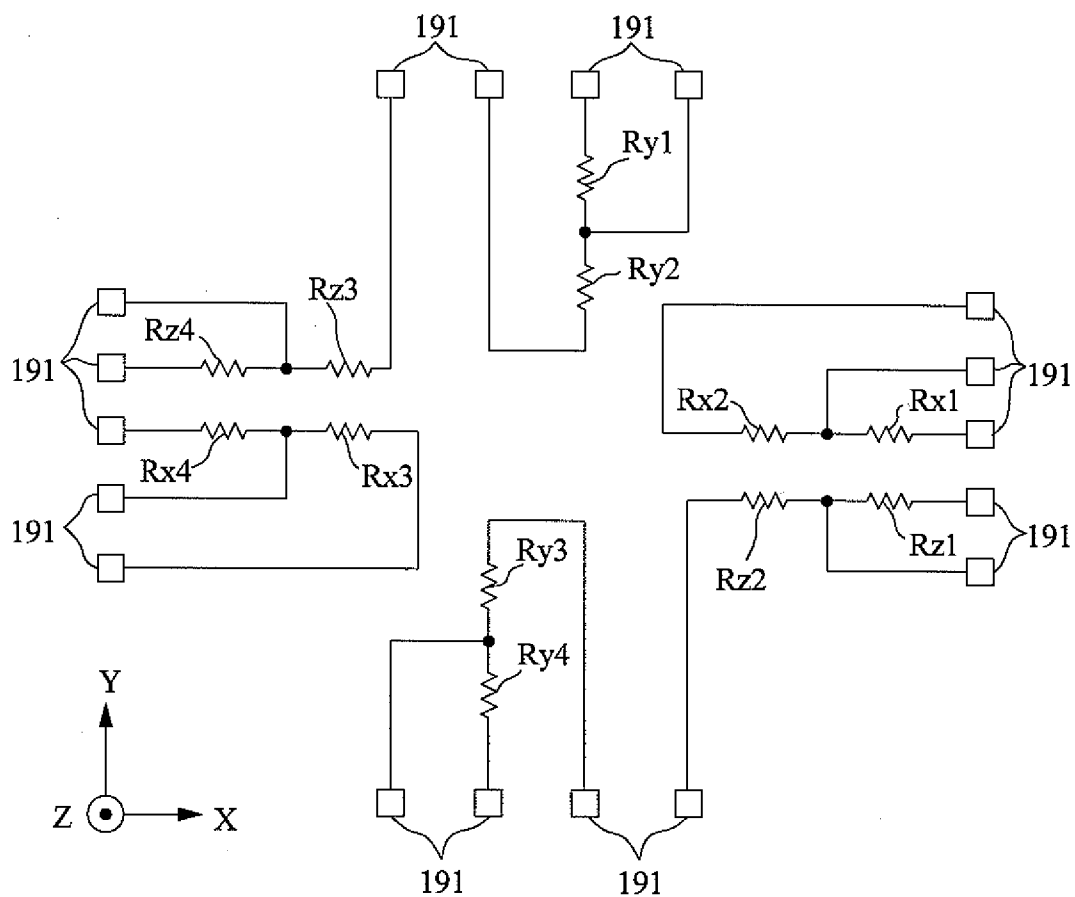


Fig. 12

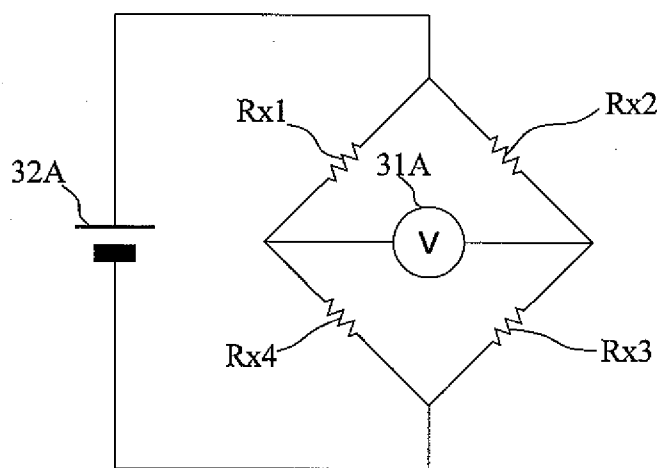


Fig. 13

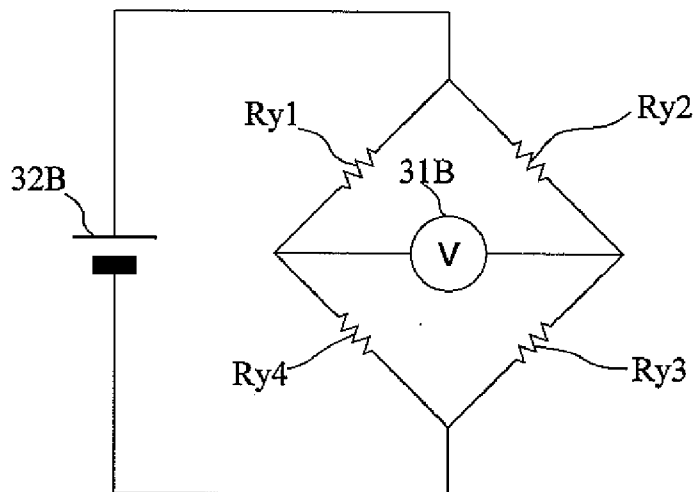


Fig. 14

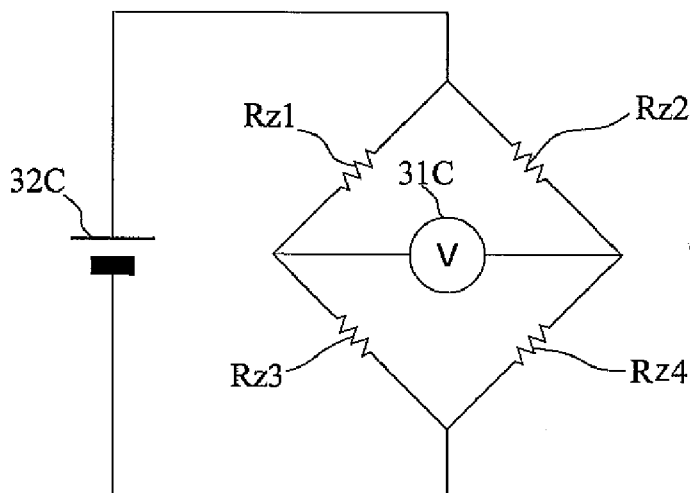


Fig. 15

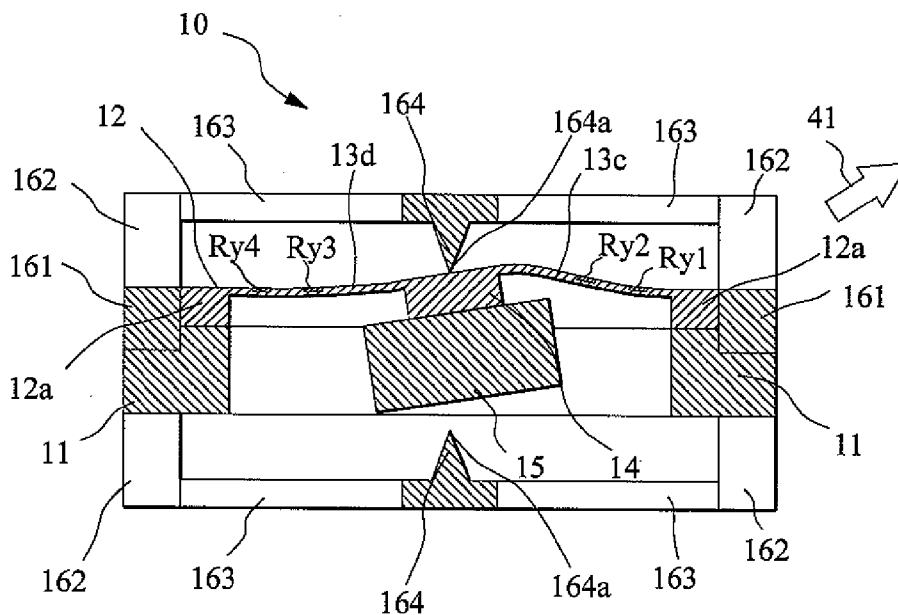


Fig. 16

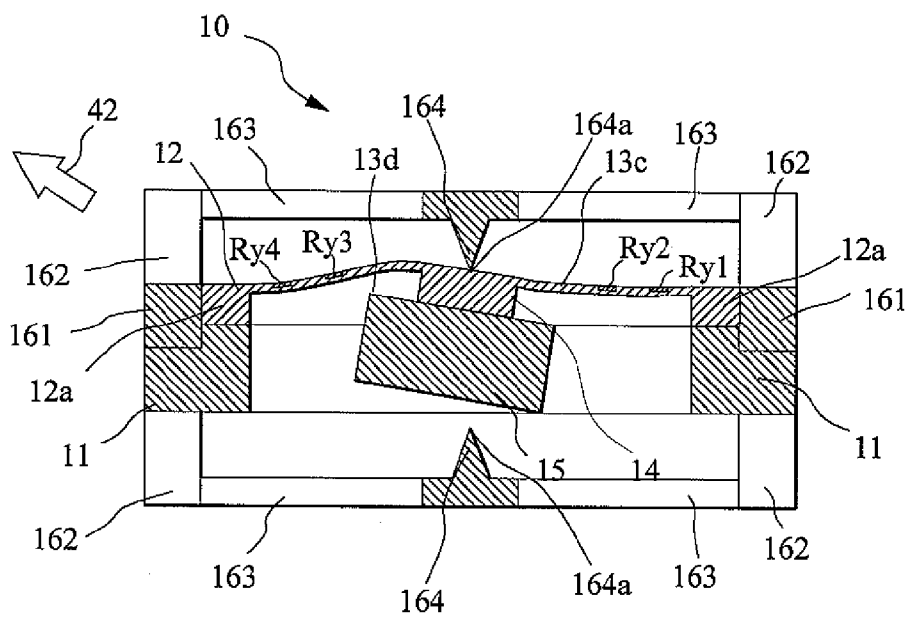


Fig. 17

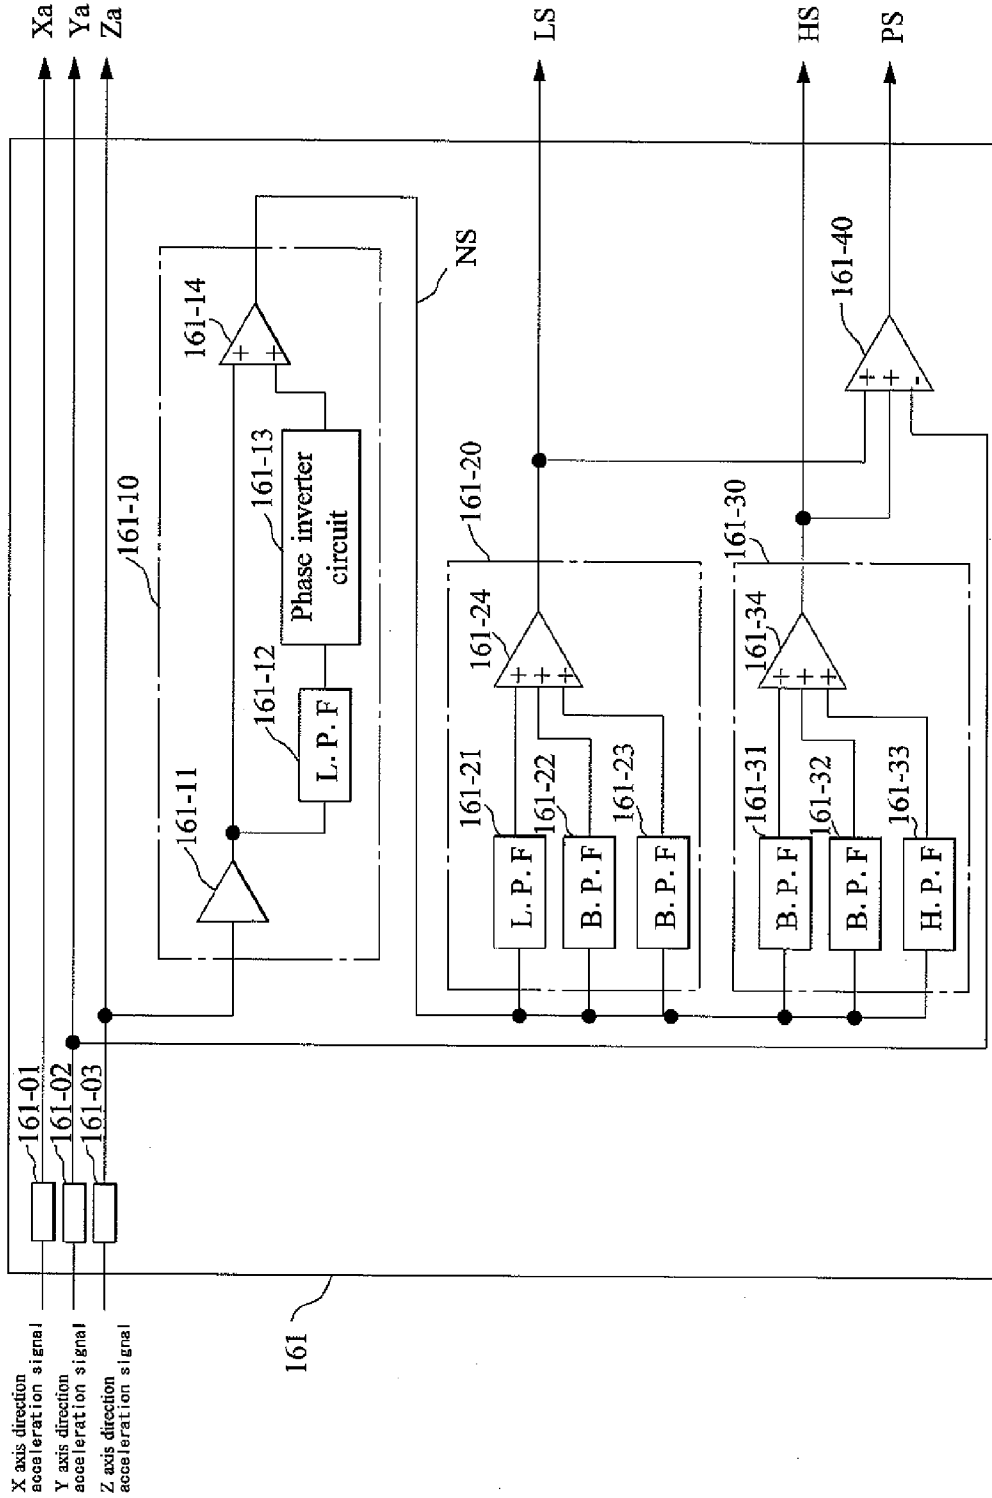


Fig. 18

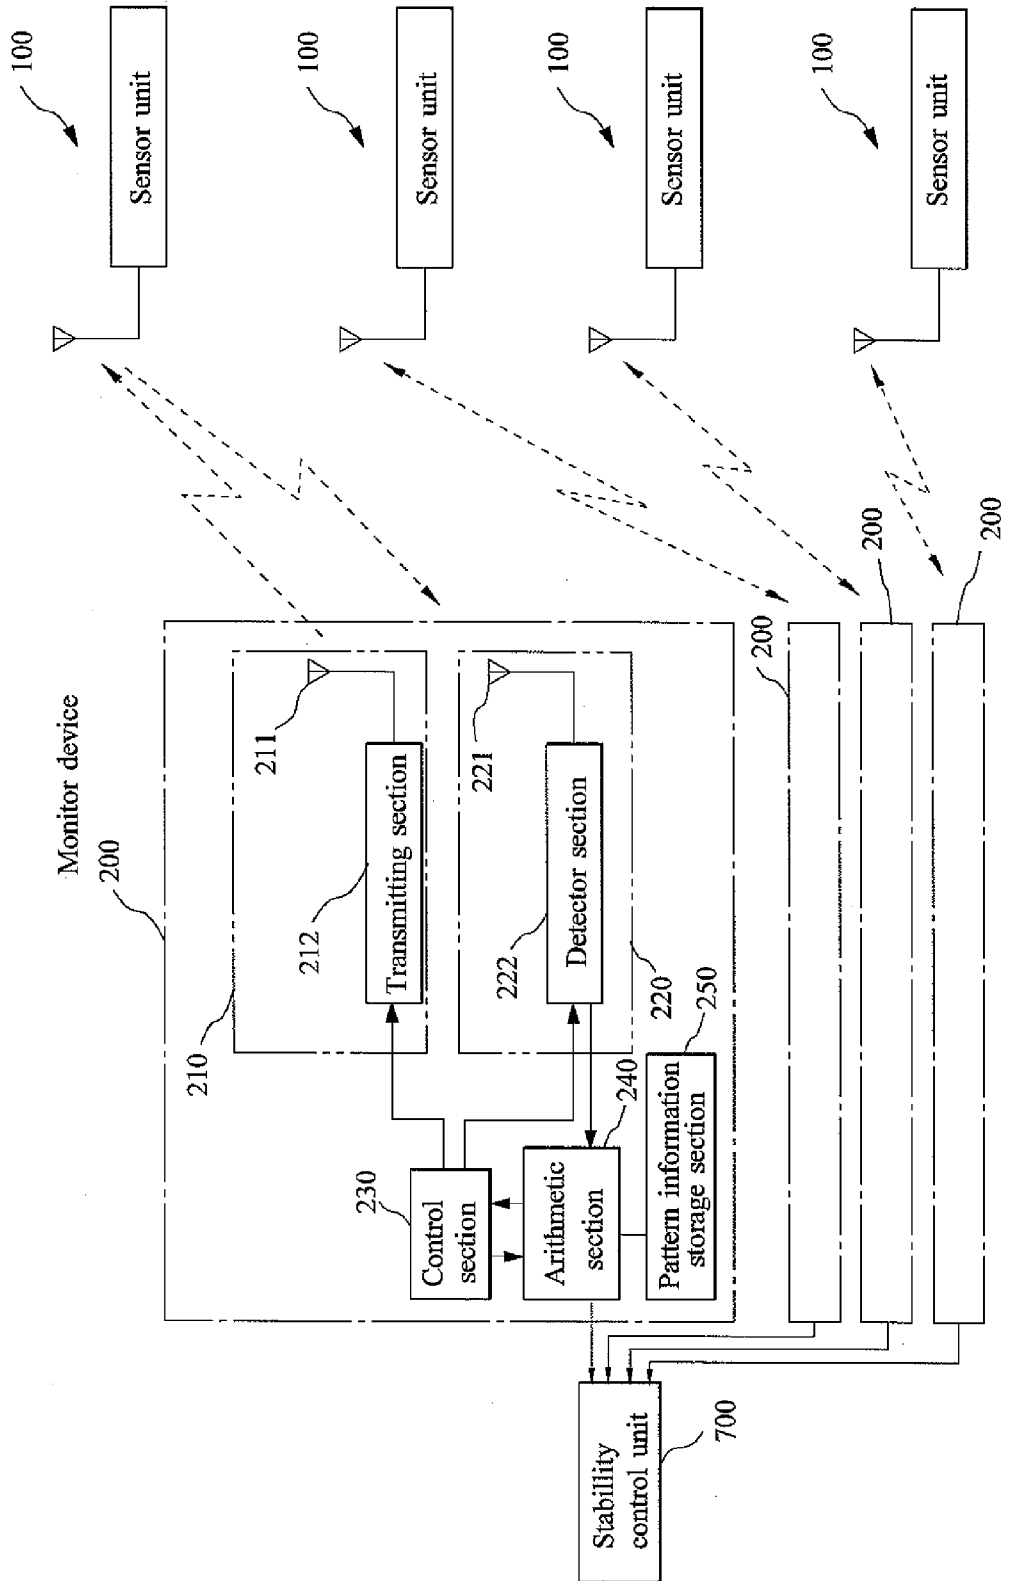


Fig. 19

2.5 Km per hour

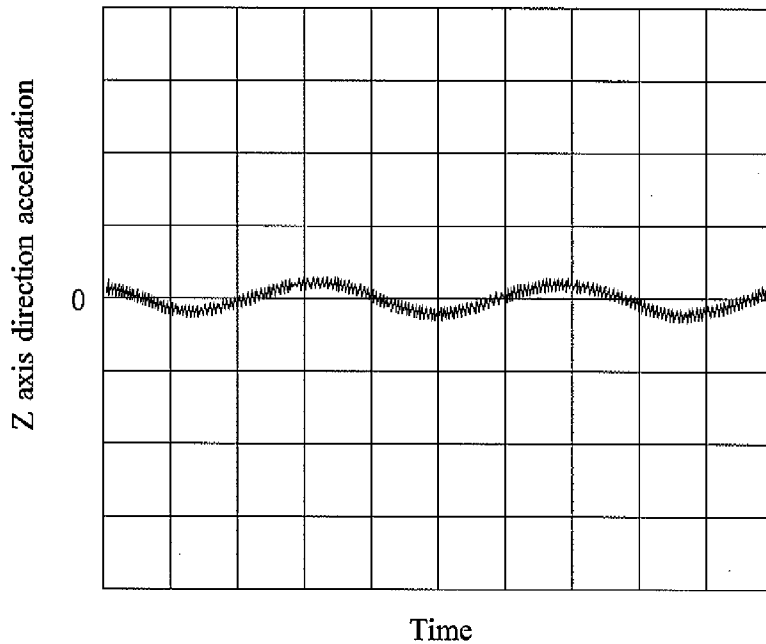


Fig. 20

20 Km per hour

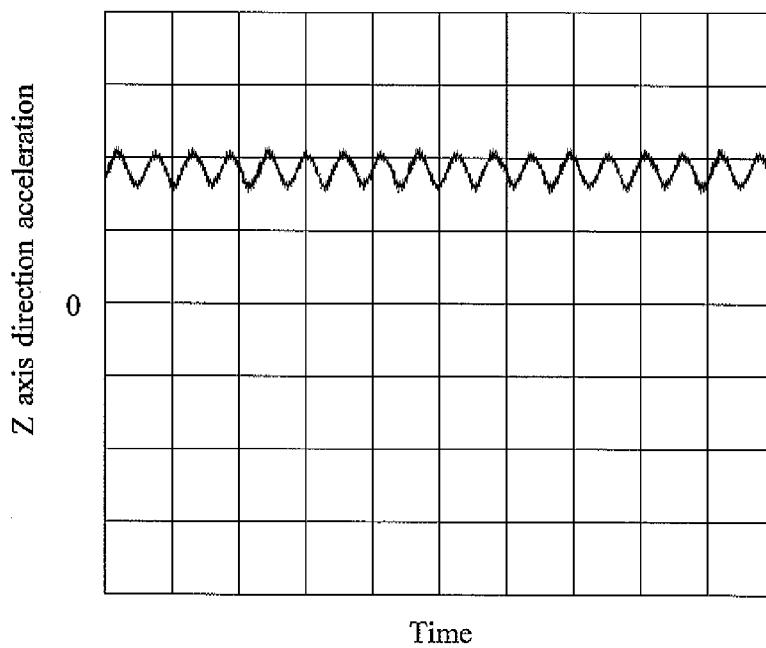


Fig. 21

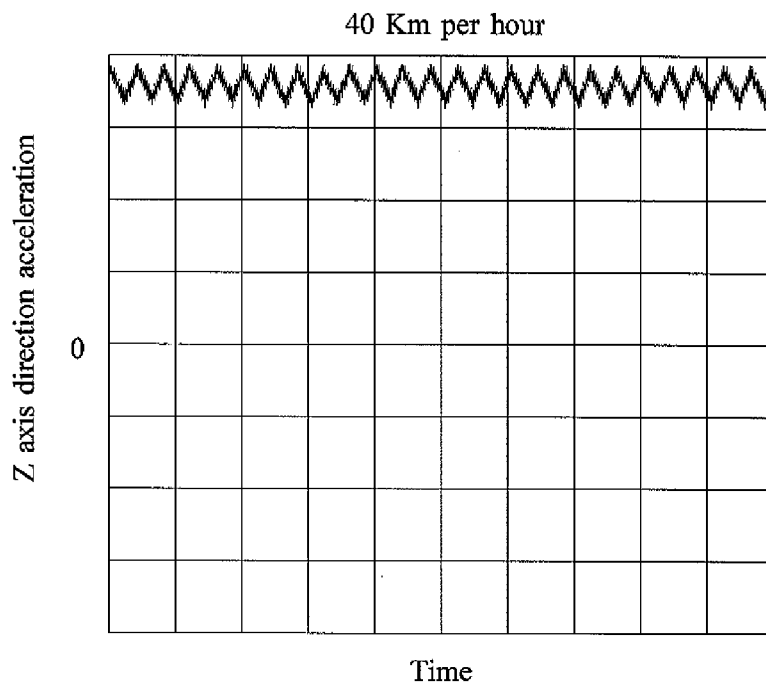


Fig. 22

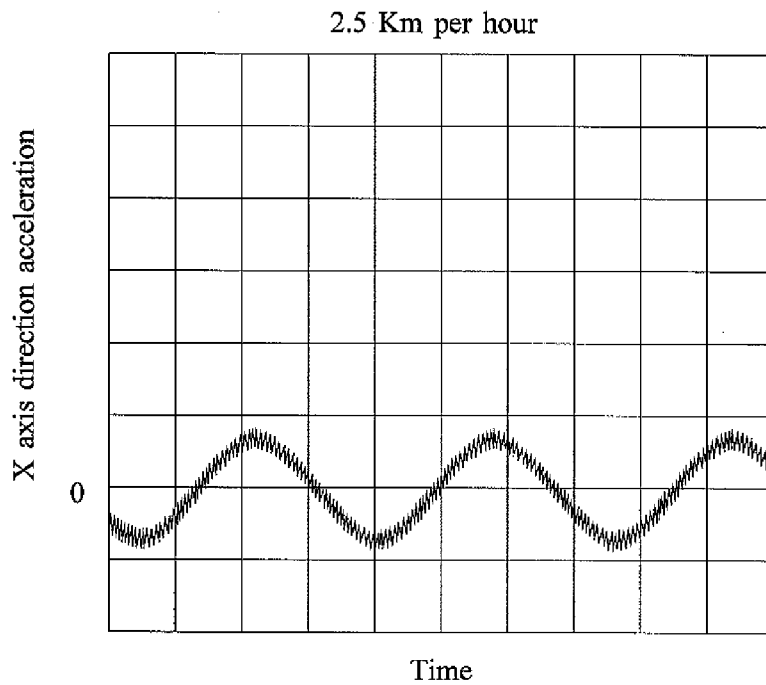


Fig. 23

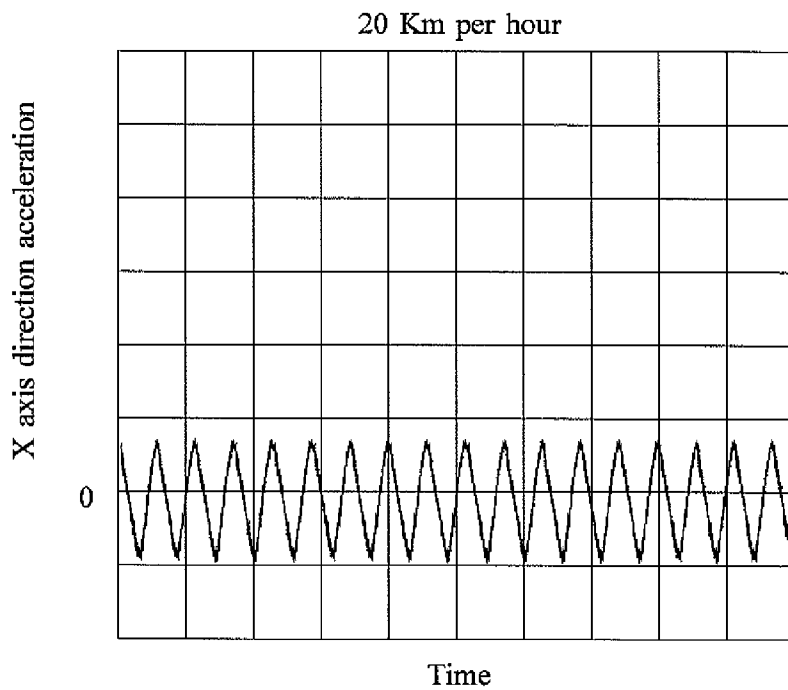


Fig. 24

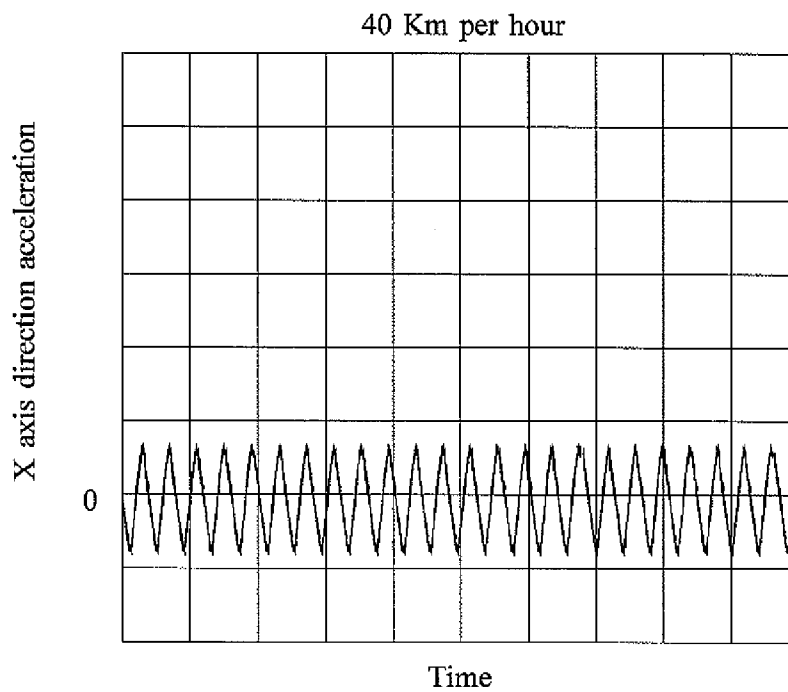


Fig. 25

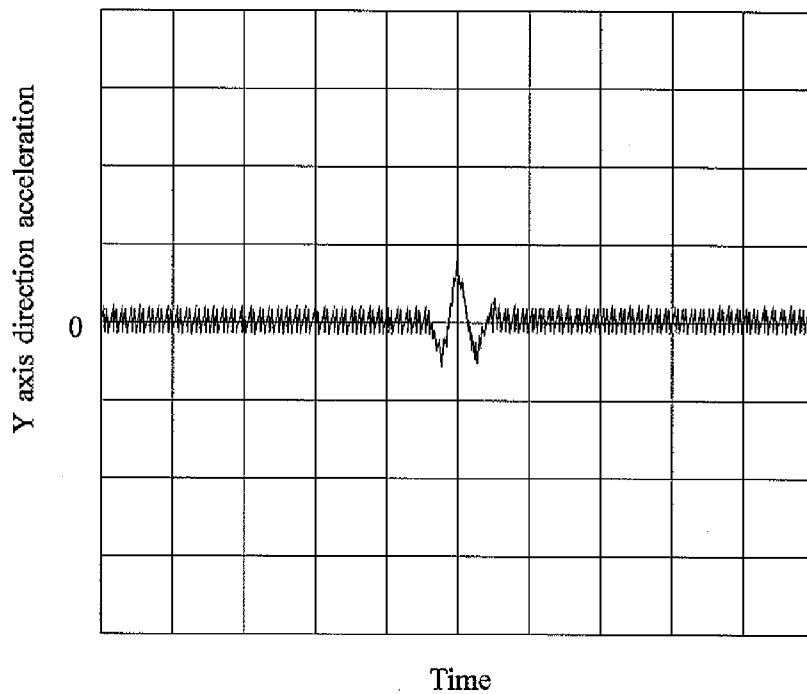


Fig. 26

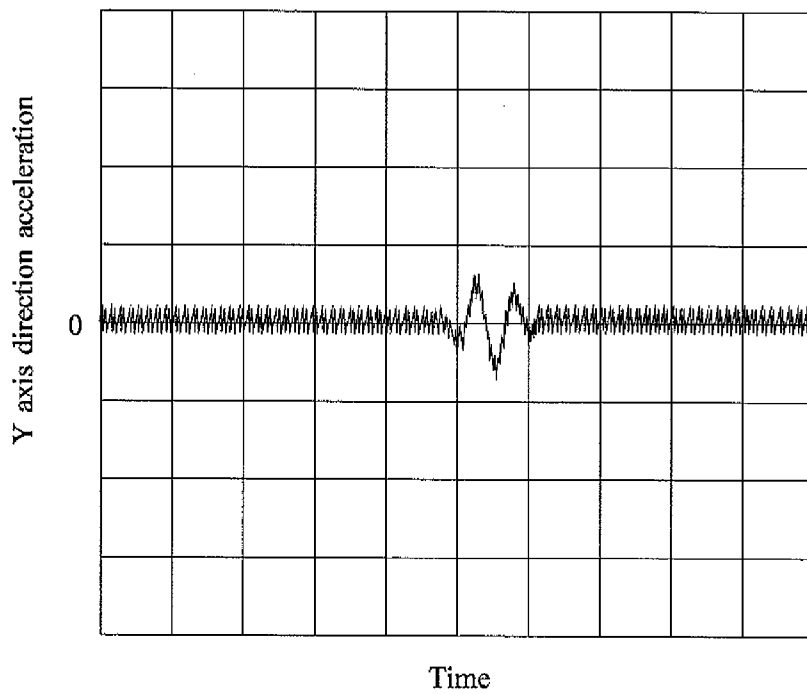


Fig. 27

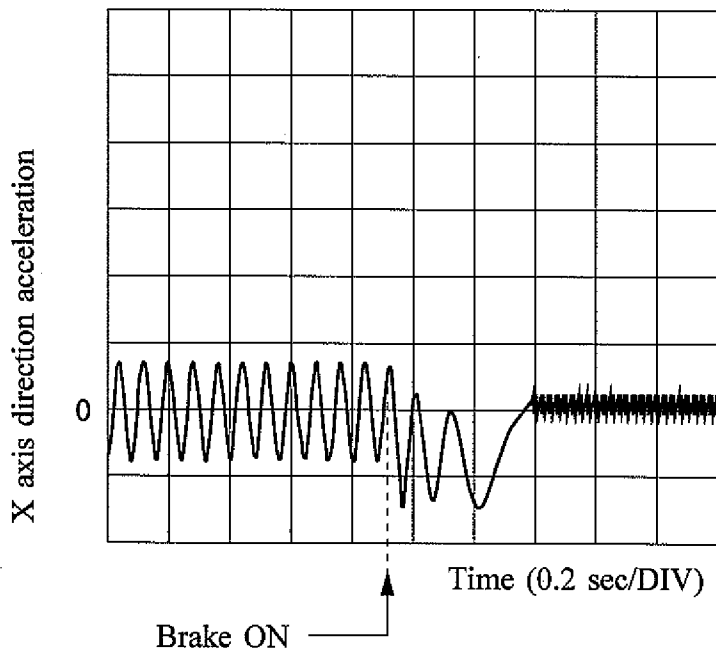


Fig. 28

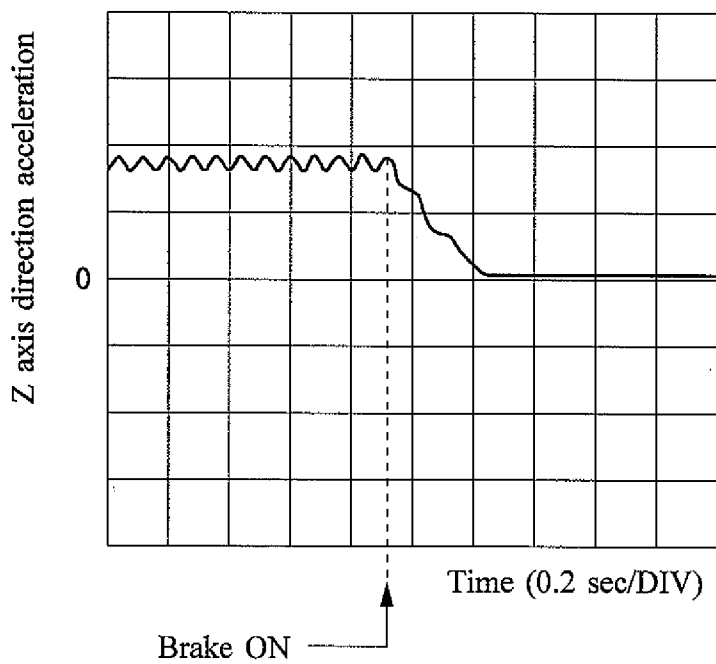


Fig. 29

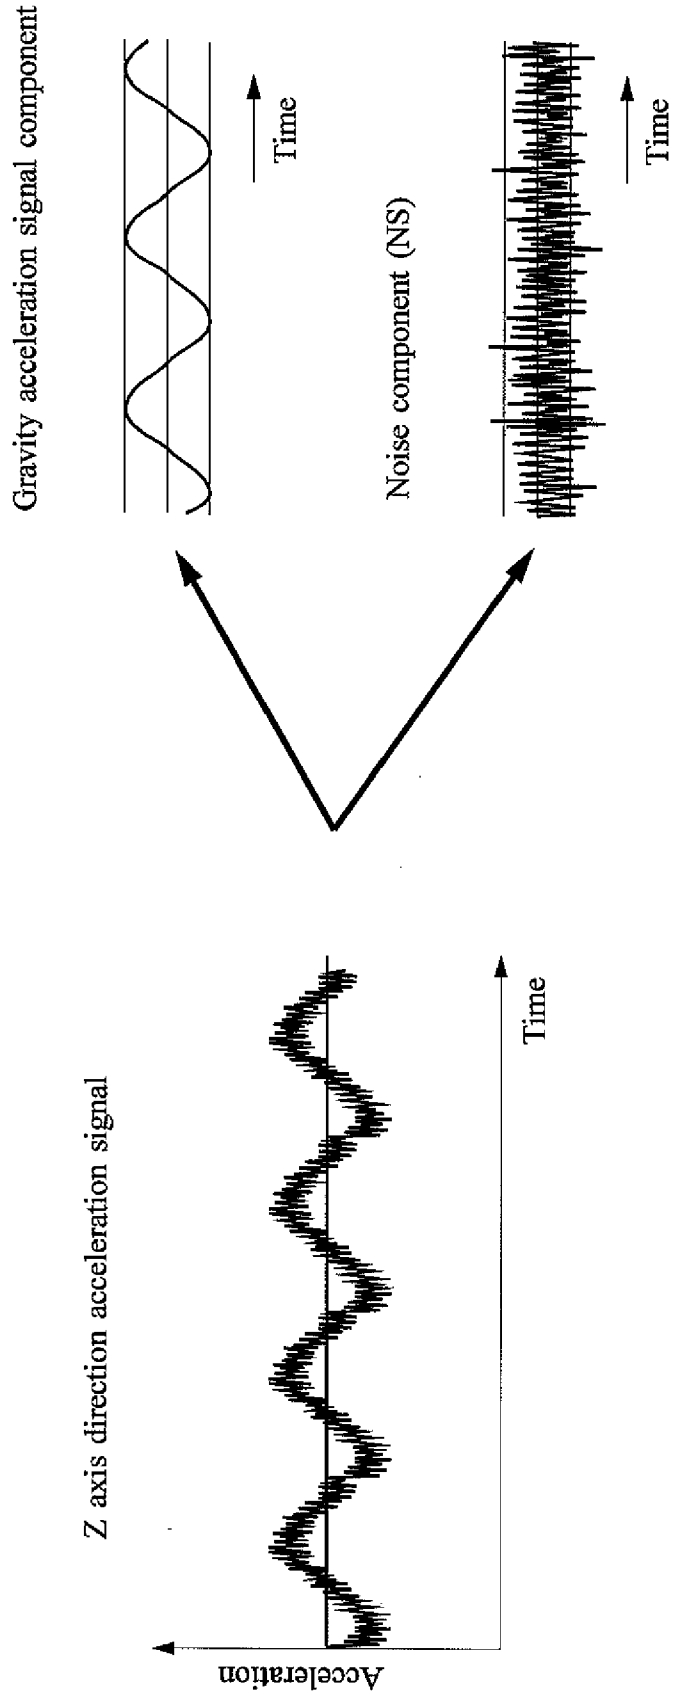


Fig. 30

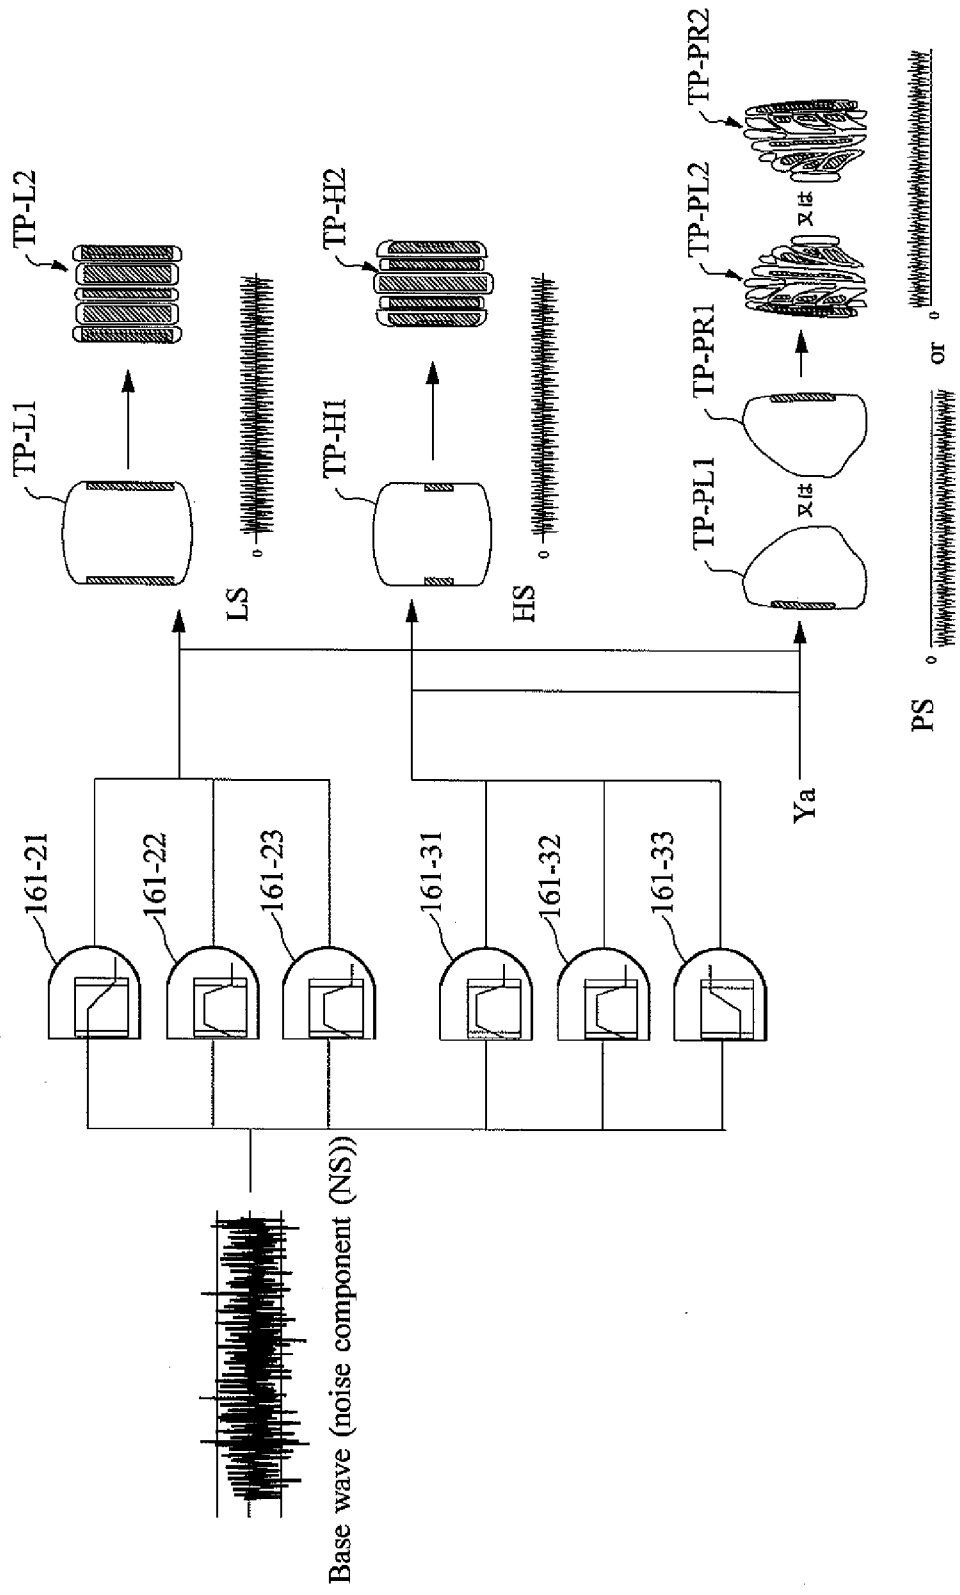


Fig. 31

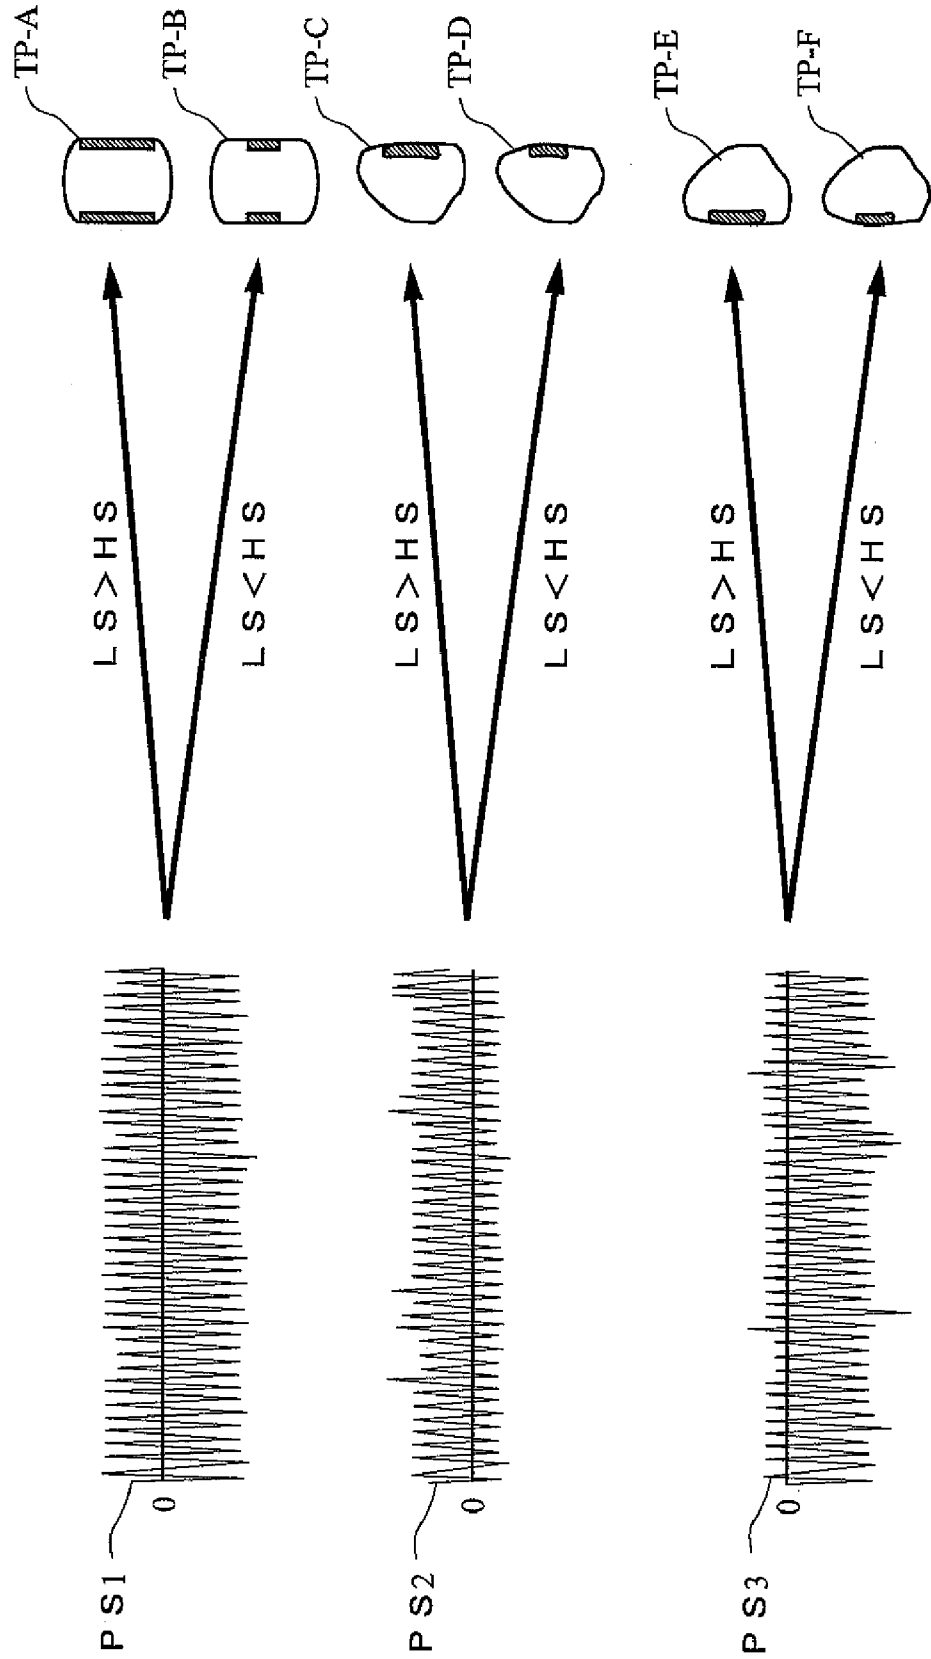


Fig. 32


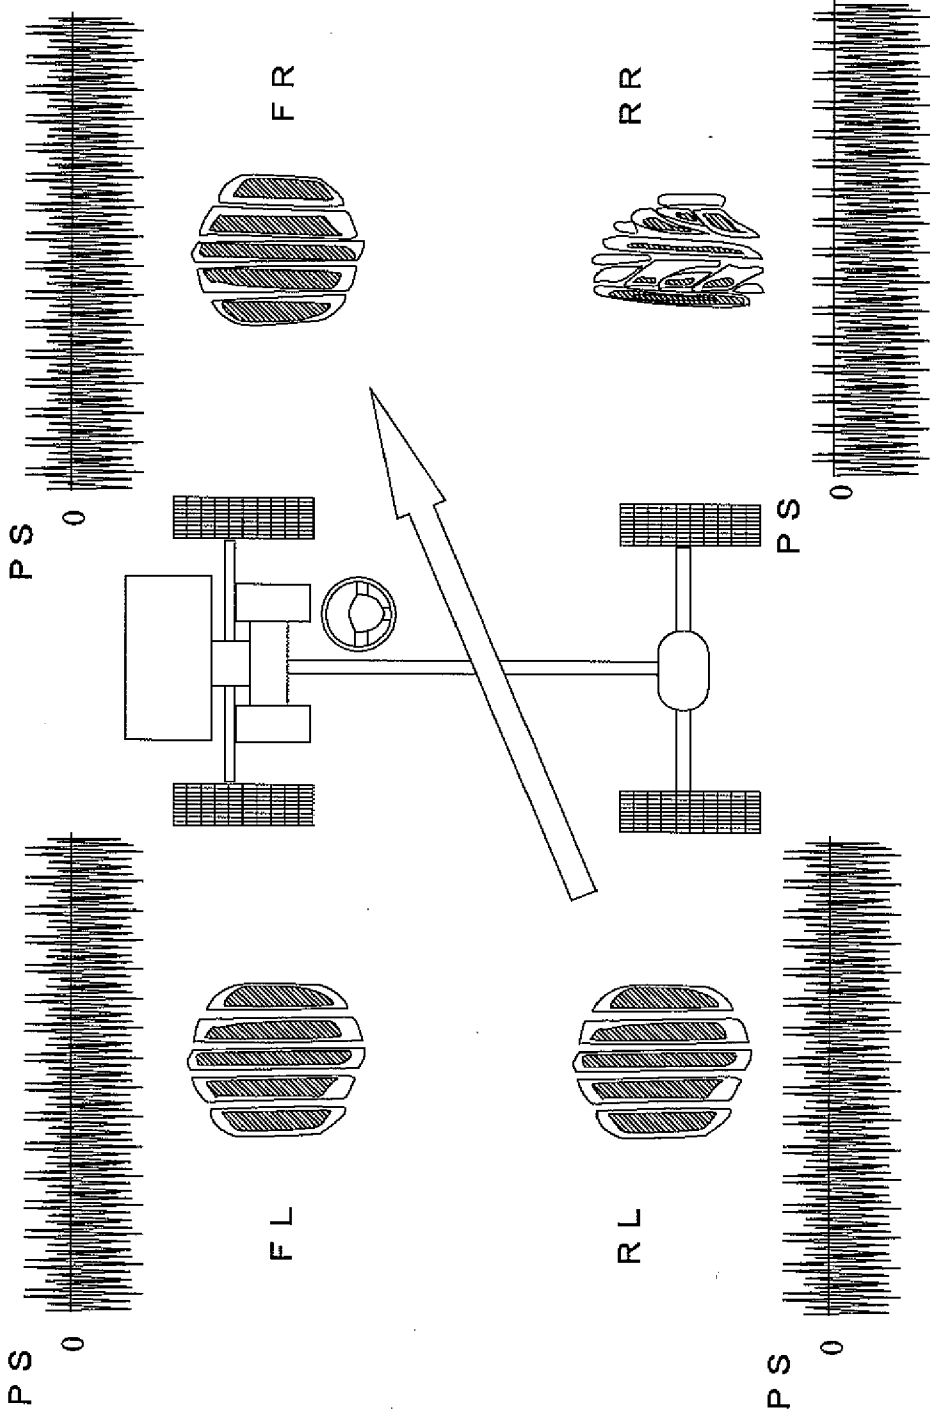


Fig. 33

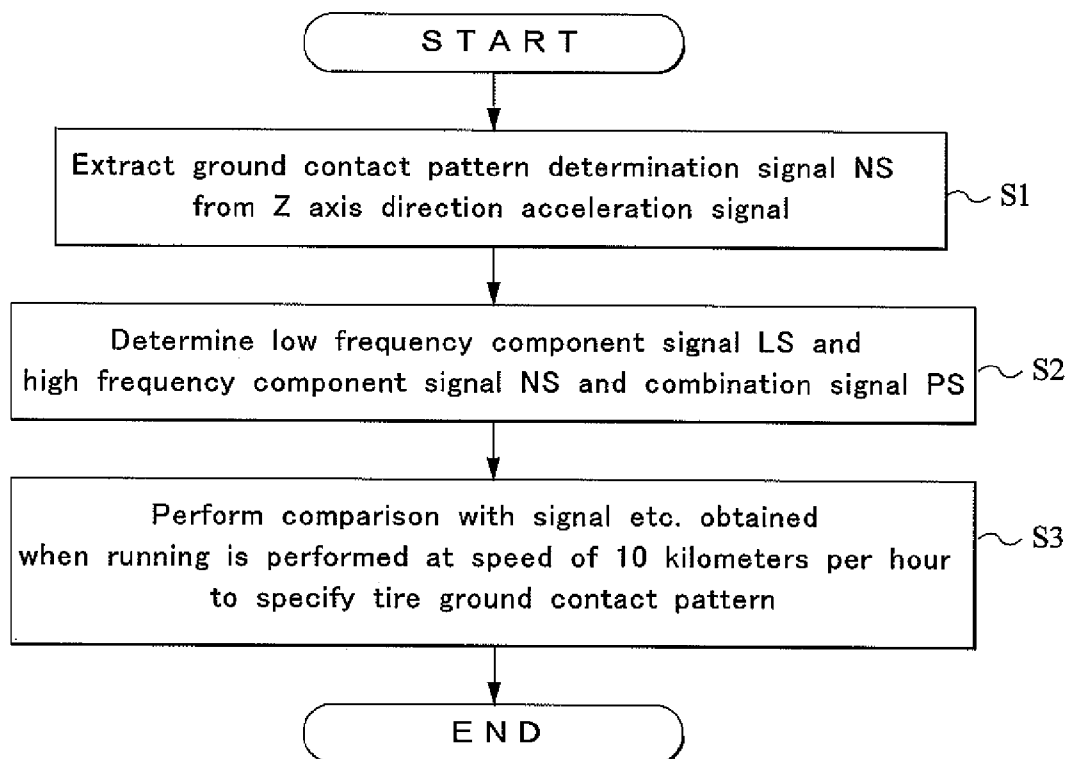

**TIRE GROUND CONTACT PATTERN
SPECIFYING METHOD AND APPARATUS
THEREOF**

TECHNICAL FIELD

[0001] The present invention relates to a tire ground contact pattern specifying method and an apparatus thereof for specifying a tire ground contact pattern during running of a vehicle.

BACKGROUND ART

[0002] According to conventional art, when the friction force between the road surface and a tire is reduced in such cases as when the road surface is wet in the rain, the vehicle can skid and move in an unexpected direction at the time when the accelerator is pushed down, causing an accident.

[0003] To prevent an accident caused by such skids, sudden acceleration, and so on, there have been developed Anti-Lock Brake System (hereinafter referred to as ABS), Traction Control System, and further a stability control system provided with a YAW sensor, and other systems.

[0004] For example, ABS is a system which senses the rotation state of each tire and controls the braking force based on the sensing result to prevent each tire from entering a locking state.

[0005] As the rotation state of a tire, it is possible to sense the number of rotations of each tire and the states such as air pressure and distortion, and use the sensing result for the control.

[0006] As examples of such control system, there have been known a brake device for an automobile (hereinafter referred to as Patent Document 1) disclosed in Japanese Patent Publication 5-338528), a brake control device (hereinafter referred to as Patent Document 2) disclosed in Japanese Patent Publication 2001-018775, a method and device for controlling a vehicle (hereinafter referred to as Patent Document 3) disclosed in Japanese Patent Publication 2001-182578, a vehicle movement control device (hereinafter referred to as Patent Document 4) disclosed in Japanese Patent Publication 2002-137721, a brake device (hereinafter referred to as Patent Document 5) disclosed in Japanese Patent Publication 2002-160616, and so on.

[0007] In Patent Document 1, there is disclosed a brake device in which negative pressure is supplied from a vacuum tank to a vacuum booster linked with a brake pedal, and negative pressure is supplied from a vacuum pump to the vacuum tank, and the vacuum pump is driven by a pump motor, whereby the pump motor is controlled so as to operate the vacuum pump when a state in which deceleration of an automobile reaches a predetermined value is detected by an acceleration sensor 14, thereby preventing the change of an operation feeling at the time of an abrupt brake operation as well as a brake operation immediately after that.

[0008] In Patent Document 2, there is disclosed a brake control device including control means which effects ABS control, the control means being provided with: lateral acceleration estimation means for estimating lateral acceleration generated in a vehicle; and comparison and determination means for comparing an estimated lateral acceleration by the lateral acceleration estimation means, an estimated lateral acceleration by vehicle behavior sensing means and a detected lateral acceleration sensed by a lateral acceleration sensor included in the vehicle behavior detecting means and

for determining that normal turning corresponding to the rudder angle is under way if the difference between the estimated and sensed accelerations is less than a predetermined value and determining that abnormal turning is underway if the difference is equal to or larger than the predetermined value, whereby the control means is adapted to change the type of control based on whether normal turning or abnormal turning is determined to be under way during the ABS control.

[0009] In Patent Document 3, there is disclosed a method and device for controlling a vehicle in which a control signal for adjusting the deceleration and/or the acceleration of a vehicle is formed by a corresponding set value, wherein a correction factor expressing a vehicle acceleration or a vehicle deceleration produced by an inclination of the running road surface is formed, and the correction factor is made to overlap the set value, whereby the setting of deceleration and/or acceleration of the vehicle is improved.

[0010] In Patent Document 4, there is disclosed a vehicle movement control device in which skid angle change speed β' of the center-of-gravity point as the actual yawing momentum of a vehicle having plural wheels is acquired, and brake fluid pressure ΔP is applied to one of brakes of left and right rear wheels when the absolute value of the change speed β is equal to or larger than predetermined value β_0' , thereby generating the yawing moment in a manner in which the more the absolute value of the change speed β' is, the more the value of the yawing moment is and at the same time, in a direction to reduce the absolute value of the change speed β' ; even during the control of the yawing moment, determination of whether the slip control is needed or not on the wheel to which the brake fluid pressure ΔP is applied, continues and, when the slip control is needed, the slip control for keeping a slip ratio within a proper range is executed by controlling the brake fluid pressure ΔP .

[0011] In Patent Document 5, there is disclosed a brake device including at least two sensors from among an acceleration sensor for sensing an acceleration in the longitudinal direction of a vehicle, a wheel speed sensor for sensing a wheel speed of each wheel, and a braking pressure sensor for sensing a braking pressure, wherein a target braking pressure is calculated by use of feedback from at least two sensors, and an indicator current is calculated by an indicator current calculation section based on this calculation result, and the indicator current is carried into a brake drive actuator to produce braking force corresponding to the amplitude of the indicator current, whereby even when disturbance occurs or one sensor is in trouble, the abnormal output can be suppressed.

[0012] As a method for sensing the number of rotations of a tire, there is typically used a method which senses the number of rotations of a tire by use of a rotor rotating integrally with a wheel carrier, and a pickup sensor. In this method, plural concaves and convexes spaced equally around the circumferential surface of the rotor traverse the magnetic field generated by the pickup sensor, whereby the magnetic flux density is varied, generating a pulsative voltage in a coil of the pickup sensor; the number of rotations can be detected by sensing this pulse. An exemplary basic principle of this method is disclosed in Japanese Patent Publication 52-109981.

[0013] Patent Document 1: Japanese Patent Publication 5-338528

[0014] Patent Document 2: Japanese Patent Publication 2001-018775

[0015] Patent Document 3: Japanese Patent Publication 2001-182578

[0016] Patent Document 4: Japanese Patent Publication 2002-137721

[0017] Patent Document 5: Japanese Patent Publication 2002-160616

[0018] Patent Document 6: Japanese Patent Publication 52-109981

[0019] In the technique disclosed in Patent Document 1, however, while the brake control operation feeling is improved, when the friction force between the tire and road surface changes, it is difficult to set a threshold value for which there are assumed such cases as when the brake torque exceeds the friction force between the tire and road surface, thus causing a skid.

[0020] In the techniques disclosed in Patent Documents 2 to 5, compared to the above described technique disclosed in Patent Document 1, more advanced control is performed in which an acceleration of the vehicle itself during running of the vehicle is sensed and the brake control of the vehicle is performed based on this acceleration. However, the friction force between the tire and road surface varies even in the identical vehicle depending on the kind of tire installed in the vehicle and the air pressure thereof. Further, there are vehicles, such as a 4WD vehicle, in which drive control is performed separately for each tire. Consequently, even with the control method which takes into consideration the acceleration of the vehicle itself during its running, highly accurate control may be impossible.

[0021] To address the above problems, an object of the present invention is provide a tire ground contact pattern specifying method and an apparatus thereof for specifying a tire ground contact pattern usable to perform the stable control of a running vehicle.

DISCLOSURE OF THE INVENTION

[0022] To achieve the above object, the present invention proposes a tire ground contact pattern specifying method for using a device to specify a ground contact pattern with respect to running road surface for a tire of a running vehicle, the device comprising: a sensor unit, disposed in a rotation mechanism section including a rotation body positioned in the vehicle body side, for securing a tire and allowing the tire to rotate and the tire, and having an acceleration sensor sensing at least one of a first acceleration generated in association with tire rotation in a direction orthogonal to a rotation axis and a second acceleration generated in a direction of rotation, and converting the sensing result by the acceleration sensor into an electrical signal and performing outputting; and pattern information storage means for associating a predetermined low frequency component and a predetermined high frequency component of a ground contact pattern determination signal with tire ground contact pattern information including at least information on tire ground contact area with respect to running road surface, and preliminarily storing the resultant information, wherein the device eliminates a gravity acceleration component from at least one electrical signal of the sensed first acceleration and second acceleration to generate the ground contact pattern determination signal, and separates the predetermined low frequency component and predetermined high frequency component of the ground contact pattern determination signal, and specifies a tire ground contact pattern with respect to running road surface based on the low frequency component and high frequency component

obtained by the separation and the information stored in the pattern information storage means.

[0023] According to the tire ground contact pattern specifying method of the present invention, at least one of the first acceleration generated in association with tire rotation in a direction orthogonal to the rotation axis and the second acceleration generated in a direction of rotation is sensed by the acceleration sensor, and this sensing result is converted into an electrical signal and outputted.

[0024] Further, the gravity acceleration component is eliminated from at least one electrical signal of the first acceleration and second acceleration, and the tire ground contact pattern determination signal is thereby generated, and the predetermined low frequency component and the predetermined high frequency component of the ground contact pattern determination signal are separated.

[0025] Also, the tire ground contact pattern information including at least the information on tire ground contact area with respect to running road surface is associated with the low frequency component and high frequency component, and the resultant information is preliminarily stored in the pattern information storage means.

[0026] Accordingly, using the above device, based on the low frequency component and high frequency component obtained by the separation means and the information stored in the pattern information storage means, a tire ground contact pattern with respect to running road surface is specified.

[0027] Also, the present invention proposes the tire ground contact pattern specifying method described above, wherein: the pattern information storage means associates as reference information, the tire ground contact pattern information and the low frequency component and high frequency component obtained at the time of running at a predetermined reference speed; and the device specifies a tire ground contact pattern with respect to running road surface based on the low frequency component and high frequency component obtained by the separation and the reference information stored in the pattern information storage means.

[0028] According to the tire ground contact pattern specifying method of the present invention, using the device, based on the low frequency component and high frequency component preliminarily obtained at the time of running at the predetermined reference speed and the information stored in the pattern information storage means, a tire ground contact pattern with respect to running road surface is specified.

[0029] Also, the present invention proposes the tire ground contact pattern specifying method described above, wherein: the sensor unit has means for sensing a third acceleration generated in a direction of the tire rotation axis and converting the sensing result into an electrical signal and perform outputting; the pattern information storage means has means for associating tire ground contact pattern information including at least information on tire ground contact area and information on tire ground contact region with respect to running road surface and the low frequency component and high frequency component and the third acceleration, and preliminarily storing the resultant information; and the device specifies a tire ground contact pattern with respect to running road surface based on the low frequency component and high frequency component, the third acceleration and the information stored in the pattern information storage means.

[0030] According to the tire ground contact pattern specifying method of the present invention, based on the low frequency component and high frequency component, the

third acceleration and the information stored in the pattern information storage means, a tire ground contact pattern with respect to running road surface is specified.

[0031] Also, the present invention proposes the tire ground contact pattern specifying method described above, wherein: the tire ground contact pattern information and the low frequency component and high frequency component and the third acceleration obtained at the time of running at a predetermined reference speed are associated with each other and preliminarily stored as reference information; the device specifies a tire ground contact pattern with respect to running road surface based on the low frequency component and high frequency component and the third acceleration and the reference information stored in the pattern information storage means.

[0032] According to the tire ground contact pattern specifying method of the present invention, based on the low frequency component and high frequency component obtained at the time of running at a predetermined speed, the information stored in the pattern information storage means and the third acceleration, a tire ground contact pattern with respect to running road surface is specified.

[0033] Also, the present invention proposes the tire ground contact pattern specifying method described above, wherein: the sensor unit has means for sensing a third acceleration generated in a direction of the tire rotation axis, converting the sensing result into an electrical signal and performing outputting; the device has signal combining means for combining an electrical signal of the low frequency component and the high frequency component with an electrical signal of the third acceleration and outputting an electrical signal obtained by combining these three signals; the pattern information storage means has means for associating tire ground contact pattern information including at least information on tire ground contact area and information on tire ground contact region with respect to running road surface and the low frequency component and high frequency component and the combination signal, and preliminarily storing the resultant information; and the device specifies a tire ground contact pattern with respect to running road surface based on the low frequency component and high frequency component and the combination signal obtained by the signal combining means and the information stored in the pattern information storage means.

[0034] According to the tire ground contact pattern specifying method of the present invention, based on the low frequency component and high frequency component, the combination signal and the information stored in the pattern information storage means, a tire ground contact pattern with respect to running road surface is specified.

[0035] Also, the present invention proposes the tire ground contact pattern specifying method described above, wherein: the pattern information storage means associates the tire ground contact pattern information and the low frequency component and high frequency component and the combination signal obtained at the time of running at a predetermined reference speed, and preliminarily stores the resulting information as reference information; and the device specifies a tire ground contact pattern with respect to running road surface based on the low frequency component and high frequency component and the combination signal and the reference information stored in the pattern information storage means.

[0036] According to the tire ground contact pattern specifying method of the present invention, based on the low frequency component and high frequency component preliminarily obtained at the time of running at the predetermined speed and the information stored in the pattern information storage means and the combination signal, a tire ground contact pattern with respect to running road surface is specified.

[0037] Also, the present invention proposes the tire ground contact pattern specifying method described above, wherein the reference speed is 10 kilometers per hour.

[0038] According to the tire ground contact pattern specifying method of the present invention, the low frequency component and high frequency component and like obtained when running is performed at a speed of 10 kilometers per hour are set as reference value, thereby allowing a ground contact pattern to be specified with high accuracy.

[0039] Also, to achieve the above object, the present invention proposes a tire ground contact pattern specifying device specifying a ground contact pattern with respect to running road surface for a tire of a running vehicle, the device comprising: a sensor unit, disposed in a rotation mechanism section including a rotation body positioned in the vehicle body side, for securing a tire and allowing the tire to rotate and the tire, and having an acceleration sensor sensing at least one of a first acceleration generated in association with tire rotation in a direction orthogonal to the rotation axis and a second acceleration generated in a direction of rotation, and converting the sensing result by the acceleration sensor into an electrical signal and performing outputting; means for eliminating a gravity acceleration component from at least one electrical signal of the first acceleration and second acceleration to generate a ground contact pattern determination signal; separation means for separating a predetermined low frequency component and a predetermined high frequency component of the ground contact pattern determination signal; pattern information storage means for associating tire ground contact pattern information including at least information on tire ground contact area with respect to running road surface and the low frequency component and high frequency component, and preliminarily storing the resultant information; and ground contact pattern specifying means for specifying a tire ground contact pattern with respect to running road surface based on the low frequency component and high frequency component obtained by the separation means and the information stored in the pattern information storage means, and outputting this tire ground contact pattern information.

[0040] According to the tire ground contact pattern specifying device of the present invention, at least one of the first acceleration generated in association with tire rotation in a direction orthogonal to the rotation axis and the second acceleration generated in a direction of rotation is sensed by the acceleration sensor, and this sensing result is converted into an electrical signal and outputted.

[0041] Further, the gravity acceleration component is eliminated from at least one electrical signal of the first acceleration and second acceleration to generate the ground contact pattern determination signal, and the predetermined low frequency component and the predetermined high frequency component of the ground contact pattern determination signal are separated.

[0042] Also, the tire ground contact pattern information including at least information on tire ground contact area with

respect to running road surface and the low frequency component and high frequency component are associated with each other and stored preliminarily in the pattern information storage means.

[0043] Accordingly, based on the low frequency component and high frequency component obtained by the separation means and the information stored in the pattern information storage means, a tire ground contact pattern with respect to running road surface is specified.

[0044] Also, according to the present invention, in the tire ground contact pattern specifying device described above, the pattern information storage means has means for associating the tire ground contact pattern information and the low frequency component and high frequency component obtained at the time of running at a predetermined reference speed, and preliminarily storing the resultant information as reference information; the device has ground contact pattern specifying means for specifying a tire ground contact pattern with respect to running road surface based on the low frequency component and high frequency component obtained by the separation means and the reference information stored in the pattern information storage means, and outputting this tire ground contact pattern information.

[0045] According to the tire ground contact pattern specifying device of the present invention, based on the low frequency component and high frequency component preliminarily obtained at the time of running at the predetermined speed and the information stored in the pattern information storage means, a tire ground contact pattern with respect to running road surface is specified.

[0046] Also, according to the present invention, in the tire ground contact pattern specifying device described above, the sensor unit has means for sensing a third acceleration generated in a direction of the tire rotation axis, converting the sensing result into an electrical signal and performing outputting, the device comprising: the pattern information storage means having means for associating tire ground contact pattern information including at least information on tire ground contact area and information on tire ground contact region with respect to running road surface and the low frequency component and high frequency component and the third acceleration, and preliminarily storing the resultant information; and the ground contact pattern specifying means for specifying a tire ground contact pattern with respect to running road surface based on the low frequency component and high frequency component and the third acceleration and the information stored in the pattern information storage means, and outputting this tire ground contact pattern information.

[0047] According to the tire ground contact pattern specifying device of the present invention, based on the low frequency component and high frequency component, the third acceleration and the information stored in the pattern information storage means, a tire ground contact pattern with respect to running road surface is specified.

[0048] Also, according to the present invention, in the tire ground contact pattern specifying device described above, the pattern information storage means has means for associating the tire ground contact pattern information and the low frequency component and high frequency component and the third acceleration obtained at the time of running at a predetermined reference speed, and preliminarily storing the resulting information as reference information; the device has the ground contact pattern specifying means for specifying a tire ground contact pattern with respect to running road sur-

face based on the low frequency component and high frequency component, the third acceleration and the reference information stored in the pattern information storage means, and outputting this tire ground contact pattern information.

[0049] According to the tire ground contact pattern specifying device of the present invention, based on the low frequency component and high frequency component preliminarily obtained at the time of running at the predetermined speed, the information stored in the pattern information storage means and the third acceleration, a tire ground contact pattern with respect to running road surface is specified.

[0050] Also, according to the present invention, in the tire ground contact pattern specifying device described above, the sensor unit has means for sensing a third acceleration generated in a direction of the tire rotation axis, converting the sensing result into an electrical signal and performing outputting, the device comprising: signal combining means for combining an electrical signal of the low frequency component and the high frequency component with an electrical signal of the third acceleration and outputting an electrical signal obtained by combining these three signals; the pattern information storage means having means for associating tire ground contact pattern information including at least information on tire ground contact area and information on tire ground contact region with respect to running road surface, and the low frequency component and high frequency component and the combination signals and preliminarily storing the resultant information; and the ground contact pattern specifying means for specifying a tire ground contact pattern with respect to running road surface based on the low frequency component and high frequency component, the combination signal obtained by the signal combining means and the information stored in the pattern information storage means and outputting this tire ground contact pattern information.

[0051] According to the tire ground contact pattern specifying device of the present invention, based on the low frequency component and high frequency component, the combination signal and the information stored in the pattern information storage means, a tire ground contact pattern with respect to running road surface is specified.

[0052] Also, according to the present invention, in the tire ground contact pattern specifying device described above, the pattern information storage means has means for associating the tire ground contact pattern information and the low frequency component and high frequency component and the combination signal obtained at the time of running at a predetermined reference speed, and preliminarily storing the resulting information as reference information; the device has the ground contact pattern specifying means for specifying a tire ground contact pattern with respect to running road surface based on the low frequency component and high frequency component and the combination signal and the reference information stored in the pattern information storage means and outputting this tire ground contact pattern information.

[0053] According to the tire ground contact pattern specifying device of the present invention, based on the low frequency component and high frequency component preliminarily obtained at the time of running at a predetermined speed and the information stored in the pattern information storage means and the combination signal, a tire ground contact pattern with respect to running road surface is specified.

[0054] Also, according to the present invention, in the tire ground contact pattern specifying device described above, the reference speed is set to 10 kilometers per hour.

[0055] According to the tire ground contact pattern specifying device of the present invention, the low frequency component and high frequency component and like obtained when running is performed at a speed of 10 kilometers per hour are set as reference value, thereby allowing a ground contact pattern to be specified with high accuracy.

[0056] Also, according to the present invention, in the tire ground contact pattern specifying device described above, the sensor unit is configured to sense accelerations in different directions at one given position.

[0057] According to the tire ground contact pattern specifying device of the present invention, the low frequency component and high frequency component and the third acceleration are obtained based on accelerations in different directions at one given position. Accordingly, the accuracy of sensing a tire ground contact pattern is improved.

[0058] Also, according to the present invention, in the tire ground contact pattern specifying device described above, sensing can be performed by the acceleration sensor up to an acceleration larger by a predetermined amount than a maximum acceleration generated by rotation of the tire.

[0059] According to the tire ground contact pattern specifying device of the present invention, a noise signal dependent on a variation in tire ground contact pattern is added to the first acceleration and second acceleration sensed by the acceleration sensor, so the amplitude of the acceleration signal sensed by the acceleration sensor is larger than a maximum acceleration generated by tire rotation. Thus, when sensing can be performed by the acceleration sensor up to an acceleration larger by a predetermined amount than a maximum acceleration generated by tire rotation, the noise signal dependent on a variation in tire ground contact pattern can be properly sensed.

[0060] Also, according to the present invention, in the tire ground contact pattern specifying device described above, in order to separate the low frequency component, the separation means includes two or more low-pass filters or band-pass filters having a different pass band and at the same time, includes means for performing a parallel processing of the ground contact pattern determination signal by use of each filter and combining and outputting electrical signals outputted from each filter.

[0061] According to the tire ground contact pattern specifying device of the present invention, since two or more filters are used, a shift in phase produced according to signal frequency when passing through the filter can be reduced.

[0062] Also, according to the present invention, in the tire ground contact pattern specifying device described above, in order to separate the high frequency component, the separation means includes two or more high-pass filters or band-pass filters having a different pass band and at the same time, includes means for performing a parallel processing of the ground contact pattern determination signal by use of each filter and combining and outputting electrical signals outputted from each filter.

[0063] According to the tire ground contact pattern specifying device of the present invention, since two or more filters are used, a shift in phase produced according to signal frequency when passing through the filter can be reduced.

[0064] According to the tire ground contact pattern specifying method and the device thereof, based on accelerations

generated in the rotation mechanism allowing a tire to rotate in a running vehicle, a tire ground contact pattern can be specified. Consequently, using this specified tire ground contact pattern, tire distortion quantity, vehicle skid, wheelspin, tire grip and the like can be estimated. Accordingly, when these are used for vehicle brake control, the vehicle drive control can be performed with high accuracy. As a result, the use of the present invention allows proper control during running of the vehicle, contributing to improvement in stability during running.

BRIEFLY DESCRIBE OF THE DRAWINGS

[0065] FIG. 1 is a plan view showing the arrangement of a monitor device and sensor unit according to one embodiment of the present invention;

[0066] FIG. 2 is a view for explaining the location of placement of the sensor unit in a tire according to the one embodiment of the present invention;

[0067] FIG. 3 is a view showing a tire inside a tire house according to the one embodiment of the present invention;

[0068] FIG. 4 is a view showing a rotation mechanism section according to the one embodiment of the present invention;

[0069] FIG. 5 is a configuration diagram showing a vehicle drive control system according to the one embodiment of the present invention;

[0070] FIG. 6 is a block diagram showing an electrical circuit of the sensor unit according to the one embodiment of the present invention;

[0071] FIG. 7 is an external perspective view showing a semiconductor acceleration sensor according to the one embodiment of the present invention;

[0072] FIG. 8 is a cross-sectional view observed from the arrow direction along the line B-B of FIG. 7;

[0073] FIG. 9 is a cross-sectional view observed from the arrow direction along the line C-C of FIG. 7;

[0074] FIG. 10 is a broken perspective view showing the semiconductor acceleration sensor according to the one embodiment of the present invention;

[0075] FIG. 11 is a configuration diagram showing an electrical circuit of the semiconductor acceleration sensor according to the one embodiment of the present invention;

[0076] FIG. 12 is a view showing a bridge circuit sensing an acceleration in an X axis direction using the semiconductor acceleration sensor according to the one embodiment of the present invention;

[0077] FIG. 13 is a view showing a bridge circuit sensing an acceleration in a Y axis direction using the semiconductor acceleration sensor according to the one embodiment of the present invention;

[0078] FIG. 14 is a view showing a bridge circuit sensing an acceleration in a Z axis direction using the semiconductor acceleration sensor according to the one embodiment of the present invention;

[0079] FIG. 15 is a view for explaining the operation of the semiconductor acceleration sensor according to the one embodiment of the present invention;

[0080] FIG. 16 is a view for explaining the operation of the semiconductor acceleration sensor according to the one embodiment of the present invention;

[0081] FIG. 17 is a configuration diagram showing a signal processing circuit according to the one embodiment of the present invention;

[0082] FIG. 18 is a configuration diagram showing an electrical circuit of the monitor device according to the one embodiment of the present invention;

[0083] FIG. 19 is a view showing the measurement result of acceleration in a Z axis direction according to the one embodiment of the present invention;

[0084] FIG. 20 is a view showing the measurement result of acceleration in a Z axis direction according to the one embodiment of the present invention;

[0085] FIG. 21 is a view showing the measurement result of acceleration in a Z axis direction according to the one embodiment of the present invention;

[0086] FIG. 22 is a view showing the measurement result of acceleration in an X axis direction according to the one embodiment of the present invention;

[0087] FIG. 23 is a view showing the measurement result of acceleration in an X axis direction according to the one embodiment of the present invention;

[0088] FIG. 24 is a view showing the measurement result of acceleration in an X axis direction according to the one embodiment of the present invention;

[0089] FIG. 25 is a view showing the measurement result of acceleration in a Y axis direction according to the one embodiment of the present invention;

[0090] FIG. 26 is a view showing the measurement result of acceleration in a Y axis direction according to the one embodiment of the present invention;

[0091] FIG. 27 is a view showing the measurement result of acceleration in an X axis direction at the time of applying the brake according to the one embodiment of the present invention;

[0092] FIG. 28 is a view showing the measurement result of acceleration in a Z axis direction at the time of applying the brake according to the one embodiment of the present invention;

[0093] FIG. 29 is a view for explaining the operation of a basic waveform elimination circuit according to the one embodiment of the present invention;

[0094] FIG. 30 is a view for explaining a tire ground contact pattern specifying method according to the one embodiment of the present invention;

[0095] FIG. 31 is a view for explaining the tire ground contact pattern specifying method according to the one embodiment of the present invention;

[0096] FIG. 32 is a view for explaining an example of stability control according to the one embodiment of the present invention; and

[0097] FIG. 33 is a flowchart of a tire ground contact pattern specifying method according to a second embodiment of the present invention.

DESCRIPTION OF SYMBOLS

[0098] 1 . . . vehicle, 2 . . . tire, 3 . . . axle, 4 . . . tire house, 100 . . . sensor unit, 110 . . . antenna, 120 . . . antenna switch, 130 . . . rectifier circuit, 131, 132 . . . diode, 133 . . . capacitor, 134 . . . resistor, 140 . . . central processing section, 141 . . . CPU, 142 . . . D/A converter circuit, 143 . . . storage section, 150 . . . transmitting section, 151 . . . oscillator circuit, 152 . . . modulator circuit, 153 . . . high frequency amplifier circuit, 160 . . . sensor section, 161 . . . signal processing circuit, 161-10 . . . basic waveform elimination circuit, 161-11 . . . amplifier circuit, 161-12 . . . low-pass filter, 161-13 . . . phase inverter circuit, 161-14 . . . arithmetic circuit, 161-20 . . . first separation circuit, 161-21 . . . low-pass filter, 161-22, 161-23

. . . band-pass filter, 161-24 . . . arithmetic circuit, 161-30 . . . second separation circuit, 161-31, 161-32 . . . band-pass filter, 161-33 . . . high-pass filter, 161-34 . . . arithmetic circuit, 161-40 . . . arithmetic circuit, 162 . . . A/D converter section, 200 . . . monitor device, 210 . . . radiation unit, 211 . . . antenna, 212 . . . transmitting section, 220 . . . receiving wave unit, 221 . . . antenna, 222 . . . detector wave section, 223 . . . intensity sensing section, 230 . . . control section, 240 . . . arithmetic section, 250 . . . pattern information storage section, 301 . . . cap tread, 302 . . . undertread, 303A, 303B . . . belt, 304 . . . carcass, 305 . . . tire main body, 306 . . . rim, 307 . . . wheel, 310 . . . brake disc, 320 . . . wheel carrier, 410 . . . engine, 411 . . . accelerator pedal, 412 . . . sub-throttle actuator, 413 . . . main throttle position sensor, 414 . . . sub-throttle position sensor, 421 . . . steering wheel, 422 . . . rudder angle sensor, 510, 520 . . . rotation number sensor, 610 . . . brake pedal, 620 . . . master cylinder, 630 . . . pressure control valve, 640 . . . brake drive actuator, 700 . . . stability control unit, 10 . . . semi conductor acceleration sensor, 11 . . . pedestal, 12 . . . silicon substrate, 13 . . . diaphragm, 13a to 13d . . . diaphragm piece, 14 . . . thick film section, 15 . . . plumb bob, 18A, 18B . . . support body, 181 . . . outer frame section, 182 . . . supporting column, 183 . . . cantilever section, 184 . . . protrusion section, 184a . . . protrusion-section tip end, 31A to 31C . . . voltage sensing section, 32A to 32C . . . direct current power supply, Rx1 to Rx4, Ry1 to Ry4, Rz1 to Rz4 . . . piezo resistor (diffusion resistor)

BEST MODE FOR CARRYING OUT THE INVENTION

[0099] One embodiment of the present invention will be described below with respect to the drawings.

[0100] In the present embodiment, there will be described an example in which a tire ground contact pattern specifying device according to the present invention is applied to a four-wheel vehicle drive control system.

[0101] FIG. 1 is an external view showing the arrangement of a monitor device and sensor unit according to one embodiment of the present invention. FIG. 2 is a view for explaining the location of placement of the sensor unit in a tire according to the one embodiment of the present invention. FIG. 3 is a view showing a tire inside a tire house according to the one embodiment of the present invention. FIG. 4 is a view showing a rotation mechanism section according to the one embodiment of the present invention. FIG. 5 is a configuration diagram showing a vehicle drive control system according to the one embodiment of the present invention.

[0102] In FIGS. 1 to 3, reference numeral 1 denotes a vehicle, 2 denotes a tire (wheel), 3 denotes an axle, 100 denotes a sensor unit, and 200 denotes a monitor device. According to the present embodiment, in the sensor unit 100 and the monitor device 200, respective electrical circuits are contained in a small housing having insulation properties and radio wave transparency. Four sensor units 100 are each attached to the tire 2 of the vehicle 1, and four monitor units 200 are disposed in respective tire houses 4. The sensor units 100 correspond to the monitor devices 200, respectively. In the present embodiment, a pair of the sensor unit 100 and monitor device 200 constitutes the tire ground contact pattern specifying device of the present invention.

[0103] The tire 2 is, for example, a known tubeless radial tire, and includes according to the present embodiment, a wheel and rim. The tire 2 is composed of a tire main body 305, a rim 306 and a wheel 307. The tire main body 305 is com-

posed of a known cap tread **301**, an undertread **302**, belts **303A** and **303B**, a carcass **304**, and so on. Also, according to the present embodiment, as shown in FIG. 3, the tire **2** includes the sensor unit **100**, and this sensor unit **100** is secured to the rim **306**.

[0104] In the present embodiment, the following description will be given with the rotation direction of the tire **2** being X axis direction, the rotation axis direction of the tire **2** being Y axis direction, and the radius direction around the rotation axis of the tire **2** being Z axis direction. In the present embodiment, the sensor unit **100** is secured to the rim **306** of the tire **2**, but the location of placement of the sensor unit **100** is not limited to the rim **306**; any rotating portion within the rotation mechanism section causing the tire **2** to rotate is possible. For example, as shown in FIG. 4, the rotation mechanism section includes a brake disk **310** rotating along with the axle **3**, a wheel carrier **320** for holding the wheel **307** of the tire **2**, and rotating bodies of the tire **2** such as the tire main body **305** and the rim **306**. Accordingly, if the sensor unit **100** is secured to the brake disk **310**, the wheel carrier **320** or the like, even when the tire main body **305** is changed along with the wheel **307**, the same sensor unit **100** can be used.

[0105] In FIG. 5, reference numeral **2** denotes a tire; **3** an axle; **100** a sensor unit; **200** a monitor device; **410** an engine; **411** an accelerator pedal; **412** a sub-throttle actuator; **413** a main throttle position sensor; **414** a sub-throttle position sensor; **421** a steering wheel; **422** a rudder angle sensor; **510** and **520** a tire rotation number sensor; **610** a brake pedal; **620** a brake master cylinder; **630** a pressure control valve controlling brake oil pressure; **640** a brake drive actuator; **700** a stability control unit.

[0106] The stability control unit **700** is constituted of a control circuit including a known CPU and imports a sensing result outputted from the sensors **510** and **520** sensing a rotation number of each tire **2** attached to the vehicle **1** and a sensing result outputted from the throttle position sensors **413** and **414**, the rudder angle sensor **422** and the monitor device **200** to perform stability control.

[0107] More specifically, at the time of acceleration, the accelerator pedal **411** is pushed down to open the main throttle, whereby fuel is sent into the engine **410** to increase the rotation number of the engine **410**. At the time of braking, the brake pedal **610** is pushed down to increase the oil pressure within the master cylinder **620**, and this oil pressure is transmitted via the pressure control valve to the brake drive actuator **640** of each tire **2**, whereby braking force is applied to the rotation of each tire **2**.

[0108] The stability control unit **700** performs the electrical control of the operation state of the sub-throttle actuator **412** based on a sensing result outputted from the sensors **510** and **520** sensing a rotation number of each tire **2**, a sensing result of the rudder angle sensor **422**, and a sensing result outputted from the monitor device **200**. Further, the stability control unit **700** performs the electrical control of the operation state of each pressure control valve **630** and thereby controls the drive of the brake drive actuator **640** to hold the stability of the vehicle and at the same time, performs automatic control to prevent the tire **2** from being locked and slipping.

[0109] The sensor unit **100** is, as described above, secured to a predetermined position in the rim **306** of the tire **2**, and a later-described acceleration sensor arranged in this sensor unit **100** senses accelerations in the directions of the X axis, Y axis and Z axis in each tire **2**. The sensed accelerations are converted into a digital value. Also, the sensor unit **100** con-

verts into a digital signal a signal obtained by applying a later-described predetermined processing to the digital values of the sensed accelerations and the sensed acceleration signals. Further, the sensor unit **100** generates and transmits digital information including these digital values. In this digital information, in addition to the acceleration digital values, there is included identification information unique to each sensor unit **100**.

[0110] As an illustrative example of the electrical circuit of the sensor unit **100**, there is a circuit shown in FIG. 6. More specifically, in the illustrative example shown in FIG. 6, the sensor unit **100** is constituted of an antenna **110**, an antenna switch **120**, a rectifier circuit **130**, a central processing section **140**, a transmitting section **150** and a sensor section **160**.

[0111] The antenna **110** serves to communicate with the monitor device **200** by use of radio wave and is adjusted to a predetermined frequency (first frequency), for example, of 2.4 GHz band.

[0112] The antenna switch **120** is composed of an electrical switch or the like, for example, and performs, according to control from the central processing section **140**, the switching between the connection between the antenna **110** and rectifier circuit **130** and the connection between the antenna **110** and transmitting section **150**.

[0113] The rectifier circuit **130** is composed of diodes **131** and **132**, a capacitor **133** and a resistor **134**, constituting a known full-wave rectifier circuit. To the input side of this rectifier circuit **130**, there is connected the antenna **110** via the antenna switch **120**. The rectifier circuit **130** rectifies high frequency current induced in the antenna **110** to convert it into direct current and outputs this as a drive power source for the central processing section **140**, the transmitting section **150** and the sensor section **160**. As the capacitor **133**, there is used a known super capacitor known as high-capacity capacitor.

[0114] The central processing section **140** is constituted of a known CPU **141**, a digital/analog (hereinafter referred to as "D/A") converter circuit **142** and a storage section **143**.

[0115] The CPU **141** operates based on a program stored in a semiconductor memory of the storage section **143** and when driven by receiving electric energy, performs a processing of generating digital information including an acceleration sensing result acquired from sensor section **160** and other digital values and later-described identification information, and sending this digital information to the monitor device **200**. In the storage section **143**, there is preliminarily stored the identification information unique to the sensor unit **100**. According to the present embodiment, programming is made such that the central processing section **140** performs transmitting for 0.30 milliseconds at an interval of 0.45 milliseconds to send the digital information to the monitor device **200**. However, these time values are preferably set according to system configuration.

[0116] The storage section **143** is composed of an ROM having recorded thereon a program for operating the CPU **141**, and an electrically rewritable nonvolatile semiconductor memory such as an EEPROM (electrically erasable programmable read-only memory). The identification information unique to each sensor unit **100** is preliminarily stored in an area designated as non-rewritable area in the storage section **143** during manufacture.

[0117] The transmitting section **150** is constituted of an oscillator circuit **151**, a modulator circuit **152** and a high-frequency amplifier circuit **153** and modulates by the modulator circuit **152**, a carrier wave of a frequency of 2.45 GHz

band generated by the oscillator circuit **151** composed of a known PLL circuit etc. based on an information signal received from the central processing section **140**, and supplies this as a high-frequency current of a predetermined frequency (second frequency) of 2.45 GHz band different from the first frequency to the antenna **110** via the high-frequency amplifier circuit **153** and antenna switch **120**. In the present embodiment, the first frequency and second frequency are set to a different frequency. However, the first frequency and second frequency may be set to the same frequency and the transmitting/receiving timing between the sensor unit **100** and monitor device **200** may be synchronized.

[0118] The sensor section **160** is constituted of an acceleration sensor **10**, a signal processing circuit **161** and an A/D converter section **162**.

[0119] The acceleration sensor **10** is constituted of a semiconductor acceleration sensor formed of MEMS (Micro Electro Mechanical Systems) as shown in FIGS. 7 to 10.

[0120] FIG. 7 is an external perspective diagram showing a semiconductor acceleration sensor according to the one embodiment of the present invention. FIG. 8 is a cross-sectional view observed from the arrow direction along the line B-B of FIG. 7. FIG. 9 is a cross-sectional view observed from the arrow direction along the line C-C of FIG. 7. FIG. 10 is an exploded perspective diagram.

[0121] In the drawings, reference numeral **10** denotes a semiconductor acceleration sensor which is constituted of a pedestal **11**, a silicon substrate **12** and support bodies **19A** and **19B**.

[0122] The pedestal **11** has a rectangular frame shape. On one opening surface of the pedestal **11**, there is mounted the silicon substrate **12** (silicon wafer). To the outer-circumferential section of the pedestal **11**, there is secured an outer frame section **191** of the support bodies **19A** and **19B**.

[0123] In the opening of the pedestal **11**, there is disposed the silicon substrate **12**; in the central part within the wafer outer-circumferential frame section **12a**, there is formed a diaphragm **13** of thin film having a cross shape; on the upper surface of each of the diaphragm pieces **13a** to **13d**, there are formed piezo resistors (diffusion resistors) Rx1 to Rx4, Ry1 to Ry4, Rz1 to Rz4.

[0124] More specifically, of the diaphragm pieces **13a** and **13b** disposed on a single line, in one diaphragm piece **13a**, there are formed the piezo resistors Rx1, Rx2, Rz1 and Rz2; in the other diaphragm piece **13b**, there are formed the piezo resistors Rx3, Rx4, Rz3 and Rz4. Also, of the diaphragm pieces **13c** and **13d** disposed in a single line orthogonal to the diaphragm pieces **13a** and **13b**, in one diaphragm piece **13c**, there are formed the piezo resistors Ry1 and Ry2; in the other diaphragm piece **13d**, there are formed the piezo resistors Ry3 and Ry4. Further, these piezo resistors Rx1 to Rx4, Ry1 to Ry4, and Rz1 to Rz4 are connected as shown in FIG. 11 so that they can constitute a resistor bridge circuit for sensing accelerations in the directions of the X axis, Y axis and Z axis orthogonal to each other. The piezo resistors are connected to connection electrodes **191** disposed on the surface of the outer-circumferential section of the silicon substrate **12**.

[0125] Further, on one face side of the central part of the diaphragm **13** in the crossing section of the diaphragm pieces **13a** to **13d**, there is formed a thick film section **14**; on the surface of the thick film section **14**, there is mounted a plumb bob **15** having a rectangular solid shape, made of, for example, glass.

[0126] Meanwhile, the above described support bodies **18A** and **18B** are each constituted of the outer frame section **181** having a rectangular frame shape, four supporting columns **182** installed in the four corners of the fixed section, a cantilever section **183** having a cross shape disposed so as to join the tip ends of each supporting column, and a protrusion section **184** having a cone shape disposed in the central, crossing part of the cantilever section **183**.

[0127] The outer frame section **181** is fit and secured into the outer-circumferential section of the pedestal **11** to be secured, so that the protrusion section **184** is positioned in the other face side of the diaphragm **13**, i.e., in the side where there is not the plumb bob **15**. Here, a setting is made such that the tip end **184a** of the protrusion section **184** is positioned at distance **D1** from the surface of the diaphragm **13** or plumb bob **15**. The distance **D1** is set to a value in which the displacement of each of the diaphragm pieces **13a** to **13d** can be limited by the protrusion section **184** so that the diaphragm pieces are not stretched excessively even when an acceleration is generated in a direction orthogonal to the face of the diaphragm **13** and force having a predetermined value or more caused by the acceleration is exerted on both face sides of the diaphragm **13**.

[0128] Also, the acceleration sensor **10** is configured so that sensing is possible up to an acceleration larger by a predetermined amount than a maximum acceleration produced by rotation of the tire **2** in each of the directions of the X axis, Y axis and Z axis. For example, when the maximum acceleration produced by rotation of the tire **2** is $\pm nG$ (n being an integer), sensing is possible up to $\pm 3nG$.

[0129] When the semiconductor acceleration sensor **10** having the above configuration is used, three resistor bridge circuits are constructed as shown in FIGS. 12 to 14. More specifically, in a bridge circuit for sensing an acceleration in a direction of the X axis, as shown in FIG. 12, the positive electrode of a direct current power source **32A** is connected to a connection point between one end of a piezo resistor Rx1 and one end of a piezo resistor Rx2, and the negative electrode of the direct current power source **32A** is connected to a connection point between one end of a piezo resistor Rx3 and one end of a piezo resistor Rx4. Further, one end of a voltage sensing unit **31A** is connected to a connection point between the other end of the piezo resistor Rx1 and the other end of the piezo resistor Rx4, and the other end of the voltage sensing unit **31A** is connected to a connection point between the other end of the piezo resistor Rx2 and the other end of the piezo resistor Rx3.

[0130] Also, in a bridge circuit for sensing an acceleration in a direction of the Y axis, as shown in FIG. 13, the positive electrode of a direct current power source **32B** is connected to a connection point between one end of a piezo resistor Ry1 and one end of a piezo resistor Ry2, and the negative electrode of the direct current power source **32B** is connected to a connection point between one end of a piezo resistor Ry3 and one end of a piezo resistor Ry4. Further, one end of a voltage sensing unit **31B** is connected to a connection point between the other end of the piezo resistor Ry1 and the other end of the piezo resistor Ry4, and the other end of the voltage sensing unit **31B** is connected to a connection point between the other end of the piezo resistor Ry2 and the other end of the piezo resistor Ry3.

[0131] In a bridge circuit for sensing an acceleration in a direction of the Z axis, as shown in FIG. 14, the positive electrode of a direct current power source **32C** is connected to

a connection point between one end of a piezo resistor Rz1 and one end of a piezo resistor Rz2, and the negative electrode of the direct current power source 32C is connected to a connection point between one end of a piezo resistor Rz3 and one end of a piezo resistor Rz4. Further, one end of a voltage sensing unit 31C is connected to a connection point between the other end of the piezo resistor Rz1 and the other end of the piezo resistor Rz3, and the other end of the voltage sensing unit 31C is connected to a connection point between the other end of the piezo resistor Rz2 and the other end of the piezo resistor Rz4.

[0132] With the semiconductor acceleration sensor 10 having the above configuration, when force generated in association with acceleration applied to the sensor 10 is exerted on the plumb bob 15, distortion occurs in each of the diaphragm pieces 13a to 13d, whereby the resistance value of the piezo resistors Rx1 to Rx4, Ry1 to Ry4 and Rz1 to Rz4 changes. Accordingly, by forming the resistor bridge circuit with the piezo resistors Rx1 to Rx4, Ry1 to Ry4 and Rz1 to Rz4 disposed in each of the diaphragm pieces 13a to 13d, accelerations in the directions of the X axis, Y axis and Z axis orthogonal to each other can be sensed.

[0133] Further, as shown in FIGS. 15 and 16, in a case where there is applied an acceleration such that force 41 or 42 including a force component in a direction orthogonal to the face of the diaphragm 13 is exerted, when force of a predetermined value or more is exerted on the other face side of the diaphragm 13, the diaphragm 13 is distorted and stretched in a direction of the force 41 or 42 being exerted. However, the displacement is limited by being supported by the apex 184a of the protrusion section 184, so each of the diaphragm pieces 13a to 13d cannot be stretched to a maximum. Accordingly, even when force of a predetermined value or more is exerted on the other face side of the diaphragm 13, also, the position of the plumb bob 15 changes with the apex 184a of the protrusion section 184 working as the supporting point, so an acceleration in a direction parallel to the face of the diaphragm 13 can be sensed.

[0134] With the above described semiconductor acceleration sensor 10, as shown in FIG. 2, when the vehicle is running, accelerations generated in the directions of the X axis, Y axis and Z axis orthogonal to each other in each of the four tires 2 of the vehicle can be sensed. Also, the grip of the tire 2 can be estimated from the acceleration in a direction of the Z axis.

[0135] The signal processing circuit 161 as shown in FIG. 17 is constituted of voltage generation circuits 160-01 to 161-03, a basic wave elimination circuit 161-10, a first separation circuit 161-20, a second separation circuit 161-30 and an arithmetic circuit 161-40.

[0136] The voltage generation circuits 160-01 to 161-03 are each constituted of a bridge circuit as described above having connected therein piezo resistors of the acceleration sensor 10. The voltage generation circuits 160-01 has connected therein piezo resistors for sensing an acceleration in a direction of the X axis and outputs signal voltage Xa corresponding to the acceleration in a direction of the X axis. The voltage generation circuits 160-02 has connected therein piezo resistors for sensing an acceleration in a direction of the Y axis and outputs signal voltage Ya corresponding to the acceleration in a direction of the Y axis. The voltage generation circuits 160-03 has connected therein piezo resistors for

sensing an acceleration in a direction of the Z axis and outputs signal voltage Za corresponding to the acceleration in a direction of the Z axis.

[0137] The basic wave elimination circuit 161-10 is constituted of an amplifier circuit 161-11, a low-pass filter (L.P.F) 161-12, a phase inverter circuit 161-13 and an arithmetic circuit 161-14.

[0138] The amplifier 161-11 receives Z axis direction acceleration signal voltage Za, amplifies this and outputs it to the low-pass filter 161-12 and the arithmetic circuit 161-14.

[0139] The low-pass filter 161-12 is constituted of a known active filter and its cutoff frequency is set, for example to 200 Hz, allowing passage of only a signal component of 200 Hz or less.

[0140] The phase inverter circuit 161-13 inverts by 180 degrees the phase of a voltage signal outputted from the low-pass filter 161-12 and performs outputting.

[0141] The arithmetic circuit 161-14 receives an output signal from the amplifier circuit 161-11 and an output signal from the phase inverter circuit 161-13 and outputs a signal obtained by adding these two signals as ground contact pattern determination signal NS.

[0142] The first separation circuit 161-20 is a circuit extracting a signal of a frequency equal to or less than a predetermined frequency from the ground contact pattern determination signal NS, and constituted of a low-pass filter 161-21, band-pass filters (B.P.F.) 161-22 and 161-23, and an arithmetic circuit 161-24.

[0143] The low-pass filter 161-21 which is constituted of a known active filter and whose cutoff frequency is set, for example to 50 Hz, receives the ground contact pattern determination signal NS, allowing passage of only a signal component of 50 Hz or less.

[0144] The band-pass filter 161-22 is constituted of a known active filter and receives the ground contact pattern determination signal NS and allows passage of a signal of a frequency between 50 Hz to 200 Hz.

[0145] The band-pass filter 161-23 is constituted of a known active filter and receives the ground contact pattern determination signal NS and allows passage of a signal of a frequency between 200 Hz to 400 Hz.

[0146] The arithmetic circuit 161-24 receives three signals outputted, respectively, from the low-pass filter 161-21 and band-pass filters (B.P.F.) 161-22 and 161-23 and outputs a signal LS obtained by adding (combining) these three signals.

[0147] The reason why the first separation circuit 161-20 includes the low-pass filter 161-21 and band-pass filter 161-22 is as follows. That is, when a gravity acceleration component is eliminated in the basic wave elimination circuit 161-10, it is expected that any noise component of 200 Hz or less is also eliminated. However, the cutoff frequency characteristic of the low-pass filter 161-12 has a slope. Therefore, due to this slope portion, a noise component of 200 Hz or less is also outputted from the basic wave elimination circuit 161-10.

[0148] The second separation circuit 161-30 is a circuit extracting a signal of a higher frequency equal to or higher than a predetermined frequency from the ground contact pattern determination signal NS, and constituted of band-pass filters (B.P.F.) 161-31 and 161-32, a high-pass filter 161-33 and an arithmetic circuit 161-34.

[0149] The band-pass filter 161-31 is constituted of a known active filter and receives the ground contact pattern

determination signal NS and allows passage of a signal of a frequency between 600 Hz to 1000 Hz.

[0150] The band-pass filter **161-32** is constituted of a known active filter and receives the ground contact pattern determination signal NS and allows passage of a signal of a frequency between 1000 Hz to 1500 Hz.

[0151] The high-pass filter **161-33** which is constituted of a known active filter and whose cutoff frequency is set, for example to 1500 Hz, receives the ground contact pattern determination signal NS, allowing passage of only a signal component of 1500 Hz or more.

[0152] The arithmetic circuit **161-34** receives three signals outputted, respectively, from the band-pass filters (B.P.F.) **161-31** and **161-32** and the high-pass filter **161-33** and outputs a signal HS obtained by adding (combining) these three signals.

[0153] The arithmetic circuit **161-40** adds the signal LS outputted from the first separation circuit **161-20** and the signal HS outputted from the second separation circuit **161-30** and at the same time, outputs a combination signal PS obtained by subtracting the Y axis acceleration signal Ya from this addition signal.

[0154] As described above, the signal processing circuit **161** outputs to the A/D converter circuit **162**, six signals, i.e., the X axis direction acceleration signal Xa, the Y axis direction acceleration signal Ya, the Z axis direction acceleration signal Za, the low frequency component signal LS of the ground contact pattern determination signal NS, the high frequency component signal HS of the ground contact pattern determination signal NS, and the combination signal PS.

[0155] The reason why the first separation circuit **161-20** and the second separation circuit **161-30** each have, as described above, plural filters connected in parallel is to reduce phase shifting of a passing signal. More specifically, when only one filter is used, its pass frequency bandwidth is broad, so a large difference in transmittance phase can occur between the lower frequency signal and higher frequency signal in the pass frequency band. However, when plural filters each having a narrower pass frequency bandwidth is provided, as with the present embodiment, to achieve a broader pass frequency bandwidth as a whole, it is possible to minimize phase shifting ascribable to a difference in passing signal frequency between the respective filters and further, and also to minimize signal phase shifting as a whole.

[0156] According to the present embodiment, in each of the first separation circuit **161-20** extracting the low frequency component from the ground contact pattern determination signal NS and the second separation circuit **161-30** extracting the high frequency component from the ground contact pattern determination signal NS, there are included three filters. However, the present invention is not limited thereto; as the number of filters increases, phase shifting of a passing signal can be reduced, so it is preferred that this number is appropriately set to two or more.

[0157] Also, according to the present embodiment, each filter is constituted of an active filter, but the present invention is not limited thereto. However, compared to typical LC type filter, active filter has a smaller signal delay time constant and has no electrical charge accumulated therein. Therefore, it is suitable for the signal high-speed real time processing as in the present embodiment.

[0158] The A/D converter section **162** converts each of the six analog electrical signal outputted from the signal processing circuit **161** into a digital signal and outputs the digital signal to the CPU **141**.

[0159] Accordingly, from the sensor unit **100**, there are transmitted to the monitor device **200** the X axis direction acceleration signal Xa, the Y axis direction acceleration signal Ya, the Z axis direction acceleration signal Za, the low frequency component signal LS of the ground contact pattern determination signal NS, the high frequency component signal HS of the ground contact pattern determination signal NS, and the combination signal PS as digital information.

[0160] As the acceleration generated in each of the directions of the X axis, Y axis and Z axis, there are positive direction acceleration and negative direction acceleration. In the present embodiment, both accelerations can be sensed.

[0161] Also, according to the present embodiment, as described above, a frequency of 2.45 GHz band is used as the first and second frequencies. Thus, susceptibleness to effects of metal is reduced. In order to reduce susceptibleness to effects of metal, a frequency of 1 GHz or more is preferably used as the first and second frequencies.

[0162] The monitor device **200** is connected to the stability control unit **700** via a cable and is operated by electric energy sent from the stability control unit **700**.

[0163] As shown in FIG. **18**, the electrical circuit of the monitor device **200** is constituted of a memory circuit including a radiation unit (power supplying section) **210**, a receiving unit **220**, a control section **230**, an arithmetic section **240** and a pattern information storage section **250**. Here, the control section **230** and the arithmetic section **240** are each constituted of a known CPU, an ROM having stored therein a program causing this CPU to operate, and an RAM required to perform an arithmetic processing.

[0164] The radiation unit **210** is constituted of an antenna **211** for radiating a radio wave of a predetermined frequency of 2.45 GHz band (the above first frequency) and a transmitting section **212** and radiates a radio wave of the above first frequency via the antenna **211** based on an instruction from the control section **230**.

[0165] Examples of the transmitting section **212** include a configuration composed of the oscillator circuit **151**, modulator circuit **152** and high frequency amplifier circuit **153** similarly to the transmitting section **150** of the sensor unit **100**. Accordingly, a radio wave of 2.45 GHz is radiated from the antenna **211**. The high frequency power outputted from the transmitting section **212** is set approximately to a value which makes it possible to supply electric energy from the antenna **211** of the monitor device **200** for radiating a radio wave to the sensor unit **100**.

[0166] The receiver unit **220** is constituted of an antenna **221** for receiving a radio wave of a predetermined frequency (the second frequency) of 2.45 GHz band and a detector section **222**, and detects the radio wave of the second frequency received by the antenna **221** based on an instruction from the control section **230** and converts a signal obtained by detecting the radio wave into a digital signal and outputs the digital signal to the arithmetic section **250**. Examples of the detector section **222** include a circuit constituted of a diode and an analog/digital converter etc. converting a signal being the result of being detected by this diode into digital data.

[0167] When electric energy is supplied from the stability control unit **700** to initiate the operation of the control section **230**, the control section **230** drives the detector section **222** at

all times so that the digital signal is outputted from the detector section 222 to the arithmetic section 240.

[0168] The arithmetic section 240 calculates the above acceleration based on the digital signal outputted from the detector section 222 and outputs it to the stability control unit 700 and at the same time, compares the information stored in the pattern information storage section 250 and the ground contact pattern information outputted from the detector section 222 to specify a ground contact pattern of each tire 2 and outputs the resultant information to the stability control unit 700.

[0169] The pattern information storage section 250 includes, for example, an information storage element such as ROM. In this information storage element, there are preliminarily stored the above described the low frequency component signal LS of the ground contact pattern determination signal NS, the high frequency component signal HS of the ground contact pattern determination signal NS, the combination signal PS and the ground contact pattern information of the tire 2, which are associated with each other. This associating is based on the result etc. of an experiment preliminarily performed. Also, the ground contact pattern information includes information on tire ground contact area, information on tire ground contact region, information on ground contact pressure, and so on with respect to running road surface.

[0170] The operation of the system having the above described configuration will now be described with reference to the drawings. FIGS. 19 to 21 each show the measurement result of acceleration in a Z axis direction; FIGS. 22 to 24 each show the measurement result of acceleration in an X axis direction; FIGS. 25 and 26 each show the measurement result of acceleration in a Y axis direction; FIG. 27 shows the measurement result of acceleration in an X axis direction at the time of applying the brake; FIG. 28 shows the measurement result of acceleration in a Z axis direction at the time of applying the brake.

[0171] Referring to FIGS. 19 to 21, FIG. 19 shows the measurement value of acceleration in a Z axis direction when the vehicle is running at a speed of 2.5 km per hour; FIG. 20 shows the measurement value of acceleration in a Z axis direction when the vehicle is running at a speed of 20 km per hour; FIG. 21 shows the measurement value of acceleration in a Z axis direction when the vehicle is running at a speed of 40 km per hour. In this manner, as the running speed increases, centrifugal force becomes larger, so the acceleration in a Z axis direction also becomes larger. Accordingly, the running speed can be determined from the acceleration in a Z axis direction.

[0172] In the drawings, the measurement value has a sinusoidal waveform because of being affected by gravity acceleration. More specifically, when the sensor unit 100 is positioned at the uppermost part of the tire 2, the acceleration in a Z axis direction is obtained by subtracting gravity from centrifugal force; when the sensor unit 100 is positioned at the lowermost part of the tire 2, the acceleration in a Z axis direction is obtained by adding gravity to centrifugal force.

[0173] According to the present embodiment, since a radio wave is radiated from the radiation unit 210, a voltage of 3 V or more used as electric energy sufficient to drive the sensor unit 100 at all times can be accumulated in the capacitor 133.

[0174] Referring to FIGS. 22 to 24, FIG. 22 shows the measurement value of acceleration in an X axis direction when the vehicle is running at a speed of 2.5 km per hour;

FIG. 23 shows the measurement value of acceleration in an X axis direction when the vehicle is running at a speed of 20 km per hour; FIG. 24 shows the measurement value of acceleration in an X axis direction when the vehicle is running at a speed of 40 km per hour. In this manner, as the running speed increases, the number of wheel rotations becomes larger, so the cycle of fluctuation of the X axis direction acceleration becomes shorter. Accordingly, the number of wheel rotations can be determined from the acceleration in an X axis direction. In the drawings, the measurement value has a sinusoidal waveform because of being affected by gravity acceleration similarly to the above described measurement value.

[0175] FIG. 25 shows the measurement value of acceleration in a Y axis direction when the steering wheel is turned to the right during running of the vehicle. FIG. 26 shows the measurement value of acceleration in a Y axis direction when the steering wheel is turned to the left during running of the vehicle. In this manner, when the steering wheel is turned to swing the tire 2 (wheel) to the right or left, the acceleration in a Y axis direction emerges noticeably. Also, it will easily be appreciated that when the vehicle body skids, also, the acceleration in a Y axis direction emerges similarly. In each of the above measurement values in a Y axis direction, acceleration in a reverse direction is observed because the driver turns slightly the steering wheel in a reverse direction unconsciously.

[0176] Also, as shown in FIGS. 27 and 28, it can be accurately sensed that the time period from when the brake is applied (brake ON: when the brake pedal is pushed down) to when the rotation of tire 2 (wheel) stops is about 0.2 seconds.

[0177] When the acceleration generated when the brake pedal 610 is pushed down is sensed, the amount of distortion of tire 2, skid of vehicle body, wheelspin and the like can be estimated, and based on these, the pressure control valve can be controlled when the vehicle is braked.

[0178] Consequently, according to the above described vehicle drive control system, during running of a vehicle, accelerations generated in the directions of the X axis, Y axis and Z axis orthogonal to each other in each of the four tires 2 of the vehicle can be sensed.

[0179] Further, according to the present embodiment, a gravity acceleration signal component of a Z axis direction acceleration signal is eliminated, as shown in FIG. 29, by the basic wave elimination circuit 161-10 of the signal processing circuit 161 to extract a noise component of the Z axis direction acceleration signal. Accordingly, a tire ground contact pattern can be accurately sensed and specified from this noise component. That is, this noise component varies according to tire ground contact pattern.

[0180] According to the present embodiment, in specifying a tire ground contact pattern, for example as shown in FIGS. 30 and 31, there are used the above described low frequency component signal LS of the ground contact pattern determination signal NS, the high frequency component signal HS of the ground contact pattern determination signal NS, and the combination signal PS.

[0181] As shown in FIG. 30, for example, when the contact area between the tire and running road surface is large as in low speed running, as indicated by tire ground contact patterns TP-L1 and TP-L2, the contact area between the running road surface and the both edge parts of tire tread having a large contact pressure between the tire and the running road surface is large. Consequently, the low frequency noise component becomes large. Also, when the contact area between

the tire and running road surface is small as in high speed running, as indicated by tire ground contact patterns TP-H1 and TP-H2, the contact area between the running road surface and the both edge parts of tire tread having a large contact pressure between the tire and the running road surface is small. Consequently, the high frequency noise component becomes large. Further, when the running vehicle performs cornering or the like to produce a lateral acceleration (Y axis direction acceleration), as indicated by tire ground contact patterns TP-PL1, TP-PR1, TP-PL2 and TP-PR2, polarization in the ground contact part of tire occurs and thus the part having a high contact pressure between the tire and the running road surface occurs in one of the left and right sides of tire tread.

[0182] Also, as shown in FIG. 31, referring to combination signal PS, when positive and negative quantities of the combination signal PS are approximately equal to each other as in combination signal PS1, the tire contacts the running road surface without polarization. Further, in this case, when the low frequency component signal LS is larger than the high frequency component signal HS, the region having high ground contact pressure becomes large in both edge parts of tread as indicated by ground contact pattern TP-A; when the low frequency component signal LS is smaller than the high frequency component signal IS, the region having high ground contact pressure becomes small in both edge parts of tread as indicated by ground contact pattern TP-B.

[0183] Also, when the whole combination signal PS has positive direction polarization as in combination signal PS2, i.e., when $-Y$ direction acceleration occurs, the tire contacts the running road surface, while inclining to the right side. Further, in this case, when the low-frequency component signal LS is larger than the high frequency component signal HS, the region having high ground contact pressure becomes large in the right edge part of tread as indicated by ground contact pattern TP-C; when the low frequency component signal LS is smaller than the high frequency component signal HS, the region having high ground contact pressure becomes small in the right edge part of tread as indicated by ground contact pattern TP-D.

[0184] Also, when whole the combination signal PS has negative direction polarization as in combination signal PS3, i.e., when $+Y$ direction acceleration occurs, the tire contacts the running road surface, while inclining to the left side. Further, in this case, when the low frequency component signal LS is larger than the high frequency component signal HS, the region having high ground contact pressure becomes large in the left edge part of tread as indicated by ground contact pattern TP-E; when the low frequency component signal LS is smaller than the high frequency component signal HS, the region having high ground contact pressure becomes small in the left edge part of tread as indicated by ground contact pattern TP-F. The area of the region having high ground contact pressure varies according to vehicle running speed, air pressure within tire (air pressure within tire also varies according to tire temperature) and Y axis direction acceleration generated by cornering or the like.

[0185] These various tire ground contact patterns and information on low frequency component signal LS, high frequency component signal HS and combination signal PS are preliminarily determined by actual measurements and stored in the pattern information storage section 250. Accordingly, during running of a vehicle, based on the low frequency component signal LS of the ground contact pattern determi-

nation signal NS, the high frequency component signal HS of the ground contact pattern determination signal NS and the combination signal PS, ground contact patterns of each tire can be specified in real-time.

[0186] Also, in order to surely sense a noise component added to the acceleration signal, according to the present embodiment, as described above, the acceleration sensor 10 is configured such that sensing can be performed in each of X axis, Y axis and Z axis directions up to an acceleration larger by a predetermined amount than a maximum acceleration generated by rotation of tire 2, e.g., up to an acceleration of $\pm 3nG$ when the maximum acceleration generated by rotation of tire 2 is $\pm nG$ (n being an integer).

[0187] As described above, a tire ground contact pattern can be determined and specified from a Z axis direction acceleration and at the same time, based on information on each acceleration, grip or floating of tire 2 can be estimated. Thus, the amount of distortion of tire 2, skid of vehicle body, wheelspin and the like can be estimated, and based on these, the above described respective actuators can be controlled to stabilize running.

[0188] For example, as shown in FIG. 32, in a case where a tire ground contact pattern is sensed in which a large right direction acceleration occurs in the right rear part (RR) tire and the ground contact area of the left edge part of tire tread increases and the ground contact area of the right edge part of tire tread decreases, if correction control by stability control is not performed, the vehicle does not go straight and curves; but if correction control is performed based on the above described sensing results, the vehicle can go straight stably.

[0189] Now, as a second embodiment of the present invention, there will be described a method for specifying a tire ground contact pattern based on a tire ground contact pattern determined when running is performed at a predetermined reference speed, and reference information on low frequency component signal LS, high frequency component signal HS, combination signal PS and the like.

[0190] First, from acceleration signals in the directions of the X axis, Y axis and Z axis sensed by a sensor unit 100 when running is performed at a predetermined reference speed, a low frequency component signal LS, high frequency component signal HS and combination signal PS are determined, and are stored as reference information in a pattern information storage section 250 along with the acceleration signals in the directions of the X axis, Y axis and Z axis. Here, if the reference speed is set lower than a speed of 5 kilometers per hour, or reversely set higher than a speed of 40 kilometers per hour, then it is difficult to extract a ground contact pattern signal NS. Consequently, the reference speed is preferably set to a speed of 10 kilometers per hour.

[0191] In specifying a tire ground contact pattern, a Z axis direction acceleration signal sensed by the sensor unit 100 mounted in the running vehicle is supplied to a basic wave elimination circuit 161-10 to extract a ground contact pattern signal NS (step S1 of FIG. 33). Then, a low frequency component signal LS and high frequency component signal HS are determined, as shown in FIG. 17, from the extracted ground contact pattern signal NS, and based on the signals LS and HS and a Y axis direction acceleration signal, a combination signal PS is determined (step S2 of FIG. 33).

[0192] The determined low frequency component signal LS, high frequency component signal HS and combination signal PS are compared with the low frequency component signal LS etc. stored in the pattern information storage section

250 to specify a tire ground contact pattern (step **S3** of FIG. **33**). For example, when positive and negative quantities of the combination signal **PS** stored in the pattern information storage section **250** are approximately equal to each other as in the combination signal **PS1** shown in FIG. **30**, if the whole combination signal **PS** determined has positive direction polarization with respect to positive/negative quantity, it can be seen that the tire contacts the running road surface, while inclining to the right side. Further, the area of a region having high ground contact pressure can be determined by comparing the amplitude between low frequency component signal **LS** and high frequency component signal **HS** and at the same time, by vehicle running speed, air pressure within tire and **Y** axis direction acceleration. Here, the vehicle running speed can be determined by comparing the **Z** axis direction acceleration signal sensed during running with the **Z** axis direction acceleration signal stored in the pattern information storage section **250**.

[0193] In this manner, when comparison with the signal output of each speed is made based on the reference information including signals determined when running is performed at a predetermined reference speed, a tire ground contact pattern can be specified. Accordingly, a tire ground contact pattern at the time of high speed running can also be simulated by creating pseudo signals etc. at the time of high speed running.

[0194] According to the present embodiment, based on the **Z** axis direction acceleration, a tire ground contact pattern is determined and specified. However, needless to say, a tire ground contact pattern may be determined and specified based on a sensing result of **X** axis direction acceleration. Similarly to the **Z** axis direction acceleration, the **X** axis direction acceleration also includes a noise component varying according to the running road surface state. Therefore, when this noise component is extracted, a tire ground contact pattern can be determined and specified.

[0195] Also, according to the present embodiment, in the sensor unit **100**, there are produced the low frequency component signal **LS** of ground contact pattern determination signal **NS**, the high frequency component signal **HS** of the ground contact pattern determination signal **NS** and the combination signal **PS**, and these are transmitted to the monitor device **200** along with acceleration signals in the directions of the **X** axis, **Y** axis and **Z** axis. However, the present invention is not limited thereto; it is also possible that the sensor unit **100** transmits acceleration signals in the directions of the **X** axis, **Y** axis and **Z** axis, and in the monitor device **200**, based on these, the low frequency component signal **LS** of the ground contact pattern determination signal **NS**, the high frequency component signal **HS** of the ground contact pattern determination signal **NS** and the combination signal **PS** are produced.

[0196] Also, according to the present embodiment, in the sensor unit **100**, there are sensed accelerations in the directions of the **X** axis, **Y** axis and **Z** axis, and these are transmitted to the monitor device **200**. However, only the low frequency component signal **LS** of the ground contact pattern determination signal **NS**, the high frequency component signal **HS** of the ground contact pattern determination signal **NS** and the combination signal **PS** may be transmitted from the sensor unit **100** to the monitor device **200**.

[0197] Also, according to the present embodiment, there is produced the signal **PS** obtained by combining the low frequency component signal **LS** of the ground contact pattern

determination signal **NS**, the high frequency component signal **HS** of the ground contact pattern determination signal **NS** and the **Y** axis direction acceleration signal. However, a configuration may be employed such that the combination signal **PS** is not produced and a tire ground contact pattern is specified based on the low frequency component signal **LS**, the high frequency component signal **HS** and the **Y** axis direction acceleration signal. In this case, the low frequency component signal **LS**, high frequency component signal **HS** and **Y** axis direction acceleration signal are associated with the information on tire ground contact area and the information on tire ground contact region with respect to running road surface, and these are preliminarily stored in the pattern information storage section **250**. Also, it is possible, to some extent, that a tire ground contact pattern is specified by two signals, i.e., the low frequency component signal **LS** and high frequency component signal **HS**. In this case, the low frequency component signal **LS** and high frequency component signal **HS** are associated with the information on tire ground contact area and the information on tire ground contact region with respect to running road surface, and these are preliminarily stored in the pattern information storage section **250**.

[0198] Also, according to the present embodiment, in addition to the low frequency component signal **LS** of the ground contact pattern determination signal **NS**, the high frequency component signal **HS** of the ground contact pattern determination signal **NS** and the combination signal **PS**, information on accelerations in the directions of the **X** axis, **Y** axis and **Z** axis generated in the tire **2** is transmitted from the sensor unit **100** to the monitor device **200**. However, it is also possible that the sensor unit **100** includes a sensor sensing physical quantity other than accelerations varying according to the state of tire **2**, e.g., physical quantity such as air pressure and temperature, and this sensing result is transmitted from the sensor unit **100** to monitor device **200**.

[0199] Also, in the monitor device **200**, one antenna may be shared as the transmitting antenna and receiving antenna.

[0200] Also, in the sensor unit **100**, the transmitting antenna and receiving antenna may be individually provided.

[0201] The configuration of the present invention is not limited to the above described embodiments. Many modifications to the embodiments are possible without departing from the gist of the invention.

INDUSTRIAL APPLICABILITY OF THE INVENTION

[0202] Based on accelerations generated in the rotation mechanism allowing a tire to rotate in a running vehicle, a tire ground contact pattern can be specified. Consequently, using this specified tire ground contact pattern, tire distortion quantity, vehicle skid, wheelspin, tire grip and the like can be estimated. Accordingly, when these are used for vehicle brake control, the vehicle drive control can be performed with high accuracy. As a result, the use of the present invention allows proper control during running of the vehicle, contributing to improvement in stability during running.

1. A tire ground contact pattern specifying method for using a device to specify a ground contact pattern with respect to running road surface for a tire of a running vehicle, the device comprising: a sensor unit, disposed in a rotation mechanism section including a rotation body positioned in the vehicle body side, for securing a tire and allowing the tire to rotate and the tire, and having an acceleration sensor sensing at least one of a first acceleration generated in association

with tire rotation in a direction orthogonal to a rotation axis and a second acceleration generated in a direction of rotation, and converting the sensing result into an electrical signal and performing outputting; and pattern information storage means for associating a predetermined low frequency component and a predetermined high frequency component of a ground contact pattern determination signal with tire ground contact pattern information including at least information on tire ground contact area with respect to running road surface, and preliminarily storing the resultant information, the method characterized in that the device:

- eliminates a gravity acceleration component from at least one electrical signal of the sensed first acceleration and second acceleration to generate the ground contact pattern determination signal;
 - separates the predetermined low frequency component and predetermined high frequency component of the ground contact pattern determination signal; and
 - specifies a tire ground contact pattern with respect to running road surface based on the low frequency component and high frequency component obtained by the separation and the information stored in the pattern information storage means.
2. The tire ground contact pattern specifying method according to claim 1, characterized in that: the pattern information storage means associates the tire ground contact pattern information and the low frequency component and high frequency component obtained at the time of running at a predetermined reference speed, and preliminarily stores the resultant information as reference information; and
- the device specifies a tire ground contact pattern with respect to running road surface based on the low frequency component and high frequency component obtained by the separation and the reference information stored in the pattern information storage means.
3. The tire ground contact pattern specifying method according to claim 1, characterized in that: the sensor unit has means for sensing a third acceleration generated in a direction of the rotation axis and converting the sensing result into an electrical signal and perform outputting;
- the pattern information storage means has means for associating tire ground contact pattern information including at least information on tire ground contact area and information on tire ground contact region with respect to running road surface and the low frequency component and high frequency component and the third acceleration, and preliminarily storing the resultant information; and
 - the device specifies a tire ground contact pattern with respect to running road surface based on the low frequency component and high frequency component, the third acceleration and the information stored in the pattern information storage means.
4. The tire ground contact pattern specifying method according to claim 3, characterized in that: the pattern information storage means associates the tire ground contact pattern information and the low frequency component and high frequency component and the third acceleration obtained at the time of running at a predetermined reference speed and preliminarily stores the resultant information as reference information;
- the device specifies a tire ground contact pattern with respect to running road surface based on the low frequency component and high frequency component and

the third acceleration and the reference information stored in the pattern information storage means.

5. The tire ground contact pattern specifying method according to claim 1, characterized in that: the sensor unit has means for sensing a third acceleration generated in a direction of the rotation axis, converting the sensing result into an electrical signal and performing outputting;

- the device has means for combining an electrical signal of the low frequency component and high frequency component with an electrical signal of the third acceleration and outputting an electrical signal obtained by combining these three signals;

- the pattern information storage means has means for associating tire ground contact pattern information including at least information on tire ground contact area and information on tire ground contact region with respect to running road surface and the low frequency component and high frequency component and the combination signal, and preliminarily storing the resultant information; and

- the device specifies a tire ground contact pattern with respect to running road surface based on the low frequency component and high frequency component and the combination signal obtained by the signal combining means and the information stored in the pattern information storage means.

6. The tire ground contact pattern specifying method according to claim 5, characterized in that: the pattern information storage means associates the tire ground contact pattern information and the low frequency component and high frequency component and the combination signal obtained at the time of running at a predetermined reference speed and preliminarily stores the resulting information as reference information; and

- the device specifies a tire ground contact pattern with respect to running road surface based on the low frequency component and high frequency component and the combination signal and the reference information stored in the pattern information storage means.

7. The tire ground contact pattern specifying method according to claim 2, characterized in that the reference speed is 10 kilometers per hour.

8. A tire ground contact pattern specifying device specifying a ground contact pattern with respect to running road surface for a tire of a running vehicle, the device characterized by comprising:

- a sensor unit, disposed in a rotation mechanism section including a rotation body positioned in the vehicle body side, for securing a tire and allowing the tire to rotate and the tire, and having an acceleration sensor sensing at least one of a first acceleration generated in association with tire rotation in a direction orthogonal to a rotation axis and a second acceleration generated in a direction of rotation, and converting the sensing result into an electrical signal and performing outputting;

- means for eliminating a gravity acceleration component from at least one electrical signal of the first acceleration and second acceleration to generate a ground contact pattern determination signal;

- separation means for separating a predetermined low frequency component and a predetermined high frequency component of the ground contact pattern determination signal;

pattern information storage means for associating tire ground contact pattern information including at least information on tire ground contact area with respect to running road surface and the low frequency component and high frequency component, and preliminarily storing the resultant information; and

ground contact pattern specifying means for specifying a tire ground contact pattern based on the low frequency component and high frequency component obtained by the separation means and the information stored in the pattern information storage means, and outputting this tire ground contact pattern information.

9. The tire ground contact pattern specifying device according to claim 8, characterized in that: the pattern information storage means has means for associating the tire ground contact pattern information and the low frequency component and high frequency component obtained at the time of running at a predetermined reference speed, and preliminarily storing the resultant information as reference information;

the device has the ground contact pattern specifying means for specifying a tire ground contact pattern with respect to running road surface based on the low frequency component and high frequency component obtained by the separation means and the reference information stored in the pattern information storage means, and outputting this tire ground contact pattern information.

10. The tire ground contact pattern specifying device according to claim 8, wherein the sensor unit has means for sensing a third acceleration generated in a direction of the rotation axis, converting the sensing result into an electrical signal and performing outputting, the device characterized by comprising:

the pattern information storage means having means for associating tire ground contact pattern information including at least information on tire ground contact area and information on tire ground contact region with respect to running road surface and the low frequency component and high frequency component and the third acceleration, and preliminarily storing the resultant information; and

the ground contact pattern specifying means for specifying a tire ground contact pattern with respect to running road surface based on the low frequency component and high frequency component and the third acceleration and the information stored in the pattern information storage means, and outputting this ground contact pattern information.

11. The tire ground contact pattern specifying device according to claim 10, characterized in that: the pattern information storage means has means for associating the tire ground contact pattern information and the low frequency component and high frequency component and the third acceleration obtained at the time of running at a predetermined reference speed, and preliminarily storing the resulting information as reference information;

the device has the ground contact pattern specifying means for specifying a tire ground contact pattern with respect to running road surface based on the low frequency component and high frequency component, the third acceleration and the reference information stored in the pattern information storage means, and outputting this tire ground contact pattern information.

12. The tire ground contact pattern specifying device according to claim 8, wherein the sensor unit has means for sensing a third acceleration generated in a direction of the rotation axis, converting the sensing result into an electrical signal and performing outputting, the device characterized by comprising: signal combining means for combining an electrical signal of the low frequency component and the high frequency component with an electrical signal of the third acceleration and outputting an electrical signal obtained by combining these three signals;

the pattern information storage means having means for associating tire ground contact pattern information including at least information on tire ground contact area and information on tire ground contact region with respect to running road surface and the low frequency component and high frequency component and the combination signal, and preliminarily storing the resultant information; and

the ground contact pattern specifying means for specifying a tire ground contact pattern with respect to running road surface based on the low frequency component and high frequency component and the combination signal obtained by the signal combining means and the information stored in the pattern information storage means, and outputting this ground contact pattern information.

13. The tire ground contact pattern specifying device according to claim 12, characterized in that: the pattern information storage means has means for associating the tire ground contact pattern information and the low frequency component and high frequency component and the combination signal obtained at the time of running at a predetermined reference speed, and preliminarily storing the resulting information as reference information;

the device has the ground contact pattern specifying means for specifying a tire ground contact pattern with respect to running road surface based on the low frequency component and high frequency component and the combination signal and the reference information stored in the pattern information storage means, and outputting this tire ground contact pattern information.

14. The tire ground contact pattern specifying device according to claim 9 characterized in that the reference speed is 10 kilometers per hour.

15. The tire ground contact pattern specifying device according to claim 8, characterized in that the sensor unit senses accelerations in different directions at one given position.

16. The tire ground contact pattern specifying device according to claim 8, characterized in that sensing can be performed by the acceleration sensor up to an acceleration larger by a predetermined amount than a maximum acceleration generated by rotation of the tire.

17. The tire ground contact pattern specifying device according to claim 8, characterized in that in order to separate the low frequency component, the separation means includes two or more low-pass filters or band-pass filters having a different pass band and has means for performing a parallel processing of the ground contact pattern determination signal by use of each filter and combining and outputting electrical signals outputted from each filter.

18. The tire ground contact pattern specifying device according to claim **8**, characterized in that in order to separate the high frequency component, the separation means includes two or more high-pass filters or band-pass filters having a different pass band and has means for performing a parallel processing of the ground contact pattern determination signal by use of each filter and combining and outputting electrical signals outputted from each filter.

19. The tire ground contact pattern specifying method according to claim **4**, characterized in that the reference speed is 10 kilometers per hour.

20. The tire ground contact pattern specifying method according to claim **6**, characterized in that the reference speed is 10 kilometers per hour.

* * * * *