



US 20190346050A1

(19) **United States**

(12) **Patent Application Publication**  
**Tempel**

(10) **Pub. No.: US 2019/0346050 A1**

(43) **Pub. Date: Nov. 14, 2019**

(54) **DIAPHRAGM VALVE**

**Publication Classification**

(71) Applicant: **Neoperl GmbH**, Mullheim (DE)

(51) **Int. Cl.**  
**F16K 7/17** (2006.01)

(72) Inventor: **Marc Tempel**, Freiburg (DE)

**F16K 27/02** (2006.01)

(73) Assignee: **Neoperl GmbH**, Mullheim (DE)

(52) **U.S. Cl.**  
CPC ..... **F16K 7/17** (2013.01); **F16K 27/0236**  
(2013.01)

(21) Appl. No.: **16/474,755**

(22) PCT Filed: **Nov. 28, 2017**

(57) **ABSTRACT**

(86) PCT No.: **PCT/EP2017/080583**


§ 371 (c)(1),

(2) Date: **Jun. 28, 2019**

(30) **Foreign Application Priority Data**

Jan. 19, 2017 (DE) ..... 20 2017 100 281.0

A diaphragm valve (1) having a diaphragm (3) that is clamped between two housing parts (9, 10), and wherein by way of the diaphragm (3), a valve seat (6) can be opened and closed. At least one clamping region (23) is formed radially outside of a clamping region (8), which clamping region (23) protrudes from the clamping region (8), and on the end face of which a sealing surface (11, 12) is formed.

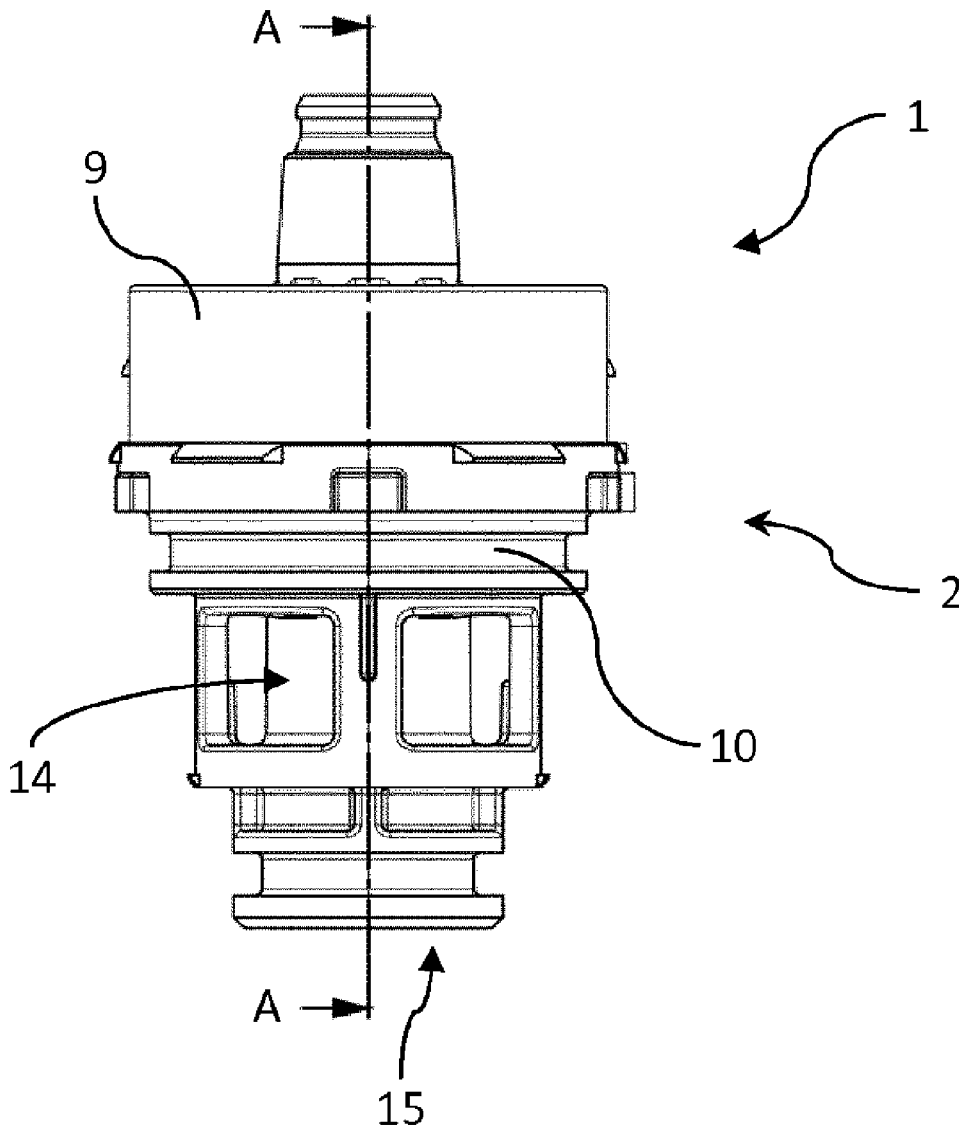

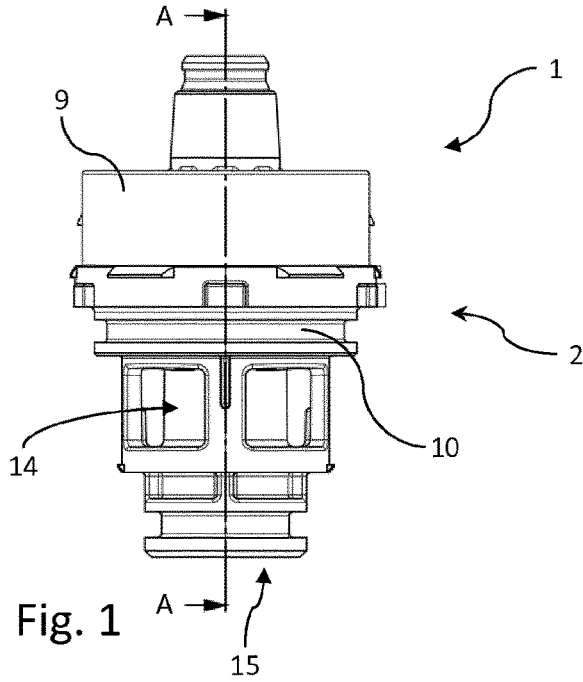


Fig. 1

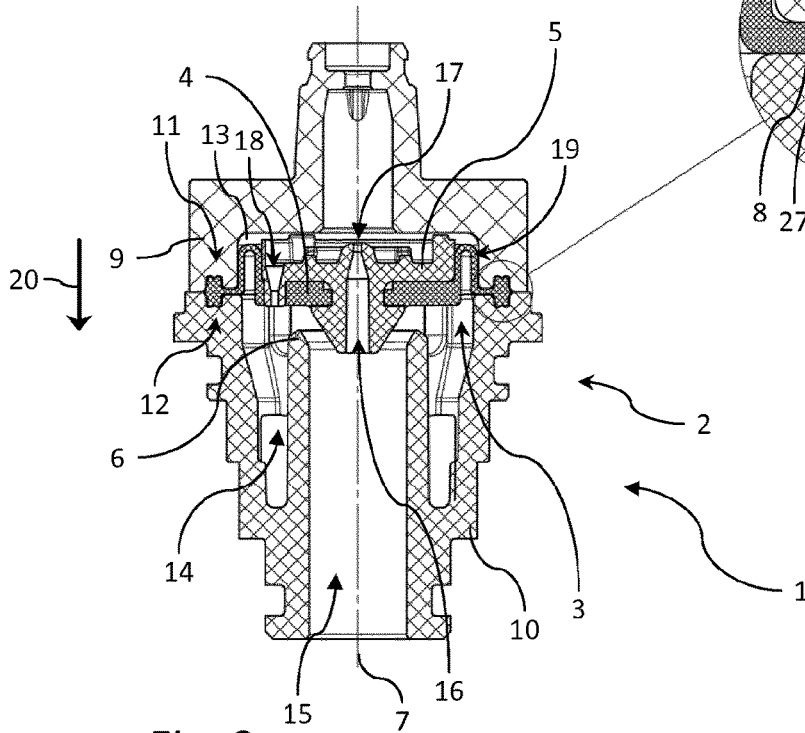


Fig. 2

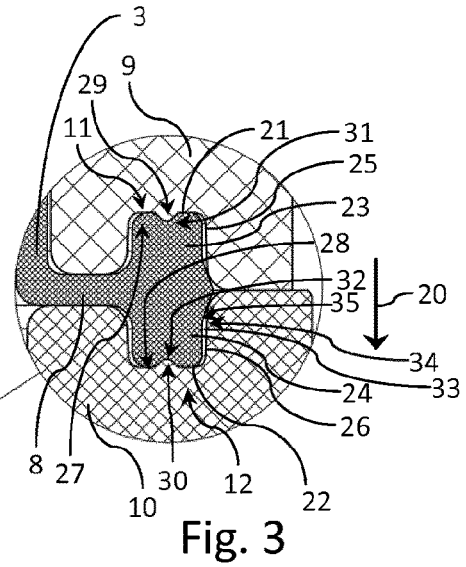


Fig. 3

## DIAPHRAGM VALVE

### BACKGROUND

**[0001]** The invention relates to a diaphragm valve having a housing and a diaphragm which is arranged within the housing and the central region of which can be moved to and fro in order to close and/or open a valve seat, the diaphragm being clamped in by way of a clamping region between two housing parts, the diaphragm having at least one sealing face.

**[0002]** Here, the clamping region can movably support a valve body, by way of which the valve seat can be closed and opened.

**[0003]** A diaphragm valve of this type is known, for example, from DE 10 2010 060 085 A1 and DE 20 2010 018 358 U1, the diaphragm having sealing faces which are oriented substantially in a direction parallel to the clamping direction. The sealing faces are therefore oriented radially in relation to a longitudinal axis of the diaphragm valve.

### SUMMARY

**[0004]** The invention is based on the object of providing an alternative to the previously known diaphragm valves, in particular of making simpler assembly possible.

**[0005]** In order to achieve the object, one or more features according to the invention are provided. In particular, it is therefore provided according to the invention for achieving the object in the case of a diaphragm valve of the type described at the outset that the at least one sealing face is oriented at least substantially in a direction transversely with respect to a clamping direction, and is configured on an end side of a plug-in region which runs at least substantially in a direction parallel to the clamping direction, in particular that the at least one sealing face is oriented in a direction transversely with respect to a clamping direction, and is configured on an end side of a plug-in region which runs in a direction parallel to the clamping direction, that the plug-in region engages into a corresponding recess on one housing part of the two housing parts, and that a sealing projection which protrudes from a recess bottom and presses against the at least one sealing face is configured in the recess. Axial sealing faces in relation to a longitudinal axis of the diaphragm valve are therefore configured. A great tightness can be achieved by way of the sealing projection, although the plug-in region is deformed along its entire length by way of a contact pressure. The plug-in region therefore serves in the radial direction not for sealing purposes, but rather merely as a tie rod. In comparison with clamping of the diaphragm on both sides of the plug-in region which likewise serves as a tie rod, the invention affords the advantage that the diaphragm can operate in an unimpeded manner. The sealing face can be arranged in a protected manner in the recess.

**[0006]** It can be provided in one refinement of the invention that the plug-in region protrudes as a projection from the clamping region at an angle, preferably a right angle. Therefore, in addition to its sealing function, the plug-in region can also assume the function of a tie rod if the recess is of corresponding configuration.

**[0007]** It can be provided in one refinement of the invention that the plug-in region is configured so as to run around the clamping region. In this way, tensile loading can be absorbed along the entire circumference of the diaphragm. It is particularly favorable if the plug-in region is configured

with a constant profile, for example a rectangular or trapezoidal profile in a preferably rounded manner. This makes satisfactory filling of the recess possible.

**[0008]** It can be provided in one refinement of the invention that the recess is configured so as to run around the clamping region. It is advantageous here that a diaphragm can be inserted in an undefined orientation or alignment, in particular in the case of a recess which runs in a circular manner. In this way, moreover, a plug-in region of circumferential configuration can be received.

**[0009]** In general, it can be said that one preferred refinement has a diaphragm with a circular contour. The terms radial and axial which are defined in relation to the above-mentioned longitudinal axis can therefore be applied to a diaphragm of this type if the longitudinal axis is oriented perpendicularly with respect to the at least substantially planar diaphragm and runs centrally through the latter, in particular if the longitudinal axis is oriented perpendicularly with respect to the planar diaphragm and runs centrally through the latter.

**[0010]** It can be provided in one refinement of the invention that the sealing projection extends over a length of the recess. In this way, all-round sealing of the diaphragm on its entire circumference can be achieved simply.

**[0011]** It can be provided in one refinement of the invention that a further plug-in region is configured in relation to the clamping region on a side which lies opposite the plug-in region, which further plug-in region engages into a corresponding recess on a further housing part of the two housing parts. This makes it possible to hold the diaphragm on both sides (above and below).

**[0012]** It can be provided in one refinement of the invention that a further sealing face is oriented at least substantially in a direction transversely with respect to the clamping direction, and is configured on an end side of the further plug-in region which runs at least substantially in a direction parallel to the clamping direction, in particular that a further sealing face is oriented in a direction transversely with respect to the clamping direction, and is configured on an end side of the further plug-in region which runs in a direction parallel to the clamping direction. The further plug-in region can firstly also absorb a tensile load of the diaphragm, as a further tie rod. Secondly, the further sealing face can be used as a bearing face, in order to absorb a force which acts on the sealing face.

**[0013]** It can be provided here that a further sealing projection which protrudes from a recess bottom and presses against the further sealing face is configured in the recess of the further housing part. In this way, a tight closure can be configured above and below the diaphragm.

**[0014]** It can be provided in one refinement of the invention that the plug-in region can be plugged with play into the respective recess. The play can be realized, for example, by virtue of the fact that an external diameter (measured transversely with respect to the clamping direction) of the plug-in region is configured to be at least partially smaller than an internal diameter (measured transversely with respect to the clamping direction) of the recess. It is advantageous here that a small resistance or even no resistance at all has to be overcome during plugging of the plug-in region into the recess. This can also apply as an alternative or in addition to the further plug-in region. This can have the consequence that, in the introduced state of the at least one plug-in region into the at least one recess, at least one gap is configured

between a lateral inner wall of the recess and a lateral outer wall of the plug-in region. A contact pressure between the outer wall of the plug-in region and the inner wall of the recess can therefore be greatest between an end side of the plug-in region and a bottom region of the recess, in particular a sealing projection of the recess. In this way, the assembly of the diaphragm valve can be facilitated considerably by way of the configuration of a play. At the same time, however, satisfactory sealing is surprisingly possible between the plug-in region and the recess despite the play.

[0015] It can be provided in one refinement of the invention that the sealing face is of at least substantially planar configuration. In this way, at least substantially flat bearing (for example, apart from a deformation as a result of the sealing projection), in particular flat bearing, of the sealing face against the recess bottom can be achieved, in particular in a manner which is independent of precise positioning of the plug-in region in the recess. It can be provided, in particular, in one refinement of the invention that the sealing face is of planar configuration. It is particularly favorable here if the sealing face is of groove-free configuration. Material weakenings due to stress concentrations which can easily result in the case of the configuration of a groove can thus be avoided. This can also apply as an alternative or in addition to the further sealing face.

[0016] It can be provided in one refinement of the invention that the recess in the housing part forms a constriction toward the associated recess bottom. In this way, an insertion aid can be configured, by way of which the plug-in region can be oriented simply in relation to the sealing projection.

[0017] As an alternative or in addition, it can be provided that the recess in the further housing part forms a constriction toward the associated recess bottom. A defined orientation of the further sealing face in the recess during plugging in can therefore also be achieved here. It is particularly favorable if the recesses are of mirror-symmetrical configuration with respect to one another, in particular in relation to a plane of symmetry which runs between the housing parts.

[0018] It can be provided in one refinement of the invention that the sealing projection has a cross section which tapers toward a free end. In this way, the sealing projection can dig simply into the diaphragm. Here, a wedge-shaped cross section can be manufactured particularly simply.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0019] The invention will now be described in greater detail using one exemplary embodiment, but is not restricted to said exemplary embodiment. Further exemplary embodiments result from a combination of the features of single or plural claims among one another and/or with single or plural features of the exemplary embodiment.

[0020] In the drawings:

[0021] FIG. 1 shows a side view of a diaphragm valve according to the invention,

[0022] FIG. 2 shows a sectional view along A-A of the diaphragm valve in accordance with FIG. 1, and

[0023] FIG. 3 shows an enlargement of a detail from FIG. 2.

#### DETAILED DESCRIPTION

[0024] FIGS. 1 to 3 show a diaphragm valve according to the invention which is denoted overall by 1 in different views, and will therefore be described together.

[0025] The diaphragm valve 1 has a housing 2 which receives a diaphragm 3 and surrounds it in a manner which forms a housing.

[0026] A center region 4 of the diaphragm 3 supports a valve body 5 which can be moved between an upper position which is shown in FIG. 2 and a lower position (not shown in further detail), in which the center region 4 of the diaphragm 3 lies with the valve body 5 on a valve seat 6 and closes said valve seat 6 sealingly.

[0027] The diaphragm 3 is clamped in by way of a clamping region 8 between a first housing part 9 and a second housing part 10 radially on the outside in relation to a longitudinal axis 7 of the diaphragm valve 1, which longitudinal axis 7 at the same time describes the movement direction of the valve body 5.

[0028] Here, the first housing part 9 and the second housing part 10 form the housing 2, possibly with further housing parts.

[0029] Here, the diaphragm 3 has a first sealing face 11 and a second sealing face 12, by way of which it seals a pressure chamber 13 firstly and an inlet 14 secondly to the outside.

[0030] The inlet 14 is connected via the valve seat 6 to an outlet 15 when the valve body 5 is situated in the above-mentioned upper position, and is disconnected from said outlet 15 when the valve body 5 is arranged in the lower position on the valve seat 6. In order to transfer the valve body 5 into the lower closed position, a relief opening 16 on an auxiliary valve seat 17 is closed by way of an auxiliary valve body (not shown in further detail), with the result that the pressure chamber 13 is filled via a filling opening 18 in the diaphragm 3. As a result of the pressure rise, possibly assisted by way of a spring force, the valve body 5 is transferred into the closed position.

[0031] In order to open the diaphragm valve 1, the auxiliary valve seat 17 is released, with the result that the pressure chamber 13 can be emptied via the relief opening 13 into the outlet 15. Said pressure relief leads to the internal pressure in the inlet 14 forcing a removal of the valve body 5 from the valve seat 6, with the result that a liquid can flow out of the inlet 14 into the outlet 15.

[0032] A folding region 19 which ensures the movability of the diaphragm 3 is configured between the clamping region 8 and the center region 4. Here, the diaphragm 3 is manufactured from an elastic material, for example rubber, or silicone.

[0033] The sealing faces 11, 12 are oriented substantially in a direction which results in an alignment transversely with respect to the clamping direction 20. This means that the perpendiculars on the sealing faces 11, 12 run in each case parallel or approximately parallel to the clamping direction 20, by way of which the first housing part 9 is pressed against the second housing part 10.

[0034] To this end, the sealing faces 11, 12 are configured in each case on an end side 21, 22 of a plug-in region 23, 24.

[0035] Here, in the mounted state, the plug-in region 23 engages into a corresponding recess 25 on the first housing part 11, whereas the plug-in region 24 is plugged into a corresponding recess 26 on the second housing part 10.

[0036] A sealing projection 29, 30 which is pressed into the respective sealing face 11, 12 is configured on each of the recesses 25, 26 on a recess bottom 27, 28.

[0037] In order to make the plugging into the recesses 25, 26 possible, each of the plug-in regions 23, 24 is configured

as a projection which is oriented at a right angle in relation to the clamping region **8** and protrudes from said clamping region **8**.

[0038] The plug-in regions **23**, **24** run in each case around the clamping region **8** and have a constant profile along their course direction.

[0039] In a manner which corresponds with this, the respective recess **25**, **26** is likewise configured so as to run around the clamping region **8**, and is provided with a cross section, with the result that a groove is formed.

[0040] The sealing projection **29**, **30** is in each case likewise of circumferential configuration and therefore extends over the entire length of the respective recess **25**, **26**.

[0041] The plug-in regions **23**, **24** are configured on sides which lie opposite one another in relation to the clamping region **8**, with the result that said plug-in regions **23**, **24** can engage into the two receptacles of the recesses **25**, **26**.

[0042] The sealing faces **11**, **12** are therefore oriented parallel to one another.

[0043] When the first housing part **9** is pressed against the second housing part **10**, the sealing projections **29**, **30** are pressed into the respective sealing face **11** and **12**, respectively.

[0044] The sealing faces **11**, **12** are configured as planar faces which extend around in an annular manner before said pressing-in operation, however.

[0045] A groove or the like for receiving the sealing projections **29**, **30** is therefore not configured in the sealing faces **11**, **12**, with the result that a sealing action is not dependent on whether the plug-in regions **23**, **24** are plugged into the respective recesses **25**, **26** in a correctly oriented manner.

[0046] The recesses **25**, **26** have a constriction toward the respective recess bottom **27**, **28**, and thus form an insertion aid for the plug-in regions **23**, **24**.

[0047] As can be seen in FIG. 3, the sealing projections **29**, **30** have a cross section which tapers toward the respective free end **31**, **32**. Therefore, the sealing projections **29**, **30** form a wedge shape (in cross section) which protrudes from the recess bottom **27** and **28**, respectively.

[0048] This can be seen, since the plug-in regions **23**, **24** are configured spaced apart from the recesses **25**, **26** in the radial direction, that is to say laterally with respect to their course direction.

[0049] In the case of the diaphragm valve **1**, in the case of which a diaphragm **3** is clamped in between two housing parts **9**, **10** and in the case of which a valve seat **6** can be opened and closed by way of the diaphragm **3**, it is therefore provided to configure at least one clamping region **23** radially outside a clamping region **8**, which clamping region **23** projects from the clamping region **8** and on the end side **21**, **22** of which clamping region **23** a sealing face **11**, **12** is configured.

[0050] If the plug-in region **23**, **24** is introduced into the at least one recess **25**, **26**, at least one gap **33** is configured between the two. Here, the gap **33** is configured, in particular, between a lateral inner wall **34** of the recess **25**, **26** and a lateral outer wall **35** of the plug-in region **23**, **24**. As a result of the gap **33**, the plug-in region **23**, **24** can be plugged with a play into the respective recess **25**, **26**. Therefore, the assembly of the diaphragm valve **1** is simplified considerably.

[0051] In order to achieve a sufficient sealing action between the diaphragm **3** and the housing parts **9**, **10** despite

the configuration of the gap **33**, a contact pressure between the outer wall of the plug-in region **23**, **24** and the inner wall of the recess **25**, **26** is therefore greatest between an end side **21**, **22** of the plug-in region **23**, **24** and a bottom region of the recess **25**, **26**. Here, the generated contact pressure is particularly great, in particular, in the region of the sealing projection **29**, **30**. Therefore, a sufficient sealing action is configured in said region.

#### LIST OF DESIGNATIONS

[0052]	1 Diaphragm valve
[0053]	2 Housing
[0054]	3 Diaphragm
[0055]	4 Center region
[0056]	5 Valve body
[0057]	6 Valve seat
[0058]	7 Longitudinal axis
[0059]	8 Clamping region
[0060]	9 (First) housing part
[0061]	10 (Second) housing part
[0062]	11 (First) sealing face
[0063]	12 (Second) sealing face
[0064]	13 Pressure chamber
[0065]	14 Inlet
[0066]	15 Outlet
[0067]	16 Relief opening
[0068]	17 Auxiliary valve seat
[0069]	18 Filling opening
[0070]	19 Folding region
[0071]	20 Clamping direction
[0072]	21 End side
[0073]	22 End side
[0074]	23 Plug-in region
[0075]	24 Plug-in region
[0076]	25 Recess
[0077]	26 Recess
[0078]	27 Recess bottom
[0079]	28 Recess bottom
[0080]	29 Sealing projection
[0081]	30 Sealing projection
[0082]	31 Free end
[0083]	32 Free end
[0084]	33 Gap
[0085]	34 Lateral inner wall
[0086]	35 Lateral outer wall

1. A diaphragm valve (1), comprising:

a housing (2) having two housing parts (9, 10);

a diaphragm (3) arranged within the housing (2) and a center region (4) of said diaphragm is movable back and forth in order to at least one of close or open a valve seat (6), the diaphragm (3) being clamped in by way of a clamping region (8) thereof between the two housing parts (9, 10);

the diaphragm (3) having at least one sealing face (11, 12), the at least one sealing face (11, 12) is oriented substantially in a direction transversely with respect to a clamping direction (20) and is configured on an end side (21, 22) of a plug-in region (23, 24) of the diaphragm (3) which runs substantially in a direction parallel to the clamping direction (20);

one housing part (9) of the two housing parts (9, 10) including a corresponding recess (25, 26), and the plug-in region (23, 24) engages into the corresponding

- recess (25, 26) on the one housing part (9, 10) of the two housing parts (9, 10); and
- a sealing projection (29, 30) protrudes from a recess bottom (27, 28) of the corresponding recess and presses against the at least one sealing face (11, 12).
2. The diaphragm valve (1) as claimed in claim 1, wherein the plug-in region (23, 24) protrudes as a projection from the clamping region (8) at an angle.
3. The diaphragm valve (1) as claimed in claim 1, wherein the recess (25, 26) is configured to extend around the clamping region (8).
4. The diaphragm valve (1) as claimed in claim 1, further comprising a further plug-in region (23, 24) that is configured in relation to the clamping region (8) on a side which lies opposite the plug-in region (23, 24), said further plug-in region (23, 24) engages into a corresponding further recess (25, 26) on a second housing part (9, 10) of the two housing parts (9, 10).
5. The diaphragm valve (1) as claimed in claim 4, further comprising a further sealing face (11, 12) oriented substantially in a direction transversely with respect to the clamping direction (20) configured on an end side (21, 22) of the further plug-in region (23, 24) which runs substantially in a direction parallel to the clamping direction (20), and a further sealing projection (29, 30) which protrudes from a recess bottom (27, 28) of the corresponding further recess and presses against the further sealing face (11, 12) configured in the further recess (25, 26) of the second housing part (9, 10).

6. The diaphragm valve (1) as claimed claim 5, wherein at least one of the plug-in region (23, 24) or the further plug-in region (23, 24) is pluggable with play into the respective recess or further recess (25, 26).

7. The diaphragm valve (1) as claimed in claim 5, wherein at least one of the sealing face (11, 12) or the further sealing face (11, 12) has a substantially planar configuration.

8. The diaphragm valve (1) as claimed in claim 5, wherein at least one of the recess (25, 26) in the housing part (9, 10) or the further recess in the second housing part (9, 10) forms a constriction toward an associated one of the recess bottoms (27, 28).

9. The diaphragm valve (1) as claimed in claim 1, wherein the sealing projection (29, 30) has a cross section which is wedge-shaped and tapers toward a free end (31, 32) thereof.

10. The diaphragm valve (1) as claimed in claim 1, wherein, in an introduced state of the at least one plug-in region (23, 24) into the corresponding recess (25, 26), at least one gap (33) is configured between a lateral inner wall (34) of the recess (25, 26) and a lateral outer wall (35) of the plug-in region (23, 24).

11. The diaphragm valve (1) as claimed in claim 1, wherein the plug-in region (23, 24) is configured so as to extend around the clamping region (8) with a constant profile.

12. The diaphragm valve (1) as claimed in claim 1, wherein the sealing projection (29, 30) extends over a length of the recess (25, 26).

\* \* \* \* \*