



(19)

Europäisches
Patentamt
European
Patent Office
Office européen
des brevets



(11)

EP 2 549 409 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
18.03.2015 Bulletin 2015/12

(51) Int Cl.:
G06K 15/02 (2006.01) **G06K 15/00** (2006.01)

(21) Application number: **12165689.6**

(22) Date of filing: **26.04.2012**

(54) Resolution of out of memory conditions for shared memory in a print controller

Auflösung von Out-of-Memory-Zuständen für gemeinsamen Speicher in einer Druckersteuerung
Résolution des conditions hors mémoire pour mémoire partagée dans un dispositif de commande
d'impression

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

- **Ward, David**
Boulder, CO Colorado 80301-9270 (US)
- **Morgan, Lisa**
Boulder, CO Colorado 80301-9270 (US)

(30) Priority: **18.07.2011 US 201113185202**

(74) Representative: **Maury, Richard Philip**
Marks & Clerk LLP
90 Long Acre
London WC2E 9RA (GB)

(43) Date of publication of application:
23.01.2013 Bulletin 2013/04

(56) References cited:
US-A1- 2010 053 179

(73) Proprietor: **Ricoh Company, Ltd.**
Tokyo 143-8555 (JP)

(72) Inventors:
• **Varga, John**
Boulder, CO Colorado 80301-9270 (US)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The invention relates to the field of printing systems, and in particular, to efficiently resolving how a raster image processor responds to out of memory conditions when writing raster data for a print job to solid state memory.

2. Description of the Related Art

[0002] Printers generally include a print controller that receives print data (e.g., Page Description Language (PDL) data), and a print engine. The print controller rasterizes the logical pages of the print job into bitmap images. In n-up printing, multiple logical pages reside on a printed page, or sheet side. The print controller assembles the bitmap images for the logical pages into a sheet side image. The sheet side image is then sent to the print engine for imprinting to a media, such as paper.

[0003] When storing the rasterized logical pages of the print job, it is generally much faster to store the rasterized pages in a solid state memory, such as a Random Access Memory (RAM). However, solid state memory is a finite resource and eventually the memory will become full. In addition, multiple processes executing on the print controller may be sharing data stored in the solid state memory. For example, a page rasterizer may store bitmap images of the logical pages to the solid state memory. A sheet side assembler may then read the bitmap images out of the solid state memory in order to build sheet side images for printing. After assembling a sheet side image, the portions of the solid state memory that store the bitmap images are freed for other uses, such as storing newly rasterized logical pages.

[0004] To handle out of memory conditions for the solid state memory, modern printers often include a mechanical hard disk drive for storing the rasterized pages as a fall-back. When the solid state memory is full, the rasterizer may automatically begin writing rasterized pages to the hard disk. However, writing data to the hard disk is slower than writing the data to the solid state memory. Thus, the rasterization process slows down when the hard disk is used to store raster data.

[0005] It thus remains a problem to efficiently respond to how a rasterizer handles out of memory conditions for solid state memory to improve the throughput of the rasterization process.

[0006] US2010/053179A discloses management of shared memory in a printer system. In case of an out-of-memory condition a requesting process may wait for another process to release memory.

[0007] The invention is in the print controller of Claim 1 and the method of Claim 6.

[0008] Embodiments described herein provide for ef-

ficiently resolving how a rasterizer responds to out of memory conditions when attempting to write raster data to a solid state memory. In the embodiments provided, a determination is made that a process is about to complete an operation that will free up some the solid state memory. The rasterizer is suspended from writing raster data to a mechanical hard disk until the process completes the operation, thus freeing up a portion of the solid state memory. The rasterizer then resumes the writing of rasterized pages to the solid state memory. This improves the throughput of the rasterization process.

[0009] In one embodiment, a print controller of a printer is disclosed. The print controller includes a control system and a rasterizer. The rasterizer determines that a solid state memory is no longer available for storing raster data, and transmits an out of memory error to the control system. The control system determines that a process is utilizing the solid state memory to complete an operation, where completing the operation frees up a portion of the solid state memory. The control system suspends the rasterizer from writing raster data to a mechanical hard disk, and waits for the process to complete the operation. The control system then instructs the rasterizer to resume writing raster data to the solid state memory.

[0010] In another embodiment, the process is a side builder that assembles sheet side images from the raster data. The control system determines that the side builder is waiting for raster data to assemble a sheet side image, and determines a number of logical pages remaining to complete the sheet side image. The control system then instructs the rasterizer to write the number of logical pages that remain to complete the sheet side image to the hard disk.

[0011] Other exemplary embodiments may be described below.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] Some embodiments of the present invention are now described, by way of example only, and with reference to the accompanying drawings. The same reference number represents the same element or the same type of element on all drawings.

[0013] FIG. 1 is a block diagram of a printer in an exemplary embodiment.

FIG. 2 is flow chart illustrating a method of efficiently resolving an out of memory condition for a rasterizer in an exemplary embodiment.

FIG. 3 is a block diagram of another printer in another exemplary embodiment.

FIG. 4 is an example of a communication and processing flow diagram for the printing system of FIG. 3 in an exemplary embodiment.

[0014] FIG. 5 illustrates a computing system in which a computer readable medium may provide instructions for performing the method of FIG. 2 and the communi-

cation and processing flows of FIG. 4 in an exemplary embodiment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0014] The figures and the following description illustrate specific exemplary embodiments of the invention. It will thus be appreciated that those skilled in the art will be able to devise various arrangements that, although not explicitly described or shown herein, embody the principles of the invention and are included within the scope of the invention. Furthermore, any examples described herein are intended to aid in understanding the principles of the invention, and are to be construed as being without limitation to such specifically recited examples and conditions. As a result, the invention is not limited to the specific embodiments or examples described below, but by the claims and their equivalents.

[0015] FIG. 1 is a block diagram of a printer 102 in an exemplary embodiment. FIG. 1 also illustrates a media 118 for imprinting by printer 102. Printer 102 includes a print controller 104, a print engine 112, and a mechanical hard disk 114. In printer 102, controller 104 receives print data 116 for imprinting onto media 118. Print controller 104 may perform a number of data processing operations on print data 116, such as generating raster bitmaps of the logical pages of print data 116 before the bitmap data is transmitted to print engine 112. Print engine 112 imprints media 118 based on the bitmap data.

[0016] Print controller 104 may write raster data of print data 116 in solid state memory 110 and/or hard disk 114 during the printing process. Generally, writing and reading data to/from solid state memory 110 is much faster than writing and reading data to/from hard disk 114. Thus, solid state memory 110 is preferred over hard disk 114 when storing raster data. Also, a number of processes executing on print controller 104 may utilize the same solid state memory 110 and/or perform operations on the same raster data (e.g., rasterized pages of print data 116) stored in solid state memory 110. Therefore, solid state memory 110 may eventually become full. Print controller 104 may then write raster data to hard disk 114 until solid state memory 110 becomes available (e.g., some of solid state memory 110 is freed up). Solid state memory 110 may become available as processes operating within print controller 104 complete operations that allow raster data stored in solid state memory 110 to be deleted or freed.

[0017] In this embodiment, print controller 104 does not automatically write raster data to hard disk 114 when solid state memory 110 is full. Instead, print controller 104 determines if a process is about to complete an operation, where completing the operation frees up a portion of solid state memory 110. When a process utilizing solid state memory 110 is about to complete, it may be more efficient to temporarily suspend rasterizing pages of print data 116 instead of writing the raster data to hard

disk 114. This improves the throughput of the rasterization process. An example of how print controller 104 may operate will be discussed in more detail with regard to FIG. 2.

[0018] FIG. 2 is flow chart illustrating a method 200 of efficiently resolving an out of memory condition for a rasterizer 108 in an exemplary embodiment. The steps of method 200 will be described with respect to printer 102 of FIG. 1, although one skilled in the art will understand that method 200 may be performed by other systems not shown. The steps of the methods described herein are not all inclusive and may include other steps not shown. The steps may also be performed in an alternative order.

[0019] In step 202, rasterizer 108 determines that solid state memory 110 is no longer available for storing raster data for print data 116. As solid state memory 110 is a finite resource, eventually solid state memory 110 becomes full as rasterizer 108 generates bitmap images of pages of print data 116, and writes the bitmap images to solid state memory 110. Solid state memory 110 that is used to store the bitmap images is not freed until other processes sharing solid state memory 110 complete their tasks, such as processes that generate sheet side images based on the bitmap images stored in solid state memory 110 (a sheet side image is a bitmap of one or more logical pages on a side of media).

[0020] In step 204, rasterizer 108 transmits an out of memory error to control system if solid state memory 110 is no longer available for storing raster data. In step 206, control system 106 determines that a process is utilizing solid state memory 110 to complete an operation, where completing the operation frees up a portion of solid state memory 110. For example, a process in print controller 104 may be assembling a sheet side image from one or more bitmap images stored in solid state memory 110. After the sheet side is assembled, the portions of solid state memory 110 storing the bitmap images are freed up for other processes that may use solid state memory 110.

[0021] In step 208, control system 106 suspends rasterizer 108 from writing raster data to hard disk 114. As writing to hard disk 114 is a slow process (e.g., a number of milliseconds) as compared to writing to solid state memory 110 (e.g., some tens of microseconds), it may be more efficient for control system 106 to temporarily suspend rasterizer 106 from writing raster data to hard disk 114 and wait for a process using memory 110 to complete its operation than to write the raster data to hard disk 114.

[0022] In step 210, control system 106 waits for the process to complete the operation that frees up a portion of solid state memory 110. In step 212, control system 106 instructs rasterizer 108 to resume writing raster data to memory 110 in response to the process completing the operation. Instead of automatically writing raster data to hard disk 114 when solid state memory 110 is no longer available, control system 106 checks to see if an operation is in progress that may free up a portion of solid state

memory 110. As writing to hard disk 114 is slower than writing to solid state memory 110, it may be more efficient to wait until a portion of solid state memory 110 is available than to immediately fall back to writing raster data to hard disk 114. This improves the throughput of the rasterization process in printer 102.

[0023] In some embodiments, the operation is a side builder that is operable to assemble sheet side images from the raster data. In this embodiment, control system 106 may determine that the side builder is waiting for raster data to assemble a sheet side image. For instance, in 4-up printing, logical pages one through three for the sheet side may already be rasterized while page four is pending. Thus, the side builder is waiting for page four. In this embodiment, control system 106 instructs rasterizer 108 to write raster data directly to hard disk 114 instead of waiting for the side builder to complete the sheet side image. Control system 106 may determine how many logical pages remain to complete the sheet side image, and instruct rasterizer 108 to write the remaining pages directly to hard disk 114. It may be more efficient to write the remaining pages directly to hard disk 114 instead of waiting for solid state memory 110 to be freed up, as control system 106 recognizes that the remaining pages are needed by the sheet side assembler to complete the sheet side image.

EXAMPLE

[0024] FIG. 3 is a block diagram of another printer 302 in another exemplary embodiment. Similar to printer 102 of FIG. 1, printer 302 imprints and media 118. Printer 302 includes a print controller 304, print engine 112, and hard disk 114. In print controller 304, a page rasterizer 308 "rips" logical pages of a print job (e.g., received via print data 116) into bitmap images. Page rasterizer 308 will rip the pages to solid state memory 110 if solid state memory 110 is available. Rasterizer 308 may also rip the pages to hard disk 114 when solid state memory 110 is full and/or not available. In n-up printing, a sheet side image may be assembled from multiple ripped pages. A side builder 310 locates ripped pages for a sheet side image that is stored solid state memory 110 and/or stored in hard disk 114. The sheet side image is built and written to side map 312, which typically is a separate memory (e.g., fast RAM) in addition to solid state memory 110. After a sheet side image is complete (or a partial sheet side image is complete), side builder 310 notifies control system 306. This allows control system 306 to free up the bitmap images stored in solid state memory 110. The sheet side image is then transmitted to print engine 112 for printing.

[0025] FIG. 4 is an example of a communication and processing flow diagram 400 for printer 302 of FIG. 3 in an exemplary embodiment. FIG. 4 illustrates the types of communications and processing activities that may be performed by control system 306, page rasterizer 308, and side builder 310 in order to more efficiently handle

out of memory errors encountered by page rasterizer 308. The particular communications and processing activities shown in FIG. 4 may include more or fewer communications and/or activities as a matter of implementation.

[0026] After receiving a print job (e.g., via print data 116), page rasterizer 308 begins rasterizing pages of the print job. Although only one page rasterizer 308 is shown in FIG. 3, print controller 106 may include any number of page rasterizers that operate substantially in parallel. After a page is rasterized (see process 402 of FIG. 4), page rasterizer 308 transmits a `page_delimited()` message (403) to control system 306. A `page_delimited()` message indicates to control system 306 information about the rasterized page, such as its location in memory 110 and/or hard disk 114. A `page_delimited()` message allows control system 306 to track the progress of rasterizing the logical pages for the print job. As pages are rasterized (404) and `page_delimited()` messages (405) are sent to control system 306, control system 306 will eventually determine (406) that either a full side or a partial side of logical pages have been rasterized and therefore, a full or partial side of bitmap images are ready for assembly into a sheet side image. For instance, if 4-up printing is defined for a sheet side, then control system 306 will track the progress of each of the four logical pages for the sheet side and notify side builder 310 that a full and/or partial side of bitmap images is ready for assembly into a sheet side image.

[0027] After a full side of pages has been rasterized, control system 306 transmits a `display_list()` message to side builder 310. Although only one side builder 310 is shown in FIG. 3, print controller 304 may include any number of side builders that operate substantially in parallel. The `display_list()` message 407 notifies the side builder 310 the location (either stored in solid state memory 110 or stored on hard disk 114) of the rasterized pages generated by page rasterizer 308. Using the `display_list()` information, side builder 310 assembles (408) a sheet side image and stores the image in side map 312. In some cases, control system 306 may indicate information to side builder 310 about a partial side that is ready to be assembled. For example, instead of waiting for all of the rasterized pages for a complete side, control system 306 may determine that some of the rasterized pages are ready for assembly by side builder 310 into a partial side. This allows side builder 310 to partially complete a sheet side image and also allows some of solid state memory 110 to be freed up for other uses.

[0028] At some point, page rasterizer 308 may determine that solid state memory 110 is full (409) and transmit an `out_of_memory()` error message (410) to control system 306. After transmitting the `out_of_memory()` message, page rasterizer 308 waits for instructions from control system 306. In response to receiving the `out_of_memory()` message, control system 306 attempts to determine if a side is currently being assembled by side builder 310. If a side is not in progress, then control

system 306 assumes that solid state memory 110 is unavailable for storing raster data. In this case, control system 306 transmits instructions (412) to page rasterizer 308 to rasterize one or more pages to hard disk 114. This happens when solid state memory 110 fills with one or more pages (due to parallel page rasterizers) where no page rasterize is able to complete its page due to contention for solid state memory 110. If a side is in progress, then control system 306 waits (413) until it receives a side_complete() message (414) from side builder 310. A side_complete() message includes information about the sheet side image that was built. As sheet side images are stored at side map 312, this allows control system 306 to free-up (415) solid state memory 110 that stores the rasterized pages for the completed (or partial) sheet side image. After freeing up some of solid state memory 110, control system 306 transmits a message (416) to page rasterizer 308 to re-try ripping pages of the print job to solid state memory 110. Page rasterizer 308 continues rasterizing (417) one or more logical pages of the print job directly to solid state memory 110.

[0029] The invention can take the form of an entirely hardware embodiment, an entirely software embodiment or an embodiment containing both hardware and software elements. In one embodiment, the invention is implemented in software, which includes but is not limited to firmware, resident software, microcode, etc. FIG. 5 illustrates a computing system in which a computer readable medium may provide instructions for performing the method of FIG. 2 and the communication and processing flows of FIG. 4 in an exemplary embodiment.

[0030] Furthermore, the invention can take the form of a computer program product accessible from a computer-readable or computer-readable medium 506 providing program code for use by or in connection with a computer or any instruction execution system. For the purposes of this description, a computer-readable or computer readable medium 506 can be any apparatus that can contain, store, communicate, or transport the program for use by or in connection with the instruction execution system, apparatus, or device.

[0031] The medium 506 can be an electronic, magnetic, optical, electromagnetic, infrared, or semiconductor system (or apparatus or device) or a propagation medium. Examples of a computer-readable medium 506 include a semiconductor or solid state memory, magnetic tape, a removable computer diskette, a random access memory (RAM), a read-only memory (ROM), a rigid magnetic disk and an optical disk. Current examples of optical disks include compact disk - read only memory (CD-ROM), compact disk - read/write (CD-R/W) and DVD.

[0032] A data processing system suitable for storing and/or executing program code will include one or more processors 502 coupled directly or indirectly to memory 508 through a system bus 510. The memory 508 can include local memory employed during actual execution of the program code, bulk storage, and cache memories which provide temporary storage of at least some pro-

gram code in order to reduce the number of times code is retrieved from bulk storage during execution.

[0033] Input/output or I/O devices 504 (including but not limited to keyboards, displays, pointing devices, etc.) can be coupled to the system either directly or through intervening I/O controllers.

[0034] Network adapters may also be coupled to the system to enable the data processing system to become coupled to other data processing systems, such as through host systems interfaces 512, or remote printers or storage devices through intervening private or public networks. Modems, cable modem and Ethernet cards are just a few of the currently available types of network adapters.

15

Claims

1. A print controller (104) for a printer (102), the print controller comprising:

a control system (106); and
a rasterizer (108) operable to generate raster data for a print job, to send the raster data to a solid state memory (110), to determine that the solid state memory is no longer available for storing the raster data, and to transmit an out of memory error to the control system,
wherein the control system is operable to determine that a process utilizing the solid state memory is about to complete an operation that will free up a portion of the solid state memory,
wherein the control system is further operable, in response to the determination that a portion of the solid state memory will be freed up, to suspend the rasterizer from writing raster data to a mechanical hard disk (114), to wait for the process to complete the operation, and to instruct the rasterizer to resume writing raster data to the solid state memory in response to the process completing the operation.

2. The print controller of claim 1, wherein the process is a side builder that is operable to assemble a sheet side image from the raster data, and wherein:

the control system is further operable to determine that the side builder is waiting for raster data to assemble a sheet side image, to determine a number of logical pages (n) remaining to complete the sheet side image, and to instruct the rasterizer to write (n) rasterized pages to the hard disk.

55 3. The print controller of claim 2, wherein:

the control system is further operable to determine that the side builder is not waiting for raster

- data to assemble a sheet side image, and to suspend the rasterizer from writing raster data to the hard disk in response to the determination.
4. The print controller of claim 3, wherein: 5
the control system (106) is further operable to receive a notification from the side builder that the sheet side image is complete, and to instruct the rasterizer to re-try writing raster data to the solid state memory. 10
5. The print controller of claim 2, wherein: 15
the control system (106) is further operable to determine that the side builder is waiting for at least one rasterized logical page to assemble a sheet side image, to determine a number (n) of logical pages remaining to complete the sheet side image, and to instruct the page rasterizer to write the (n) rasterized pages to the hard disk to provide the (n) remaining rasterized pages to the side builder. 20
6. A method operable on a print controller of a printer, 25
the method comprising:
determining whether a solid state memory is no longer available for storing raster data for a print job and, if so, transmitting an out of memory error; 30
determining whether a process utilizing the solid state memory is about to complete an operation that will free up a portion of the solid state memory and, if so, suspending writing of the raster data to a mechanical hard disk, waiting for the process to complete the operation, and resuming writing of the raster data to the solid state memory in response to the process completing the operation. 35
7. The method of claim 6, wherein the process is operable to assemble a sheet side image from the raster data, and wherein the method further comprises: 40
determining that the process is waiting for raster data to assemble a sheet side image; determining a number of logical pages (n) remaining to complete the sheet side image; and writing the (n) rasterized pages to the hard disk. 45
8. The method of claim 7, further comprising:
determining that the process is not waiting for raster data to assemble a sheet side image; and suspending a writing of raster data to the hard disk in response to the determination. 50
9. The method of claim 8, further comprising:
receiving a notification from the process that the sheet side image is complete; and re-trying the writing of raster data to the solid state memory. 55
10. The method of claim 7, further comprising:
determining that the process is waiting for at least one rasterized logical page to assemble a sheet side image; determining a number (n) of logical pages remaining to complete the sheet side image; and writing the (n) rasterized pages to the hard disk to provide the (n) remaining rasterized pages to the process. 60
11. A tangible computer readable medium embodying programmed instructions which, when executed by a processor of a print controller, are operable for performing the method of any one of claims 6 to 10.

Patentansprüche

1. Drucksteuerung (104) für einen Drucker (102), wobei die Drucksteuerung umfasst:
ein Steuersystem (106); und einen Rasterer (108), betriebsfähig zum Erzeugen von Rasterdaten für einen Druckjob, zum Senden der Rasterdaten an einen Festkörperspeicher (110), zum Bestimmen, dass der Festkörperspeicher zum Speichern der Rasterdaten nicht mehr verfügbar ist, und zum Übertragen eines Out-of-Memory-Fehlers an das Steuersystem,
worin das Steuersystem zum Bestimmen betriebsfähig ist, dass ein Prozess, der den Festkörperspeicher nutzt, im Begriff steht, eine Operation abzuschließen, die einen Teil des Festkörperspeichers freigibt,
worin das Steuersystem außerdem betriebsfähig ist, als Antwort auf die Bestimmung, dass ein Teil des Festkörperspeichers freigegeben wird, den Rasterer vom Schreiben von Rasterdaten auf eine mechanische Festplatte (114) zu suspendieren, um darauf zu warten, dass der Prozess die Operation abschließt, und den Rasterer anzuweisen, das Schreiben von Rasterdaten auf den Festkörperspeicher als Antwort darauf wiederzunehmen, dass der Prozess die Operation abschließt.
2. Drucksteuerung nach Anspruch 1, worin der Prozess ein Seitenhersteller ist, der betriebsfähig ist zum Zusammenstellen eines Blattseitenbildes aus den

Rasterdaten, und worin:		perspeicher wiederaufnehmen als Antwort auf das Abschließen der Operation.
das Steuersystem außerdem betriebsfähig ist, zu bestimmen, dass der Seitenersteller darauf wartet, dass Rasterdaten ein Blattseitenbild zusammenstellen, eine Anzahl von logischen Seiten (n) zu bestimmen, die übrigbleiben, um das Blattseitenbild zu vervollständigen, und den Rasterer anzugeben (n) gerasterte Seiten auf die Festplatte zu schreiben.	5 10	7. Verfahren nach Anspruch 6, worin der Prozess betriebsfähig ist, ein Blattseitenbild von den Rasterdaten zusammenzustellen, und worin das Verfahren außerdem umfasst:
3. Drucksteuerung nach Anspruch 2, worin:		Bestimmen, dass der Prozess darauf wartet, dass Rasterdaten ein Blattseitenbild zusammenstellen;
das Steuersystem außerdem betriebsfähig ist, zu bestimmen, dass der Seitenersteller nicht darauf wartet, dass Rasterdaten ein Blattseitenbild zusammenstellen, und als Antwort auf die Bestimmung den Rasterer zu suspendieren, die Rasterdaten auf die Festplatte zu schreiben.	15	Bestimmen einer Anzahl von logischen Seiten (n), die übrigbleiben, um das Blattseitenbild zu vervollständigen; und Schreiben der (n) gerasterten Seiten auf die Festplatte.
4. Drucksteuerung nach Anspruch 3, worin:	20	8. Verfahren nach Anspruch 7, außerdem umfassend:
das Steuersystem (106) außerdem zum Empfangen einer Benachrichtigung vom Seitenersteller betriebsfähig ist, dass das Blattseitenbild vollständig ist und den Rasterer anzugeben, den Versuch zu wiederholen, die Rasterdaten auf den Festkörperspeicher zu schreiben.	25	Bestimmen, dass der Prozess nicht darauf wartet, dass Rasterdaten ein Blattseitenbild zusammenstellen; und Suspendieren eines Schreibens von Rasterdaten auf die Festplatte als Antwort auf die Bestimmung.
5. Drucksteuerung nach Anspruch 2, worin:	30	9. Verfahren nach Anspruch 8, außerdem umfassend:
das Steuersystem (106) außerdem zum Bestimmen betriebsfähig ist, dass der Seitenersteller darauf wartet, dass mindestens eine gerasterte logische Seite ein Blattseitenbild zusammenstellt, um eine Anzahl (n) von logischen Seiten zu bestimmen, die übrigbleiben, um das Blattseitenbild zu vervollständigen, und den Seitenrasterer anzugeben, die (n) gerasterten Seiten auf die Festplatte zu schreiben, um die (n) restlichen gerasterten Seiten dem Seitenersteller bereitzustellen.	40	Empfangen einer Benachrichtigung vom Prozess, dass das Blattseitenbild vollständig ist; und den Versuch wiederholen, Rasterdaten auf den Festkörperspeicher zu schreiben.
6. Verfahren, betriebsfähig auf einer Drucksteuerung eines Druckers, wobei das Verfahren umfasst:	45	10. Verfahren nach Anspruch 7, außerdem umfassend:
Bestimmen, ob ein Festkörperspeicher nicht mehr verfügbar ist, um Rasterdaten für einen Druckjob zu speichern, und, falls dies der Fall ist, einen Out-of-Memory-Fehler zu übertragen; Bestimmen, ob ein Prozess, der den Festkörperspeicher nutzt, im Begriff steht, eine Operation abzuschließen, die einen Teil des Festkörperspeichers freigibt, und, falls dies der Fall ist, das Schreiben der Rasterdaten auf eine mechanische Festplatte suspendieren, darauf warten, dass der Prozess die Operation abschließt, und das Schreiben der Rasterdaten an den Festkör-	50 55	Bestimmen, dass der Prozess darauf wartet, dass mindestens eine gerasterte logische Seite ein Blattseitenbild zusammenstellt; Bestimmen, dass eine Anzahl (n) von logischen Seiten übrigbleiben, um das Blattseitenbild zu vervollständigen; und Schreiben der (n) gerasterten Seiten auf die Festplatte, um die (n) verbleibenden gerasterten Seiten dem Prozess bereitzustellen.
		11. Greifbares computerlesbares Medium, das programmierte Anweisungen darstellt, die, wenn sie von einem Prozessor einer Drucksteuerung ausgeführt werden, betriebsfähig sind, das Verfahren nach einem der Ansprüche 6 bis 10 auszuführen.

Revendications

1. Dispositif de commande d'impression (104) pour une imprimante (102), le dispositif de commande d'impression comprenant :

- un système de commande (106) ; et
un traceur matriciel (108) pouvant servir à générer des données matricielles pour une tache d'impression, à envoyer les données matricielles vers une mémoire à semi-conducteurs (110), à déterminer que la mémoire à semi-conducteurs n'est plus disponible pour stocker les données matricielles, et à émettre une erreur de mémoire insuffisante vers le système de commande,
dans lequel le système de commande peut servir à déterminer qu'un procédé utilisant la mémoire à semi-conducteurs est sur le point d'achever une opération qui va libérer une partie de la mémoire à semi-conducteurs,
dans lequel le système de commande peut en outre servir, en réaction à la détermination qu'une partie de la mémoire à semi-conducteurs va être libérée, à empêcher temporairement le traceur matriciel d'écrire des données matricielles sur un disque dur mécanique (114), à attendre que le procédé termine l'opération, et à ordonner au traceur matriciel de reprendre l'écriture des données matricielles sur la mémoire à semi-conducteurs en réaction à l'achèvement de l'opération par le procédé.
2. Dispositif de commande d'impression selon la revendication 1, dans lequel le procédé est un créateur de côté qui peut servir à assembler une image de côté de feuille à partir des données matricielles, et dans lequel :
- le système de commande peut en outre servir à déterminer que le créateur de côté est en train d'attendre que des données matricielles assemblent une image de côté de feuille, à déterminer un nombre (n) de pages logiques restantes pour achever l'image de côté de feuille, et à ordonner au traceur matriciel d'écrire (n) pages matriciellement converties sur le disque dur.
3. Dispositif de commande d'impression selon la revendication 2, dans lequel :
- le système de commande peut en outre servir à déterminer que le créateur de côté n'est pas en train d'attendre que des données matricielles assemblent une image de côté de feuille, et à empêcher temporairement le traceur matriciel d'écrire des données matricielles sur le disque dur en réaction à ladite détermination.
4. Dispositif de commande d'impression selon la revendication 3, dans lequel :
- le système de commande (106) peut en outre servir à recevoir une notification en provenance du créateur de côté indiquant que l'image de côté de feuille est achevée, et à ordonner au traceur matriciel de réessayer d'écrire des données matricielles sur la mémoire à semi-conducteurs.
5. Dispositif de commande d'impression selon la revendication 2, dans lequel :
- le système de commande (106) peut en outre servir à déterminer que le créateur de côté est en train d'attendre qu'au moins une page logique matriciellement convertie assemble une image de côté de feuille, à déterminer un nombre (n) de pages logiques restantes pour achever l'image de côté de feuille, et à ordonner au traceur matriciel de page d'écrire les (n) pages matriciellement converties sur le disque dur afin de fournir au créateur de côté les (n) pages matriciellement converties restantes.
6. Procédé pouvant servir sur un dispositif de commande d'impression d'une imprimante, le procédé comprenant les étapes consistant à :
- déterminer si une mémoire à semi-conducteurs n'est plus disponible pour stocker des données matricielles pour une tâche d'impression, et si c'est le cas, émettre une erreur de mémoire insuffisante ;
déterminer si un procédé utilisant la mémoire à semi-conducteurs est sur le point d'achever une opération qui va libérer une partie de la mémoire à semi-conducteurs et, si c'est le cas, empêcher temporairement l'écriture des données matricielles sur un disque dur mécanique, attendre que le procédé achève l'opération, et reprendre l'écriture des données matricielles sur la mémoire à semi-conducteurs en réaction à l'achèvement de l'opération par le procédé.
7. Procédé selon la revendication 6, dans lequel le procédé peut servir à assembler une image de côté de feuille à partir des données matricielles, et dans lequel le procédé comprend en outre les étapes consistant à :
- déterminer que le procédé est en train d'attendre que des données matricielles assemblent une image de côté de feuille ;
déterminer un nombre (n) de pages logiques restantes pour achever l'image de côté de feuille ; et
écrire les (n) pages matriciellement converties sur le disque dur.
8. Procédé selon la revendication 7, comprenant en outre les étapes consistant à :

déterminer que le procédé n'est pas en train d'attendre que des données matricielles assemblent une image de côté de feuille ; et empêcher temporairement une écriture de données matricielles sur le disque dur en réaction à ladite détermination. 5

9. Procédé selon la revendication 8, comprenant en outre les étapes consistant à :

10
recevoir une notification en provenance du procédé indiquant que l'image de côté de feuille est achevée ; et réessayer l'écriture de données matricielles sur la mémoire à semi-conducteurs. 15

10. Procédé selon la revendication 7, comprenant en outre les étapes consistant à :

déterminer que le procédé est en train d'attendre qu'au moins une page logique matriciellement convertie assemble une image de côté de feuille ;
déterminer un nombre (n) de pages logiques restantes pourachever l'image de côté de feuille ; et écrire les (n) pages matriciellement converties sur le disque dur afin de fournir audit procédé les (n) pages matriciellement converties restantes. 20 25 30

11. Support matériel pouvant être lu par un ordinateur et présentant des instructions programmées qui, lorsqu'elles sont exécutées par un processeur d'un dispositif de commande d'impression, peuvent servir à mettre en oeuvre le procédé selon l'une quelconque des revendications 6 à 10. 35

40

45

50

55

FIG.1

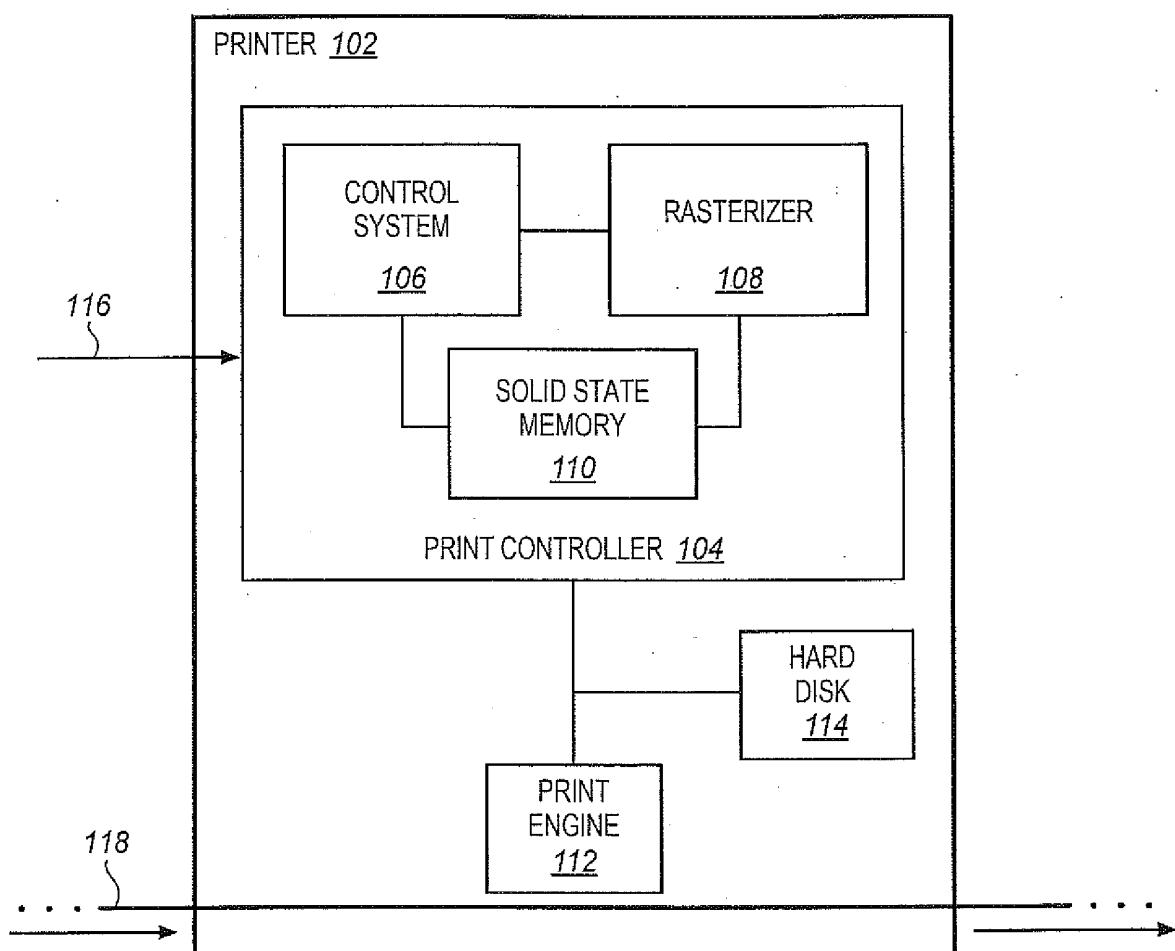


FIG.2

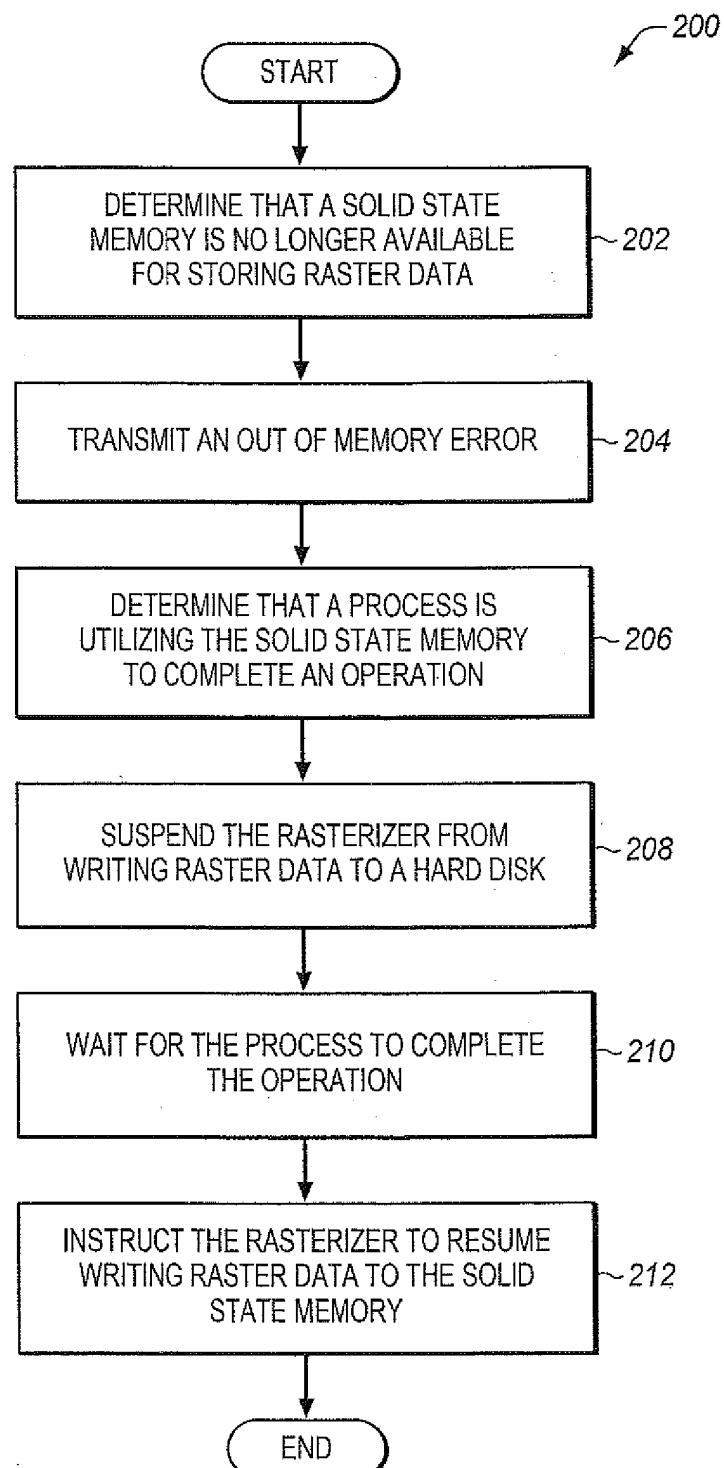


FIG.3

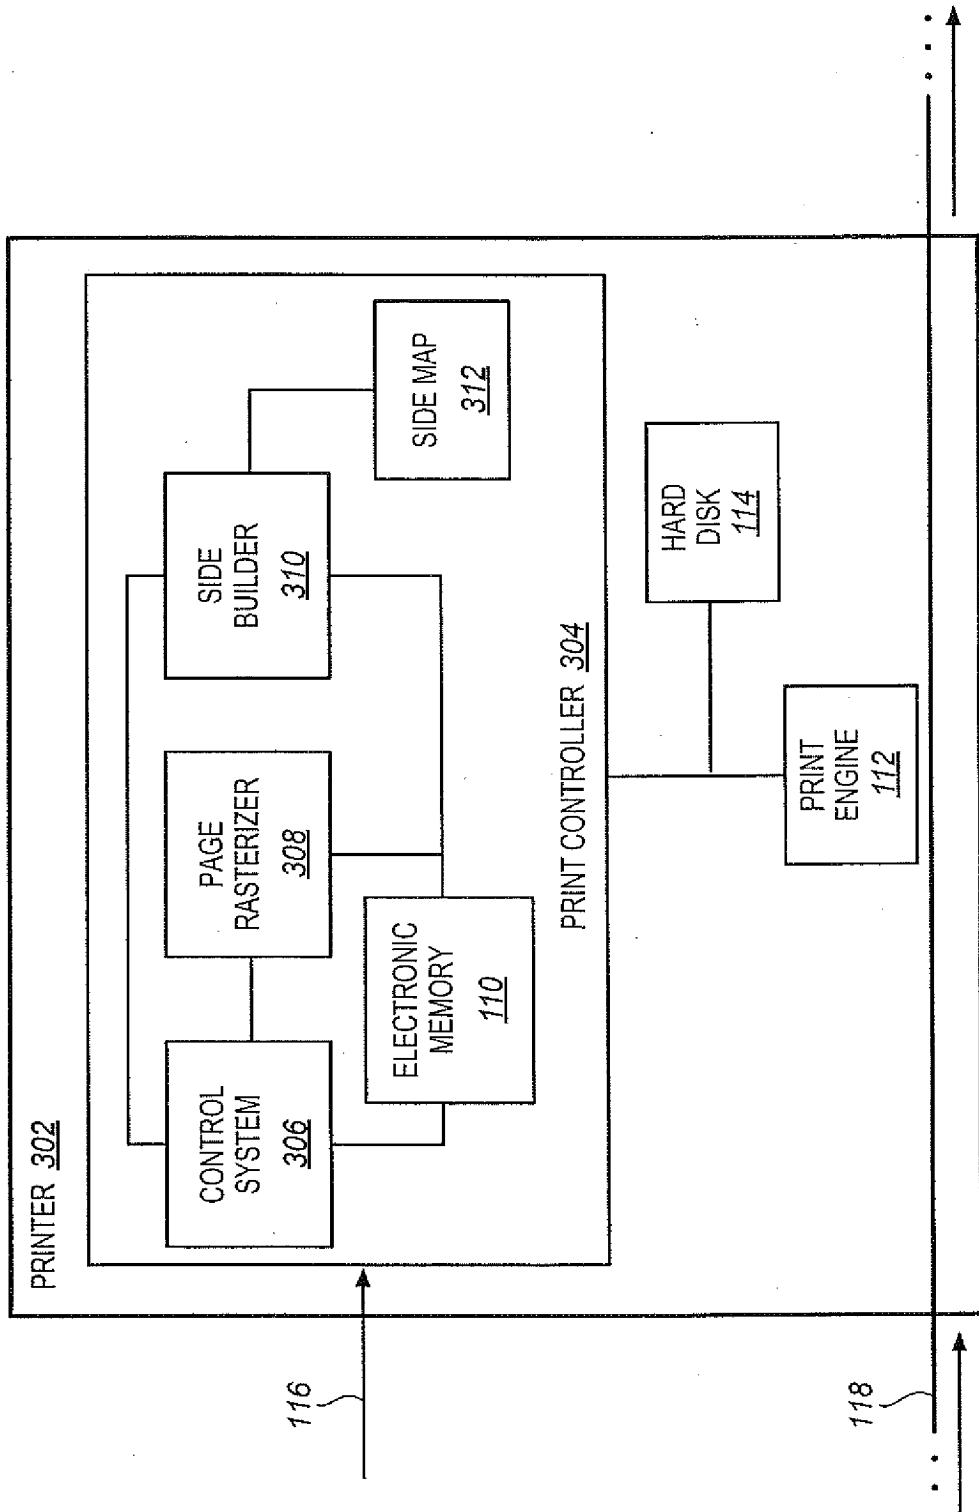


FIG.4

400


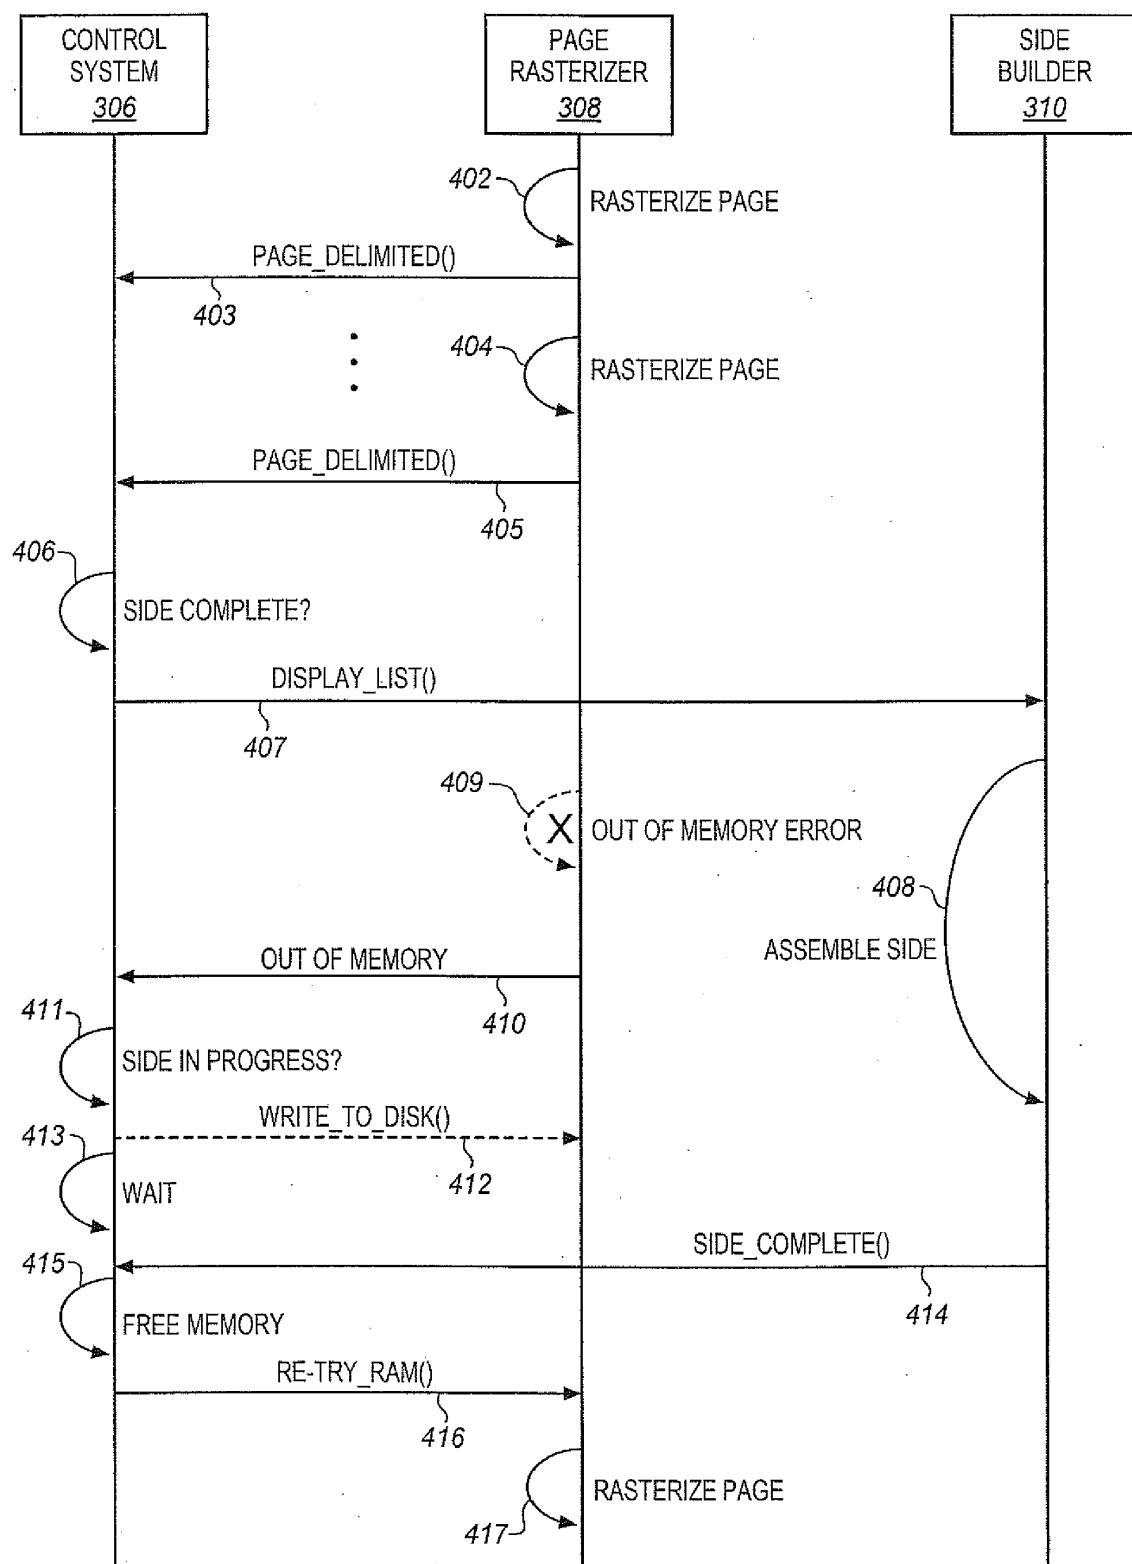


FIG.5

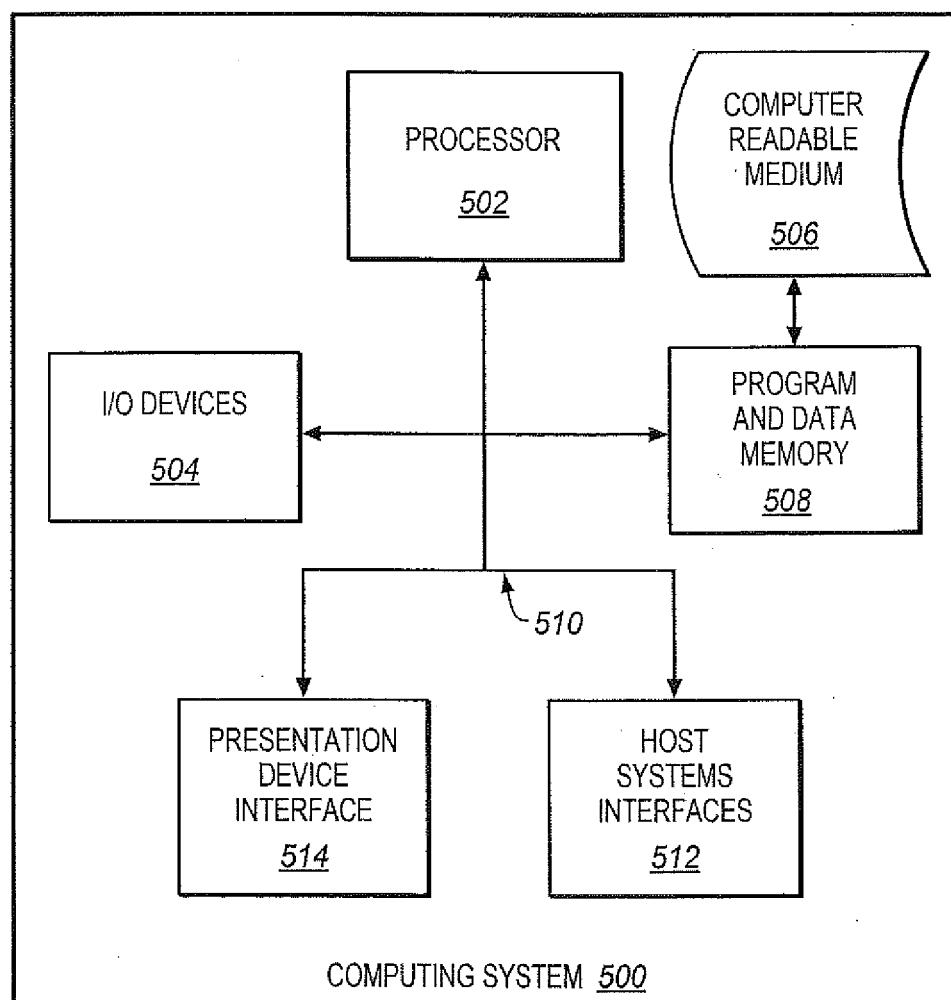

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2010053179 A [0006]