



US008267241B2

(12) **United States Patent**
den Boer et al.

(10) **Patent No.:** **US 8,267,241 B2**

(45) **Date of Patent:** **Sep. 18, 2012**

(54) **ROTATIONALLY INDEXED ARTICLE SUPPORT FOR A CONVEYOR SYSTEM HAVING AN ALIGNMENT STATION**

4,147,012 A 4/1979 van Mil
4,153,971 A 5/1979 Simonds
4,153,972 A 5/1979 Harben et al.

(Continued)

(75) Inventors: **Mark Thomas Gustaaf den Boer**,
Roosendaal (NL); **Juul Floris van den Berg**,
Roosendaal (NL); **Arij de Vrij**,
Numansdorp (NL)

FOREIGN PATENT DOCUMENTS

DE 603 16 104 T2 6/2008

(Continued)

(73) Assignee: **Foodmate BV** (NL)

OTHER PUBLICATIONS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 6 days.

International Search Report and Written Opinion dated Jan. 20, 2012 for NL2006075.

(Continued)

(21) Appl. No.: **13/014,261**

Primary Examiner — James R Bidwell

(22) Filed: **Jan. 26, 2011**

(74) *Attorney, Agent, or Firm* — Womble Carlyle Sandridge & Rice LLP

(65) **Prior Publication Data**

US 2012/0186941 A1 Jul. 26, 2012

(51) **Int. Cl.**
B65G 17/46 (2006.01)

(52) **U.S. Cl.** **198/679**; 198/680; 198/682

(58) **Field of Classification Search** 198/678.1,
198/683, 684, 685, 679, 680, 465.4, 682

See application file for complete search history.

(56) **References Cited**


U.S. PATENT DOCUMENTS

1,730,382 A	*	10/1929	Posnick	198/465.4
2,526,253 A	*	10/1950	Merrill	198/679
3,847,269 A	*	11/1974	Buccicone	198/679
3,956,794 A		5/1976	Verbakel	
3,969,790 A		7/1976	Smorenburg	
3,979,793 A		9/1976	Hazenbroek	
3,983,601 A		10/1976	Verbakel	
3,990,128 A		11/1976	van Mil	
4,034,440 A		7/1977	van Mil	
4,118,829 A		10/1978	Harben, Jr.	
4,131,973 A		1/1979	Verbakel	

(57) **ABSTRACT**

An article support assembly (1) is adapted for movement by a conveyor along a path of conveyance. The article support assembly (1) includes a trolley (5) for engagement by the conveyor and a shackle (3) configured to support an article, and rotatable with respect to the trolley. A turning block (33) is associated with the shackle (3), and rotation of the turning block with respect to the trolley (5) causes corresponding rotation of the shackle relative to the trolley. Yieldable indexing features (23, 27, 29, 31) are operatively arranged between the trolley (5) and the turning block (33) to define at least a first and a second incremental rotational position or orientation for the shackle (3). The yieldable indexing features (23, 27, 29, 31) of the article support assembly (1) are biased into yieldable engagement by magnetic repelling forces. A conveyor system for conveying articles along processing stations is adapted to include the article support assembly (1) and comprises a turning station (43A, 43B, 43C, 43D) for giving a predetermined rotational orientation to the shackle (3) with respect to the trolley (5).

13 Claims, 5 Drawing Sheets

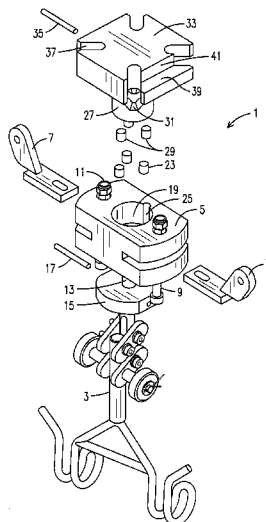

U.S. PATENT DOCUMENTS							
4,178,659	A	12/1979	Simonds	5,090,940	A	2/1992	Adkison
4,180,152	A	12/1979	Sefcik	5,098,333	A	3/1992	Cobb
4,203,178	A	5/1980	Hazenbroek	5,104,351	A	4/1992	van den Nieuwelaar et al.
4,283,813	A	8/1981	House	5,122,090	A	6/1992	van den Nieuwelaar et al.
4,292,709	A	10/1981	van Mil	5,123,871	A	6/1992	van den Nieuwelaar et al.
4,388,811	A	6/1983	Zebarth	5,125,498	A	6/1992	Meyn
4,395,795	A	8/1983	Hazenbroek	5,147,240	A	9/1992	Hazenbroek et al.
4,406,037	A	9/1983	Hazenbroek	5,147,241	A	9/1992	Rudin
4,418,444	A	12/1983	Meyn et al.	5,154,664	A	10/1992	Hazenbroek et al.
4,418,445	A	12/1983	Meyn et al.	5,154,665	A	10/1992	Hazenbroek
4,434,526	A	3/1984	van Mil	RE34,149	E	12/1992	Markert
4,439,891	A	4/1984	van Mil	5,173,076	A	12/1992	Hazenbroek
4,468,838	A	9/1984	Sjöström et al.	5,173,077	A	12/1992	van den Nieuwelaar et al.
4,490,922	A	* 1/1985	Gorodetsky et al. 198/679	5,176,563	A	1/1993	van den Nieuwelaar et al.
4,510,886	A	4/1985	van Mil	5,176,564	A	1/1993	Hazenbroek
4,514,879	A	5/1985	Hazenbroek	5,178,890	A	1/1993	van den Nieuwelaar et al.
4,516,290	A	5/1985	van Mil	5,186,679	A	2/1993	Meyn
4,524,489	A	6/1985	van Mil	5,188,559	A	2/1993	Hazenbroek
4,558,490	A	12/1985	Hazenbroek et al.	5,188,560	A	2/1993	Hazenbroek
4,559,672	A	12/1985	Hazenbroek et al.	5,194,035	A	3/1993	Dillard
4,567,624	A	2/1986	van Mil	5,197,917	A	3/1993	Verbakel et al.
4,570,295	A	2/1986	van Mil	5,199,922	A	4/1993	Korenberg et al.
4,574,429	A	3/1986	Hazenbroek	5,222,905	A	6/1993	Van den Nieuwelaar et al.
4,577,368	A	3/1986	Hazenbroek	5,242,324	A	9/1993	Koops
D283,289	S	4/1986	Hazenbroek	5,248,277	A	9/1993	Bos et al.
4,593,432	A	6/1986	Hazenbroek	5,256,101	A	10/1993	Koops
4,597,133	A	7/1986	van de Nieuwelaar	5,269,721	A	12/1993	Meyn
4,597,136	A	7/1986	Hazenbroek	5,277,649	A	1/1994	Adkison
4,635,317	A	1/1987	van der Eerden	5,277,650	A	1/1994	Meyn
4,639,973	A	2/1987	van der Eerden	5,279,517	A	1/1994	Koops
4,639,974	A	2/1987	Olson	5,290,187	A	3/1994	Meyn
4,639,975	A	2/1987	van der Eerden	5,299,975	A	4/1994	Meyn
4,646,384	A	3/1987	van der Eerden	5,299,976	A	4/1994	Meyn
4,651,383	A	3/1987	van der Eerden	5,318,428	A	6/1994	Meyn
4,653,147	A	3/1987	van der Eerden	5,326,311	A	7/1994	Persoon et al.
4,682,386	A	7/1987	Hazenbroek et al.	5,334,083	A	8/1994	van den Nieuwelaar et al.
4,704,768	A	11/1987	Hutting et al.	5,336,127	A	8/1994	Hazenbroek
4,723,339	A	2/1988	van de Nieuwelaar et al.	5,339,941	A	* 8/1994	Moll 198/465.4
4,724,581	A	2/1988	van de Nieuwelaar	5,340,351	A	8/1994	Minderman et al.
4,736,492	A	4/1988	Hazenbroek	5,340,355	A	8/1994	Meyn
RE32,697	E	6/1988	Hazenbroek et al.	5,342,237	A	8/1994	Kolkman
4,765,028	A	8/1988	van de Nieuwelaar et al.	5,344,359	A	9/1994	Kolkman
4,766,644	A	8/1988	van den Nieuwelaar et al.	5,344,360	A	9/1994	Hazenbroek
4,769,872	A	9/1988	Hazenbroek et al.	5,366,406	A	11/1994	Hobbel et al.
4,779,308	A	10/1988	van de Nieuwelaar et al.	5,370,574	A	12/1994	Meyn
4,788,749	A	12/1988	Hazenbroek et al.	5,372,246	A	12/1994	van Aalst
4,811,456	A	3/1989	Heuvel	RE34,882	E	3/1995	Meyn
4,811,458	A	3/1989	v.d. Nieuwelaar et al.	5,429,549	A	7/1995	Verrijp et al.
4,811,462	A	3/1989	Meyn	5,439,702	A	8/1995	French
4,813,101	A	3/1989	Brakels et al.	5,453,045	A	9/1995	Hobbel et al.
4,884,318	A	12/1989	Hazenbroek	5,462,477	A	10/1995	Ketels
4,893,378	A	1/1990	Hazenbroek	5,470,194	A	11/1995	Zegers
4,894,885	A	1/1990	Markert	5,487,700	A	1/1996	Dillard
4,896,399	A	1/1990	Hazenbroek	5,505,657	A	4/1996	Janssen et al.
4,899,421	A	2/1990	Van Der Eerden	5,549,521	A	8/1996	van den Nieuwelaar et al.
4,918,787	A	4/1990	Hazenbroek	D373,883	S	9/1996	Dillard
4,928,351	A	5/1990	van den Nieuwelaar et al.	5,569,067	A	10/1996	Meyn
4,935,990	A	6/1990	Linnenbank	5,595,066	A	1/1997	Zwanikken et al.
4,939,813	A	7/1990	Hazenbroek	5,605,503	A	2/1997	Martin
4,958,694	A	9/1990	van den Nieuwelaar et al.	5,643,072	A	7/1997	Lankhaar et al.
4,965,908	A	10/1990	Meyn	5,643,074	A	7/1997	Linnenbank
4,972,549	A	11/1990	van Den Nieuwelaar et al.	5,672,098	A	9/1997	Veraart
4,993,113	A	2/1991	Hazenbroek	5,676,594	A	10/1997	Joosten
4,993,115	A	2/1991	Hazenbroek	5,704,830	A	1/1998	Van Ochten
5,001,812	A	3/1991	Hazenbroek	5,713,786	A	2/1998	Kikstra
5,013,431	A	5/1991	Doets	5,713,787	A	2/1998	Schoenmakers et al.
5,015,213	A	5/1991	Hazenbroek	5,741,176	A	4/1998	Lapp et al.
5,019,013	A	5/1991	Hazenbroek	5,755,617	A	5/1998	van Harskamp et al.
5,026,983	A	6/1991	Meyn	5,759,095	A	6/1998	De Weerd
5,035,673	A	7/1991	Hazenbroek	5,766,063	A	6/1998	Hazenbroek et al.
5,037,351	A	8/1991	van Den Nieuwelaar et al.	5,782,685	A	7/1998	Hazenbroek et al.
5,041,054	A	8/1991	van den Nieuwelaar et al.	5,785,588	A	7/1998	Jacobs et al.
5,045,022	A	9/1991	Hazenbroek	5,803,802	A	9/1998	Jansen
5,060,596	A	10/1991	Esbroeck	5,810,651	A	9/1998	De Heer et al.
5,064,402	A	11/1991	Koops	5,810,653	A	9/1998	Van Craaikamp et al.
5,067,927	A	11/1991	Hazenbroek et al.	5,813,908	A	9/1998	Craaikamp
5,074,823	A	12/1991	Meyn	5,827,116	A	10/1998	Al et al.
5,088,959	A	2/1992	Heemskerk	5,833,527	A	11/1998	Hazenbroek et al.
				5,865,672	A	2/1999	Hazenbroek

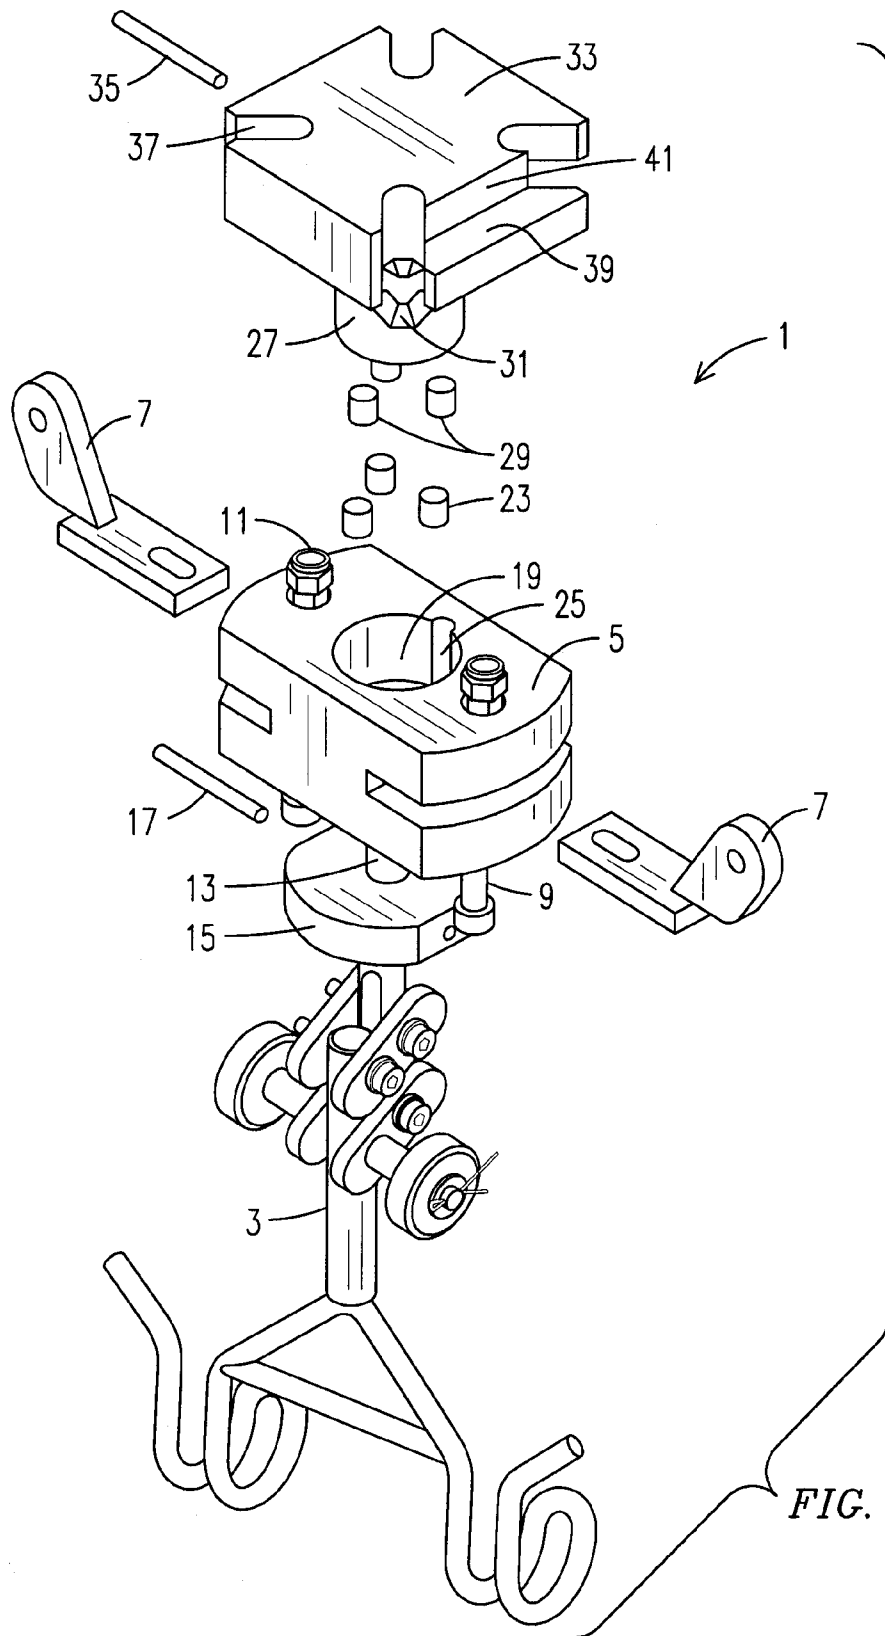


FIG. 1

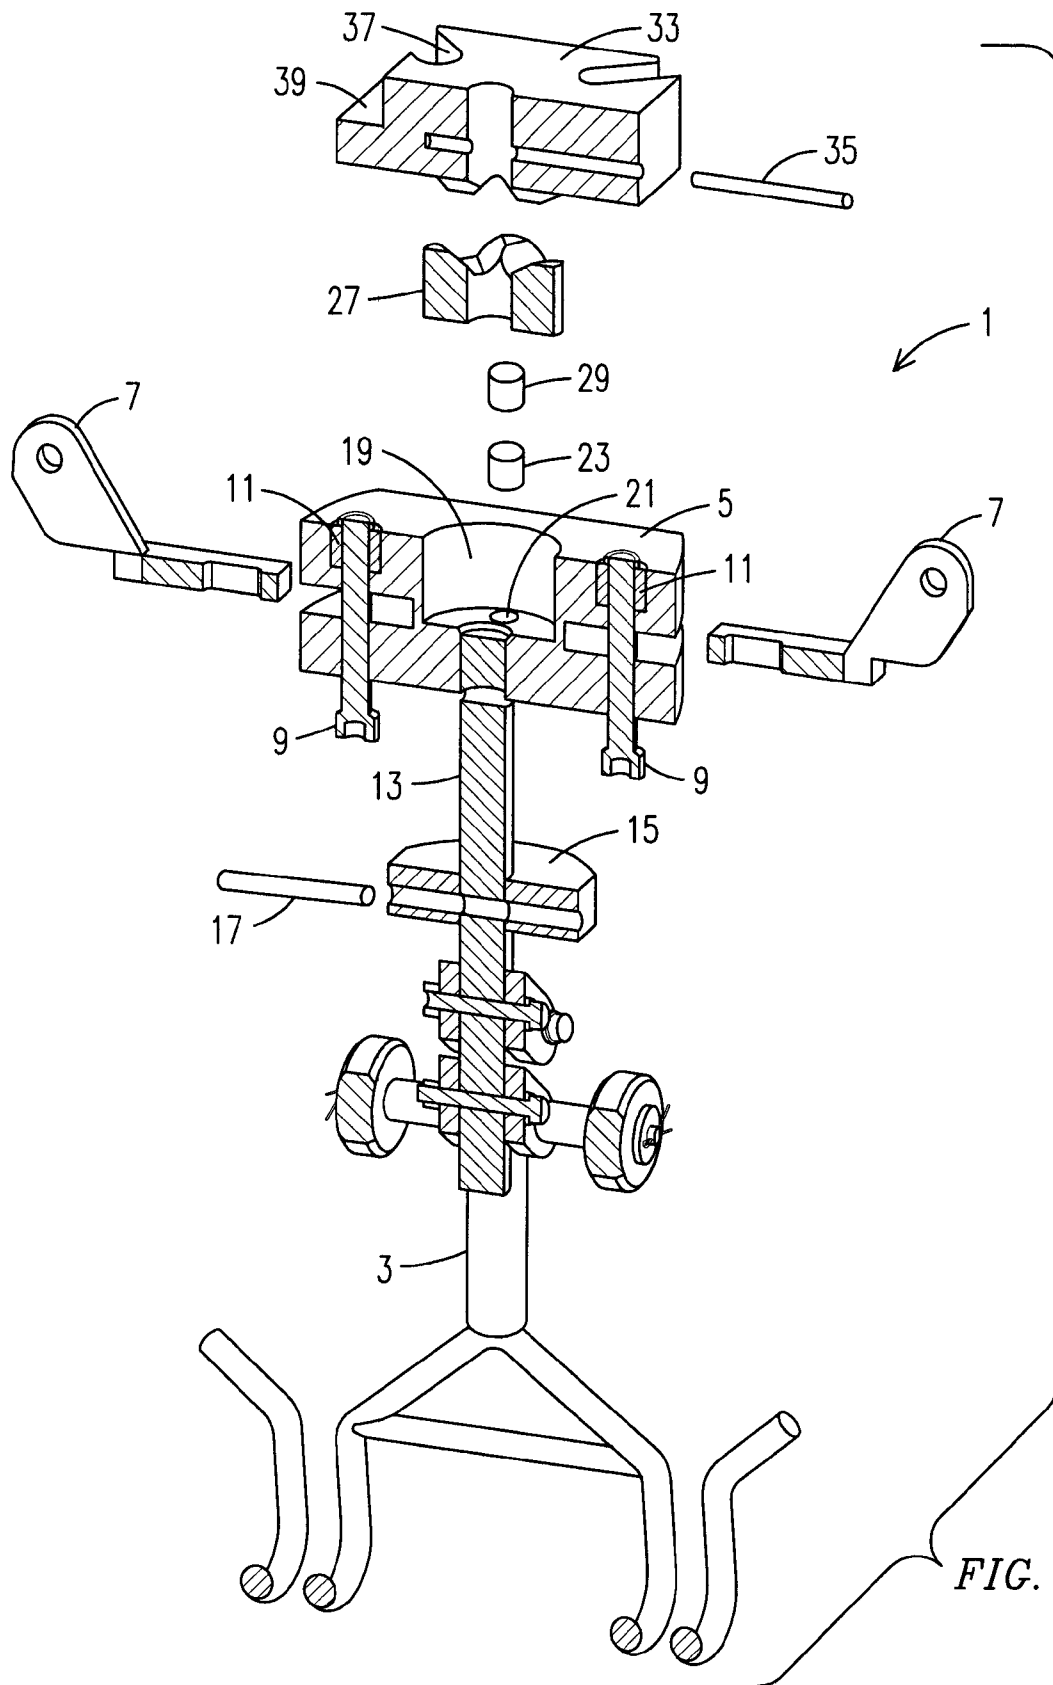


FIG. 2

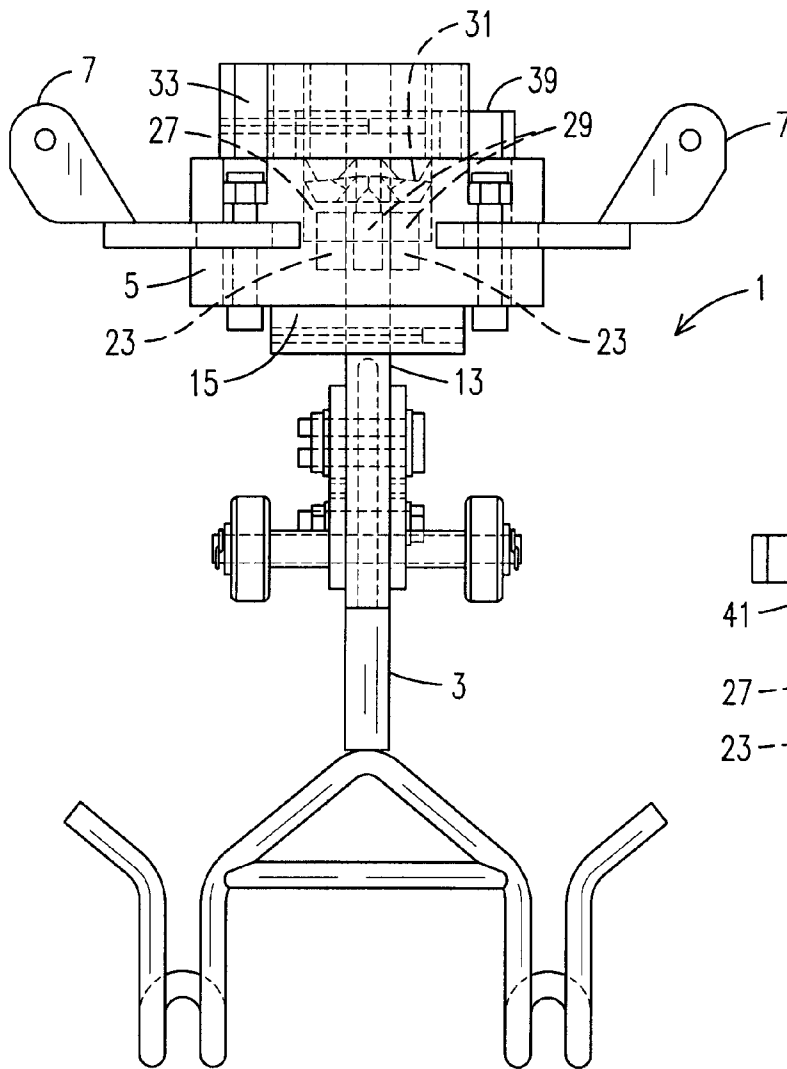


FIG. 4




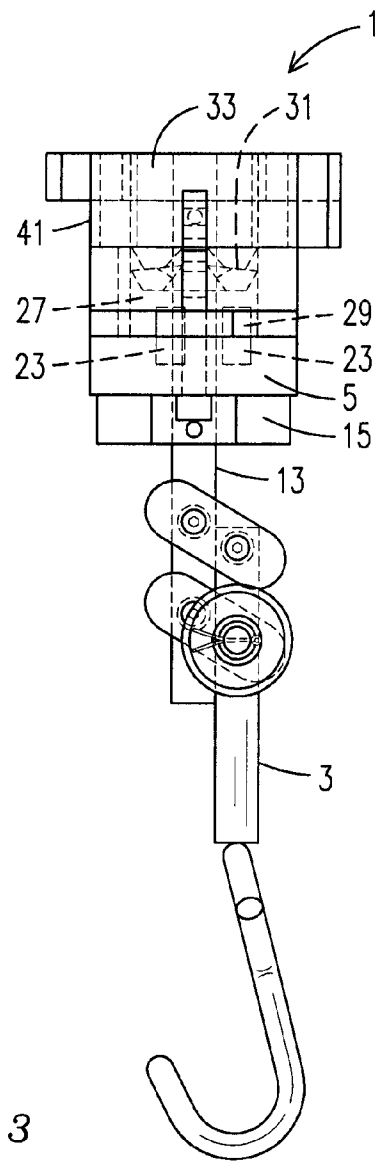


FIG. 3

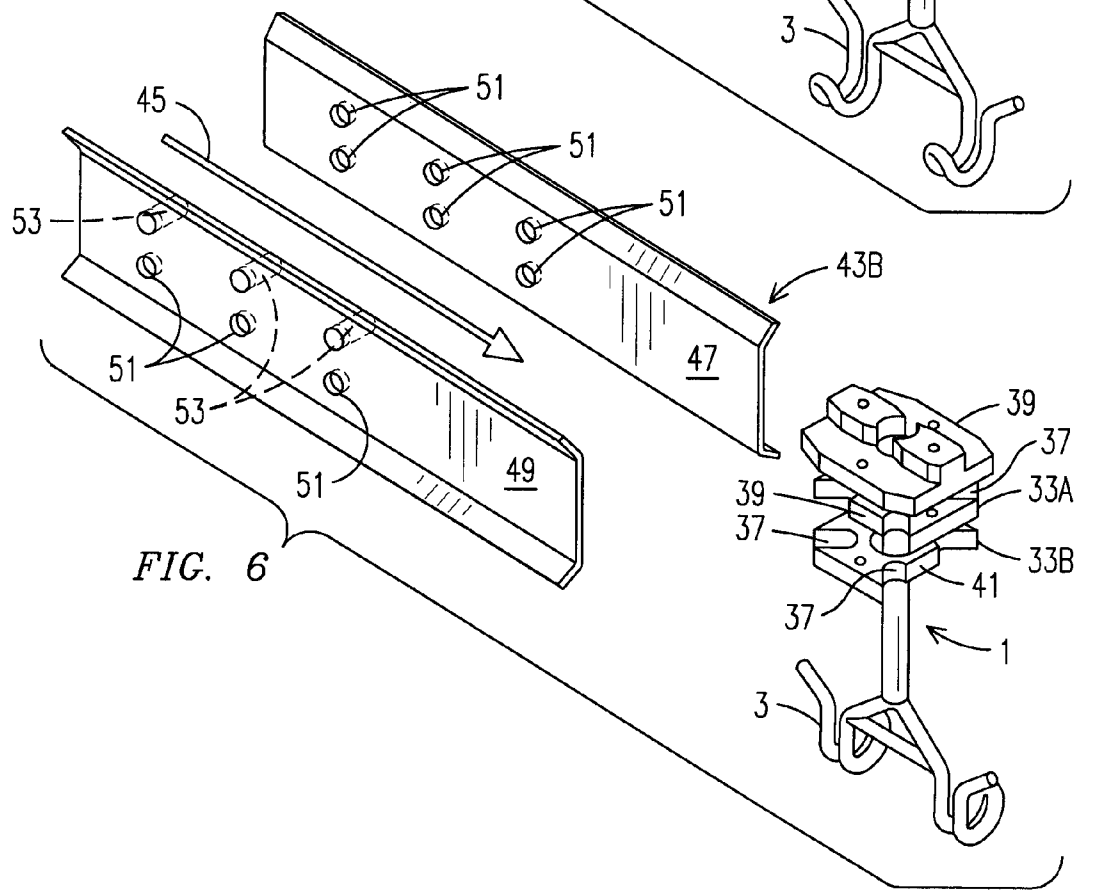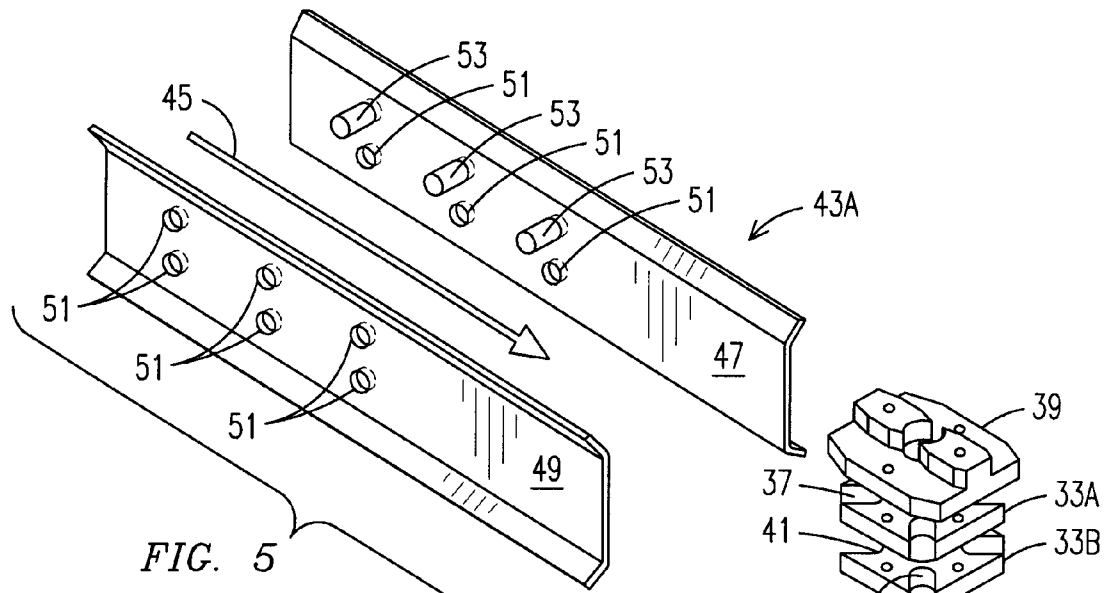

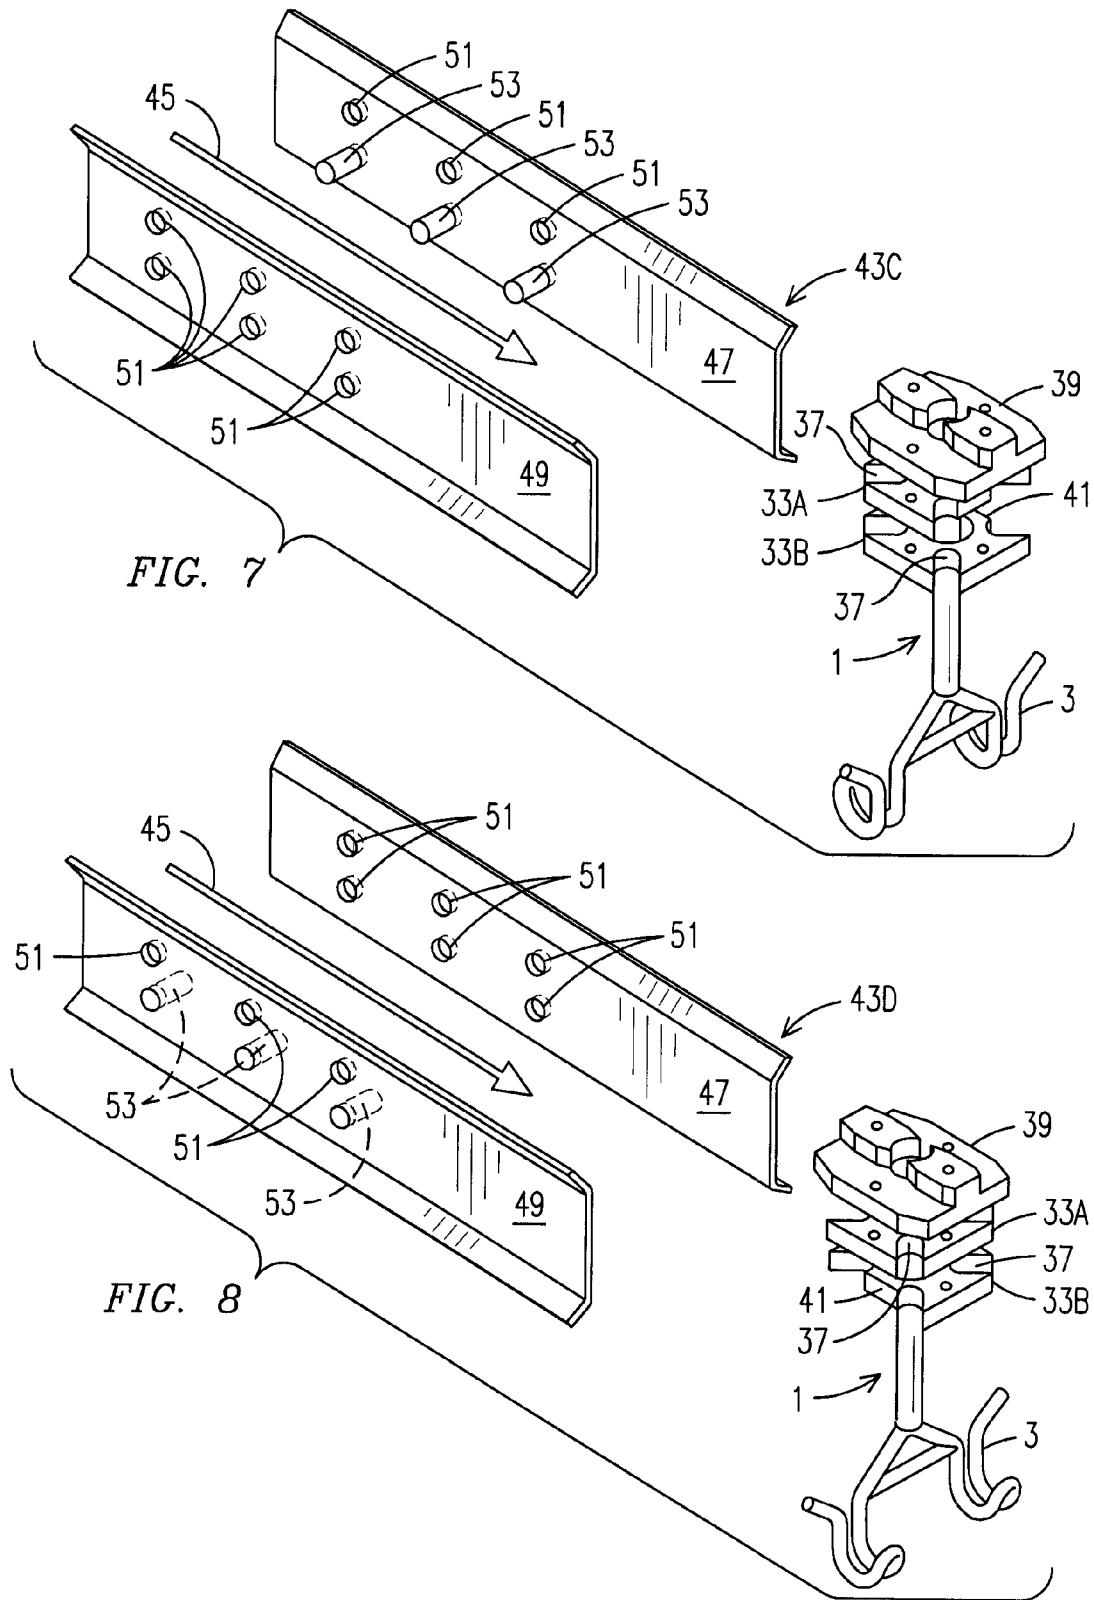

1

**ROTATIONALLY INDEXED ARTICLE
SUPPORT FOR A CONVEYOR SYSTEM
HAVING AN ALIGNMENT STATION**

TECHNICAL FIELD

The present disclosure relates generally to article supports for conveyor systems and more particularly to article supports for conveyor systems that include an alignment station for aligning the article supports, and articles supported thereby, in predetermined orientations. More specifically, the disclosure relates to poultry processing systems where the article supports are configured to hold poultry carcasses for movement along a processing path.

BACKGROUND

Conveyor systems having article supports that comprise a trolley and a rotatable article holder or shackle are well known in the poultry processing industry. One suitable example is described in European patent 0786208, which discloses a shackle for suspending poultry by their legs for movement by a conveyor track of a poultry processing line past and through individual processing stations. More specifically, a trolley assembly is supported and guided along a conveyor track and moved therealong by a transport chain. Poultry suspension hooks are rotatably mounted to the trolley and an associated turning gear is adapted to cooperate with turning features along the track to rotate the turning gear and thereby the poultry suspension hooks between predetermined rotary positions or orientations. At the location of individual processing stations, the turning gear is usually retained between opposite parallel side guides to inhibit any rotation when a suspended poultry carcass is being processed at the processing station. In between the processing stations, however, these parallel side guides may be interrupted or otherwise not be present. The side guides are also interrupted where the turning gear is engaged by turning features at a turning station to effect its rotation to a desired orientation.

The turning gear, which is a substantially square body, has slots extending inwardly from its corners. These slots are engageable by turning pins at turning stations positioned along the conveyor path to rotate the turning gear and its associated shackle to a desired orientation. A yieldable indexing arrangement between the trolley and the turning gear ensures that the desired orientation is retained as the assembly moves further along the track. This is of particular importance at locations where the lateral side guides are interrupted. The typical yieldable indexing arrangement includes a spring biased ball and socket assembly with a cavity for holding the ball and spring on one of the relatively rotatable parts and a ball receiving recess or detent on the other relatively rotatable part. The ball snaps into a detent when the turning gear is in predetermined indexed orientations to maintain the turning gear and shackle yieldably in these orientations. Other mechanical arrangements may be used.

The characteristics of mechanical tension springs of these indexing assemblies are not always compatible with the yieldability requirements of rotatable article support assemblies. It is important from a safety perspective, for instance, that the indexing assemblies give way when human beings accidentally obstruct a suspended article moving along the path of conveyance. Thus while relatively firm indexing is required to hold the turning gear and shackle in its indexed orientations, there is also a somewhat conflicting need for relatively forceless disturbance of the turning gear and

2

shackle away from the indexed orientations when accidentally disturbed, and to return them thereafter back to their indexed orientation.

There is therefore a need for an improved article support assembly and aligning station for use in a processing conveyor. In a more general sense there is a need for such a support assembly and aligning station that overcomes or ameliorates at least one of the disadvantages of the prior art. There is a related need for alternative structures which are less cumbersome in assembly and operation and which moreover can be made relatively inexpensively. Alternatively a need exist at least to provide consumers with a useful choice. It is to a method and apparatus that addresses these and other needs that the present invention is primarily directed.

SUMMARY

Briefly described, an article support assembly and a conveyor system is disclosed for conveying articles between processing stations. The article support assembly includes a trolley for engagement with the conveyor and a holder or shackle mounted to the trolley and configured to support an article such as a poultry carcass. The shackle is rotatable with respect to the trolley. A turning block is associated with the shackle and rotation of the turning block with respect to the trolley causes corresponding rotation of the shackle relative to the trolley. A yieldable indexing arrangement is operatively disposed between the trolley and the turning block to define at least a first and a second incremental indexed rotational orientation for the shackle. The yieldable indexing arrangement is biased into operative engagement by magnetic repelling forces.

The article support assembly of this disclosure is more efficient than those of the prior art. It has been found that the magnetic repulsion also better meets the somewhat conflicting requirement of relatively firm retention of the shackle in its indexed orientations and relatively forceless disturbance of the shackle away from the indexed orientations when accidentally engaged by, for instance, a worker. Further advantageous aspects of the invention will become clear from the appended description and in reference to the accompanying drawing figures, which are briefly described as follows.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an exploded perspective illustration of a rotatable article support that embodies principles of the invention in one preferred embodiment.

FIG. 2 is a cross section of the exploded perspective illustration of FIG. 1.

FIG. 3 is a side elevation in ghost view of the article support of FIGS. 1 and 2.

FIG. 4 is a rear elevation in ghost view of the article support of FIGS. 1, 2, and 3.

FIG. 5 is a perspective view showing a first arrangement of turning pins for obtaining a first output orientation of the article support.

FIG. 6 is a perspective view showing a second arrangement of turning pins for obtaining a second output orientation of the article support.

FIG. 7 is a perspective view showing a third arrangement of turning pins for obtaining a third output orientation of the article support.

FIG. 8 is a perspective view showing a fourth arrangement of turning pins for obtaining a fourth output orientation of the article support.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

Reference will now be made in more detail to the drawing figures, in which like parts may be indicated by like reference numerals throughout the several views. In FIGS. 1 and 2 an exploded and an exploded cross sectional view respectively are presented and show a rotatable article support assembly 1 according to the disclosure. In this example, the article support assembly 1 is configured to suspend poultry carcasses as they are conveyed along a processing path. The article support assembly 1 includes a shackle 3, which in this example is a so called weighing shackle, for the suspension of animal carcasses, such as fowl or poultry carcasses. The shackle 3 is rotatably suspended from a base block 5. The base block 5 is arranged for movement along an overhead conveyor rail or track (not shown, but conventional). Such conveyor rails or tracks are common in industrial apparatuses for carrying out a succession of processing steps. Commonly such conveyor rails are laid out in a continuous loop that defines a path of conveyance along or past or through a plurality of processing stations. Such systems are well known in the meat processing industry, but are also used in other disciplines of industry and manufacture. The base block 5 in the illustrated embodiment thus forms a trolley or carriage that is linked to similar base blocks of adjacent spaced article support assemblies by trolley brackets 7 and chains, or the like (not shown). The trolley brackets 7 are attached to the base block 5 by means of bolts 9 and nuts 11.

Extending upwardly from shackle 3 is a shaft 13 to which an abutment flange 15 is attached by means of a first transverse pin 17. The shaft 13 extends upwardly through a central bore in the base block 5, which central bore is enlarged at the upper end of the base block 5 to form a cavity 19. The cavity 19, as best seen in FIG. 2, has three bores 21 (only one visible in FIG. 2) each configured to receive a lower magnet 23. The cavity 19 has a groove 25 (FIG. 1) for non-rotatably receiving an indexing plunger 27 which has its perimeter adapted to the contour of cavity 19 to inhibit relative rotation but to allow axial movement of the plunger 27.

Not visible in FIGS. 1 and 2, but visible in the ghost views of FIGS. 3 and 4, the indexing plunger 27 has bores opening into its bottom surface for receiving upper magnets 29. In this example the lower magnets 23 are positioned with their north poles on top or facing up and the upper magnets 29 are positioned with their north poles facing down. In such an orientation, the lower and upper magnets 23, 29 will repulse or repel one another when they are in or near aligned positions. Thus, the indexing plunger is urged upwardly within the cavity 19 when the magnets are near or in alignment with one another and further are urged upwardly with the maximum force with the magnets are in precise alignment with the repulsive forces falling off as the magnets move progressively away from precise alignment.

The indexing plunger 27 carries on its upper surface a number of radial indexing formations or features 31, which are configured to cooperate with complementary indexing formations or features on a lower face of a turning gear or turning block 33. The indexing formations on the indexing plunger and turning block are configured to mesh and yieldably lock together when the plunger and turning block are in predetermined rotary orientations with respect to each other. In this example, the indexing formations 31 provide for four yieldably locked rotational orientations that are 90° apart, although other configurations are possible as may be dictated by application specific requirements.

The turning block 33 is mounted to the shaft 13 by means of a second transverse pin 35. Spacing between transverse bore in the shaft 13 for receiving the first and second transverse pins 17, 35 is such that the base block 5 is snugly and rotatably received between the abutment flange 15 and the turning block 33. Thereby also the indexing plunger 27 is held or captured within the cavity 19 of the base block 5 against the repulsive forces of the confronting lower and upper magnets 23, 29. The magnets 23, 29 are preferably sintered rare earth magnets that may contain neodymium or be ceramic magnets of ferrous material. Another suitable magnet material may be samarium cobalt.

The polarity and strength of the lower and upper magnets 23, 29 should be sufficient to obtain the repulsive force necessary to bias the indexing formation 31 into engagement with the turning block 33. This can be achieved with the north poles of confronting magnets facing one another, but may also be achieved by having the south poles facing one another. The important aspect is that like poles of confronting magnets are facing one another. The turning block 33 further has diagonal slots 37 extending diagonally inwardly from each corner of the substantially square contour of the turning block 33. As described above, these diagonal slots are configured to be engaged by pins or other features of a turning station as the turning block is conveyed through the turning station to move the turning block and shackle between its indexed orientations to a desired orientation.

In FIGS. 3 and 4, a side and a rear elevation of the assembled article support assembly 1 are illustrated as ghost views; i.e. with internal surfaces and parts shown in phantom line. Accordingly, internal parts like the magnets 23, 29, the indexing plunger 27 and the indexing formations 31 are visible as if the base block 5 and the turning block 33 were of transparent material. Also best visible in FIGS. 3 and 4 is that the turning block 33 has an upper cut-out 39 along one edge extending between adjacent slots 37, as well as a lower cut-out 41 along another edge that is perpendicular to the one edge. The turning block may thus be said to be truncated along that edge.

The purpose of the upper and lower cut-outs will now be described with particular reference to FIGS. 5 to 8. In FIGS. 5 to 8 several possible output orientations are shown for the article support assembly 1 after having passed through a selectively configured aligning, or turning station 43A, 43B, 43C, 43D in a direction of conveyance indicated by arrow 45. The representation of FIGS. 5 to 8 is essentially schematic and structure that is not directly relevant to a correct understanding of the disclosure is omitted for clarity. Also the article support assembly 1 is shown in a simplified form with the turning block 33 separated in two levels of disks 33A, 33B to better visualize the upper and lower cut-outs 39, 41 defining the truncated sides.

Each of the turning stations 43A-43D has opposed left and right hand guiding walls 47, 49. Each right hand guiding wall 47, 49 has a series of openings 51 in an upper and a lower row, each consisting of three openings. Each opening 51 is adapted to receive selectively a turning pin 53. As shown in FIG. 5, three turning pins 3 are successively arranged in the upper row of openings 51 of the left hand guiding wall 47. Irrespective of the rotational position of the article support assembly 1 when it enters the turning station 43A, the three successive turning pins 53 in the upper row will always be sufficient to engage as many of the diagonal slots 37 as is necessary to bring the upper cut-out 39 (in level 33A of the turning block) into a position facing the left hand guide rail 47, once it has passed all three turning pins 53.

5

As shown in FIG. 6, three turning pins 53 are now mounted in the upper row of three openings 51 of the right hand guiding wall 49. This has the effect that article supported assembly 1 will now always leave the turning station 43B with the upper cut-out 39 facing the right hand guiding wall 49. This results in a different orientation of the shackle 3 than that achieved with the turning station 43A configured as shown in FIG. 5.

In FIG. 7 again a different arrangement or configuration of turning station 43C is shown. In this variation the three successive turning pins 53 are positioned in the lower row of openings 51 of the left hand guiding wall 47. The pins 53 now engage the diagonal slots 37 at the lower portion 33B of the turning block. Upon passage of the article support assembly 1 through the turning station 43C in the direction 45 of conveyance, the lower cut-out 41 will emerge always from the turning station 43C, facing the left hand guide wall 47.

In a further variation according to FIG. 8, the turning station 43D has the successive turning pins 53 installed on the lower row of openings 51 in the right hand guide wall 49. This results in the lower cut-out 41 of the lower portion 33B of the turning block emerging always from the turning station 43D facing the right hand side wall 49.

It will thus be seen that the turning station may be configured as needed such that the shackle 3, and a carcasses suspended therefrom, emerges from the turning station in any desired one of four orientations that are 90° apart with respect to each other. Thus, the carcass can be rotated to the orientation that it needs to be in prior to engaging one of the successive processing stations of a poultry processing line. This is enabled at least in part by the two levels of turning pins that cooperate with corresponding portions (upper and lower) of the turning block to obtain the desired indexed orientation each time.

As the turning block is moved from one indexed orientation to another, the indexing formations 31 on the indexing plunger 27 are progressively moved out of precise engagement with the corresponding mating formations on the bottom of the turning block 33. As this occurs, the indexing plunger is urged downwardly by the relatively moving formations into the cavity 19 against the repulsive forces of the magnets, which are still in near alignment with each other but becoming progressively misaligned. When the rotation of the turning block moves beyond about 45°, the indexing formations of the indexing plunger begin to move progressively into mating engagement with the next adjacent mating formations on the bottom of the turning block. At this point, the upward forces applied to the indexing plunger by the repulsion of the magnets urges the indexing plunger upwardly with a force sufficient to snap the indexing formations and the mating formations into mating alignment. Thus, the turning block and shackle snap to their next indexed orientation after having been rotated about half way to that position.

By the same token, if the shackle or a carcass suspended therefrom is accidentally disturbed away from an indexed orientation through less than about 45° by, for instance, a worker in the processing path, the repulsive forces supplied by the magnets will cause the turning block and shackle to snap back to the indexed orientation by the same mechanism. However, as the magnets move further out of precise alignment, the repulsive force that they impart is reduced proportionally. Thus, resistance to the disturbance is significantly reduced to accommodate the disturbance in a relatively forceless way so as not to injure the worker or damage components of the machine. When the indexing features are in precise alignment, the magnets may be arranged to be more closely aligned to provide greater repulsive force to obtain a firm mating engagement of the indexing features. This function-

6

ality is not present in prior art indexing systems using springs, balls, detents, and the like. It has been found that this arrangement accommodates well the somewhat conflicting needs to provide for indexed orientations that are firmly maintained yet provide for a relatively forceless disturbance away from an indexed orientation, and an automatic return thereto, in the event of an accidental contact.

Accordingly an article support assembly 1 is disclosed that is adapted for movement by a conveyor along a path of conveyance. The article support assembly 1 includes a trolley 5 for engagement by the conveyor and a shackle 3 configured to support an article, and rotatable with respect to the trolley. A turning block 33 is associated with the shackle 3, and rotation of the turning block with respect to the trolley 5 causes corresponding rotation of the shackle relative to the trolley. Yieldable indexing features 23, 27, 29, 31 are operatively arranged between the trolley 5 and the turning block 33 to define at least a first and a second incremental rotational orientation or position for the shackle 3. The yieldable indexing features 23, 27, 29, 31 of the article support assembly 1 are biased into engagement by magnetic repelling forces provided by magnets with like poles arranged to confront one another when in or near alignment. A conveyor system for conveying articles along processing stations is adapted to include the article support assembly 1 and comprises a turning station 43A, 43B, 43C, 43D for giving a predetermined rotational position to the shackle 3 with respect to the trolley 5.

It is thus believed that the operation and construction of the present invention will be apparent from the foregoing description and drawings appended thereto. It will be clear to the skilled person that the invention is not limited to any embodiment herein described and that modifications are possible which should be considered within the scope of the appended claims. Also kinematic inversions are considered inherently disclosed and to be within the scope of the invention. In the claims, any reference signs shall not be construed as limiting the scope of the invention. The term 'comprising' and 'including' when used in this description or the appended claims should not be construed in an exclusive or exhaustive sense but rather in an inclusive sense. Thus the expression 'comprising' as used herein does not exclude the presence of other elements or steps in addition to those listed in any claim. Furthermore, the words 'a' and 'an' shall not be construed as limited to 'only one', but instead are used to mean 'at least one', and do not exclude a plurality. Features that are not specifically or explicitly described or claimed may be additionally included in the structure of the invention within its scope. Additions, deletions, and modifications within the purview of the skilled person may generally be made without departing from the spirit and scope of the invention, which is determined only by the claims.

What is claimed is:

1. An article support assembly for movement by a conveyor along a path of conveyance, including:
 - a trolley for engagement by the conveyor;
 - a shackle configured to support an article, and rotatable with respect to the trolley;
 - a turning block associated with the shackle, rotation of the turning block with respect to the trolley causing corresponding rotation of the shackle relative to the trolley;
 - a yieldable indexing feature operatively arranged between the trolley and the turning block to define at least a first and a second incremental rotational orientation for the shackle, and

7

magnets associated with the yieldably indexing feature and arranged to urge the indexing feature into yieldable locked configurations through magnetic repulsion.

2. An article support assembly according to claim 1, wherein the magnets comprise a lower magnet and an upper magnet arranged to confront one another, the lower and upper magnets being positioned and oriented so that like poles of confronting magnets oppose one another when the shackle is in an incremental rotational orientation.

3. Article support assembly according to claim 1, wherein the turning block has a substantially rectangular perimeter contour with diagonal slots extending radially inwardly from each corner, and further comprising an upper cut-out along one perimeter edge extending between adjacent slots, and a lower cut-out extending along another perimeter edge that is substantially perpendicular to the one perimeter edge.

4. An article support assembly according to claim 1, wherein the yieldable indexing feature defines a total of four indexing positions.

5. An article support assembly according to claim 2, wherein the yieldable indexing feature comprises three confronting pairs of lower and upper magnets in a spaced arrangement.

6. An article support assembly according to claim 1, wherein the shackle is adapted to support a poultry carcass.

7. A conveyor system for conveying articles along processing stations including an article support assembly in accordance with claim 3 and a turning station.

8. The conveyor system according to claim 7, wherein the turning station includes a succession of three turning pins positioned to engage a predetermined selection of diagonal slots of the turning block as well as allowing passage of at least one of the upper and lower cut-outs.

8

9. A conveyor according to claim 8, wherein the turning pins are selectively mountable in upper and lower rows of openings provided in one of a right hand and left hand guide wall.

10. An article support assembly for attachment to a conveyor extending along a processing path, the article support assembly comprising:

a trolley securable to the conveyor;
a shackle rotatably secured with respect to the trolley and configured to support an article;

an indexing arrangement associated with the shackle and configured to maintain the shackle yieldably in at least a first and a second indexed rotational orientation relative to the processing path;

the indexing arrangement comprising confronting surfaces rotatable with respect to each other and having surface features that mate when the shackle is in the first and the second indexed rotational orientations; and

magnets associated with the indexing arrangement, the magnets being positioned and oriented to urge the confronting surfaces toward one another through magnetic force when the shackle is in the first and the second indexed rotational orientations.

11. The article support assembly of claim 10 and wherein the magnetic force is a repulsive magnetic force.

12. The article support assembly of claim 10 and further comprising a turning block associated with the shackle, rotation of the turning block relative to the trolley causing corresponding rotation of the shackle relative to the trolley.

13. The article support assembly of claim 12 and wherein the indexing arrangement is disposed between the turning block and the trolley.

* * * * *