



(19) Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 2 332 828 B1**

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
23.05.2012 Bulletin 2012/21

(51) Int Cl.:
B63J 99/00 (2009.01) **E05B 73/00 (2006.01)**

(21) Application number: **10194121.9**

(22) Date of filing: **08.12.2010**

(54) Antitheft apparatus for equipment with prime mover

Diebstahlsicherung für eine Ausrüstung mit Antriebsmotor

Appareil antivol pour équipement doté d'un moteur d'entraînement

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **09.12.2009 JP 2009279929**

(43) Date of publication of application:
15.06.2011 Bulletin 2011/24

(73) Proprietor: **Honda Motor Co., Ltd.**
Tokyo 107-8556 (JP)

(72) Inventors:

- **Shinogi, Yoshihisa**
Saitama 351-0193 (JP)
- **Takeda, Masato**
Saitama 351-0193 (JP)

- **Yamashita, Kosei**
Saitama 351-0193 (JP)
- **Yamamura, Makoto**
Saitama 351-0193 (JP)
- **Manita, Masashi**
Saitama 351-0193 (JP)
- **Maekawa, Yoshinori**
Saitama 351-0193 (JP)

(74) Representative: **Herzog, Markus et al**
Weickmann & Weickmann
Patentanwälte
Postfach 86 08 20
81635 München (DE)

(56) References cited:
EP-A1- 1 724 167 EP-A2- 1 288 411
US-A- 6 077 133

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**BACKGROUND OF THE INVENTION****Field of the Invention**

[0001] This invention relates to an antitheft apparatus for equipment with a prime mover.

Description of the Related

[0002] Conventionally, an antitheft apparatus (so-called an "immobilizer") for equipment like a vehicle having a prime mover is known which, when an electronic key storing ID information is manipulated by the operator, sends the ID information to an immobilizer controller to verify it with authentication ID information, and only when the authentication is verified (the ID information is valid), allows the prime mover to be started with the electronic key, thereby preventing theft, as taught, for example, by Japanese Laid-Open Patent Application No. 2007-90908, or closest prior art document EP1288411.

SUMMARY OF THE INVENTION

[0003] However, in the equipment frequently and repeatedly started and stopped, it is necessary for the operator to conduct authentication operation every time the equipment is started and it is bothersome. Specifically, in the case where the equipment comprises an outboard motor which is mounted on a boat to be used for fishing, usually the prime mover is stopped in a fishing spot and started to move to another fishing spot. Since the prime mover is frequently started and stopped, it is extremely troublesome to conduct the authentication operation every time the prime mover is started.

[0004] An object of this invention is therefore to overcome the aforesaid problem by providing an antitheft apparatus for equipment with a prime mover that, when the prime mover is frequently and repeatedly started and stopped, enables to easily restart the prime mover without authentication operation.

[0005] In order to achieve the object, this invention provides in its first aspect an apparatus for preventing theft of equipment having a prime mover, a prime mover controller that controls operation of the prime mover, and an authenticator that acquires ID information from an electronic key when the key is brought close thereto by an operator, determines whether the acquired ID information corresponds with authentication ID information, and gives permission to the prime mover controller to start the prime mover when the acquired ID information is determined to correspond with the authentication ID information, comprising a memorizer that stores information that the permission was given to the prime mover controller to start the prime mover; and wherein the authenticator determines whether the information is stored each time when activated, and gives the permission to the

prime mover controller immediately when it is determined that the information is stored.

[0006] In order to achieve the object, this invention provides in its second aspect a method for preventing theft of equipment having a prime mover, a prime mover controller that controls operation of the prime mover, and an authentication comprising the steps of acquiring ID information from an electronic key when the key is brought close thereto by an operator, determining whether the acquired ID information corresponds with authentication ID information, and giving permission to the prime mover controller to start the prime mover when the acquired ID information is determined to correspond with the authentication ID information, comprising the steps of: storing information that the permission was given to the prime mover controller to start the prime mover; and determining whether the information is stored each time when activated (S12), and giving the permission to the prime mover controller immediately when it is determined that the information is stored.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] The above and other objects and advantages of the invention will be more apparent from the following description and drawings in which:

FIG. 1 is an overall schematic view of an antitheft apparatus for equipment with a prime mover including a boat (hull) according to an embodiment of the invention;

FIG. 2 is a block diagram showing the configuration of the apparatus shown in FIG 1; and

FIG. 3 is a flowchart showing the operation of the apparatus shown in FIG 2.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0008] An antitheft apparatus for equipment with a prime mover according to an embodiment of the invention will now be explained with reference to the attached drawings.

[0009] FIG. 1 is an overall schematic view of an antitheft apparatus for equipment with a prime mover including a boat (hull) according to an embodiment of the invention

[0010] In FIG 1, reference numeral 1 indicates the antitheft apparatus for equipment with a prime mover. In the following, the explanation will be made by taking an outboard motor mounted with an internal combustion engine as an example of the equipment with a prime mover. As shown in FIG. 1, the outboard motor 12 is clamped (fastened) to the stem or transom of a boat (hull) 10.

[0011] The outboard motor 12 is equipped with a propeller 14 and internal combustion engine (prime mover) 16. The propeller 14 is rotated by power transmitted from the engine 16 and produces thrust for propelling the boat

10. The engine 16 comprises a spark-ignition gasoline engine with a displacement of 2,200 cc. The engine 16 is located above the water surface and covered by an engine cover.

[0012] A remote control box 18 is installed near a cockpit or operator's seat of the boat 10. The remote control box 18 is equipped with a lever 20 to be operable by the operator. The lever 20 can be moved (swung) fore and aft, i.e., toward and away from the operator from its initial position, by which the operator can input shift (gear) position commands and engine speed regulation commands. A lever position sensor (not shown) is installed near the lever 20 and produces an output or signal corresponding to a position of the operated lever 20.

[0013] A steering wheel 22 is installed near the cockpit to be rotatably manipulated. The operator manipulates the steering wheel 22 to input steering or turning commands. A steering angle sensor (not shown) is installed at a rotary shaft of the steering wheel 22 and produces an output or signal indicative of steering angle of the steering wheel 22.

[0014] The outboard motor 12 is installed near the engine 16 with an Electronic Control Unit (hereinafter called the "engine ECU" or "prime mover controller") 24 that controls the operation of the engine 16 and other components of the outboard motor 12. The engine ECU 24 comprises a microcomputer having a CPU, ROM, memory, input/output circuit and the like. The outputs of the forgoing sensors are inputted to the engine ECU 24. Based on the inputted outputs, the engine ECU 24 controls the operation of the engine 16 and other components of the outboard motor 12 in accordance with programs stored in the ROM.

[0015] Details of the outboard motor are described in Japanese Laid-Open Patent Application No. 2006-142880 proposed by the applicant earlier and the further explanation is omitted here.

[0016] The outboard motor 12 is also installed near the engine ECU 24 with other Electronic Control Unit (hereinafter called the "authentication ECU" or "authenticator") 26 that performs authentication check of an electronic key so as to prevent the outboard motor from theft. The authentication ECU 26 similarly comprises a microcomputer having a CPU, ROM, memory, input/output circuit and the like. Upon the manipulation of the electronic key, the authentication ECU 26 acquires ID information stored in the key, determines whether the ID acquired information corresponds with authentication ID information of the outboard motor 12, and when they are determined to correspond with each other, allows the engine 16 of the outboard motor 12 to start.

[0017] The engine ECU 24 and authentication ECU 26 are activated upon the supply of power from a battery disposed in the outboard motor 12 or the boat 10.

[0018] FIG 2 is a block diagram showing the configuration of the engine ECU 24 and authentication ECU 26 of the outboard motor 12.

[0019] In the outboard motor 12, the engine ECU 24

and authentication ECU 26 are interconnected to communicate with each other by a communication line 28. The engine ECU 24 stores ID information A (authentication ID information; indicated by "ID: A" in the drawing) used to identify the engine 16 of the outboard motor 12. The ID information comprises a string of several characters.

[0020] A card-shaped electronic key 30 for the outboard motor 12 stores the ID information A (indicated by "ID: A") which is the same as that stored in the engine ECU 24.

[0021] The authentication ECU 26 is equipped with a reader 26a. When the key 30 is brought close to the authentication ECU 26 of the outboard motor 12 by the operator, the authentication ECU 26 can acquire the ID information A from the key 30 through the reader 26a by wireless communication (more precisely, the contactless-type short-distance wireless communication). The authentication ECU 26 verifies the acquired ID information A of the key 30 with the ID information A of the engine 16 of the outboard motor 12 sent through the communication line 28.

[0022] In this case, since the above two data of the ID information A correspond with each other, the authentication ECU 26 sends an enable signal to the engine ECU 24, whereby the engine ECU 24 makes the engine 16 ready for start, more exactly, enables the ignition. Under this condition, when a starter switch 26b associated with the authentication ECU 26 is made ON, the engine 16 is started.

[0023] The aforementioned memory of the authentication ECU 26 includes a non-volatile memory (indicated as "EEPROM" in FIG. 2; memorizer) 26c capable of keeping stored information even when the power is OFF. When the engine 16 is enabled or allowed to start (which will be mentioned later), the memory 26c stores the information indicating that the engine start is enabled. The authentication ECU 26 further comprises an indicator 26d having an LED (Light-Emitting Diode), etc., that is lit when the engine start enabled information is stored in the memory 26c.

[0024] On the other hand, when the authentication ECU 26 determines in its authentication operation that the ID information acquired from an electronic key does not correspond with the ID information A of the engine 16, the authentication ECU 26 does not send the enable signal to the engine ECU 24. Consequently, since the ignition position is not established, even when the starter switch 26b is made ON, the engine 16 is not started.

[0025] Thus, the outboard motor 12 is configured such that, when the authentication ECU 26 determines that the ID information A in the key 30 corresponds with the authentication ID information A in the engine ECU 24, the engine start is enabled or allowed and when the two data of ID information do not correspond with each other, the engine start is disabled, thereby preventing theft of the outboard motor 12 and the boat 10.

[0026] The apparatus 1 according to this embodiment

is characterized in that, when once the authentication for starting the engine 16 is verified, the engine start enabled condition is maintained. In the following, more details of the operation of the apparatus 1 will be explained.

[0027] FIG. 3 is a flowchart showing the operation of the apparatus 1. The illustrated program is executed by the authentication ECU 26 when the authentication ECU 26 is supplied with power.

[0028] The program begins at S10, in which a flag F (explained later) is read from the memory 26c and proceeds to S12, in which it is determined whether a bit of the flag F is 0. Since a bit of the flag F is initially set to 0, the result in S12 in the first program loop is affirmative and the program proceeds to S14, in which the status is changed to a key-reading standby mode.

[0029] Next, in S16, it is determined whether the key 30 is manipulated near (brought close to) the reader 26a by the operator. When the result in S16 is affirmative, the program proceeds to S18, in which it is determined whether the authentication is verified. Specifically, as mentioned above, upon the manipulation of the key 30, the ID information of the key 30 is acquired and it is determined whether the acquired ID information corresponds with the authentication ID information of the engine 16.

[0030] When the result in S18 is affirmative, the program proceeds to S20, in which the engine 16 is enabled or allowed to start, i.e., the engine start enable signal is sent to the engine ECU 24. In other words, a permission is given to the prime mover controller to start the prime mover when the acquired ID information is determined to correspond with the authentication ID information (S20).

[0031] The program proceeds to S22, in which a bit of the flag F is set to 1 and to S24, in which information about the flag F is stored in the memory 26c. The information about the flag F being set to 1 eventually means information indicating that the engine start is enabled.

[0032] The program proceeds to S26, in which the indicator 26d is lit. This is done to inform the operator that the authentication has been verified in S18 and the engine 16 was enabled to start, i.e., it is under the condition where the antitheft function through the authentication ECU 26 is not active.

[0033] Next, the program proceeds to S28, it is determined whether the engine 16 is started, i.e., whether the starter switch 26b is made ON. When the result in S28 is affirmative, the program is terminated and the authentication ECU 26 is made OFF. However, since the indicator 26d is continuously supplied with power, it remains lit.

[0034] When the result in S16 or S18 is negative, the program proceeds to S30, in which it is determined whether a predetermined time period (e.g., 30 seconds) has elapsed since the authentication ECU 26 was activated. When the result in S30 is negative, the program returns to S14, while, when the result is affirmative, the program is terminated and the authentication ECU 26 is

made OFF.

[0035] In the case where the authentication ECU 26 is activated with a bit of the flag F being set to 1 as explained, in S10, the flag F (whose bit is 1) is read and the program proceeds to S12 to determine whether a bit of the flag F is 0. Since the result in S12 is naturally negative, the program proceeds to S32, in which the engine 16 is enabled to start.

[0036] Specifically, in this case, the authentication ECU 26 sends the engine start enabled signal to the engine ECU 24 without authenticating the key 30. Thus, the authenticator (26) determines whether the information is stored each time when activated (S12), and gives the permission to the prime mover controller immediately when it is determined that the information is stored (S32).

[0037] The program proceeds to S34, in which it is determined whether the engine 16 is started, i.e., whether the starter switch 26b is made ON. When the result in S34 is affirmative, the program is terminated and the authentication ECU 26 is made OFF.

[0038] When the result in S34 is negative, the program proceeds to S36, in which the status is changed to the key-reading standby mode.

[0039] Next, in S38, it is determined whether the key 30 is manipulated near the reader 26a. When the result in S38 is affirmative, the program proceeds to S40, in which it is determined whether the authentication is verified. Specifically, as mentioned above, upon the manipulation of the key 30, the ID information of the key 30 is acquired and it is determined whether the acquired ID information corresponds with the authentication ID information of the engine 16.

[0040] When the result in S40 is affirmative, the program proceeds to S42, in which a bit of the flag F is reset to 0 (i.e., the information is erased when the acquired ID information is determined to correspond with the authentication ID information). The program then proceeds to S44, in which information about the flag F is stored in the memory 26c, and to S46, in which the indicator 26d is made OFF.

[0041] To be more specific, when the authentication is verified again under the condition where a bit of the flag F is set to 1 (i.e., the engine start enabled information is stored), the authentication ECU 26 is restored to the initial condition (where the antitheft function is active). Further, the indicator 26d is used to inform the operator that the authentication ECU 26 is in the initial condition.

[0042] Then the program is terminated and the authentication ECU 26 is made OFF.

[0043] When the result in S38 or S40 is negative, the program proceeds to S48, in which it is determined whether a predetermined time period (e.g., 30 seconds) has elapsed since the authentication ECU 26 was activated. When the result in S48 is negative, the program returns to S34, while, when the result is affirmative, the program is terminated and the authentication ECU 26 is made OFF.

[0044] As stated above, the embodiment is configured

to have an apparatus and method for preventing theft of equipment (outboard motor 12) having a prime mover (internal combustion engine 16), a prime mover controller (engine ECU 24) that controls operation of the prime mover, and an authenticator (authentication ECU 26) that acquires ID information from an electronic key (30) when the key is brought close thereto by an operator (S 16), determines whether the acquired ID information corresponds with authentication ID information (S18), and gives permission to the prime mover controller to start the prime mover when the acquired ID information is determined to correspond with the authentication ID information (S20), characterized in that: a memorizer (EEP-ROM 26c) that stores information (or data) that the permission was given to the prime mover controller to start the prime mover (S24); and the authenticator determines whether the information is stored each time when activated (S12), and gives the permission to the prime mover controller immediately when it is determined that the information is stored (S32).

[0045] Specifically, when once the authentication for starting the prime mover (engine 16) is verified, the condition that the prime mover start is enabled is maintained. With this, even in the case where the prime mover is frequently and repeatedly started and stopped, it is not necessary to conduct the authentication operation every time the prime mover is started, thereby easily restarting the prime mover.

[0046] Further, in a case that the equipment is the outboard motor 12, even if the electronic key 30 is lost at sea, the operator can restart the prime mover and avoid manually rowing the boat.

[0047] In the apparatus and method, the authenticator acquires the ID information from an electronic key (30) when the key is brought close thereto by an operator (S38), determines whether the acquired ID information corresponds with authentication ID information (S40), and erases the information when the acquired ID information is determined to correspond with the authentication ID information (S42).

[0048] Specifically, since the key 30 for the equipment is also used to reset the prime mover start enabled condition, it becomes possible to appropriately restore the antitheft function.

[0049] The apparatus and method further includes: an indicator (26d) installed in the authenticator (26), and the indicator is turned on when the information is kept stored in the memorizer (S26).

[0050] With this, it becomes possible to easily know whether the antitheft function of the equipment is currently active.

[0051] In the apparatus and method, the equipment comprises an outboard motor (12), and the prime mover comprises an internal combustion engine (16).

[0052] It should be noted that although, in the foregoing, one outboard motor is mounted on the boat 10, the invention can also be applied to multiple outboard motor installations comprising two or more outboard motors.

[0053] In an apparatus for preventing theft of equipment such as outboard motor having a prime mover (engine), a prime mover controller and an authenticator (26) that acquires ID information from an electronic key when the key is brought close thereto by an operator and gives a permission to the prime mover controller to start the prime mover when acquired ID information is determined to correspond with authentication ID information, the permission was given is stored, and the authenticator determines whether the information is stored each time when activated (S12), and gives the permission to the prime mover controller immediately when it is determined that it is stored (S32), thereby enabling to easily restart the prime mover without authentication operation.

15

Claims

1. An apparatus for preventing theft of equipment (12) having a prime mover (16), a prime mover controller (24) that controls operation of the prime mover, and an authenticator (26) that acquires ID information from an electronic key (30) when the key is brought close thereto by an operator (S16), determines whether the acquired ID information corresponds with authentication ID information (S18), and gives permission to the prime mover controller to start the prime mover when the acquired ID information is determined to correspond with the authentication ID information (S20),

characterized in that:

a memorizer (26c) that stores information that the permission was given to the prime mover controller to start the prime move (S24); and the authenticator determines whether the information is stored each time when activated (S12), and gives the permission to the prime mover controller immediately when it is determined that the information is stored (S32).

2. The apparatus according to claim 1, wherein the authenticator acquires the ID information from an electronic key (30) when the key is brought close thereto by the operator (S38), determines whether the acquired ID information corresponds with authentication ID information (S40), and erases the information when the acquired ID information is determined to correspond with the authentication ID information (S42).

3. The apparatus according to claim 1 or 2, further including:

an indicator (26d) installed in the authenticator (26), and the indicator is turned on when the information is kept stored in the memorizer (S26).

4. The apparatus according to any of claims 1 to 3, wherein the equipment comprises an outboard motor (12). 5
5. The apparatus according to claim 4, wherein the prime mover comprises an internal combustion engine (16). 5
6. A method for preventing theft of equipment (10) having a prime mover (16), a prime mover controller (24) that controls operation of the prime mover, and an authentication (26) comprising the steps of acquiring ID information from an electronic key (30) when the key is brought close thereto by an operator (S16), determining whether the acquired ID information corresponds with authentication ID information (S 18), and giving permission to the prime mover controller to start the prime mover when the acquired ID information is determined to correspond with the authentication ID information (S20), 10
characterized by the steps of:
storing information that the permission was given to the prime mover controller to start the prime mover (S24); and 20
determining whether the information is stored each time when activated (S12), and giving the permission to the prime mover controller immediately when it is determined that the information is stored (S32). 25
7. The method according to claim 6, wherein the authentication acquires the ID information from an electronic key (30) when the key is brought close thereto by the operator (S38), determines whether the acquired ID information corresponds with authentication ID information (S40), and erases the information when the acquired ID information is determined to correspond with the authentication ID information (S42). 30
8. The method according to claim 6 or 7, further including the step of:
turning an indicator (26d) when the information is kept stored in the memorizer (S26). 40
9. The method according to any of claims 6 to 8, wherein the equipment comprises an outboard motor (12). 45
10. The method according to claim 9, wherein the prime mover comprises an internal combustion engine (16). 50
- rätschaft (12), umfassend eine Antriebsmaschine (16), eine Antriebsmaschinen-Steuereinrichtung (24), die den Betrieb der Antriebsmaschine steuert, und einen Authentifikator (26), der ID Information von einem elektronischen Schlüssel (30) erfasst, wenn der Schlüssel durch einen Bediener (S16) in dessen Nähe gebracht wird, bestimmt, ob die erfasste ID Information mit Authentifizierungs-ID Information (S18) übereinstimmt, und der Antriebsmaschinen-Steuereinrichtung Erlaubnis erteilt, die Antriebsmaschine zu starten, wenn die erfasste ID Information als übereinstimmend mit der Authentifizierungs-ID Information (S20) bestimmt wird,
gekennzeichnet durch:
- eine Speichereinrichtung (26c), die die Information speichert, dass der Antriebsmaschinen-Steuereinrichtung die Erlaubnis erteilt wurde, die Antriebsmaschine (S24) zu starten; und **dadurch**
dass der Authentifikator bei jeder Aktivierung (S12) bestimmt, ob die Information gespeichert ist und unmittelbar der Antriebsmaschinen-Steuereinrichtung die Erlaubnis erteilt, wenn bestimmt wird, dass die Information gespeichert ist (S32). 55
2. Vorrichtung nach Anspruch 1, in welcher der Authentifikator die ID Information von einem elektronischen Schlüssel (30) erfasst, wenn der Schlüssel durch einen Bediener (S38) in dessen Nähe gebracht wird, bestimmt, ob die erfasste ID Information mit Authentifizierungs-ID Information (S40) übereinstimmt und die Information löscht, wenn die erfasste ID Information als mit der Authentifizierungs-ID Information (S42) übereinstimmend bestimmt wird.
3. Vorrichtung nach Anspruch 1 oder 2, die des weiteren umfasst:
ein Anzeigegerät (26d), das im Authentifikator (26) installiert ist,
und das Anzeigegerät angeschaltet ist, wenn die Information in der Speichereinrichtung (S26) gespeichert ist.
4. Vorrichtung nach einem der Ansprüche 1 bis 3, wobei die Gerätschaft einen Außenbordmotor (12) umfasst.
5. Vorrichtung nach Anspruch 4, wobei die Antriebsmaschine einen Verbrennungsmotor (16) umfasst.
6. Verfahren zur Verhinderung von Diebstahl von Gerätschaft (10), umfassend eine Antriebsmaschine (16), eine Antriebsmaschinen-Steuereinrichtung (24), die den Betrieb der Antriebsmaschine steuert, und eine Authentifizierung (26), die die Schritte des

Patentansprüche

- Vorrichtung zur Verhinderung von Diebstahl von Ge-

Erfassens der ID Information von einem elektronischen Schlüssel (30), wenn der Schlüssel durch einen Bediener (S16) in dessen Nähe gebracht wird, des Bestimmens, ob die erfasste ID Information mit Authentifizierungs-ID Information (S18) übereinstimmt und des Erteilens der Erlaubnis an die Antriebsmaschinen-Steuereinrichtung, die Antriebsmaschine zu starten, wenn die erfasste ID Information als übereinstimmend mit der Authentifizierungs-ID Information (S20) bestimmt wird, umfasst, **gekennzeichnet durch** folgende Schritte:

- Speichern der Information, dass der Antriebsmaschinen-Steuereinrichtung die Erlaubnis 15erteilt wurde, die Antriebsmaschine (S24) zu starten und
- Bestimmen bei jeder Aktivierung (S12), ob die Information gespeichert ist, und unmittelbares Erteilen der Erlaubnis an die Antriebsmaschinen-Steuereinrichtung, wenn bestimmt wird, dass die Information gespeichert ist (S32).

7. Verfahren nach Anspruch 6, in welchem die Authentifizierung die ID Information von einem elektronischen Schlüssel (30) erfasst, wenn der Schlüssel durch einen Bediener (S38) in dessen Nähe gebracht wird, bestimmt, ob die erfasste ID Information mit Authentifizierungs-ID Information (S40) übereinstimmt, und die Information löscht, wenn die erfasste ID Information als mit der Authentifizierungs-ID Information (S42) übereinstimmend bestimmt wird.
 8. Verfahren nach Anspruch 6 oder 7, das des weiteren den folgenden Schritt beinhaltet:
- Schalten eines Anzeigegeräts (26d), wenn die Information in der Speichereinrichtung (S26) gespeichert ist.
9. Verfahren nach einem der Ansprüche 6 bis 8, wobei die Gerätschaft einen Außenbordmotor (12) umfasst.
 10. Verfahren nach Anspruch 9, wobei die Antriebsmaschine einen Verbrennungsmotor (16) umfasst.

Revendications

1. Appareil destiné à empêcher le vol d'un équipement (12) ayant un générateur de force motrice (16), un organe de commande de générateur de force motrice (24) qui commande le fonctionnement du générateur de force motrice, et un authentificateur (26) qui acquiert des informations d'identification d'une clé électronique (30) lorsque la clé est approchée de celui-ci par un opérateur (S16), détermine si les informations d'identification acquises correspondent 50 à des informations d'identification d'authentification (S18), et donne la permission à l'organe de commande de générateur de force motrice de démarrer le générateur de force motrice lorsqu'il est déterminé que les informations d'identification acquises correspondent aux informations d'identification d'authentification (S20),
 2. caractérisé en ce que :
- un dispositif de mémoire (26c) stocke des informations indiquant que la permission a été donnée à l'organe de commande de générateur de force motrice de démarrer le générateur de force motrice (S24) ; et l'authentificateur détermine si les informations sont stockées chaque fois qu'il est activé (S12), et donne immédiatement la permission à l'organe de commande de générateur de force motrice lorsqu'il est déterminé que les informations sont stockées (S32).
2. Appareil selon la revendication 1, dans lequel l'authentificateur acquiert les informations d'identification d'une clé électronique (30) lorsque la clé est approchée de celui-ci par l'opérateur (S38), détermine si les informations d'identification acquises correspondent aux informations d'identification d'authentification (S40), et efface les informations lorsqu'il est déterminé que les informations d'identification acquises correspondent aux informations d'identification d'authentification (S42).
 3. Appareil selon la revendication 1 ou 2, comprenant en outre :
- un indicateur (26d) installé dans l'authentificateur (26), et l'indicateur est activé lorsque les informations sont maintenues stockées dans le dispositif de mémoire (S26).
4. Appareil selon l'une quelconque des revendications 1 à 3, dans lequel l'équipement comprend un moteur hors-bord (12).
 5. Appareil selon la revendication 4, dans lequel le générateur de force motrice comprend un moteur à combustion interne (16).
 6. Procédé destiné à empêcher le vol d'un équipement (10) ayant un générateur de force motrice (16), un organe de commande de générateur de force motrice (24) qui commande le fonctionnement du générateur de force motrice, et une authentification (26) comprenant les étapes de l'acquisition d'informations d'identification d'une clé électronique (30) lorsque la clé est approchée par un opérateur (S16), la détermination si les informations d'identification ac-

quises correspondent à des informations d'identification d'authentification (S18), et la permission donnée à l'organe de commande de générateur de force motrice de démarrer le générateur de force motrice lorsqu'il est déterminé que les informations d'identification acquises correspondent aux informations d'identification d'authentification (S20),
caractérisé par les étapes de :

le stockage d'informations indiquant que la permission a été donnée à l'organe de commande de générateur de force motrice de démarrer le générateur de force motrice (S24) ; et
 la détermination si les informations sont stockées à chaque activation (S12), et la permission donnée immédiatement à l'organe de commande de générateur de force motrice lorsqu'il est déterminé que les informations sont stockées (S32). 10
15

7. Procédé selon la revendication 6, dans lequel l'authentification acquiert les informations d'identification d'une clé électronique (30) lorsque la clé est approchée par l'opérateur (S38), détermine si les informations d'identification acquises correspondent aux informations d'identification d'authentification (S40), et efface les informations lorsqu'il est déterminé que les informations d'identification acquises correspondent aux informations d'identification d'authentification (S42). 20
25
30
8. Procédé selon la revendication 6 ou 7, comprenant en outre l'étape de :

l'activation d'un indicateur (26d) lorsque les informations sont maintenues stockées dans le dispositif de mémoire (S26). 35

9. Procédé selon l'une quelconque des revendications 6 à 8, dans lequel l'équipement comprend un moteur hors-bord (12). 40
10. Procédé selon la revendication 9, dans lequel le générateur de force motrice comprend un moteur à combustion interne (16). 45

50

55

FIG. 1

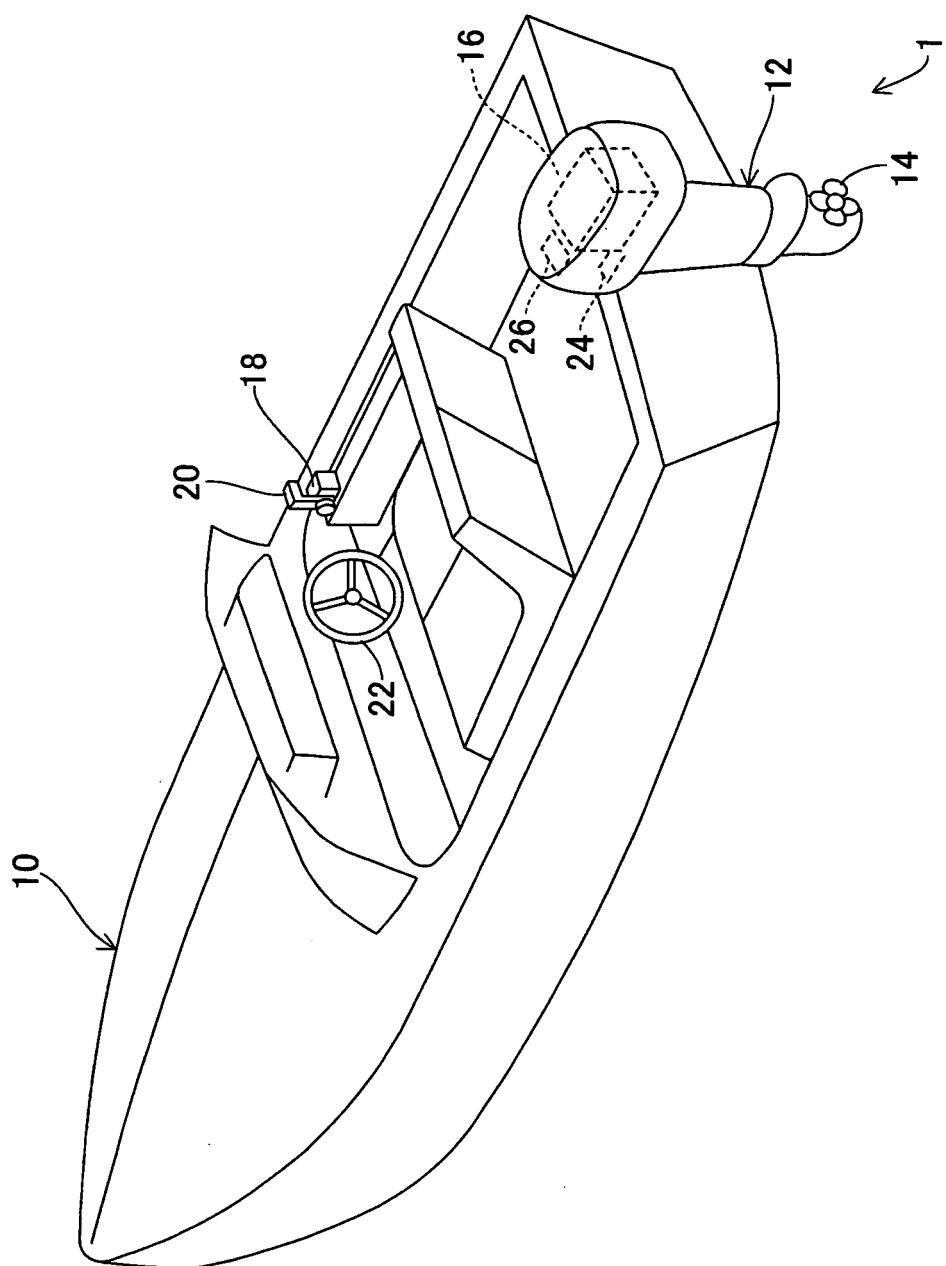


FIG.2


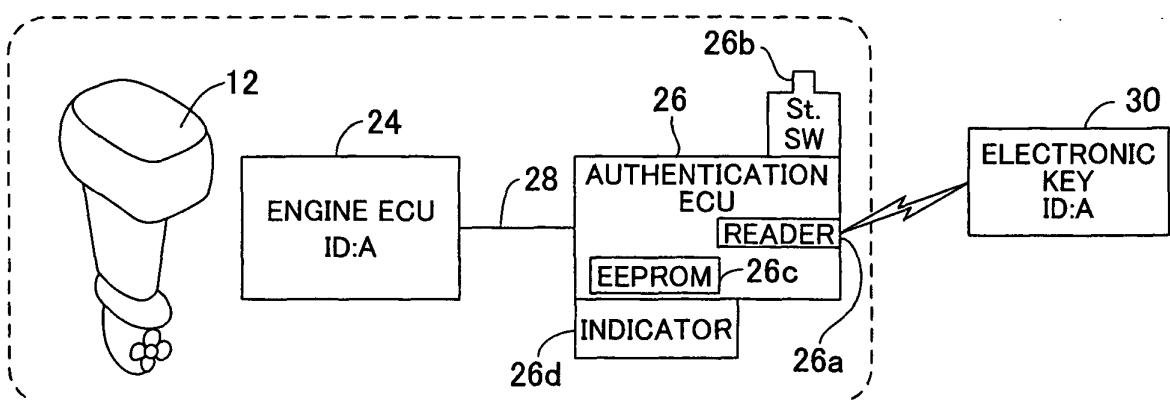


FIG.3

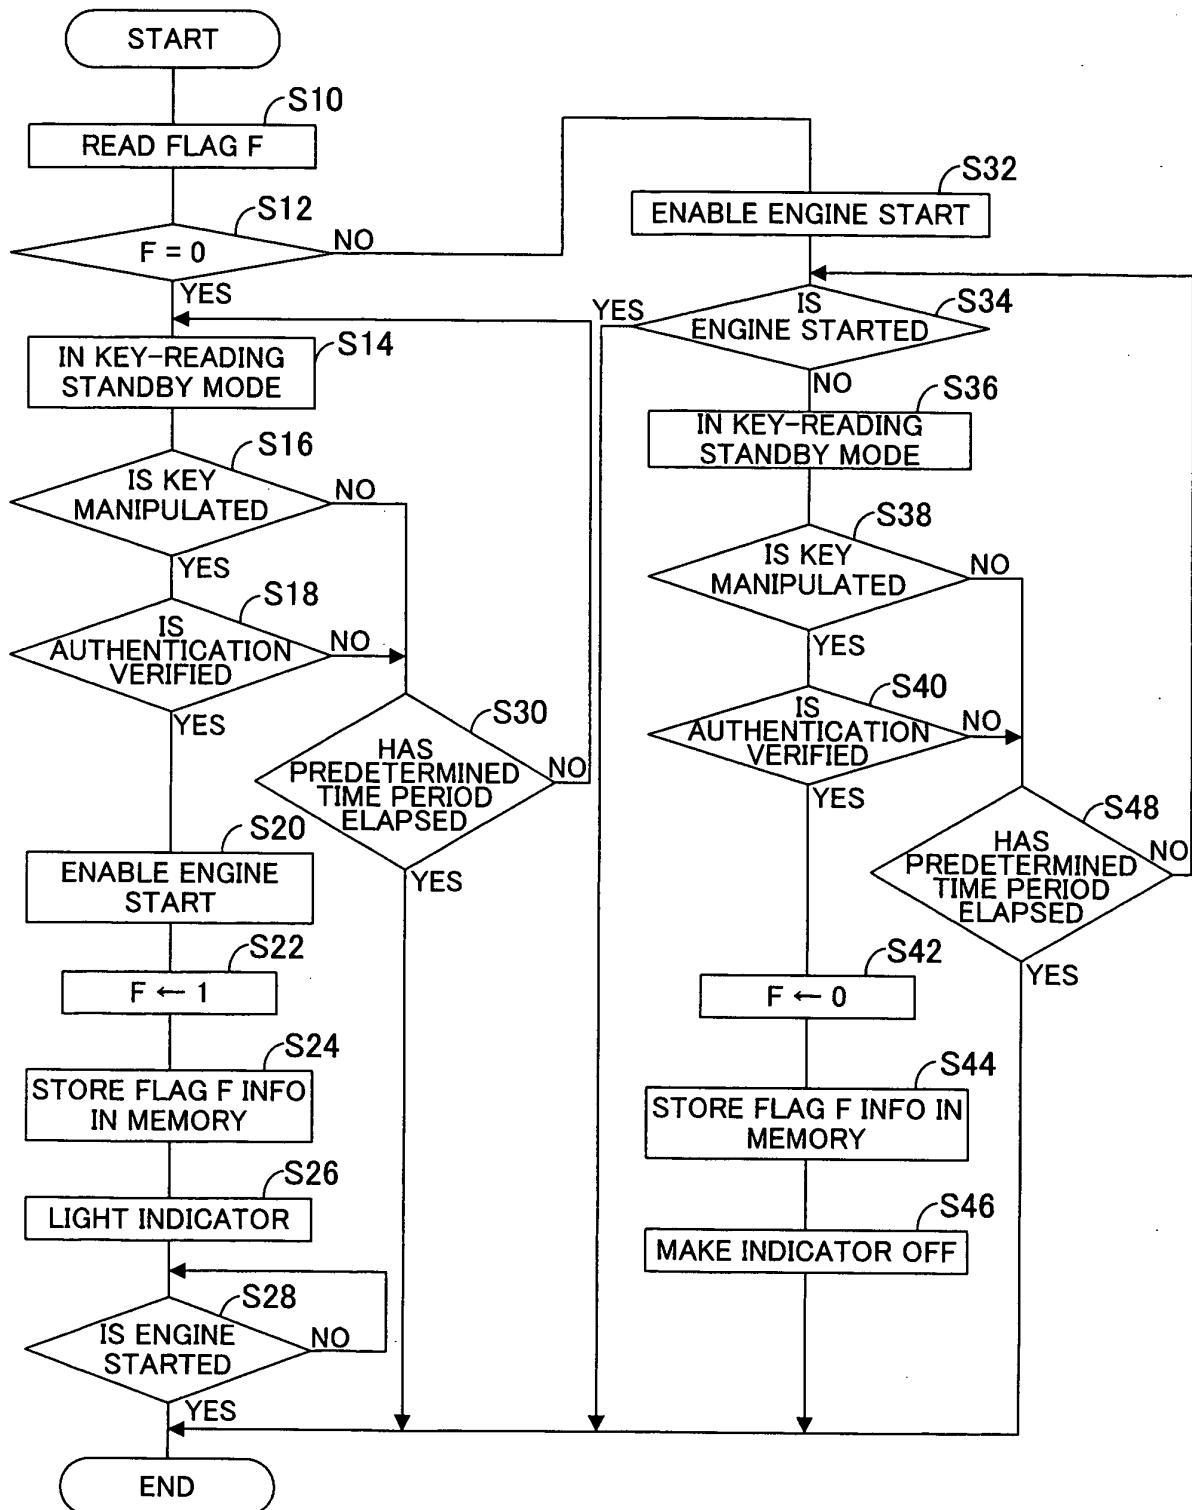

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2007090908 A [0002]
- EP 1288411 A [0002]
- JP 2006142880 A [0015]