



(11) **EP 2 602 484 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:  
**06.05.2020 Bulletin 2020/19**

(51) Int Cl.:  
**F04C 2/08<sup>(2006.01)</sup> F04C 2/10<sup>(2006.01)</sup>**

(21) Application number: **12195608.0**

(22) Date of filing: **05.12.2012**

(54) **INTERNAL GEAR PUMP**

INTERNE GETRIEBEPUMPE

POMPE À ENGRENAGES INTERNE

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**

(30) Priority: **07.12.2011 JP 2011267741**

(43) Date of publication of application:  
**12.06.2013 Bulletin 2013/24**

(73) Proprietors:  
• **JTEKT Corporation**  
**Osaka-shi**  
**Osaka 542-8502 (JP)**  
• **TOYOOKI KOGYO CO., LTD.**  
**Okazaki-shi,**  
**Aichi 444-3592 (JP)**

(72) Inventors:  
• **Oono, Yoshihiro**  
**Osaka-shi, Osaka 542-8502 (JP)**  
• **Yamamori, Motoyasu**  
**Osaka-shi, Osaka 542-8502 (JP)**  
• **Kanda, Daichi**  
**Osaka-shi, Osaka 542-8502 (JP)**  
• **Takagi, Kenichi**  
**Okazaki-shi, Aichi, 444-3592 (JP)**

(74) Representative: **TBK**  
**Bavariaring 4-6**  
**80336 München (DE)**

(56) References cited:  
**EP-A1- 0 367 046 EP-A1- 1 662 144**  
**EP-A2- 1 840 327 NL-A- 6 602 352**

**EP 2 602 484 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**Description**

## BACKGROUND OF THE INVENTION

## 5 1. Field of the Invention

**[0001]** The present invention relates to an internal gear pump that performs suction and discharge of fluid by a structure in which an inner tooth of an outer gear meshes with an outer tooth of an inner gear.

## 10 2. Description of Related Art

**[0002]** Internal gear pumps have been used such as for automotive oil pumps, and include an inner gear having  $n$  outer teeth, an outer gear having  $n+1$  inner teeth that mesh with the outer teeth, and a housing that houses the inner gear and the outer gear therein. The housing is provided with a suction mouth for drawing fluid and a discharge mouth for discharging the fluid. Various shapes have been suggested for the inner teeth of the outer gear and the outer teeth of the inner gear for purposes such as reduction of resistance.

**[0003]** For example, related art disclosed in Japanese Patent Application Publication No. 2003-322088 (JP 2003-322088 A) suggests that top lands and bottom lands of outer teeth are defined by cycloid curves that are generated by a circumscribed-rolling cycle of an inner gear that rotates while contacting the outer periphery of an inner gear base circle, which is a base circle of the outer teeth with a rotational axis of the inner gear as its center, and an inscribed-rolling circle of the inner gear that rotates while contacting the inner periphery of the inner gear base circle. Similarly, top lands and bottom lands of inner teeth are defined by cycloid curves that are generated by a circumscribed-rolling cycle of an outer gear that rotates while contacting the outer periphery of an outer gear base circle, which is a base circle of the inner teeth with an rotational axis of the outer gear as its center, and an inscribed-rolling circle of the outer gear that rotates while contacting the internal periphery of the outer gear base circle. As a result, sliding resistance and rattling are reduced. In addition, related art disclosed in Japanese Patent Application Publication No. 2005-36735 (JP 2005-36735 A) suggests that bottom lands of outer teeth of an inner gear are defined by a hypocycloid curve and that meshing sections between top lands and the bottom lands of the outer teeth of the inner gear are defined by an involute curve. This gives freedom in setting of a displacement amount of a rotor to increase a discharge amount.

**[0004]** In recent years, weight reduction and improved efficiency have been requested for each component of an automobile for the purpose of improved fuel efficiency of automobiles, etc. The size reduction sounds appropriate as an approach to the weight reduction. However, if only the size is simply reduced, a discharging capability of a pump is also reduced. The related art disclosed in JP 2003-322088 A uses the cycloid curve to determine shapes of the inner teeth and the outer teeth. However, when the cycloid curve is used, height of the teeth cannot be adjusted when the number of teeth is fixed. If the height of the teeth cannot be freely adjusted, it is impossible to reduce the size of an internal gear pump while maintaining the discharging capability. It is because the height of the teeth influences the discharging capability of the internal gear pump. The resistance reduction can be suggested as an approach to the improved efficiency. It has been known that efficiency of the internal gear pump is reduced by slippage that occurs between the outer tooth of the inner gear and the inner tooth of the outer gear. However, specific means for the improved efficiency is not suggested in the related art disclosed in JP 2005-36735 A.

**[0005]** EP 0 367 046 A1, EP 1 840 327 A2, EP 1 662 144 A1 and NL 6 602 352 A likewise disclose internal gear pumps of conventional art.

## SUMMARY OF THE INVENTION

**[0006]** The present invention provides an internal gear pump with which both size reduction and improved efficiency can be possible.

**[0007]** One aspect of the present invention relates to the internal gear pump. This internal gear pump includes an inner gear that has plural outer teeth on an outer peripheral surface of the inner gear, and an outer gear that is formed with a housing space that is capable of housing the inner gear and that includes plural inner teeth that mesh with the outer teeth on an inner peripheral surface that forms the housing space. One of the inner teeth and the outer teeth have a shape based on a tooth shape that is respectively formed from a generating curve of the other of the inner teeth and the outer teeth. A section of each of the inner teeth that protrudes in a direction toward the inner gear has a first arc shape. A section of each of the outer teeth that protrudes in a direction toward the outer gear has a curved shape. Each of both end sections of the curved shape have a second arc shape. If a radius of the first arc shape is set as  $r_o$ , a radius of the second arc shape is set as  $r_i$ , a diameter of a pitch circle of the inner teeth is set as  $d_p$ , and the number of the inner teeth is set as  $z$ , the inner gear and outer gear each has a shape that satisfies a relationship established by following equations:  $1.6 > r_o/(d_p/z) > 1.0$ ; and  $r_o/(d_p/z) > r_i/(d_p/z) \geq 0.13$ . Each of the inner teeth is provided so that an intersecting

point between one of arcs that follow the first arc shapes of the adjacent inner teeth and the pitch circle of the inner teeth and that is in proximity to the other arc is located outside of the other arc.

[0008] According to this aspect, slippage that occurs between the outer teeth of the inner gear and the inner teeth of the outer gear can appropriately be reduced. In addition, the inner teeth and the outer teeth are formed without using a cycloid curve, and thus height of the teeth is freely adjustable. Therefore, it is possible to achieve size reduction while maintaining a discharging capability of the pump. Furthermore, each of the inner teeth can be arranged in an appropriate position that prevents interference with the adjacent inner teeth.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] Features, advantages, and technical and industrial significance of exemplary embodiments of the invention will be described below with reference to the accompanying drawings, in which like numerals denote like elements, and wherein:

FIG. 1 is a perspective view for explaining an embodiment of a structure of an internal gear pump;  
 FIG. 2A is a view of a housing in FIG. 1 that is seen from a pump plate side;  
 FIG. 2B is a view of an inner gear and an outer gear in FIG. 1 that are seen from the pump plate side;  
 FIG. 2C is a view of a pump plate in FIG. 1 that is seen from a housing side;  
 FIG. 3A is a view for explaining a state in which inner teeth of the outer gear mesh with outer teeth of the inner gear;  
 FIG. 3B is an enlarged view of peripheries of the inner teeth and the outer teeth;  
 FIG. 3C is an enlarged view of a periphery of a corner section of the outer tooth;  
 FIG. 4A to FIG. 4C show three exemplary shapes of the outer gear and the inner gear in which a radius of an arc, which determines shapes of the inner teeth of the outer gear, is changed;  
 FIG. 4D is a table for explaining dimensions of each section in FIG. 4A to FIG. 4C;  
 FIG. 5 is a graph for explaining ratio of each meshing area shown in FIG. 3 for each of FIG. 4A to FIG. 4C;  
 FIG. 6 is a view for explaining a setting method to prevent interference between the adjacent inner teeth;  
 FIG. 7A is a view for explaining a state in which the adjacent inner teeth are arranged in locations where the adjacent inner teeth do not interfere with each other; and  
 FIG. 7B and FIG. 7C are views for explaining a state in which the adjacent inner teeth are arranged in locations where the adjacent inner teeth interfere with each other.

DETAILED DESCRIPTION OF EMBODIMENTS

[0010] A description will hereinafter be made on an embodiment of the present invention with accompanied drawings.

[Overall structure of an internal gear pump 1 (FIG. 1 to FIG. 3)]

[0011] A description is first made on a structure of an internal gear pump 1 with reference to a perspective view in FIG. 1. The internal gear pump 1 is constructed from an inner gear 10, an outer gear 20, a housing 30, a pump plate 40, and a drive shaft member 50. The inner gear 10 is housed in a housing space 20K of the outer gear 20. The inner gear 10 and the outer gear 20 are housed in a gear housing space 30K that is formed by the pump plate 40, which functions as a lid for the housing 30, and the housing 30. In the drive shaft member 50, a shaft 51, which is rotatable about an axis Z51, is inserted through a through hole 32 formed in the housing 30 and a shaft hole 12 formed in the inner gear 10 so as to drive the inner gear 10 for rotation. This axis Z51 is a rotational axis Zi of the inner gear 10, which will be described later. The reference numeral 52 denotes a sealing member. FIG. 2C is a view of the pump plate 40 in FIG. 1 that is seen from the housing 30 side. FIG. 2B is a view of the outer gear 20 and the inner gear 10 in FIG. 1 that are seen from the pump plate 40 side. FIG. 2A is a view of the housing 30 in FIG. 1 that is seen from the pump plate 40 side.

[0012] As shown in FIG. 3A, the inner gear 10 is provided on an outer peripheral surface thereof with plural outer teeth T11 to T17 that mesh with inner teeth T21 to T28 of the outer gear 20, and this embodiment shows an example in which the number of the outer teeth is seven. The outer gear 20 has the housing space 20K that can house the inner gear 10, and an inner peripheral surface of the outer gear 20, which forms the housing space 20K, has the plural inner teeth T21 to T28 that mesh with the outer teeth T11 to T17 of the inner gear 10. This embodiment shows an example in which the number of the inner teeth is eight. In FIG. 3A, an outer pitch circle Co is a pitch circle of the inner teeth T21 to T28 of the outer gear 20, and an inner pitch circle Ci is a pitch circle of the outer teeth T11 to T17 of the inner gear 10. In addition, as shown in FIG. 2B and FIG. 3A, a rotational axis Zo of the outer gear 20 and the rotational axis Zi of the inner gear 10 are dislocated from each other. Accordingly, when the inner gear 10 rotates about the rotational axis Zi, the outer gear 20 rotates about the rotational axis Zo, and a volume of a closed space 22 that is formed between the outer teeth T11 to T17 of the inner gear 10 and the outer teeth T21 to T28 of the outer gear 20 first gradually increases, and

then gradually decreases. A suction mouth 41 of fluid is provided in a side where the volume gradually increases, and a discharge mouth 42 of the fluid is provided in a side where the volume gradually decreases (see FIG. 2C). In this embodiment, an example in which the suction mouth 41 and the discharge mouth 42 are provided in the pump plate 40 is described.

**[0013]** As shown in FIG. 1, FIG. 2A, and FIG. 2C, in the gear housing space 30K, which is a space for housing the outer gear 20 and the inner gear 10 and is also a space formed by the pump plate 40 and the housing 30, a surface of the pump plate 40 that faces the housing 30 is formed with a suction port 41A that continuously extends from the suction mouth 41 in a circumferential direction and is a generally crescent-shaped concave section. Meanwhile, a surface of the housing 30 that faces the suction port 41A of the pump plate 40 is formed with a suction port 31A that is in the same shape as the suction port 41A and thus is the generally crescent-shaped concave section. Similarly, in the gear housing space 30K, the surface of the pump plate 40 that faces the housing 30 is formed with a discharge port 41B that continuously extends from the discharge mouth 42 in the circumferential direction and is the generally crescent-shaped concave section. The surface of the housing 30 that faces the discharge port 41B of the pump plate 40 is formed with a discharge port 31B that is in the same shape as the discharge port 41B and thus is the generally crescent-shaped concave section.

[An arc shape of the inner teeth of the outer gear 20, an arc shape of the corner section of the inner gear 10, and a meshing area between the outer gear 20 and the inner gear 10 (FIG. 3)]

**[0014]** FIG. 3A to FIG. 3C show a meshing state between the inner gear 10 and the outer gear 20. FIG. 3B is an enlarged view of an area A1 in FIG. 3A, and FIG. 3C is an enlarged view of an area A2 in FIG. 3B. In FIG. 3A, the shaft hole 12 of the inner gear 10 is not shown. As shown in FIG. 3B, for each of the inner teeth T21 to T28 of the outer gear 20, a shape of a top land of the tooth, which protrudes in a direction toward the inner gear 10, is set to follow a shape defined by an arc (first arc) Cro having a center Zro and a radius ro. Meanwhile, for each of the inner teeth T21 to T28 of the outer gear 20, a shape of a bottom land of the tooth, which is dented in an opposite direction from the inner gear 10, is not particularly limited to an arc shape, a cycloid curve, etc., and is appropriately set to a curved shape (any continuous curved shape). The outer teeth T11 to T17 of the inner gear 10 each has a shape that is based on a tooth shape formed from a generating curve of the outer gear 20. For each of the outer teeth T11 to T17 of the inner gear 10, a top land of the tooth that protrudes toward the outer gear 20 is set to a curved shape. As shown in FIG. 3C, with respect to the shape formed from the generating curve, both corner sections T11S and T12S from a center of the curved shape of the top land of the tooth are set to follow a shape defined by an arc (second arc) Cri having a center Zri and a radius ri. In this embodiment, an example is described in which the top land of the inner tooth of the outer gear is formed in the arc shape while the bottom land thereof is formed in the curved shape, and in which the outer tooth of the inner gear is formed on the basis of the generating curve of the inner tooth. However, the bottom land of the outer tooth of the inner gear may be formed in the arc shape while the top land thereof may be formed in the curved shape, and the inner tooth of the outer gear may be formed on the basis of the generating curve of the outer tooth. The above curved shape is a shape that curves toward one side. In other words, the curved shape is a shape that is not curved in a zigzag manner. Both end sections of the curved shape, that is, both corner sections are respectively connected to portions that curve toward the side opposite to the side toward which the curved shape curves.

**[0015]** As for FIG. 3A to FIG. 3C, as shown in FIG. 3C, which is an enlarged view of the outer tooth T12 of the inner gear 10 and the inner tooth T22 of the outer gear 20, within a meshing area between the outer tooth T12 and the inner tooth T22, meshing between the outer tooth T12 and the inner tooth T22 starts from a meshing area LA, and then continues to a meshing area LB and a meshing area LC. The meshing area LB is an area where slippage between the outer tooth T12 and the inner tooth T22 hardly occur (the rate of slippage is approximately zero). The meshing area LA is an area immediately before the meshing area LB and where the slippage occurs. The meshing area LC is an area immediately after the meshing area LB, where the corner section of the outer tooth T12 with the arc radius ri presses against the inner tooth T22, and where the slippage occurs. The lengths of the meshing areas LA to LC change according to the shapes of the outer tooth and the inner tooth. In this embodiment, it is possible to change the shapes of the inner tooth and the outer tooth (that is, the lengths of the meshing areas LA to LC) by appropriately changing the radius ro of the arc-shaped top land of the inner tooth (or the radius of the arc-shaped bottom land of the outer tooth). In addition, the length of the meshing area LC can also be changed by appropriately changing the arc radius ri of each of the corner sections of the outer tooth.

**[0016]** The shapes of the outer teeth and the inner teeth can appropriately be changed as described above. By changing the shapes of the outer teeth and the inner teeth, the volume of the closed space 22 (see FIG 2B) can be changed, and thus the discharging capability of the pump can also be changed. When the internal gear pump is reduced in size, the shapes of the outer teeth and the inner teeth should be changed such that the discharging capability of the pump after the size reduction corresponds to the discharging capability of the pump before the size reduction. A description will be made below on three exemplary shapes of the outer gear 20 and the inner gear 10 by changing the radius ro of the arc Cro of the arc-shaped top land of the inner tooth of the outer gear 20. A description will also be made on differences in

lengths of the meshing areas LA to LC for the three shapes. Then, an optical shape that can substantially reduce the slippage will be considered.

[An Example of changing the radius ro of the arc Cro that determines the arc shape of the inner teeth of the outer gear 20 (FIG. 4, FIG. 5)]

**[0017]** FIG. 4A to FIG. 4C each shows the shapes of the outer gear 20 and the inner gear 10 in which a dimension of each relevant section thereof is set according to the values indicated in a setting table 60 of FIG. 4D. In FIG. 4A to FIG. 4C, the shaft hole 12 of the inner gear 10 is not shown. An "amount of eccentricity" in the setting table 60 shown in FIG. 4D indicates a distance between the rotational axis Zo of the outer gear 20 and the rotational axis Zi of the inner gear 10. The "number of teeth (z)" indicates the number of the inner teeth of the outer gear 20. The "outer pitch diameter (dp)" indicates the diameter of the outer pitch circle Co, which is the pitch circle of the inner teeth of the outer gear 20. The "inner tooth arc radius (ro)" indicates a radius of the arc Cro, which forms the top lands of the inner teeth of the outer gear 20 in the arc shape. The "outer tooth corner section radius (ri)" indicates a radius of the arc Cri, which forms both of the corner sections from the center of the top land of the outer tooth shown in FIG. 3 in the arc shape. A "ratio ro/(dp/z)" indicates a ratio to determine the height and the shape of the top land of the inner tooth with respect to the entire shape of the outer gear 20. A "ratio ri/(dp/z)" indicates a ratio to determine the shapes of the corner sections from the center of the top land of the outer tooth of the inner gear 10 with respect to the entire shape of the outer gear 20.

**[0018]** The outer gear 20 and the inner gear 10 that are shown as the examples in FIG. 4A have shapes with following setting values indicated in the setting table 60 in FIG. 4D: the amount of eccentricity = 1.55 [mm]; the number of teeth (z) = 8; the outer pitch diameter (dp) = 24.8 [mm]; the inner tooth arc radius (ro) = 3.0 [mm]; and the outer tooth corner section radius (ri) = 0.30 [mm]. For the shapes shown as the examples in FIG. 4A, the actual value of the ratio of the outer pitch diameter to the inner tooth arc radius is: ro/(dp/z) = 0.967..., and the value is presented as 1.0 in the setting table 60 in FIG. 4D. Also, the actual value of the ratio of the outer pitch diameter to the outer tooth corner section radius is: ri/(dp/z) = 0.0967..., and the value is presented as 0.10 in the setting table 60 in FIG. 4D.

**[0019]** The outer gear 20 and the inner gear 10 that are shown as the examples in FIG. 4B have shapes with the following setting values indicated in the setting table 60 in FIG. 4D: the amount of eccentricity = 1.55 [mm]; the number of teeth (z) = 8; the outer pitch diameter (dp) = 24.8 [mm]; the inner tooth arc radius (ro) = 4.0 [mm]; and the outer tooth corner section radius (ri) = 0.42 [mm]. For the shapes shown as the examples in FIG. 4B, the actual value of the ratio of the outer pitch diameter to the inner tooth arc radius is: ro/(dp/z) = 1.290..., and the value is presented as 1.3 in the setting table 60 in FIG. 4D. Also, the actual value of the ratio of the outer pitch diameter to the outer tooth corner section radius is: ri/(dp/z) = 0.1354..., and the value is presented as 0.13 in the setting table 60 in FIG. 4D.

**[0020]** The outer gear 20 and the inner gear 10 that are shown as the examples in FIG. 4C have shapes with the following setting values indicated in the setting table 60 in FIG. 4D: the amount of eccentricity = 1.52 [mm]; the number of teeth (z) = 8; the outer pitch diameter (dp) = 24.3 [mm]; the inner tooth arc radius (ro) = 4.7 [mm]; and the outer tooth corner section radius (ri) = 0.38 [mm]. For the shapes shown as the examples in FIG. 4C, the actual value of the ratio of the outer pitch diameter to the inner tooth arc radius is: ro/(dp/z) = 1.547..., and the value is presented as 1.6 in the setting table 60 in FIG. 4D. Also, the actual value of the ratio of the outer pitch diameter to the outer tooth corner section radius is: ri/(dp/z) = 0.1251..., and the value is presented as 0.12 in the setting table 60 in FIG. 4D.

**[0021]** FIG 5 is a graph in which ratios of the meshing areas LA to LC are calculated in terms of lengths of the meshing areas LA to LC for each of the three shapes in FIG. 4A to FIG 4C of the outer gear 20 and the inner gear 10. It is considered from this graph that the shape with the highest ratio of the meshing area LB where the rate of slippage is approximately zero is the most efficient shape (with the least resistance). It can be said from the graph in FIG. 5 that the shape shown in FIG. 4B is the most efficient shape. The inventor also confirmed that the discharging capability of the pump for each of the shapes in FIG. 4A to FIG. 4C of the outer gear 20 and the inner gear 10 is equal to or superior to related arts.

**[0022]** Accordingly, it can be considered that the significantly efficient internal gear pump can be created if conditions below are satisfied:

$$1.6 > ro/(dp/z) > 1.0 \quad (\text{Equation 1})$$

$$ri/(dp/z) \geq 0.13 \quad (\text{Equation 2}).$$

**[0023]** Because ri never becomes larger than ro, Equation 2 can be changed to Equation 3 with more conditions added:

$$r_o/(dp/z) > r_i/(dp/z) \geq 0.13 \quad (\text{Equation 3}).$$

**[0024]** Therefore, if both of the conditions in Equation 1 and Equation 3 are satisfied, the shapes of the outer gear 20 and the inner gear 10 can be significantly efficient. Here, the shape that has the minimum value (= 1.0) to satisfy Equation 1 is the shape shown in FIG. 4A, while the shape that has the maximum value (= 1.6) to satisfy Equation 1 is the shape shown in FIG. 4C. Also, the shape that has the minimum value (= 0.13) to satisfy Equation 2 is the shape shown in FIG. 4B.

[A setting method for preventing interference of the adjacent inner teeth in the outer gear 20 (FIG. 6, FIG. 7)]

**[0025]** Next, with reference to FIG. 6 and FIG. 7A to FIG. 7C, a description is made on a setting method for preventing interference of the adjacent inner teeth with each other. As shown in FIG. 6, each of parameters below is set for the adjacent two inner teeth of the outer gear 20:

arc Cro: the arc whose shape follows the arc shape of the top land of the inner tooth of the outer gear 20 (see FIG. 3B);  
 center Zro: the center of the arc Cro (see FIG. 3B);  
 outer pitch circle Co: the pitch circle of the inner tooth of the outer gear 20 (see FIG. 3A);  
 inner tooth center pitch circle Cc: a circle that passes through the center Zro of the arc Cro that follows the arc shape of the inner tooth of the outer gear 20;  
 ro: the radius of the arc Cro (see FIG. 3B);  
 dp: the diameter of the outer pitch circle Co (see FIG. 3A);  
 dc: the diameter of the inner tooth pitch center circle Cc;  
 a: the amount of eccentricity (the distance between the rotational axis Zo of the outer gear 20 and the rotational axis Zi of the inner gear 10);  
 z: the number of inner teeth of the outer gear 20;  
 straight line Y1: a straight line that passes through the center Zro of each of the arcs Cro of the adjacent two inner teeth;  
 straight line Y2: a straight line that passes through the rotational axis Zo of the outer gear 20 and crosses the straight line Y1 at right angles;  
 straight line Y3: a straight line that passes through the rotational axis Zo of the outer gear 20 and the center Zro of one of the arcs Cro;  
 intersecting point P1: an intersecting point that is between the one arc Cro and the outer pitch circle Co and is in proximity to the other arc Cro;  
 $\theta$ : an angle between the straight line Y2 and the straight line Y3;  
 straight line Y4: a straight line that passes through the intersecting point P1 and the center Zro of the arc Cro having the intersecting point P1;  
 straight line Y5: a straight line that passes through the intersecting point P1 and is parallel to the straight line Y2;  
 straight line Y6: a straight line that passes through the rotational axis Zo of the outer gear 20 and the intersecting point P1;  
 $\theta_1$ : an angle between the straight line Y2 and the straight line Y6 and smaller than the angle  $\theta$ ;  
 ho: a distance between the intersecting point P1 and the straight line Y1;  
 lo: a distance between the center Zro and the straight line Y2;  
 lo': a distance between the center Zro and the straight line Y5.

**[0026]** If the above parameters are set, following Equation 4 to Equation 8 are formulated:

$$\theta = 360^\circ/2z \quad (\text{Equation 4});$$

$$dp = 2az \quad (\text{Equation 5});$$

$$ho = (dc/2) * \cos \theta - (dp/2) * \cos \theta_1 \quad (\text{Equation 6});$$

$$lo = (dc/2) * \sin \theta \quad (\text{Equation 7});$$

$$l_0' = \sqrt{(r_{o2} - h_{o2})^2} \quad (\text{Equation 8}).$$

Then, in the internal gear pump 1 of the present invention, the position of the center  $Z_{ro}$  of the arc  $C_{ro}$  that follows that arc shape of the inner tooth of the outer gear 20 is set within a range that satisfies following Equation 9:

$$l_0' < l_0 \quad (\text{Equation 9}).$$

**[0027]** FIG. 7A is a view that shows the outer pitch circle  $C_o$ , the inner tooth center pitch circle  $C_c$ , the arc  $C_{ro}$ , and the center  $Z_{ro}$  in a state where the center  $Z_{ro}$  is set within the range that satisfies the Equation 9 ( $l_0' < l_0$ ). In this setting, in the adjacent two inner teeth, the intersecting point  $P_1$ , which is the intersecting point between the one arc  $C_{ro}$  (the arc that follows the arc shape of the inner tooth) and the outer pitch circle  $C_o$  and is in proximity to the other arc  $C_{ro}$ , is located outside of the other arc  $C_{ro}$ . In this state, because the adjacent inner teeth are set not to interfere with each other, the inner teeth are arranged in preferred positions. FIG. 7B is a view that shows the outer pitch circle  $C_o$ , the inner tooth center pitch circle  $C_c$ , the arc  $C_{ro}$ , and the center  $Z_{ro}$  in a state where the center  $Z_{ro}$  is set in a range that does not satisfy the Equation 9 ( $l_0' = l_0$ ). In this setting, in the adjacent two inner teeth, the intersecting point  $P_1$ , which is the intersecting point between the one arc  $C_{ro}$  and the outer pitch circle  $C_o$  and is in proximity to the other arc  $C_{ro}$ , is located on the circumference of the other arc  $C_{ro}$ . In this state, because the adjacent inner teeth interfere with each other, the inner teeth are arranged in unfavorable positions. FIG. 7C is a view that shows the outer pitch circle  $C_o$ , the inner tooth center pitch circle  $C_c$ , the arc  $C_{ro}$ , and the center  $Z_{ro}$  in a state where the center  $Z_{ro}$  is set in the range that does not satisfy the Equation 9 ( $l_0' > l_0$ ). In this setting, in the adjacent two inner teeth, the intersecting point  $P_1$ , which is the intersecting point between the one arc  $C_{ro}$  and the outer pitch circle  $C_o$  and is in proximity to the other arc  $C_{ro}$ , is located inside of the other arc  $C_{ro}$ . In this state, because the adjacent inner teeth interfere with each other, the inner teeth are arranged in the unfavorable positions.

**[0028]** The internal gear pump 1 of the present invention is not limited to the appearances, configurations, structures, etc. that are described in the embodiment, and various modifications, additions, and substitutions can be made without departing from the scope of the present invention, as disclosed in the appended claims. In the internal gear pump 1 of the present invention, the number of teeth of the outer gear and that of the inner gear are not limited to the numbers described in the embodiment, and various numbers of teeth can be adopted for the outer gear and the inner gear. The internal gear pump 1 of the present invention can be used not only as various types of oil pumps used for automobiles but also as various machinery pumps that perform suction and discharge of various types of fluids.

## Claims

### 1. An internal gear pump comprising:

an inner gear (10) that has plural outer teeth (T11 to T17) on an outer peripheral surface of the inner gear; and an outer gear (20) that is formed with a housing space that is capable of housing the inner gear (10) and includes plural inner teeth (T21 to T28) that mesh with the outer teeth (T11 to T17) on an inner peripheral surface that forms the housing space,

one of the inner teeth and the outer teeth having a shape based on a tooth shape that is respectively formed from a generating curve of the other of the inner teeth and the outer teeth, the internal gear pump **characterised by**

a section of each of the inner teeth that protrudes in a direction toward the inner gear (10) having a first arc shape ( $C_{ro}$ ),

a section of each of the outer teeth that protrudes in a direction toward the outer gear (20) having a curved shape, each of both end sections of the curved shape having a second arc shape ( $C_{ri}$ ),

if a radius of the first arc shape ( $C_{ro}$ ) is set as  $r_o$ , a radius of the second arc shape ( $C_{ri}$ ) is set as  $r_i$ , a diameter of a pitch circle of the inner teeth is set as  $d_p$ , and the number of the inner teeth of the outer gear is set as  $z$ , the inner gear (10) and the outer gear (20) each having a shape that satisfies a relationship established by following equations:  $1.6 > r_o/(d_p/z) > 1.0$ ; and  $r_o/(d_p/z) > r_i/(d_p/z) \geq 0.13$ , and

each of the inner teeth being provided so that an intersecting point ( $P_1$ ) that is between one ( $C_{ro}$ ) of arcs that follow the first arc shapes of the adjacent inner teeth and the pitch circle ( $C_o$ ) of the inner teeth and that is in proximity to the other arc ( $C_{ro}$ ) is located outside of the other arc ( $C_{ro}$ ).

## Patentansprüche

### 1. Innenzahnradpumpe, dadurch gekennzeichnet, dass sie Folgendes aufweist:

5 ein Innenzahnrad (10), das mehrere Außenzähne (T11 bis T17) auf einer Außenumfangsfläche des Innenzahn-  
rads aufweist; und  
ein Außenzahnrad (20), das mit einem Gehäuseraum ausgebildet ist, der das Innenzahnrad (10) aufnehmen  
kann und mehrere Innenzähne (T21 bis T28) aufweist, die mit den Außenzähnen (T11 bis T17) auf einer  
10 Innenumfangsfläche kämmen, die den Gehäuseraum bildet,  
wobei einer der Innen- und Außenzähne eine Form hat, die auf einer Zahnform basiert, die jeweils aus einer  
Erzeugungskurve des anderen der Innen- und Außenzähne gebildet wird,  
wobei ein Abschnitt von jedem der Innenzähne, der in Richtung auf das Innenzahnrad (10) vorsteht und eine  
erste Bogenform (Cro) aufweist,  
15 wobei ein Abschnitt von jedem der Außenzähne, der in Richtung des Außenrades (20) vorsteht und eine ge-  
krümmte Form hat,  
wobei jeder der beiden Endabschnitte der gekrümmten Form eine zweite Bogenform (Cri) hat,  
wobei dann, wenn ein Radius der ersten Bogenform (Cro) als  $r_o$ , ein Radius der zweiten Bogenform (Cri) als  
 $r_i$ , ein Durchmesser eines Wälzkreises der Innenzähne als  $d_p$  und die Anzahl der Innenzähne des Außenrades  
20 als  $z$  festgelegt ist, das Innenzahnrad (10) und das Außenzahnrad (20) jeweils eine Form haben, die eine durch  
folgende Gleichungen festgelegte Beziehung erfüllt:  $1,6 > r_o/(d_p/z) > 1,0$ ; und  $r_o/(d_p/z) > r_i/(d_p/z) \geq 0,13$ , und  
wobei jeder der Innenzähne so vorgesehen ist, dass ein Schnittpunkt (P1), der zwischen einem (Cro) der Bögen,  
die den ersten Bogenformen der benachbarten Innenzähne folgen, und dem Teilkreis (Co) der Innenzähne liegt  
und der sich in der Nähe des anderen Bogens (Cro) befindet, außerhalb des anderen Bogens (Cro) liegt.

25

## Revendications

### 1. Pompe à engrenages interne comprenant :

30 un engrenage intérieur (10) qui possède plusieurs dents extérieures (T11 à T17) sur une surface périphérique  
extérieure de l'engrenage intérieur ; et  
un engrenage extérieur (20) qui est formé avec un espace de logement apte à recevoir l'engrenage intérieur  
(10) et qui comprend plusieurs dents intérieures (T21 à T28) qui s'engrènent avec les dents extérieures (T11  
à T17) sur une surface périphérique intérieure qui forme l'espace de logement,  
35 une dent parmi les dents intérieures et les dents extérieures ayant une forme basée sur une forme de dent qui  
est respectivement formée à partir d'une courbe de génération de l'autre dent parmi les dents intérieures et les  
dents extérieures, la pompe à engrenages interne étant **caractérisée par**  
une section de chacune des dents intérieures qui fait saillie suivant une direction vers l'engrenage intérieur (10)  
ayant une première forme d'arc (Cro),  
40 une section de chacune des dents extérieures qui fait saillie suivant une direction vers l'engrenage extérieur  
(20) ayant une forme incurvée,  
chacune des deux sections d'extrémité de la forme incurvée ayant une seconde forme d'arc (Cri),  
si un rayon de la première forme d'arc (Cro) est défini par  $r_o$ , un rayon de la seconde forme d'arc (Cri) est défini  
par  $r_i$ , un diamètre d'un cercle de pas des dents intérieures est défini par  $d_p$  et le nombre de dents intérieures  
45 de l'engrenage extérieur est défini par  $z$ , l'engrenage intérieur (10) et l'engrenage extérieur (20) ayant chacun  
une forme qui satisfait une relation établie par les équations suivantes :  $1,6 > r_o/(d_p/z) > 1,0$  ; et  $r_o/(d_p/z) >$   
 $r_i/(d_p/z) \geq 0,13$ , et  
chacune des dents intérieures est disposée de telle sorte qu'un point d'intersection (P1) qui est entre un des  
arcs (Cro) qui suit les premières formes d'arc des dents intérieures adjacentes et le cercle de pas (Co) des  
50 dents intérieures et qui est à proximité de l'autre arc (Cro) est situé à l'extérieur de l'autre arc (Cro).

55



FIG. 2A

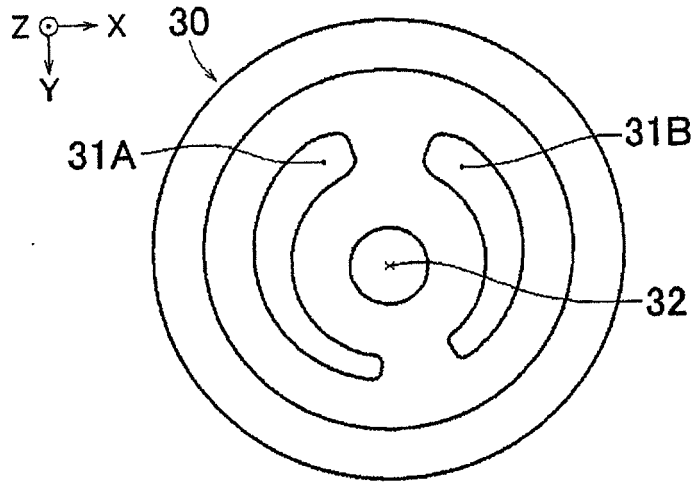


FIG. 2B

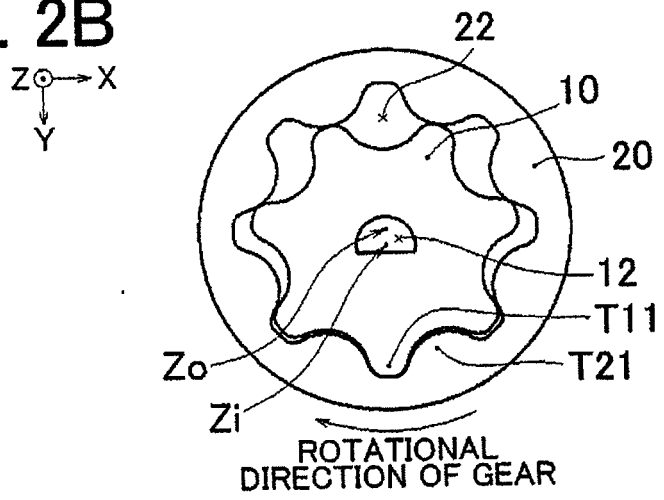
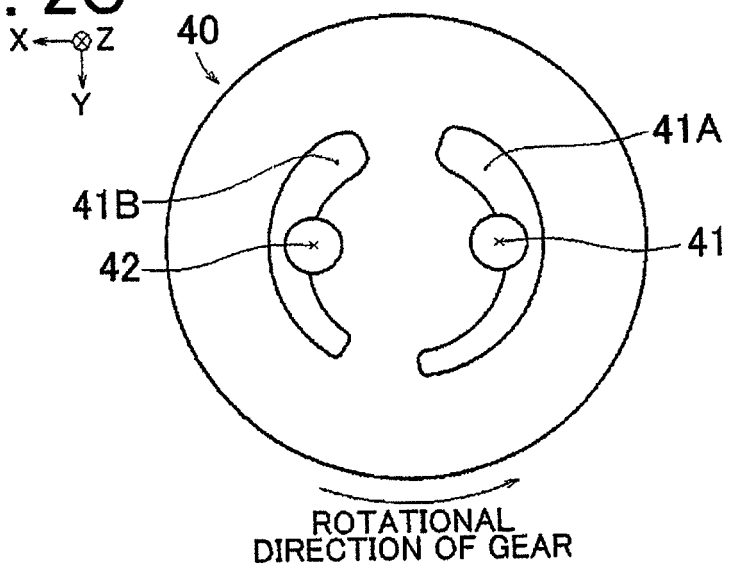


FIG. 2C





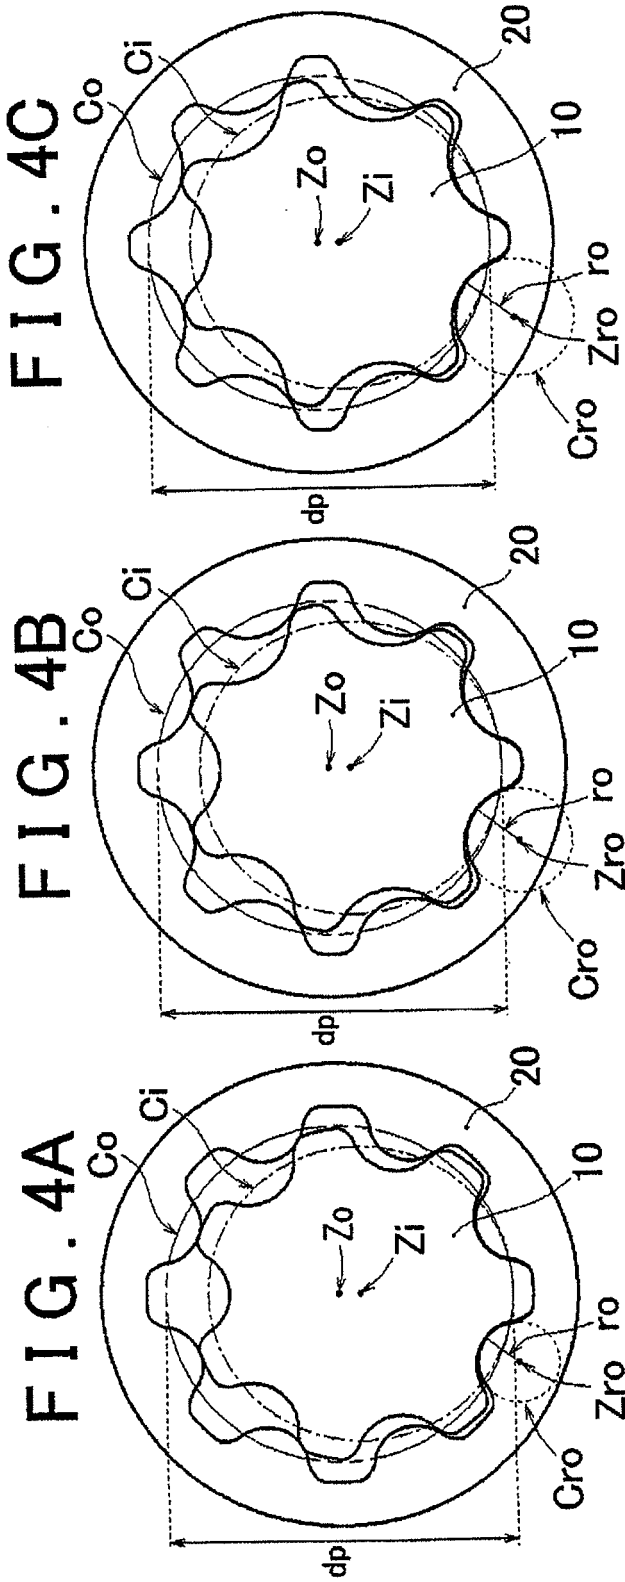


FIG. 4D 60

AMOUNT OF ECCENTRICITY	NUMBER OF TOOTH	OUTER PITCH DIAMETER	INNER TOOTH ARC RADIUS	OUTER TOOTH CORNER SECTION RADIUS	RATIO	
					$r_o/(dp/z)$	$r_i/(dp/z)$
	$z$	$dp$	$r_o$	$r_i$	-	-
mm	-	mm	mm	mm	-	-
(A) 1.55	8	24.8	3.0	0.30	1.0	0.10
(B) 1.55	8	24.8	4.0	0.42	1.3	0.13
(C) 1.52	8	24.3	4.7	0.38	1.6	0.12

FIG. 5

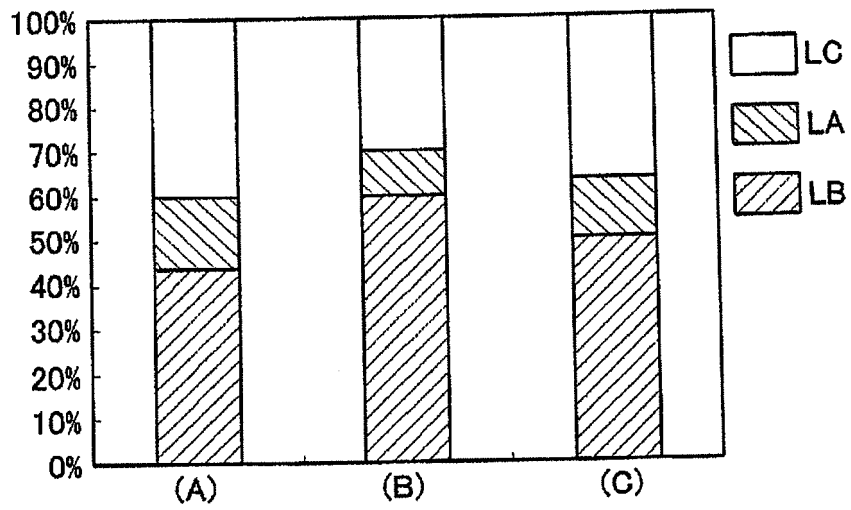




FIG. 7A

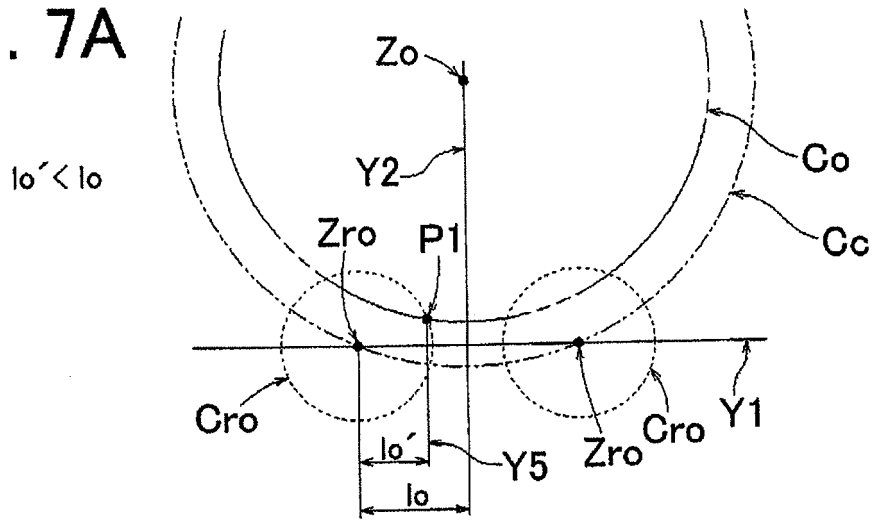


FIG. 7B


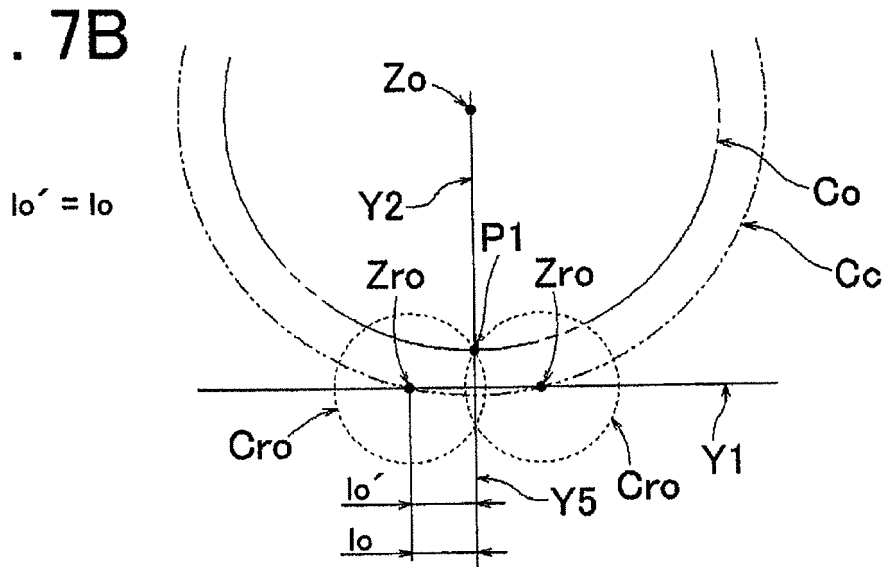


FIG. 7C

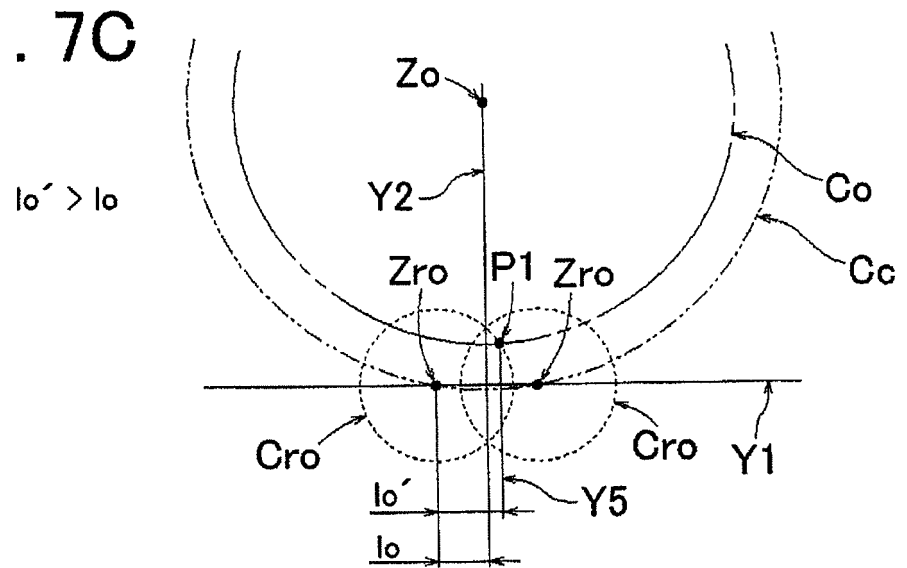

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- JP 2003322088 A [0003] [0004]
- JP 2005036735 A [0003] [0004]
- EP 0367046 A1 [0005]
- EP 1840327 A2 [0005]
- EP 1662144 A1 [0005]
- NL 6602352 A [0005]