



US010663889B2

(12) **United States Patent**
Iwamura

(10) **Patent No.:** **US 10,663,889 B2**

(45) **Date of Patent:** **May 26, 2020**

(54) **DEVELOPING DEVICE AND IMAGE FORMING APPARATUS**

FOREIGN PATENT DOCUMENTS

(71) Applicant: **FUJI XEROX CO., LTD.**, Tokyo (JP)

JP	2006113401	4/2006
JP	2007155916	6/2007
JP	2008250290 A *	10/2008
JP	2010211112	9/2010

(72) Inventor: **Takuya Iwamura**, Kanagawa (JP)

* cited by examiner

(73) Assignee: **FUJI XEROX CO., LTD.**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

Primary Examiner — Clayton E. LaBalle
Assistant Examiner — Leon W Rhodes, Jr.
(74) *Attorney, Agent, or Firm* — JCIPRNET

(21) Appl. No.: **16/253,231**

(57) **ABSTRACT**

(22) Filed: **Jan. 22, 2019**

A developing device includes a rotating member that delivers developer to a latent image on an image carrier while rotating; a supplying member provided in a supply path extending in an axial direction of the rotating member; a stirring member including a stirring shaft extending in the axial direction and provided in a stirring path extending in the axial direction and arranged side by side with the supply path in a direction intersecting the axial direction, the stirring member stirring the developer while rotating by causing the developer to circulate between the supply path and the stirring path; and a preliminary member provided in a preliminary stirring path into which toner is supplied from an outside and provided by extending an end of the stirring path that is on a side where the developer delivered from the supply member is received by the stirring member, the preliminary member including an extension shaft as an extension of the stirring shaft and a helical transporting blade provided on the extension shaft, the transporting blade being divided into a first transporting blade and a second transporting blade provided across the first transporting blade from the stirring shaft, the preliminary member transporting the toner into the stirring path while rotating.

(65) **Prior Publication Data**

US 2020/0019091 A1 Jan. 16, 2020

(30) **Foreign Application Priority Data**

Jul. 12, 2018 (JP) 2018-132131

(51) **Int. Cl.**
G03G 15/08 (2006.01)

(52) **U.S. Cl.**
CPC . **G03G 15/0893** (2013.01); **G03G 2215/0838** (2013.01)

(58) **Field of Classification Search**
CPC G03G 2215/0833; G03G 2215/0822
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,502,576 B2 *	3/2009	Kubota	G03G 15/0893	399/254
8,208,837 B2	6/2012	Iwamura			

14 Claims, 12 Drawing Sheets

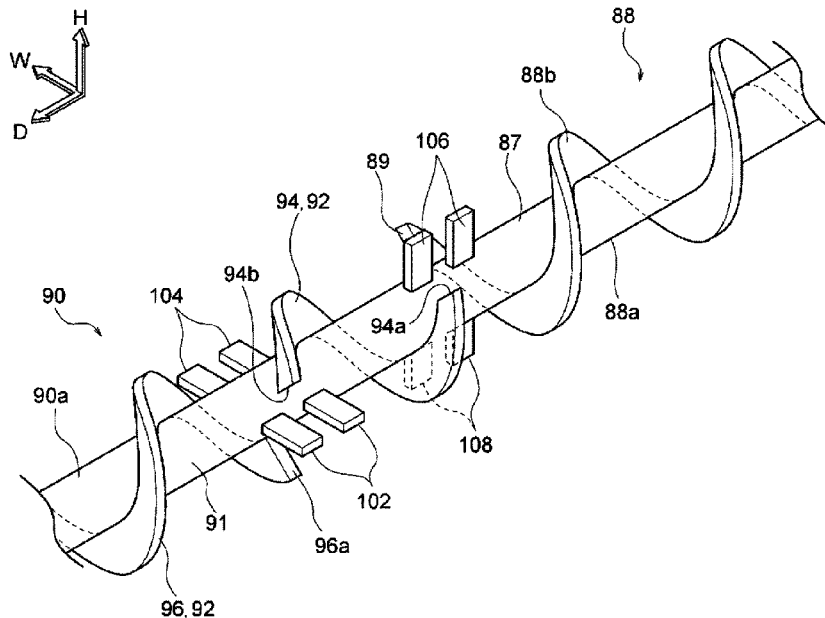


FIG. 1

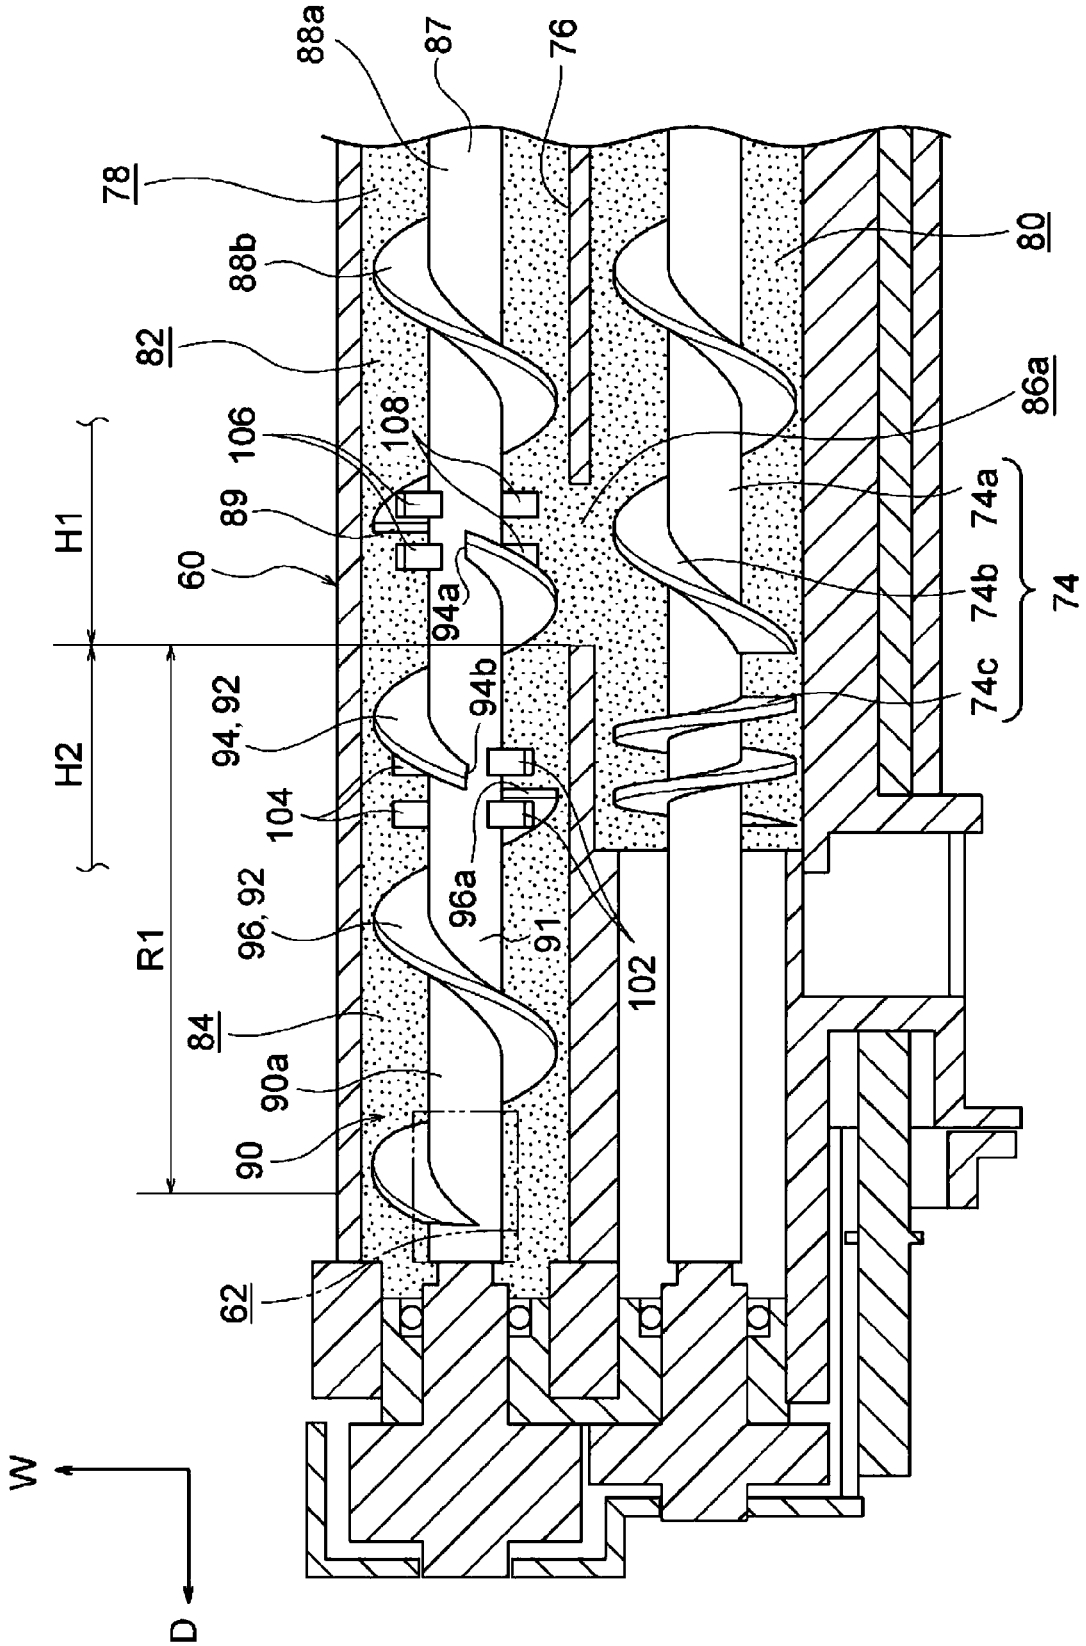


FIG. 2

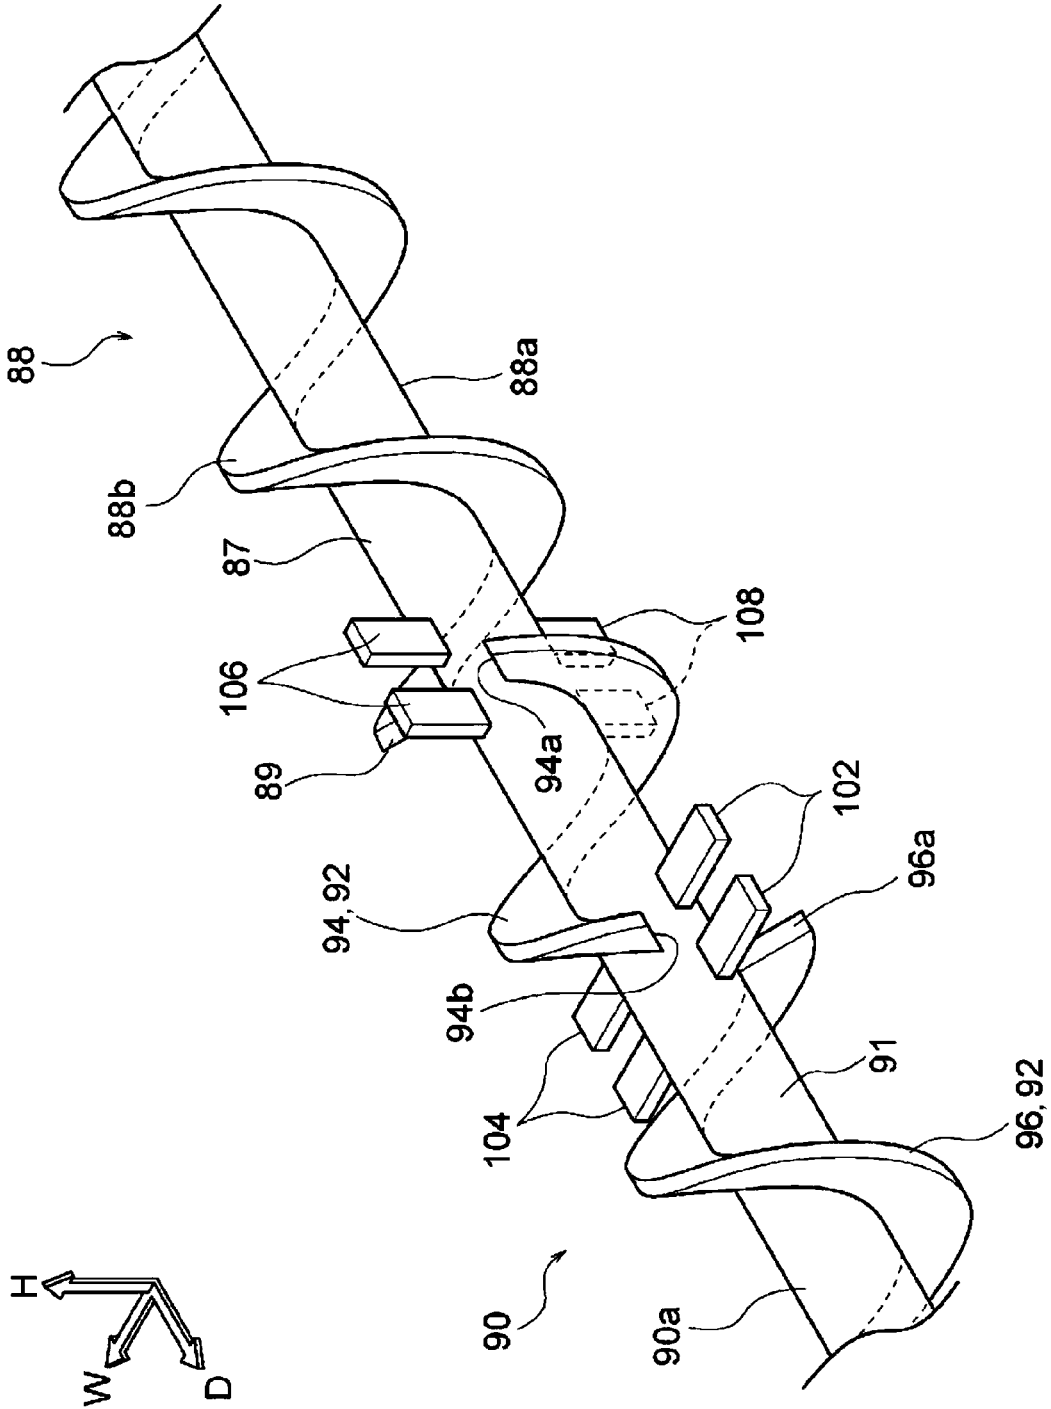


FIG. 3

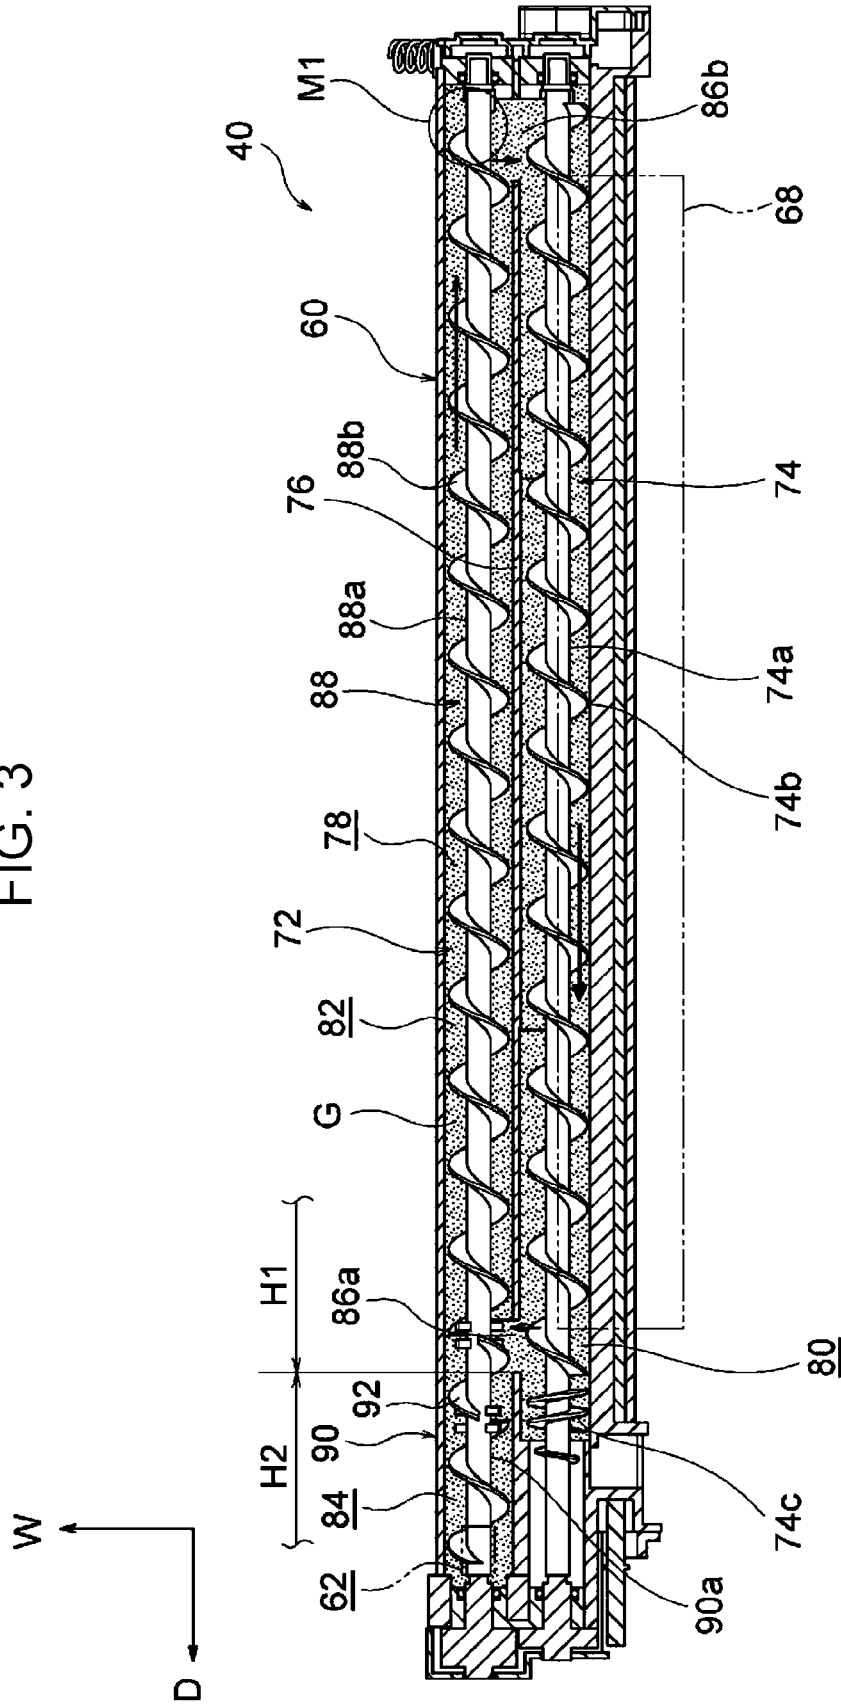
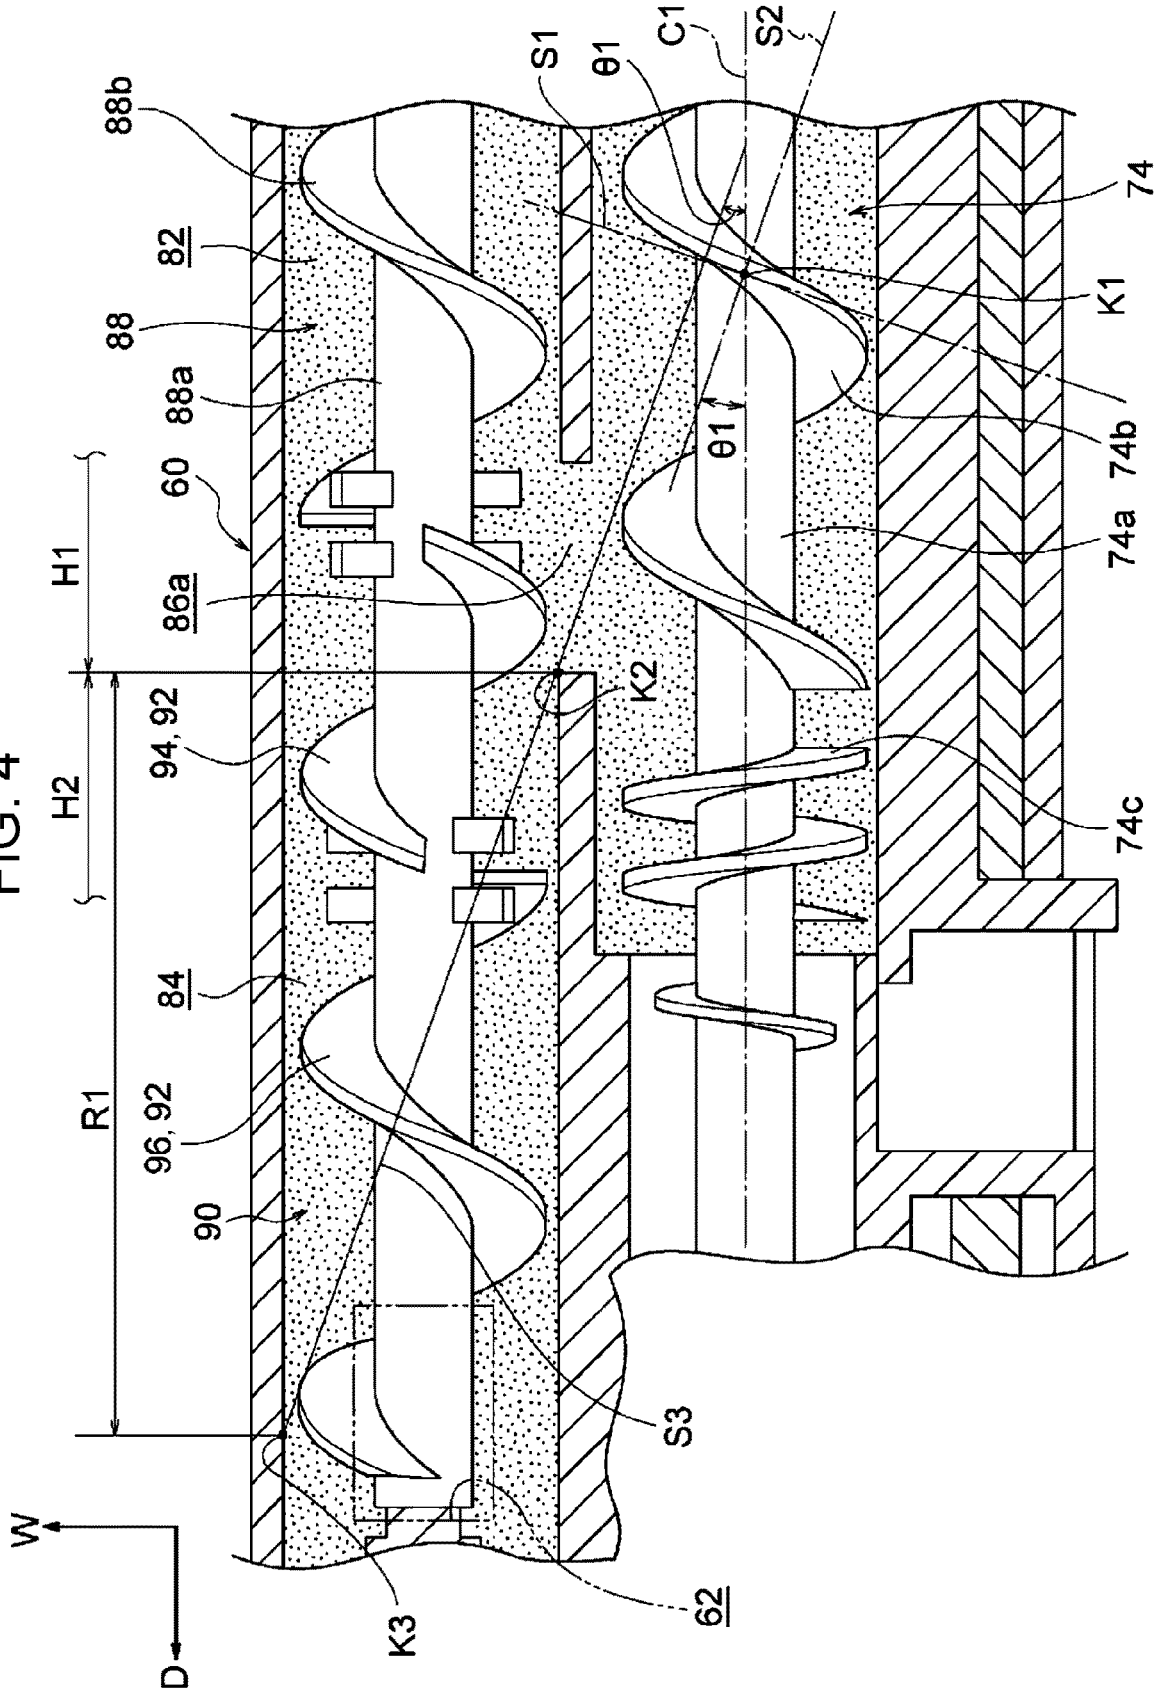


FIG. 4



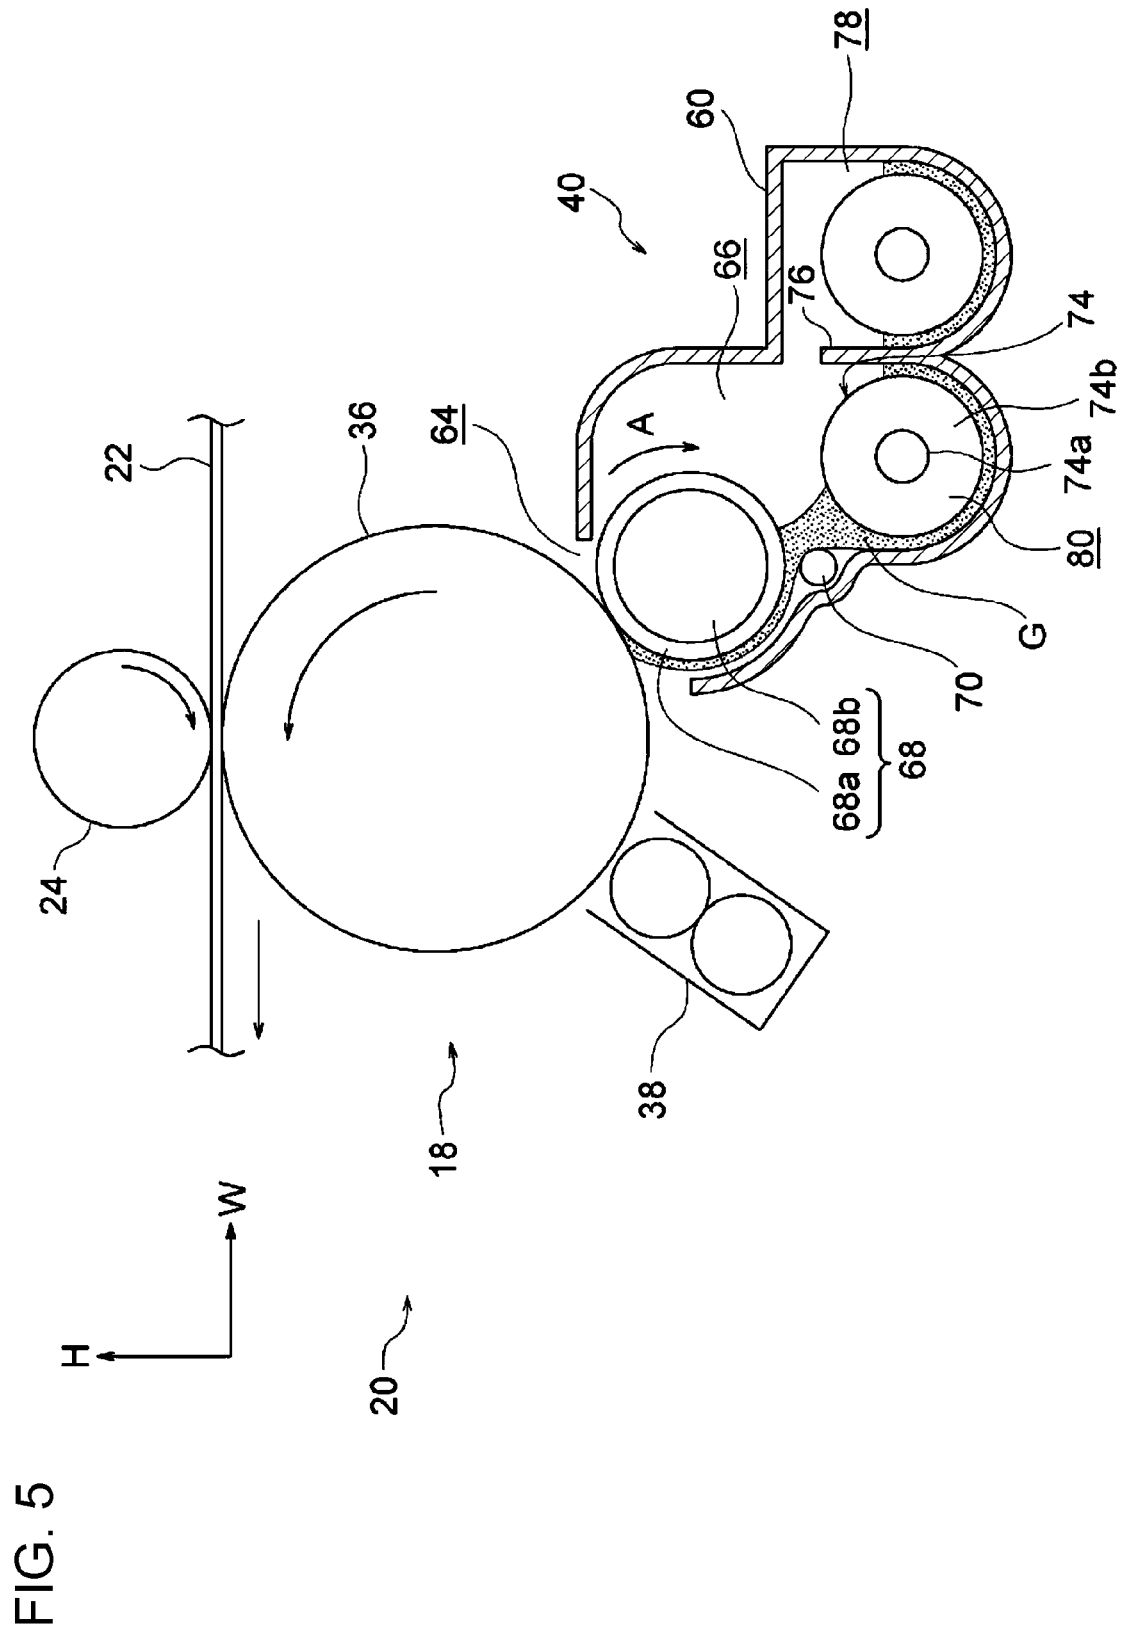


FIG. 6

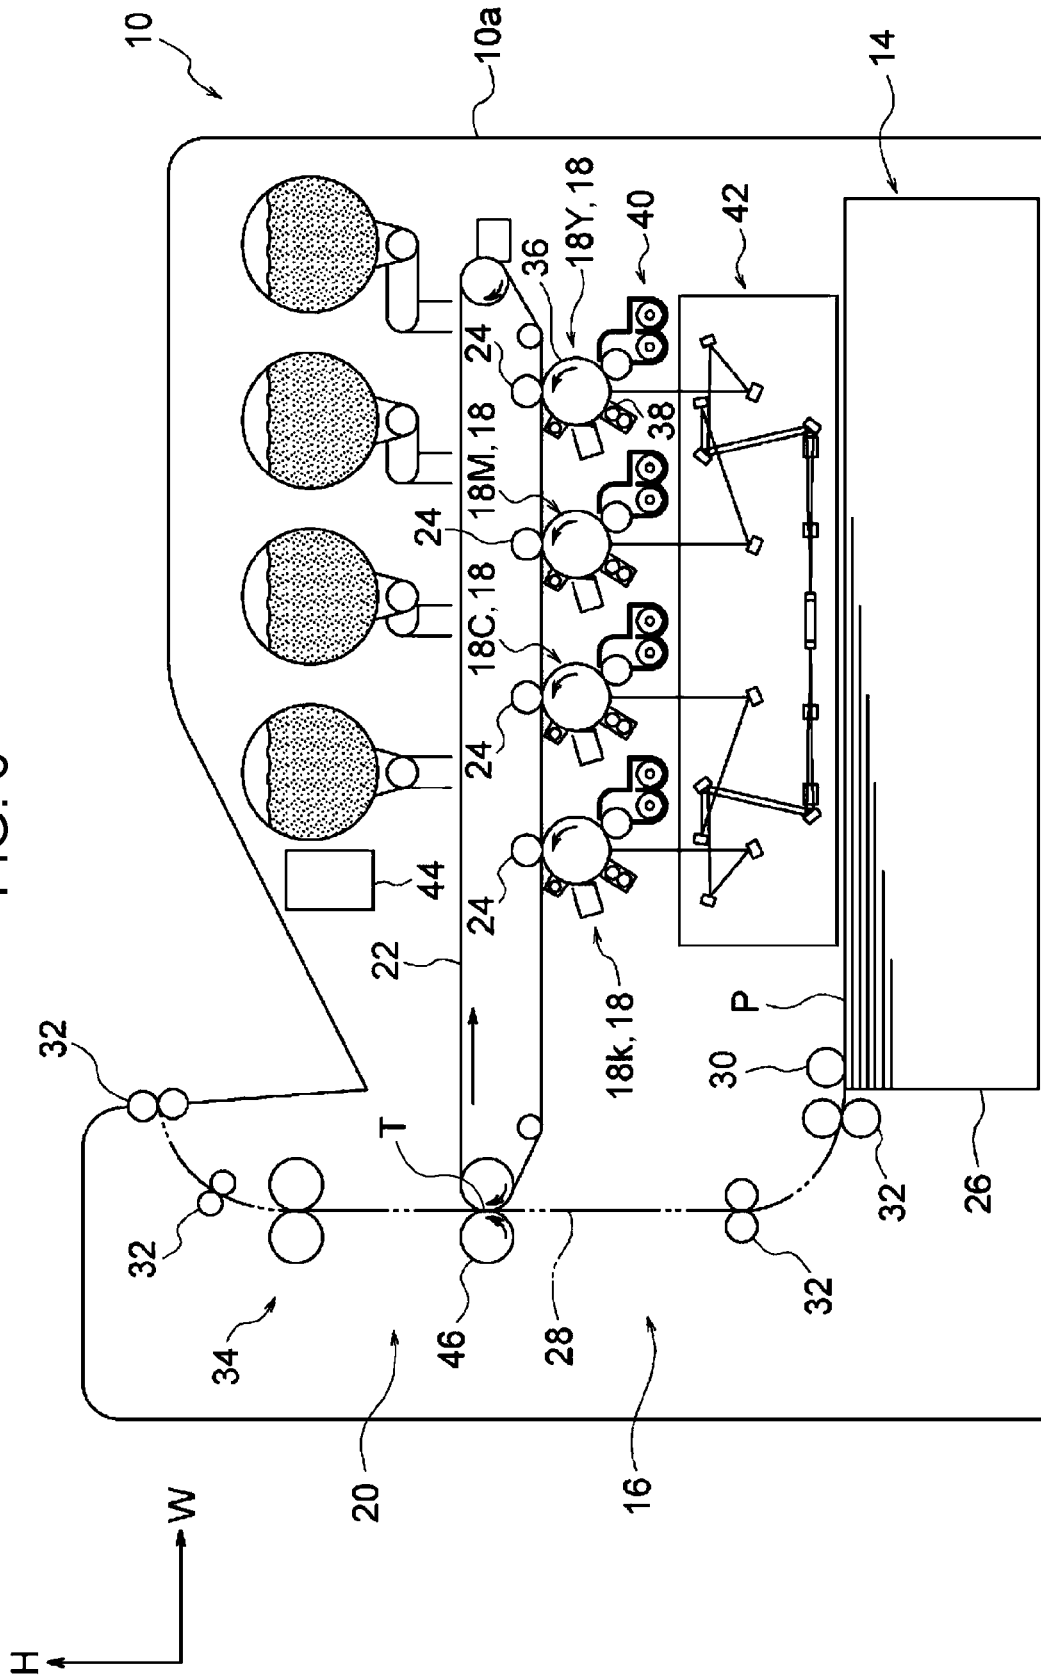


FIG. 7B

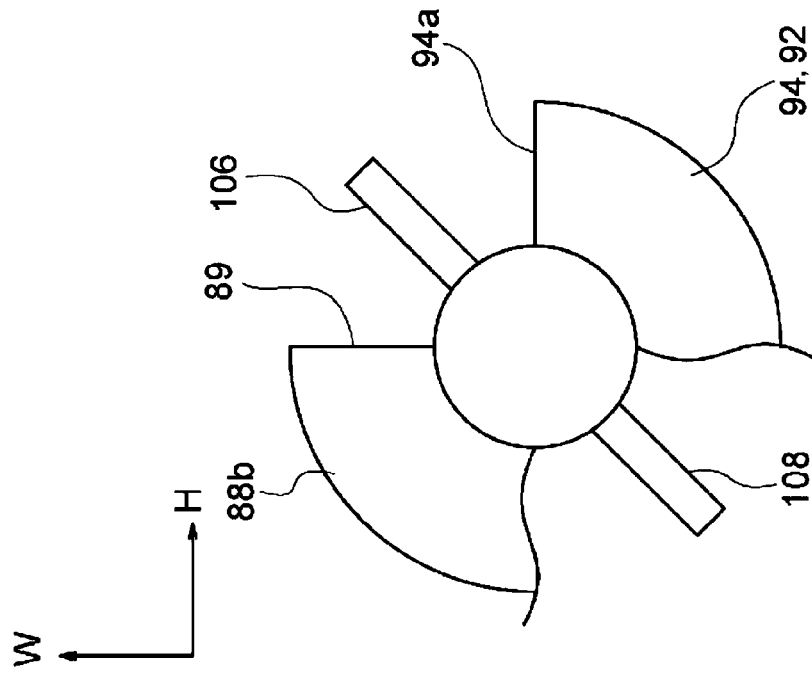


FIG. 7A

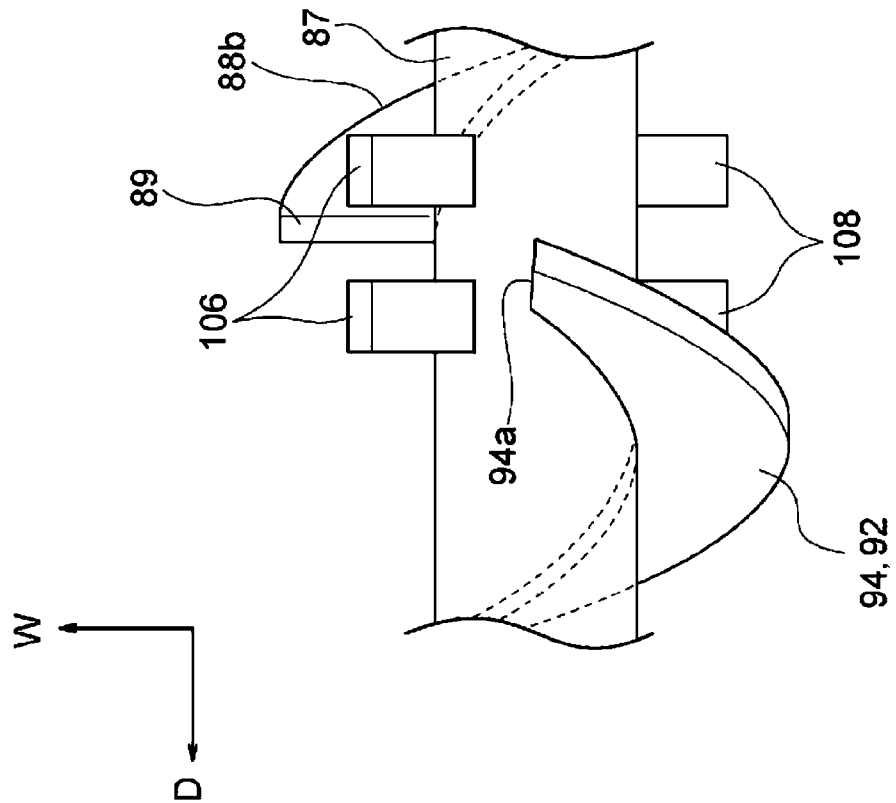


FIG. 8B

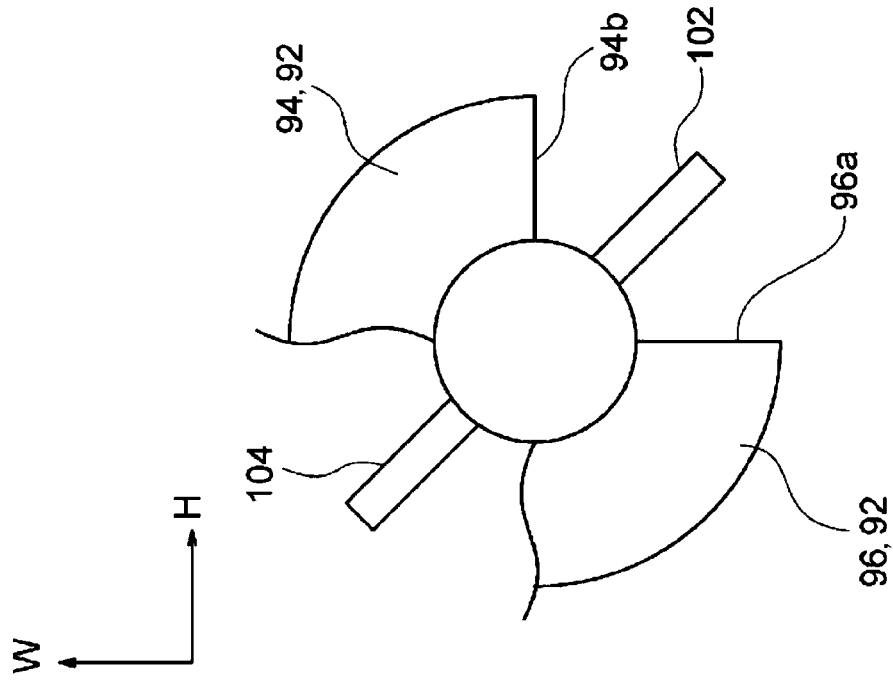


FIG. 8A

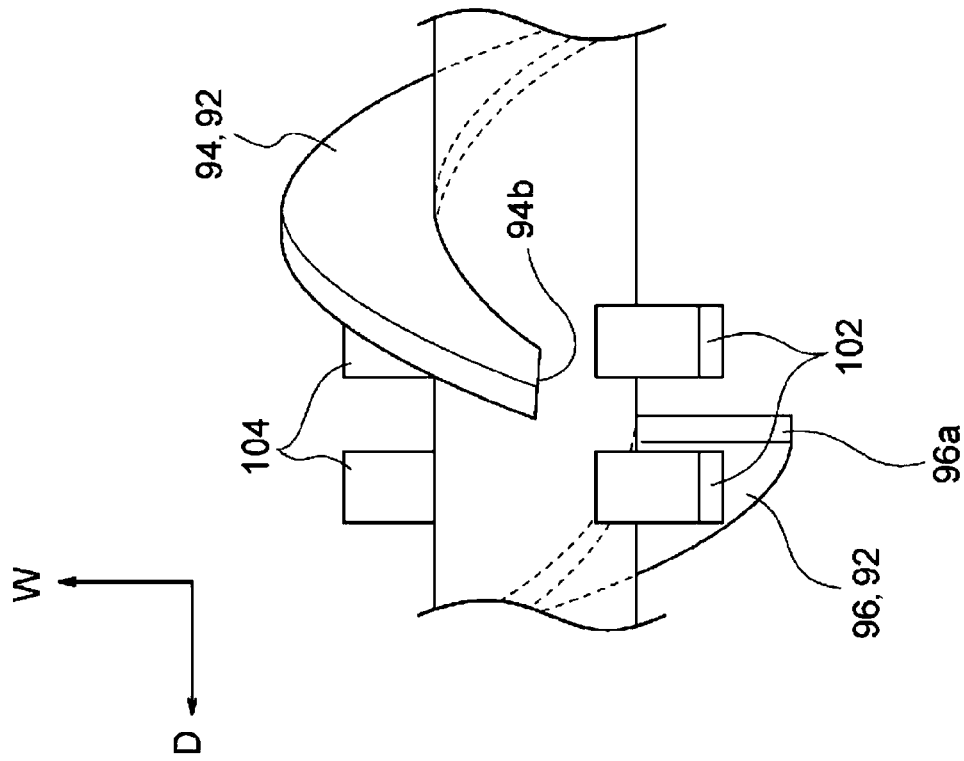


FIG. 9

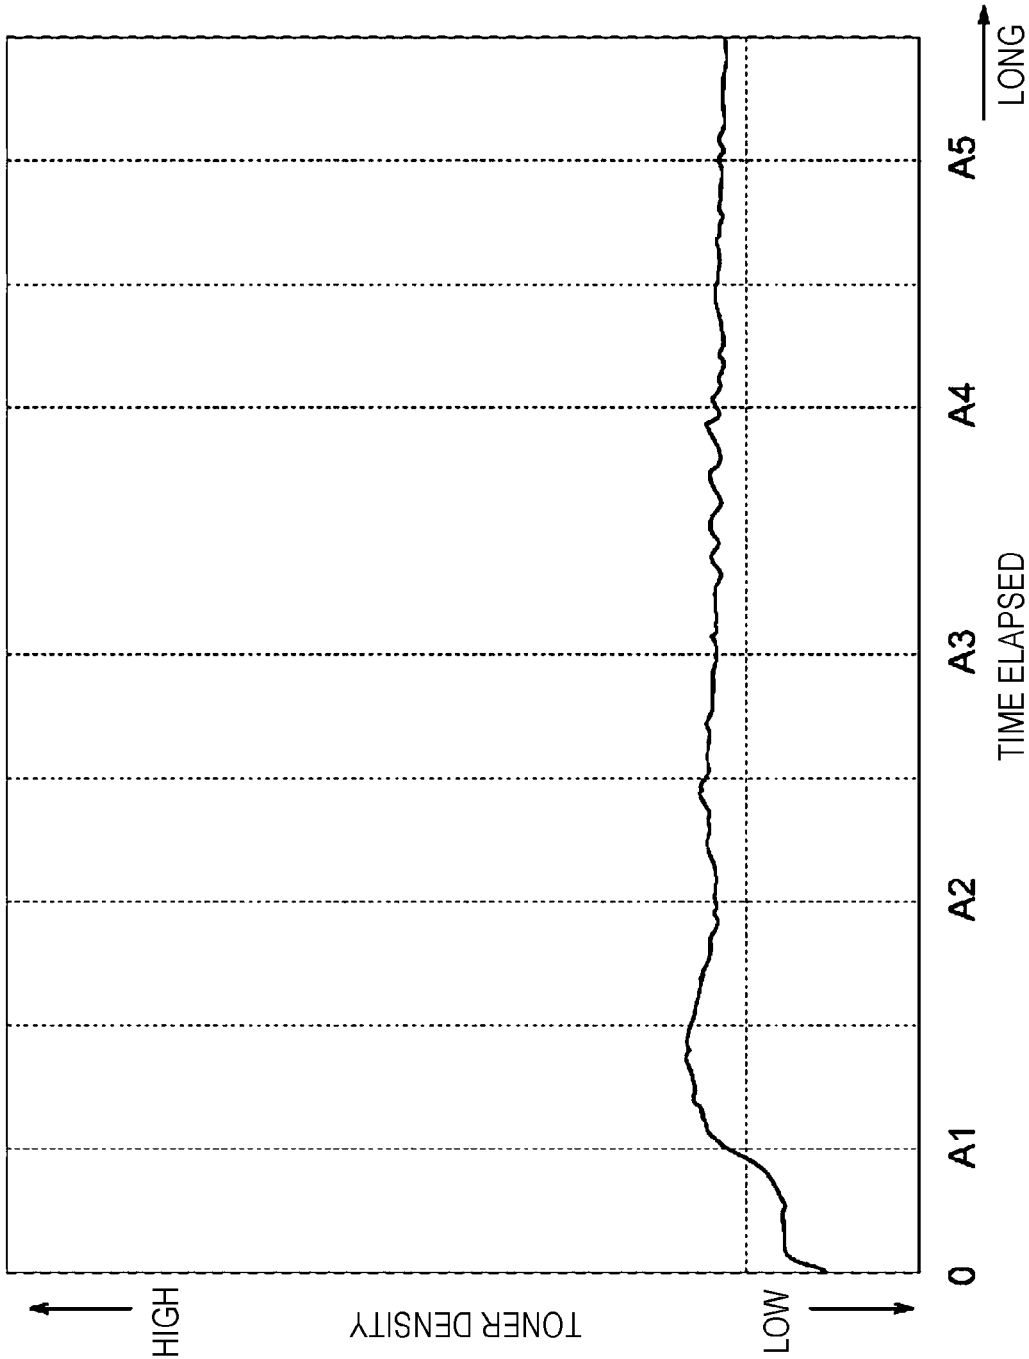


FIG. 10

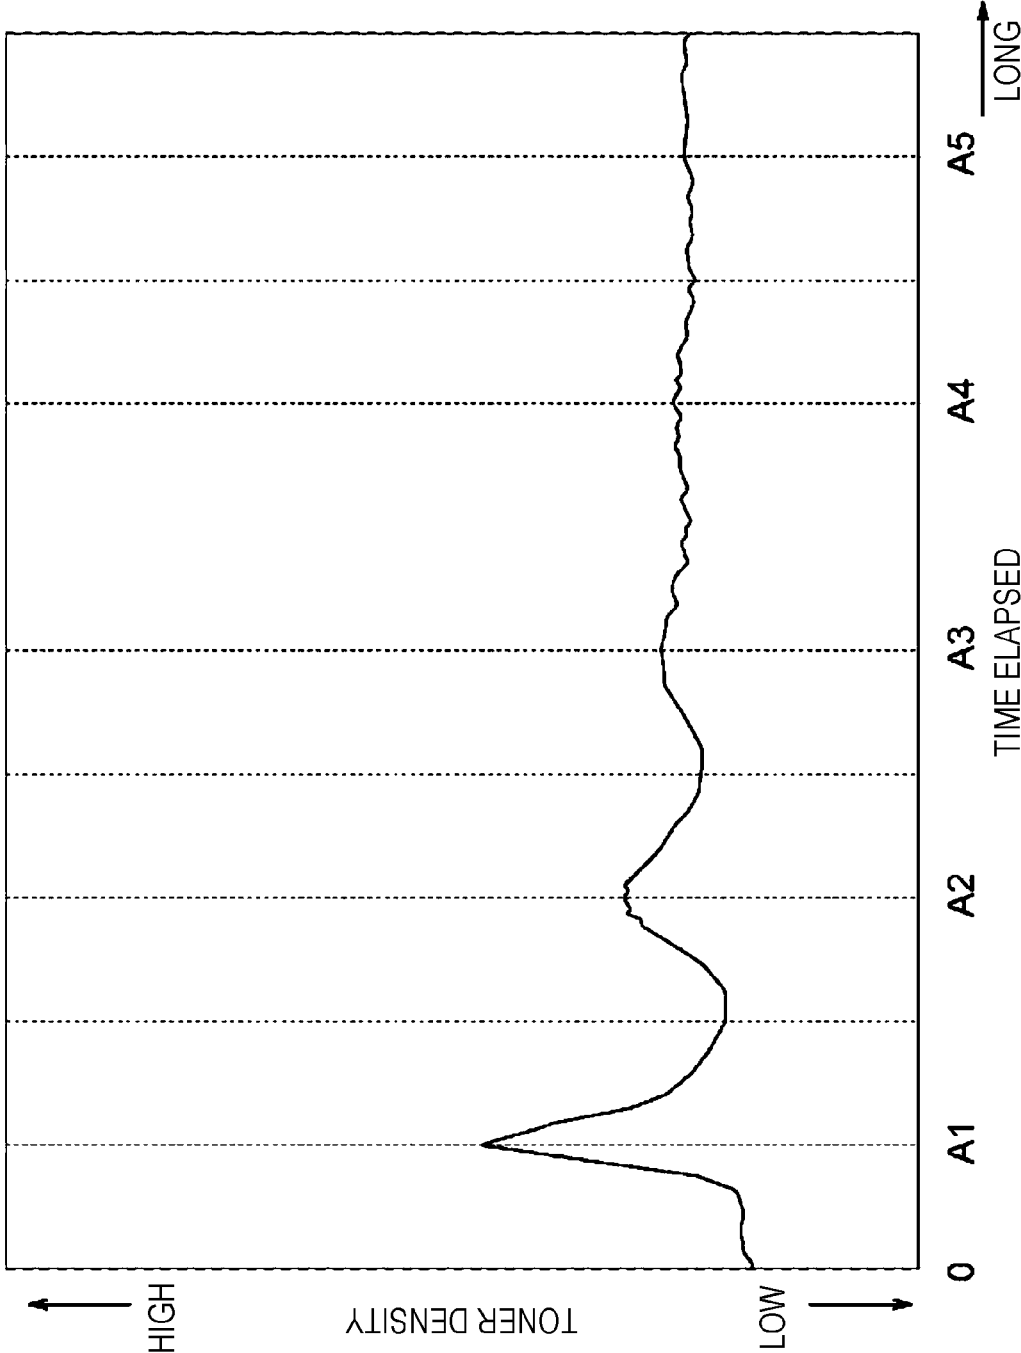


FIG. 11


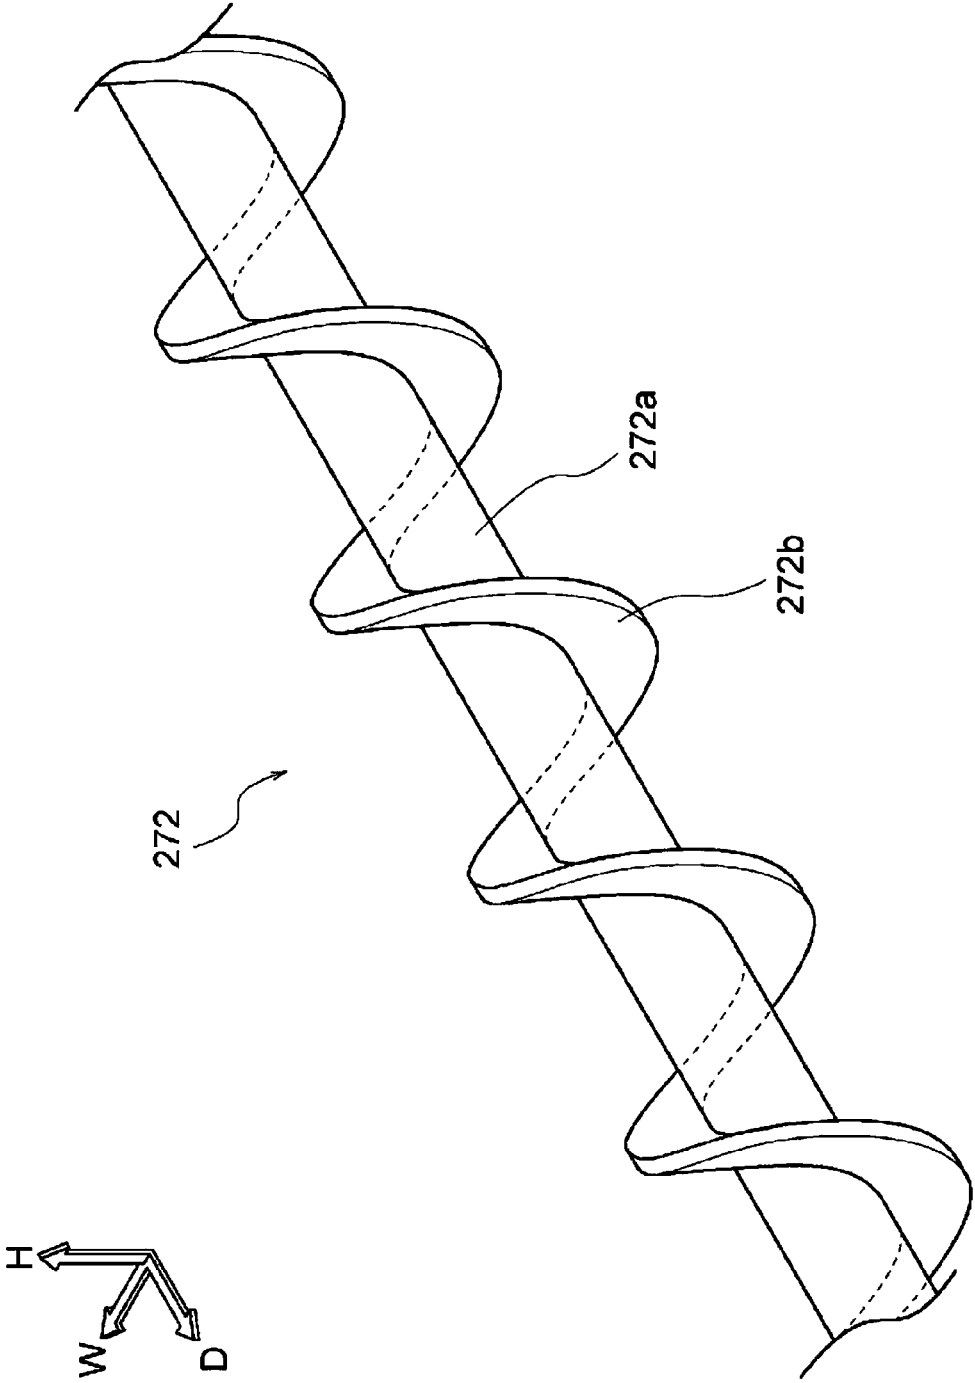


FIG. 12

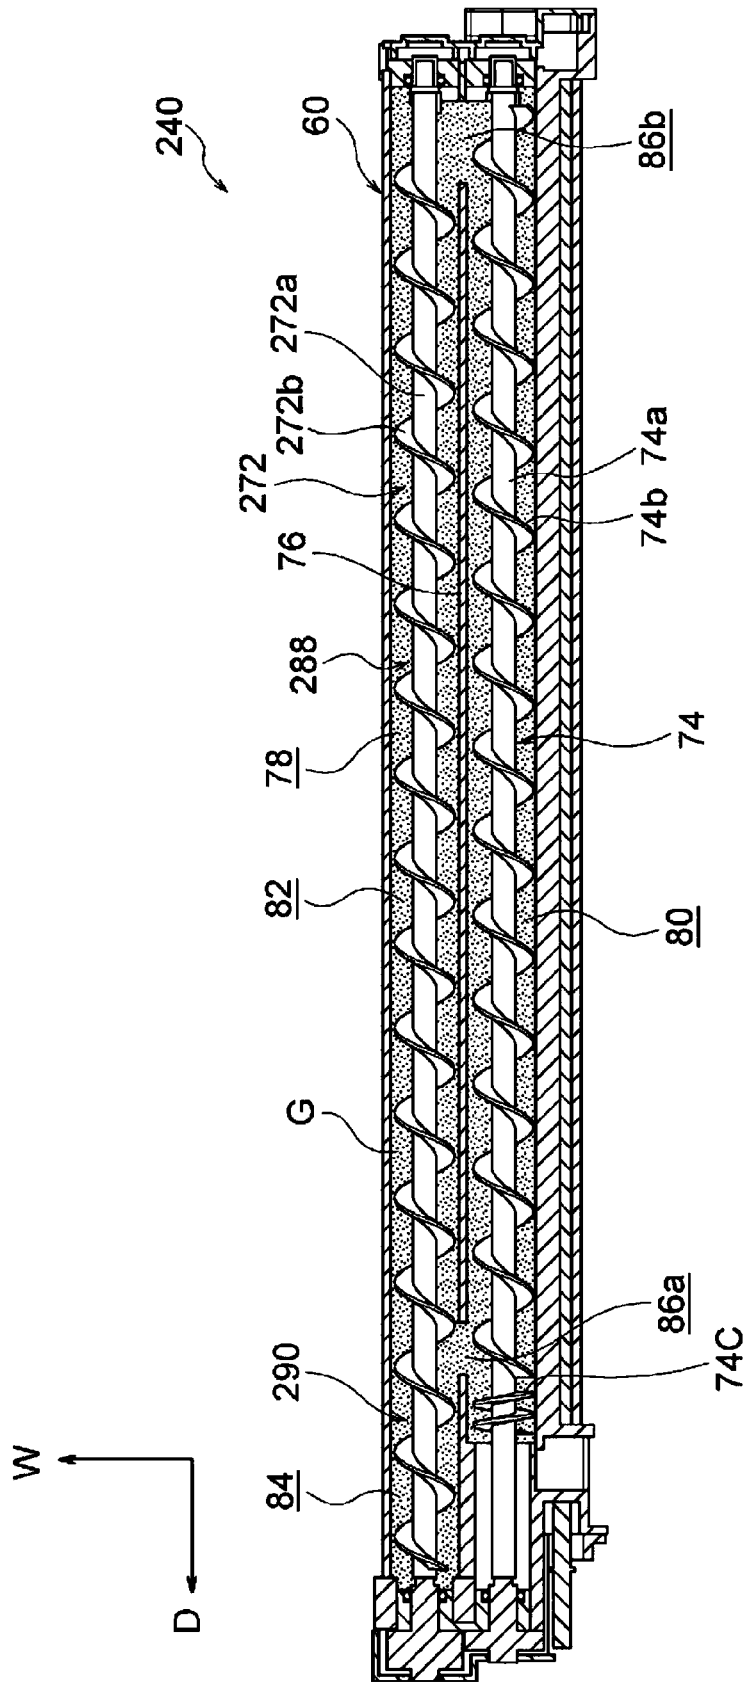

1

DEVELOPING DEVICE AND IMAGE FORMING APPARATUS

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is based on and claims priority under 35 USC 119 from Japanese Patent Application No. 2018-132131 filed Jul. 12, 2018.

BACKGROUND

(i) Technical Field

The present disclosure relates to a developing device and an image forming apparatus.

(ii) Related Art

A developer supplying device disclosed by Japanese Unexamined Patent Application Publication No. 2006-113401 includes a body portion, a transporting member, and a toner supplying port. The developer supplying device has a circulation path including a first circulation path provided in proximity to a developing roller, and a second circulation path communicating with the first circulation path at two ends thereof. The transporting member includes a first transporting screw and a second transporting screw provided in the first and second circulation paths, respectively. The first and second transporting screws each having a long narrow shape are provided with helical fins, respectively, and rotate on their own axes.

SUMMARY

A developing device has a stirring path in which developer is stirred, and a supply path from which the developer is supplied to a developing roller. The developer circulates between the stirring path and the supply path forming a circulation path. Furthermore, the developing device has a preliminary stirring path in which toner supplied to the developing device is stirred and simultaneously transported to the circulation path. The preliminary stirring path is provided by extending the stirring path. The preliminary stirring path is provided with a preliminary member including a shaft and a helical transporting blade provided on the shaft. The helical transporting blade provided on the shaft is continuous.

In such a configuration, the developer delivered from the supply path to the stirring path may occasionally advances into the preliminary stirring path (a situation called overrun). If the stirring of such developer having advanced into the preliminary stirring path and fresh toner supplied is insufficient, the density of the resulting toner image may become nonuniform.

Aspects of non-limiting embodiments of the present disclosure relate to a reduction in the occurrence of nonuniformity in the density of a toner image, compared with the case where the helical blade of the preliminary member provided in the preliminary stirring path is continuous.

Aspects of certain non-limiting embodiments of the present disclosure overcome the above disadvantages and/or other disadvantages not described above. However, aspects of the non-limiting embodiments are not required to overcome the disadvantages described above, and aspects of the non-limiting embodiments of the present disclosure may not overcome any of the disadvantages described above.

2

According to an aspect of the present disclosure, there is provided a developing device including a rotating member that delivers developer to a latent image on an image carrier while rotating; a supplying member provided in a supply path extending in an axial direction of the rotating member; a stirring member including a stirring shaft extending in the axial direction and provided in a stirring path extending in the axial direction and arranged side by side with the supply path in a direction intersecting the axial direction, the stirring member stirring the developer while rotating by causing the developer to circulate between the supply path and the stirring path; and a preliminary member provided in a preliminary stirring path into which toner is supplied from an outside and provided by extending an end of the stirring path that is on a side where the developer delivered from the supply member is received by the stirring member, the preliminary member including an extension shaft as an extension of the stirring shaft and a helical transporting blade provided on the extension shaft, the transporting blade being divided into a first transporting blade and a second transporting blade provided across the first transporting blade from the stirring shaft, the preliminary member transporting the toner into the stirring path while rotating.

BRIEF DESCRIPTION OF THE DRAWINGS

An exemplary embodiment of the present disclosure will be described in detail based on the following figures, wherein:

FIG. 1 is a sectional view of a developing device according to an exemplary embodiment of the present disclosure, illustrating a preliminary stirring path and other relevant elements;

FIG. 2 is an enlarged perspective view of part of a preliminary member provided in the preliminary stirring path of the developing device according to the exemplary embodiment of the present disclosure;

FIG. 3 is a sectional view of the developing device according to the exemplary embodiment of the present disclosure, illustrating a supply path, a stirring path, the preliminary stirring path, and other relevant elements;

FIG. 4 is another sectional view of the developing device according to the exemplary embodiment of the present disclosure, illustrating the preliminary stirring path and other relevant elements;

FIG. 5 is a sectional view of the developing device according to the exemplary embodiment of the present disclosure;

FIG. 6 illustrates an overall configuration of an image forming apparatus according to the exemplary embodiment of the present disclosure;

FIGS. 7A and 7B are a front view and a side view, respectively, of the stirring member and the preliminary member included in the developing device according to the exemplary embodiment of the present disclosure;

FIGS. 8A and 8B are a front view and a side view, respectively, of the preliminary member included in the developing device according to the exemplary embodiment of the present disclosure;

FIG. 9 is a graph illustrating the result of an evaluation of the developing device according to the exemplary embodiment of the present disclosure;

FIG. 10 is a graph illustrating the result of an evaluation of a developing device according to a comparative embodiment of the present disclosure;

FIG. 11 is an enlarged perspective view of part of a preliminary member provided in a preliminary stirring path

of the developing device according to the comparative embodiment of the present disclosure; and

FIG. 12 is a sectional view of the developing device according to the comparative embodiment of the present disclosure, illustrating a supply path, a stirring path, the preliminary stirring path, and other relevant elements.

DETAILED DESCRIPTION

An exemplary developing device and an exemplary image forming apparatus according to an exemplary embodiment of the present disclosure will now be described with reference to FIGS. 1 to 9. In the drawings, arrow H represents an apparatus top-bottom direction (a vertical direction), arrow W represents an apparatus width direction (a horizontal direction), and arrow D represents an apparatus depth direction (another horizontal direction).

Image Forming Apparatus 10

Referring to FIG. 6, an image forming apparatus 10 includes, in order from the bottom to the top thereof in the apparatus top-bottom direction, a container section 14 that contains sheet members P each being a recording medium, a transport section 16 that transports each of the sheet members P from the container section 14, and an image forming section 20 that forms an image on the sheet member P transported from the container section 14 by the transport section 16. The image forming apparatus 10 further includes a controller 44 that controls the above sections.

Container Section

The container section 14 includes a container member 26 that is drawable from an apparatus body 10a of the image forming apparatus 10 toward the near side in the apparatus depth direction. The sheet members P are stacked in the container member 26. The container section 14 further includes a feed roller 30 that feeds the top one of the sheet members P stacked in the container member 26 into a transport path 28 included in the transport section 16.

Transport Section

The transport section 16 includes a plurality of pairs of transport rollers 32 that transport the sheet member P along the transport path 28.

Image Forming Section

The image forming section 20 includes four image forming units 18Y, 18M, 18C, and 18K for yellow (Y), magenta (M), cyan (C), and black (K). Hereinafter, if there is no need to distinguish relevant elements from one another by the colors of Y, M, C, and K, the reference characters Y, M, C, and K are omitted occasionally.

The image forming section 20 further includes an exposure device 42 that applies exposure beams for the respective colors to respective image carriers 36 included in the image forming units 18 for the respective colors. Referring to FIG. 5, the image forming units 18 for the respective colors each include the image carrier 36 and a charging member 38 that charges the surface of the image carrier 36. The image forming unit 18 further includes a developing device 40 that develops an electrostatic latent image formed by the exposure beam applied from the exposure device 42 to the charged surface of the image carrier 36 and thus visualizes the electrostatic latent image as a toner image.

Referring to FIG. 6, the image forming section 20 includes an endless transfer belt 22 to which the toner images formed by the image forming units 18 for the respective colors are transferred, and first transfer rollers 24 that transfer the toner images formed by the respective image forming units 18 to the transfer belt 22. The image forming section 20 further includes a second transfer roller

46 that transfers the toner images on the transfer belt 22 to a sheet member P. The image forming section 20 further includes a fixing device 34 that heats and presses the toner images on the sheet member P and thus fixes the toner images to the sheet member P. Details of the developing device 40 will be described separately below.

Operation of Image Forming Apparatus

The image forming apparatus 10 forms an image as follows.

First, the charging members 38 for the respective colors to which a voltage is applied come into contact with the surfaces of the image carriers 36 for the respective colors, thereby negatively charging the surfaces of the image carriers 36 uniformly with a predetermined potential. Subsequently, the exposure device 42 applies exposure beams to the charged surfaces of the image carriers 36 for the respective colors in accordance with pieces of image data inputted thereto from an external device, thereby forming electrostatic latent images.

Thus, electrostatic latent images corresponding to the respective pieces of image data are formed on the surfaces of the respective image carriers 36. Then, the developing devices 40 for the respective colors develop the electrostatic latent images and thus visualizes the electrostatic latent images as toner images, respectively. Furthermore, the first transfer rollers 24 transfer the toner images on the surfaces of the image carriers 36 for the respective colors to the transfer belt 22.

Meanwhile, the feed roller 30 feeds the top one of the sheet members P stacked in the container member 26 into the transport path 28 toward a transfer position T where the transfer belt 22 and the second transfer roller 46 are in contact with each other. At the transfer position T, the sheet member P is nipped between the second transfer roller 46 and the transfer belt 22, whereby the toner images on the transfer belt 22 are transferred to the sheet member P.

Then, the fixing device 34 fixes the toner images on the sheet member P to the sheet member P. The sheet member P thus having the fixed toner images is discharged to the outside of the apparatus body 10a by the pairs of transport rollers 32.

Featured Configuration

A configuration of the developing device 40 according to the present exemplary embodiment will now be described.

Referring to FIG. 5, the developing device 40 includes a housing 60 that houses relevant elements. The housing 60 has therein a developer storing chamber 66 in which developer G containing toner T and carrier C is storable.

Housing 60

Referring to FIG. 5, the housing 60 has an open part 64 that opens toward the image carrier 36. The housing 60 houses a developing roller 68. Part of the developing roller 68 is exposed from the open part 64. The developing roller 68 is oriented such that the axial direction thereof corresponds to the apparatus depth direction. The developing roller 68 delivers the developer G to the image carrier 36. The developing roller 68 is an exemplary rotating member.

The housing 60 has therein a supply path 80 in which the developer G is transported and from which the developer G is supplied to the developing roller 68. The supply path 80 extends in the apparatus depth direction. Specifically, seen in the apparatus depth direction, the supply path 80 is provided across the developing roller 68 from the image carrier 36. The supply path 80 has a U-shaped section, with the top thereof being open.

Referring to FIG. 3, the supply path 80 is provided with a supplying member 74 extending in the apparatus depth

5

direction. The supplying member 74 transports, when rotated, the developer G from the near side (the right side in FIG. 3) toward the far side (the left side in FIG. 3) in the apparatus depth direction and supplies the developer G to the developing roller 68.

Referring to FIG. 5, the housing 60 has therein a transport path 78 extending in the apparatus depth direction and in which the developer G is stirred while being transported. Specifically, the transport path 78 is positioned farther from the developing roller 68 than the supply path 80 and side by side with the supply path 80 in the apparatus width direction (a direction intersecting the axial direction of the developing roller 68). The transport path 78 has a U-shaped section, with the top thereof being open.

Referring to FIG. 3, the transport path 78 extending in the apparatus depth direction includes a stirring path 82 in which the developer G is stirred while being transported, and a preliminary stirring path 84 that receives fresh toner T supplied into the housing 60 from the outside. The preliminary stirring path 84 is provided by extending an end of the stirring path 82 that is on the far side in the apparatus depth direction, i.e., a side where the developer G delivered from the supplying member 74 is received (details will be described separately below).

The preliminary stirring path 84 is shorter than the stirring path 82 in the apparatus depth direction. The stirring path 82 and the preliminary stirring path 84 are continuous with each other in that order from the near side toward the far side in the apparatus depth direction. Specifically, a portion of the transport path 78 that is side by side with the supply path 80 in the apparatus width direction is defined as the stirring path 82. In other words, the stirring path 82 is side by side with the supply path 80 in the apparatus width direction.

The transport path 78 is provided with a transporting member 72 extending in the apparatus depth direction. The transporting member 72 transports, when rotated, the developer G from the far side (the left side in FIG. 3) toward the near side (the right side in FIG. 3) in the apparatus depth direction, thereby stirring the developer G.

The housing 60 has a toner supply port 62 through which fresh toner T is supplied from the outside into the housing 60. The toner supply port 62 is provided at the top of a portion of the preliminary stirring path 84 that is on the far side in the apparatus depth direction. In other words, fresh toner T supplied into the housing 60 through the toner supply port 62 is received by the portion of the preliminary stirring path 84 that is on the far side in the apparatus depth direction. That is, the toner supply port 62 is provided at the top of a portion of the preliminary stirring path 84 that is farther from the stirring path 82.

The housing 60 includes a partition member 76 extending in the apparatus depth direction and that separates the supply path 80 and the stirring path 82 from each other except the two ends thereof in the apparatus depth direction. The partition member 76 has a passageway 86a on the far side in the apparatus depth direction. The passageway 86a allows the developer G to move between the supply path 80 and the stirring path 82. The partition member 76 has another passageway 86b on the near side in the apparatus depth direction. The passageway 86b also allows the developer G to move between the supply path 80 and the stirring path 82. The passageway 86a and the passageway 86b are each an exemplary opening.

A portion (an area H1 illustrated in FIG. 3) of the transport path 78 that extends toward the near side in the apparatus depth direction from an end of the passageway 86a that is on the far side in the apparatus depth direction is defined as the

6

stirring path 82. Whereas, a portion (an area H2 illustrated in FIG. 3) of the transport path 78 that extends toward the far side in the apparatus depth direction from the end of the stirring path 82 is defined as the preliminary stirring path 84.

5 Developing Roller 68

Referring to FIG. 5, the developing roller 68 extends in the apparatus depth direction and includes an electrically conductive cylindrical sleeve 68a rotatably supported by the housing 60, and a round columnar magnet roller 68b fixed to the housing 60. The sleeve 68a is provided with a gear (not illustrated) fixed at an end of a rotating shaft thereof. A rotational force generated by a motor (not illustrated) is transmitted to the gear, and the gear causes the sleeve 68a to rotate in a direction of arrow A illustrated in FIG. 5.

A regulating member 70 that regulates the amount of developer G on the developing roller 68 is provided at a position facing the developing roller 68 and across the developing roller 68 from the image carrier 36.

In such a configuration, the developing roller 68 magnetically attracts the carrier C contained in the developer G and forms a magnetic brush of developer G on the surface thereof. The developer G whose amount has been regulated by the regulating member 70 is transported to a position facing the image carrier 36. Then, the electrostatic latent image on the image carrier 36 is visualized as a toner image with the developer G on the developing roller 68.

Supplying Member 74

Referring to FIG. 3, the supplying member 74 is provided in the supply path 80. The supplying member 74 includes a supplying shaft 74a extending in the apparatus depth direction, a helical supplying blade 74b provided around the supplying shaft 74a, and a reversal blade 74c that is helical in a direction opposite to the direction in which the supplying blade 74b is helical.

The supplying shaft 74a is rotatably supported at two ends thereof by the wall of the housing 60 and is provided with a gear (not illustrated) fixed at one end thereof. A rotational force is transmitted to the gear from a drive source.

The supplying blade 74b provided around the supplying shaft 74a extends from a position facing the passageway 86a in the apparatus width direction to a position facing the passageway 86b in the apparatus width direction.

The reversal blade 74c is provided on the far side with respect to the supplying blade 74b in the apparatus depth direction. In the present exemplary embodiment, the reversal blade 74c and the supplying blade 74b have the same outside diameter. However, the pitch of the reversal blade 74c is smaller than the pitch of the supplying blade 74b.

In such a configuration, the portion of the rotating supplying member 74 where the supplying blade 74b is provided transports the developer G in the supply path 80 from the near side toward the far side in the apparatus depth direction while stirring the developer G, and supplies the developer G to the developing roller 68. The portion of the rotating supplying member 74 where the reversal blade 74c is provided changes the direction of transport of the developer G transported thereto by the portion where the supplying blade 74b is provided, and delivers the developer G to a stirring member 88, included in the transporting member 72, through the passageway 86a.

Transporting Member 72

Referring to FIG. 3, the transporting member 72 is provided in the transport path 78 including the stirring path 82 and the preliminary stirring path 84. The transporting member 72 includes the stirring member 88 extending in the stirring path 82, and a preliminary member 90 extending in the preliminary stirring path 84.

Stirring Member 88

Referring to FIG. 3, the stirring member **88** includes a stirring shaft **88a** extending in the apparatus depth direction, and a helical stirring blade **88b** provided around the stirring shaft **88a**.

An end of the stirring shaft **88a** that is on the near side in the apparatus depth direction is rotatably supported by the wall of the housing **60**. An end of the stirring shaft **88a** that is on the far side in the apparatus depth direction is connected to an extension shaft **90a** included in the preliminary member **90**. In other words, the extension shaft **90a** is provided by extending the end of the stirring member **88** that is on the far side in the apparatus depth direction. That is, the stirring shaft **88a** and the extension shaft **90a** are integrated with each other. An end of the extension shaft **90a** that is on the far side in the apparatus depth direction is rotatably supported by the wall of the housing **60**.

The stirring shaft **88a** is provided with a gear (not illustrated) fixed at the end thereof on the far side in the apparatus depth direction. A rotational force is transmitted to the gear from a drive source. In the present exemplary embodiment, the stirring shaft **88a** and the supplying shaft **74a** have the same outside diameter, and the stirring blade **88b** and the supplying blade **74b** have the same outside diameter. Furthermore, the pitch of the stirring blade **88b** is the same as the pitch of the supplying blade **74b**.

Referring to FIG. 1, an end of the stirring blade **88b** on the far side (the side where the preliminary stirring path **84** is provided) in the apparatus depth direction reaches a position facing a central part of the passageway **86a** in the apparatus width direction. Furthermore, seen in the axial direction, an end surface **89** of the stirring blade **88b** that is on a side nearer to the preliminary stirring path **84** extends in the radial direction of the stirring shaft **88a**. The end surface **89** is an exemplary end part.

In such a configuration, referring to FIG. 3, the rotating stirring member **88** that is stirring the developer **G** transports the developer **G** received from the supplying member **74** through the passageway **86a** provided on the far side in the apparatus depth direction. Specifically, the rotating stirring member **88** that is stirring the developer **G** transports the developer **G** from the far side toward the near side in the apparatus depth direction.

The developer **G** transported by the stirring member **88** is stopped by the wall surface of the housing **60**. Hence, the rotating stirring member **88** delivers the developer **G** to the portion of the supplying member **74** where the supplying blade **74b** is provided through the passageway **86b** provided on the near side in the apparatus depth direction. Thus, the developer **G** circulates between the supply path **80** and the stirring path **82** (as represented by arrows in FIG. 3).

Meanwhile, some of the developer **G** that is moving from the rotating supplying member **74** toward the stirring path **82** through the passageway **86a** is not delivered to the stirring member **88** but advances into an allowance area **R1** (a so-called overrun area) provided in the preliminary stirring path **84**.

The allowance area **R1** will now be described with reference to FIG. 4. In top view, a tangent (denoted by **S1** in FIG. 4) to the peripheral edge of the supplying blade **74b** is drawn at an intersection **K1** where a center line **C1** of the supplying shaft **74a** and the peripheral edge of the supplying blade **74b** meet. Furthermore, in top view, a line (denoted by **S2** in FIG. 4) orthogonal to the tangent **S1** is drawn at the intersection **K1**. Then, an acute angle (denoted by $\theta 1$ in FIG. 4) formed between the line **S2** and the center line **C1** is calculated.

Furthermore, in top view, a line (denoted by **S3** in FIG. 4) passing an edge **K2** of the passageway **86a** that is on the side of the preliminary stirring path **84** and forming the angle $\theta 1$ with respect to the center line **C1** is drawn. An area enclosed by the wall of the housing **60** in the preliminary stirring path **84** and extending toward the stirring path **82** from an intersection **K3** where the wall surface of the housing **60** and the line **S3** meet is defined as the allowance area **R1** of the preliminary stirring path **84**. If the wall surface of the housing does not reach a position where the line **S3** would meet the wall surface, the intersection **K3** is defined as a point where a virtual wall surface extended from the actual wall surface of the housing and the line **S3** meet.

Preliminary Member 90

Referring to FIG. 3, the preliminary member **90** includes the extension shaft **90a** provided by extending an end of the stirring shaft **88a** that is on the far side in the apparatus depth direction, and a helical transporting blade **92** provided around the extension shaft **90a**. The direction of the helix of the transporting blade **92** is the same as that of the stirring blade **88b**.

Referring to FIG. 1, the transporting blade **92** is divided into a first transporting blade **94** and a second transporting blade **96** in the allowance area **R1** of the preliminary stirring path **84**. The first transporting blade **94** is provided on a side nearer to the stirring blade **88b**. The second transporting blade **96** is provided across the first transporting blade **94** from the stirring blade **88b**. In other words, the first transporting blade **94** and the second transporting blade **96** are aligned with each other and are spaced apart from the stirring blade **88b** in that order in the apparatus depth direction.

In the present exemplary embodiment, the outside diameters of the first transporting blade **94** and the second transporting blade **96** are the same as the outside diameter of the stirring blade **88b**, and the pitches of the first transporting blade **94** and the second transporting blade **96** are the same as the pitch of the stirring blade **88b**.

A portion of the first transporting blade **94** that is on a side nearer to the stirring blade **88b** extends into the stirring path **82**, reaching the outer peripheral surface of the stirring shaft **88a**. Seen in the axial direction, an end surface **94a** of the first transporting blade **94** that is on the side nearer to the stirring blade **88b** extends in the radial direction of the stirring shaft **88a**. The end surface **94a** of the first transporting blade **94** and the end surface **89** of the stirring blade **88b** are spaced apart from each other in the peripheral direction of the stirring shaft **88a**. In other words, in the peripheral direction of the stirring shaft **88a**, there is an area where a peripheral surface **87** of the stirring shaft **88a** spreads continuously between the end surface **94a** of the first transporting blade **94** and the end surface **89** of the stirring blade **88b**. The end surface **94a** is an exemplary end part.

As described above, the stirring blade **88b** and the first transporting blade **94** are separate from each other. Specifically, the stirring blade **88b** and the first transporting blade **94** are spaced apart from each other at a position on a side nearer to the supplying blade **74b** with respect to the reversal blade **74c** in the apparatus depth direction (the axial direction) and in an area that faces the passageway **86a** in the apparatus width direction (the direction in which the supply path **80** and the stirring path **82** are side by side).

Furthermore, seen in the axial direction of the stirring shaft **88a**, the direction in which the end surface **94a** of the first transporting blade **94** extends and the direction in which the end surface **89** of the stirring blade **88b** extends intersect each other. In the present exemplary embodiment, seen in

the axial direction of the stirring shaft **88a**, the angle formed between the direction in which the end surface **94a** of the first transporting blade **94** extends and the direction in which the end surface **89** of the stirring blade **88b** extends is 90 degrees (see FIGS. 7A and 7B).

As described above, the end surface **89** of the stirring blade **88b** and the end surface **94a** of the first transporting blade **94** are spaced apart from each other in the peripheral direction of the stirring shaft **88a**, whereby the stirring blade **88b** and the first transporting blade **94** are out of phase. In other words, even if the stirring blade **88b** is extended up to the first transporting blade **94**, the extended portion and the first transporting blade **94** do not match in the peripheral direction of the stirring shaft **88a**. Herein, the expression “being spaced apart in the peripheral direction” refers to a state where the end surface **89** of the stirring blade **88b** and the end surface **94a** of the first transporting blade **94** are spaced apart from each other in the peripheral direction of the stirring shaft **88a** with a gap between the tips thereof in the axial direction of the stirring shaft **88a** being 2 mm or smaller, considering errors in the shaping process and the like of relevant components.

In such a configuration, the toner T transported by the first transporting blade **94** temporarily decelerates between the first transporting blade **94** and the stirring blade **88b**. That is, the area between the first transporting blade **94** and the stirring blade **88b** is defined as a temporary deceleration area where the toner T that is being transported temporarily decelerates.

The stirring shaft **88a** is provided with a pair of plate-like members **106** between the end surface **89** of the stirring blade **88b** and the end surface **94a** of the first transporting blade **94** in the peripheral direction thereof. The plate-like members **106** project from the peripheral surface **87** of the stirring shaft **88a**. In the axial direction of the stirring shaft **88a**, at least part of the plate-like members **106** is present in an area between the base of the end surface **89** and the base of the end surface **94a**. The plate-like members **106** are each an exemplary another plate-like member.

The pair of plate-like members **106** are arranged side by side in the apparatus depth direction and project in the radial direction of the stirring shaft **88a** from the peripheral surface **87**. The major surface of each of the plate-like members **106** has a rectangular shape extending in the radial direction of the stirring shaft **88a** and faces against the peripheral direction of the stirring shaft **88a**. The height of the plate-like members **106** from the peripheral surface **87** of the stirring shaft **88a** is the same as the height of the stirring blade **88b** from the peripheral surface **87** of the stirring shaft **88a**.

The stirring shaft **88a** is provided with another pair of plate-like members **108** projecting from a side of the peripheral surface **87** that is opposite the pair of plate-like members **106**. The pair of plate-like members **108** each have the same shape as the pair of plate-like members **106**.

Seen in the axial direction, an end surface **94b** of the first transporting blade **94** that is on a side nearer to the second transporting blade **96** extends in the radial direction of the extension shaft **90a**, and an end surface **96a** of the second transporting blade **96** that is on a side nearer to the first transporting blade **94** extends in the radial direction of the extension shaft **90a**. The end surface **94b** and the end surface **96a** are each an exemplary end part.

The end surface **96a** of the second transporting blade **96** and the end surface **94b** of the first transporting blade **94** are spaced apart from each other in the peripheral direction of the extension shaft **90a**. Seen in the axial direction of the extension shaft **90a**, the direction in which the end surface

96a of the second transporting blade **96** extends and the direction in which the end surface **94b** of the first transporting blade **94** extends intersect each other. In the present exemplary embodiment, seen in the axial direction of the extension shaft **90a**, the angle formed between the direction in which the end surface **96a** of the second transporting blade **96** extends and the direction in which the end surface **94b** of the first transporting blade **94** extends is 90 degrees (see FIGS. 8A and 8B).

As described above, the end surface **94b** of the first transporting blade **94** and the end surface **96a** of the second transporting blade **96** are spaced apart from each other in the peripheral direction of the extension shaft **90a**, whereby the first transporting blade **94** and the second transporting blade **96** are out of phase. In other words, even if the first transporting blade **94** is extended up to the second transporting blade **96**, the extended portion and the second transporting blade **96** do not match in the peripheral direction of the extension shaft **90a**. Herein, the expression “being spaced apart in the peripheral direction” refers to a state where the end surface **94b** of the first transporting blade **94** and the end surface **96a** of the second transporting blade **96** are spaced apart from each other in the peripheral direction of the extension shaft **90a** with a gap between the tips thereof in the axial direction of the extension shaft **90a** being 2 mm or smaller, considering errors in the shaping process and the like of relevant components.

In such a configuration, the toner T transported by the second transporting blade **96** temporarily decelerates between the first transporting blade **94** and the second transporting blade **96**. That is, the area between the first transporting blade **94** and the second transporting blade **96** is defined as a temporary deceleration area where the toner T that is being transported temporarily decelerates.

Referring to FIGS. 1 and 2, the extension shaft **90a** is provided with a pair of plate-like members **102** between the end surface **94b** of the first transporting blade **94** and the end surface **96a** of the second transporting blade **96** in the peripheral direction thereof. The plate-like members **102** project from a peripheral surface **91** of the extension shaft **90a**. In the axial direction of the extension shaft **90a**, at least part of each of the plate-like members **102** is present in an area between the base of the end surface **94b** and the base of the end surface **96a**.

The pair of plate-like members **102** are arranged side by side in the apparatus depth direction and project in the radial direction of the extension shaft **90a** from the peripheral surface **91**. The major surface of each of the plate-like members **102** has a rectangular shape extending in the radial direction of the extension shaft **90a** and faces against the peripheral direction of the extension shaft **90a**. The height of the plate-like members **102** from the peripheral surface **91** of the extension shaft **90a** is the same as the height of the transporting blade **92** from the peripheral surface **91** of the extension shaft **90a**.

The extension shaft **90a** is provided with another pair of plate-like members **104** projecting from a side of the peripheral surface **91** that is opposite the pair of plate-like members **102**. The pair of plate-like members **104** each have the same shape as the pair of plate-like members **102**.

Functions of Featured Elements

Functions of the developing device **40** will now be described.

In an area of the housing **60** of the developing device **40** illustrated in FIG. 3 where the stirring member **88** is provided, the rotating stirring member **88** that is stirring the developer G transports the developer G received from the

supplying member **74** through the passageway **86a** provided on the far side in the apparatus depth direction. Specifically, the rotating stirring member **88** that is stirring the developer G transports the developer G from the far side toward the near side in the apparatus depth direction.

The developer G transported by the stirring member **88** is stopped by the wall surface of the housing **60**. Hence, the rotating stirring member **88** delivers the developer G to the supplying member **74** through the passageway **86b** provided on the near side in the apparatus depth direction.

The rotating supplying member **74** transports the developer G received as above from the near side toward the far side in the apparatus depth direction and simultaneously supplies the developer G to the developing roller **68**.

The rotating supplying member **74** changes the direction of transport of the developer G and delivers the developer G to the rotating stirring member **88** through the passageway **86a**. Thus, the developer G circulates between the supply path **80** and the stirring path **82** (as represented by the arrows in FIG. 3).

The developer G supplied to the developing roller **68** illustrated in FIG. 5 is held on the surface of the developing roller **68** in the form of a magnetic brush (not illustrated), with the magnetic force generated by the magnet roller **68b**. The rotating sleeve **68a** transports the developer G to a position facing the image carrier **36**. Then, the toner T contained in the developer G transported to the position facing the image carrier **36** is attracted to the electrostatic latent image on the image carrier **36**, whereby the electrostatic latent image is visualized as a toner image.

Meanwhile, referring to FIG. 3, some of the developer G that is moving from the rotating supplying member **74** toward the stirring path **82** through the passageway **86a** is not delivered to the stirring member **88** but advances into the allowance area **R1** (see FIG. 4) provided in the preliminary stirring path **84**.

In the above process, when the controller **44** (see FIG. 6) receives, from a detector (not illustrated), information notifying a reduction in the amount of toner T contained in the developer G circulating between the supply path **80** and the stirring path **82**, the controller **44** causes fresh toner T stored in a storage unit to be supplied to the preliminary stirring path **84** through the toner supply port **62** illustrated in FIG. 1.

A portion of the rotating preliminary member **90** where the second transporting blade **96** is provided transports the fresh toner T and the developer G advanced into the allowance area **R1** of the preliminary stirring path **84** toward the stirring path **82**. The toner T and the developer G transported by the second transporting blade **96** temporarily decelerate before reaching the first transporting blade **94** that is spaced apart from the second transporting blade **96**.

The toner T and the developer G thus decelerated and stopped are stirred by a portion of the rotating preliminary member **90**, specifically, by a portion of the second transporting blade **96** that is on a side nearer to the first transporting blade **94**, a portion of the first transporting blade **94** that is on a side nearer to the second transporting blade **96**, and the plate-like members **102** and **104**. The toner T and the developer G thus stirred are pushed by the toner T and the developer G transported by the portion of the rotating preliminary member **90** where the second transporting blade **96** is provided, and are moved toward the first transporting blade **94**.

The toner T and the developer G moved toward the first transporting blade **94** are further transported toward the stirring path **82** by a portion of the rotating preliminary

member **90** where the first transporting blade **94** is provided. The toner T and the developer G transported by the first transporting blade **94** temporarily decelerate before reaching the stirring blade **88b** that is spaced apart from the first transporting blade **94**.

The toner T and the developer G thus decelerated and stopped are stirred by a portion of the rotating preliminary member **90** and a portion of the rotating stirring member **88**, specifically, by a portion of the first transporting blade **94** that is on a side nearer to the stirring blade **88b**, a portion of the stirring blade **88b** that is on a side nearer to the first transporting blade **94**, and the plate-like members **106** and **108**. The developer G thus stirred is pushed by the toner T and the developer G transported by the portion of the rotating preliminary member **90** where the first transporting blade **94** is provided, and is moved toward the stirring blade **88b**.

The developer G thus moved toward the stirring blade **88b** is stirred and simultaneously transported by the rotating stirring member **88** toward the near side in the apparatus depth direction.

Evaluation

An evaluation made for each of the developing device **40** according to the present exemplary embodiment and a developing device **240** according to a comparative embodiment will now be described. The evaluation is conducted by using a Fuji Xerox "DocuPrint C3450 d" as an image forming apparatus, with developing devices thereof exchanged between the developing devices **40** according to the above exemplary embodiment and the developing devices **240** according to the comparative embodiment. A configuration of each developing device **240** according to the comparative embodiment will first be described, focusing on differences from the developing device **40**, followed by a method of the evaluation and so forth.

Developing Device **240**

Referring to FIG. 12, the developing device **240** includes, in the housing **60** thereof, the supplying member **74** provided in the supply path **80**, and a transporting member **272** provided in the transport path **78**. The transporting member **272** includes a stirring member **288** extending in the stirring path **82**, and a preliminary member **290** extending in the preliminary stirring path **84**. The stirring member **288** and the preliminary member **290** have the same configuration.

Specifically, the transporting member **272** includes a transporting shaft **272a** and a helical transporting blade **272b** provided around the transporting shaft **272a**. The transporting shaft **272a** extends in the apparatus depth direction in the transport path **78**. The transporting blade **272b** extends continuously from one end to the other end of the transporting shaft **272a**. That is, the transporting blade **272b** is not divided into plural members but is continuously provided around the transporting shaft **272a** (see FIG. 11) in such a manner as to extend over the stirring path **82** and the preliminary stirring path **84**.

The transporting shaft **272a** and the supplying shaft **74a** have the same outside diameter, and the transporting blade **272b** and the supplying blade **74b** have the same outside diameter. The pitch of the transporting blade **272b** is the same as the pitch of the supplying blade **74b**.

Evaluation Method and Items Evaluated

A specified amount of developer G is provided in the supply path **80** and the stirring path **82** of each of the developing devices **40** for the respective colors and the developing devices **240** for the respective colors, and 2 g of toner T is supplied into the preliminary stirring path **84** thereof. Then, the image forming apparatus is operated with

each of the set of developing devices **40** and the set of developing devices **240** in the above state, and the toner density is measured for any one of the developing devices **40** (**240**) with a toner-density meter in an area (an area **M1** illustrated in FIG. **3**) of the stirring path **82** that is on the near side in the apparatus depth direction.

Results of Evaluation

FIG. **10** is a graph illustrating the result of the evaluation of the developing device **240**. FIG. **9** is a graph illustrating the result of the evaluation of the developing device **40**. In each of the graphs, the vertical axis represents the toner density, and the horizontal axis represents the time elapsed. Points of time **A1** to **A5** in each of the graphs each represent the time when the fresh toner **T** supplied into the preliminary stirring path **84** passes through the area **M1**. Specifically, the point of time **A1** represents the time when the fresh toner **T** supplied into the preliminary stirring path **84** passes through the area **M1** for the first time. The point of time **A2** represents the time when the fresh toner **T** supplied into the preliminary stirring path **84** and circulating between the supply path **80** and the stirring path **82** passes through the area **M1** for the second time. Likewise, the point of time **A3** represents the time when the fresh toner **T** passes through the area **M1** for the third time, the point of time **A4** represents the time when the fresh toner **T** passes through the area **M1** for the fourth time, and the point of time **A5** represents the time when the fresh toner **T** passes through the area **M1** for the fifth time.

As is seen from the graph illustrated in FIG. **10**, in the developing device **240**, the toner density increases at each of the points of time **A1** to **A3** when the fresh toner **T** passes through the area **M1** for the first to third times. This shows that, at the point of time when the fresh toner **T** passes through the area **M1** for the third time, the fresh toner **T** and the developer **G** have not been stirred sufficiently.

In contrast, in the developing device **40**, as is seen from the graph illustrated in FIG. **9**, the toner density increases at the point of time **A1** when the fresh toner **T** passes through the area **M1** for the first time but does not increase at the point of time **A2** and thereafter. This shows that, at the point of time **A2** when the fresh toner **T** passes through the area **M1** for the second time, the fresh toner **T** and the developer **G** have been stirred sufficiently.

Discussion

The transporting blade **272b** of the transporting member **272** included in the developing device **240** extends continuously from one end to the other end of the transporting shaft **272a**. That is, the transporting blade **272b** of the transporting member **272** extending over the stirring path **82** and the preliminary stirring path **84** is not divided into plural members. Therefore, it is considered that, in the developing device **240**, the fresh toner **T** supplied into the preliminary stirring path **84** receives a strong transporting force but a weak stirring force from the rotating transporting member **272**.

In contrast, the transporting member **72** of the developing device **40** includes the stirring member **88** extending in the stirring path **82** and the preliminary member **90** extending in the preliminary stirring path **84**. Furthermore, the transporting blade **92** of the preliminary member **90** is divided into the first transporting blade **94** and the second transporting blade **96** in the allowance area **R1** of the preliminary stirring path **84**. Furthermore, the first transporting blade **94** of the preliminary member **90** and the stirring blade **88b** of the stirring member **88** are spaced apart from each other. Furthermore, the plate-like members **102**, **104**, **106**, and **108** are provided in the areas between the pairs of the above mem-

bers. Therefore, it is considered that, in the developing device **40**, the fresh toner **T** supplied into the preliminary stirring path **84** receives a strong stirring force but a weak transporting force from the rotating preliminary member **90**.

Hence, as is seen from the above results of the evaluation, the time required for the developing device **40** to stir the fresh toner **T** and the developer **G** is shorter than for the developing device **240**.

CONCLUSIONS

As described above, in the developing device **40**, the transporting blade **92** is divided into the first transporting blade **94** and the second transporting blade **96**. Therefore, the time required for stirring the fresh toner **T** and the developer **G** is shorter than in the developing device **240**. Accordingly, the occurrence of nonuniformity in the density of the toner image is reduced.

In the developing device **40**, the transporting blade **92** is divided into the first transporting blade **94** and the second transporting blade **96** in the allowance area **R1** into which some of the developer **G** advances. Therefore, the time required for stirring the fresh toner **T** and the developer **G** is shorter than in a case where the transporting blade is divided outside the allowance area **R1**. Accordingly, the occurrence of nonuniformity in the density of the toner image is reduced.

In the developing device **40**, the first transporting blade **94** and the second transporting blade **96** are out of phase. Therefore, the rhythm of transport of the fresh toner **T** and the developer **G** is changed. Hence, the time required for stirring the fresh toner **T** and the developer **G** is shorter than in a case where the first transporting blade and the second transporting blade are in phase. Accordingly, the occurrence of nonuniformity in the density of the toner image is reduced.

In the developing device **40**, the end surface **94b** of the first transporting blade **94** and the end surface **96a** of the second transporting blade **96** are spaced apart from each other in the peripheral direction of the extension shaft **90a**, whereby the first transporting blade **94** and the second transporting blade **96** are made out of phase. Therefore, the size of an area where no stirring force is received from the blade is smaller than in a case where the first transporting blade **94** and the second transporting blade **96** are made out of phase by providing a space between the first transporting blade **94** and the second transporting blade **96** in the axial direction of the extension shaft **90a**. Accordingly, the time required for stirring the fresh toner **T** and the developer **G** is reduced, and the occurrence of nonuniformity in the density of the toner image is reduced.

In the developing device **40**, the plate-like members **102** project from the peripheral surface **91** of the extension shaft **90a** between the end surface **94b** of the first transporting blade **94** and the end surface **96a** of the second transporting blade **96** in the peripheral direction of the extension shaft **90a**. Therefore, the time required for stirring the fresh toner **T** and the developer **G** is shorter than in a case where a continuously smooth curved surface extends between the end surface **94b** of the first transporting blade **94** and the end surface **96a** of the second transporting blade **96** in the peripheral direction of the extension shaft **90a**. Accordingly, the occurrence of nonuniformity in the density of the toner image is reduced.

In the developing device **40**, the major surface of each of the plate-like members **102** faces against the peripheral direction of the extension shaft **90a**. Therefore, the time

required for stirring the fresh toner T and the developer G is shorter than in a case where the major surface of each of the plate-like members is oblique with respect to the peripheral direction of the extension shaft. Accordingly, the occurrence of nonuniformity in the density of the toner image is reduced.

In the developing device 40, the stirring blade 88b and the first transporting blade 94 are spaced apart from each other at a position on a side nearer to the supplying blade 74b with respect to the reversal blade 74c in the apparatus depth direction and in an area that faces the passageway 86a in the apparatus width direction. Therefore, the time required for stirring the fresh toner T and the developer G is shorter than in a case where the position where the stirring blade 88b and the first transporting blade 94 are spaced apart from each other is shifted from the area facing the passageway 86a in the apparatus depth direction (the axial direction). Accordingly, the occurrence of nonuniformity in the density of the toner image is reduced.

In the developing device 40, the stirring blade 88b and the first transporting blade 94 are spaced apart from each other at the position on the side nearer to the supplying blade 74b with respect to the reversal blade 74c in the apparatus depth direction and in the area that faces the passageway 86a in the apparatus width direction. Therefore, the toner T and the developer G transported by the first transporting blade 94 temporarily decelerate and stop before reaching the stirring blade 88b that is spaced apart from the first transporting blade 94. Hence, the amount of toner T and the developer G stirred in the preliminary stirring path 84 is greater than in a case where the toner T and the developer G do not temporarily decelerate. In other words, since the developer G stops, more toner T and more developer G received from the supplying member 74 are pushed toward the preliminary stirring path and are subjected to supplemental stirring.

In the developing device 40, the stirring blade 88b and the first transporting blade 94 are out of phase. Therefore, the rhythm of transport of the fresh toner T and the developer G is changed. Hence, the time required for stirring the fresh toner T and the developer G is shorter than in a case where the stirring blade and the first transporting blade are in phase. Accordingly, the occurrence of nonuniformity in the density of the toner image is reduced.

In the developing device 40, the end surface 89 of the stirring blade 88b and the end surface 94a of the first transporting blade 94 are spaced apart from each other in the peripheral direction of the stirring shaft 88a, whereby the stirring blade 88b and the first transporting blade 94 are made out of phase. Therefore, the size of an area where no stirring force is received from the blade is smaller than in a case where the stirring blade 88b and the first transporting blade 94 are made out of phase by providing a space between the stirring blade 88b and the first transporting blade 94 in the axial direction of the stirring shaft 88a. Accordingly, the time required for stirring the fresh toner T and the developer G is reduced, and the occurrence of nonuniformity in the density of the toner image is reduced.

In the developing device 40, the plate-like members 106 project from the peripheral surface 87 of the stirring shaft 88a between the end surface 89 of the stirring blade 88b and the end surface 94a of the first transporting blade 94 in the peripheral direction of the stirring shaft 88a. Therefore, the time required for stirring the fresh toner T and the developer G is shorter than in a case where a continuously smooth curved surface extends between the end surface 89 of the stirring blade 88b and the end surface 94a of the first transporting blade 94 in the peripheral direction of the

stirring shaft 88a. Accordingly, the occurrence of nonuniformity in the density of the toner image is reduced.

In the developing device 40, the major surface of each of the plate-like members 106 faces against the peripheral direction of the stirring shaft 88a. Therefore, the time required for stirring the fresh toner T and the developer G is shorter than in a case where the major surface of each of the plate-like members is oblique with respect to the peripheral direction of the stirring shaft 88a. Accordingly, the occurrence of nonuniformity in the density of the toner image is reduced.

The image forming apparatus 10 includes the developing device 40. Therefore, the occurrence of nonuniformity in the density of the output image is reduced more than in a case where the image forming apparatus 10 includes the developing device 240.

While a specific exemplary embodiment of the present disclosure has been described in detail, the present disclosure is not limited to the above exemplary embodiment. It is obvious to those skilled in the art that various other embodiments are conceivable within the scope of the present disclosure. For example, while the above exemplary embodiment concerns a case where fresh toner T is supplied from the toner supply port 62, fresh toner T and fresh carrier C may be supplied from a supply port.

The above exemplary embodiment concerns a case where the transporting blade 92 is divided into plural members in the allowance area R1. Alternatively, the transporting blade 92 may be divided outside the allowance area R1. In that case, the effect produced by dividing the transporting blade 92 in the allowance area R1 is not produced.

The above exemplary embodiment concerns a case where the first transporting blade 94 and the second transporting blade 96 are out of phase. Alternatively, the first transporting blade 94 and the second transporting blade 96 may be in phase. In that case, the effect produced by the first transporting blade 94 and the second transporting blade 96 that are out of phase is not produced.

The above exemplary embodiment concerns a case where the first transporting blade 94 and the second transporting blade 96 are made out of phase by providing a space between the end surface 94b of the first transporting blade 94 and the end surface 96a of the second transporting blade 96 in the peripheral direction of the extension shaft 90a. Alternatively, the first transporting blade and the second transporting blade may be made out of phase by providing a space between the two in the axial direction of the extension shaft 90a. In that case, the effect produced by the first transporting blade 94 and the second transporting blade 96 that are made out of phase by providing a space between the end surface 94b of the first transporting blade 94 and the end surface 96a of the second transporting blade 96 in the peripheral direction of the extension shaft 90a is not produced.

The above exemplary embodiment concerns a case where the stirring blade 88b and the first transporting blade 94 are out of phase. Alternatively, the stirring blade 88b and the first transporting blade 94 may be in phase. In that case, the effect produced by the stirring blade 88b and the first transporting blade 94 that are out of phase is not produced.

The above exemplary embodiment concerns a case where the stirring blade 88b and the first transporting blade 94 are made out of phase by providing a space between the end surface 89 of the stirring blade 88b and the end surface 94a of the first transporting blade 94 in the peripheral direction of the stirring shaft 88a. Alternatively, the stirring blade and the first transporting blade may be made out of phase by

17

providing a space between the two in the axial direction of the stirring shaft **88a**. In that case, the effect produced by the stirring blade **88b** and the first transporting blade **94** that are made out of phase by providing a space between the end surface **89** of the stirring blade **88b** and the end surface **94a** of the first transporting blade **94** in the peripheral direction of the stirring shaft **88a** is not produced.

The thickness of each of the plate-like members **102**, **104**, **106**, and **108** has not been described specifically in the above exemplary embodiment. The thickness of each of the plate-like members **102**, **104**, **106**, and **108** may be uniform or be varied from the base to the tip thereof.

The foregoing description of the exemplary embodiment of the present disclosure has been provided for the purposes of illustration and description. It is not intended to be exhaustive or to limit the disclosure to the precise forms disclosed. Obviously, many modifications and variations will be apparent to practitioners skilled in the art. The embodiment was chosen and described in order to best explain the principles of the disclosure and its practical applications, thereby enabling others skilled in the art to understand the disclosure for various embodiments and with the various modifications as are suited to the particular use contemplated. It is intended that the scope of the disclosure be defined by the following claims and their equivalents.

What is claimed is:

1. A developing device comprising:
 - a rotating member that delivers developer to a latent image on an image carrier while rotating;
 - a supplying member provided in a supply path extending in an axial direction of the rotating member;
 - a stirring member including a stirring shaft extending in the axial direction and provided in a stirring path extending in the axial direction and arranged side by side with the supply path in a direction intersecting the axial direction, the stirring member stirring the developer while rotating by causing the developer to circulate between the supply path and the stirring path; and
 - a preliminary member provided in a preliminary stirring path into which toner is supplied from an outside and provided by extending an end of the stirring path that is on a side where the developer delivered from the supply member is received by the stirring member, the preliminary member including an extension shaft as an extension of the stirring shaft and a helical transporting blade provided on the extension shaft, the transporting blade being divided into a first transporting blade and a second transporting blade provided across the first transporting blade from the stirring shaft by providing a space between an end part of the first transporting blade and an end part of the second transporting blade in a peripheral direction of the extension shaft, the preliminary member transporting the toner into the stirring path while rotating.
2. The developing device according to claim 1, wherein the transporting blade is divided in an allowance area included in the preliminary stirring path and into which the developer transported from the supply path advances.
3. The developing device according to claim 1, wherein a pitch of the first transporting blade and a pitch of the second transporting blade are equal, and the first transporting blade and the second transporting blade are out of phase.
4. The developing device according to claim 2, wherein a pitch of the first transporting blade and a pitch of the second transporting blade are equal, and the first transporting blade and the second transporting blade are out of phase.

18

5. The developing device according to claim 3, wherein the first transporting blade and the second transporting blade are made out of phase by providing the space between the end part of the first transporting blade and the end part of the second transporting blade in the peripheral direction of the extension shaft.

6. The developing device according to claim 5, wherein a plate-like member projects from a peripheral surface of the extension shaft in a radial direction of extension shall and between the end part of the first transporting blade and the end part of the second transporting blade in the peripheral direction of the extension shaft.

7. The developing device according to claim 6, wherein a major surface of the plate-like member faces against the peripheral direction.

8. The developing device according to claim 1, wherein the supplying member includes a supplying shaft extending in the axial direction and a helical supplying blade provided on the supplying shaft,

wherein the stirring member includes the stirring shaft and a helical stirring blade provided on the stirring shaft,

wherein the developing device includes a partition member that separates the supply path and the stirring path from each other, the partition member being provided between a pair of openings through which the developer is delivered from the supplying member to the stirring member and from the stirring member to the supplying member, respectively,

wherein the supplying shaft is provided with a reversal blade that is helical in a direction opposite to a direction in which the supplying blade is helical, the reversal blade being aligned with the supplying blade in the axial direction, and

wherein the stirring blade and the first transporting blade are spaced apart from each other on a side nearer to the supplying blade with respect to the reversal blade in the axial direction and in an area facing one of the openings in a direction intersecting the axial direction.

9. The developing device according to claim 8, wherein a pitch of the stirring blade and a pitch of the first transporting blade are equal, and the stirring blade and the first transporting blade are out of phase.

10. The developing device according to claim 9, wherein the stirring blade and the first transporting blade are made out of phase by providing a space between an end part of the stirring blade and an end part of the first transporting blade in a peripheral direction of the stirring shaft.

11. The developing device according to claim 10, wherein a projecting plate-like member projects from a peripheral surface of the stirring shaft in a radial direction of the stirring shaft and between the end part of the stirring blade and the end part of the first transporting blade in the peripheral direction of the stirring shaft.

12. The developing device according to claim 11, wherein a major surface of the projecting plate-like member faces against the peripheral direction.

13. An image forming apparatus comprising: an image carrier that carries a latent image; and the developing device according to claim 1 that develops the latent image on the image carrier.

14. A developing device comprising: a rotating member that delivers developer to a latent image on an image carrier while rotating; a supplying member provided in a supply path extending in an axial direction of the rotating member;

a stirring member including a stirring shaft extending in the axial direction and provided in a stirring path extending in the axial direction and arranged side by side with the supply path in a direction intersecting the axial direction, the stirring member stirring the developer while rotating by causing the developer to circulate between the supply path and the stirring path; and
a preliminary member provided in a preliminary stirring path into which toner is supplied from an outside and provided by extending an end of the stirring path that is on a side where the developer delivered from the supply member is received by the stirring member, the preliminary member including an extension shaft as an extension of the stirring shaft and a helical transporting blade provided on the extension shaft, the transporting blade being divided into a first transporting blade and a second transporting blade provided across the first transporting blade from the stirring shaft, the preliminary member transporting the toner into the stirring path while rotating, a pitch of the first transporting blade and a pitch of the second transporting blade are equal, and the first transporting blade and the second transporting blade are out of phase.

* * * * *