



US 20120255107A1

(19) **United States**
(12) **Patent Application Publication**
Wu et al.

(10) **Pub. No.: US 2012/0255107 A1**
(43) **Pub. Date: Oct. 11, 2012**

(54) **LAMINAR COMPOSITE TOILET LID AND SEAT**

Publication Classification

(75) Inventors: **Chengdong Wu**, Allen, TX (US);
Jie ZHANG, Allen, TX (US)

(51) **Int. Cl.**
A47K 13/02 (2006.01)
B05D 1/36 (2006.01)
B32B 37/12 (2006.01)
B32B 27/00 (2006.01)
(52) **U.S. Cl.** **4/242.1; 428/500; 428/447; 428/201;**
427/407.1; 156/60

(73) Assignee: **Topseat International, Inc.**, Plano,
TX (US)

(57) **ABSTRACT**



(21) Appl. No.: **13/486,872**

Embodiments of the present disclosure include a laminate composite toilet lid and seat and a method of manufacturing thereof. The toilet lid includes a core structural layer having a shape and size associated with the toilet lid. The toilet lid also includes first and second resilient layers disposed on first and second surfaces of the core structural layer. The toilet lid further includes a plurality of exterior layers disposed on exterior surfaces of the core structural layer and the first and second resilient layers, the exterior layers configured to envelop the toilet lid.

(22) Filed: **Jun. 1, 2012**

Related U.S. Application Data

(63) Continuation-in-part of application No. 13/083,161, filed on Apr. 8, 2011.

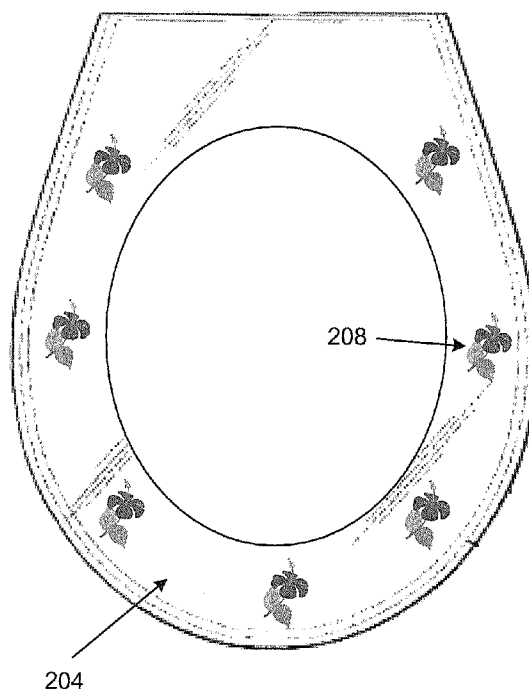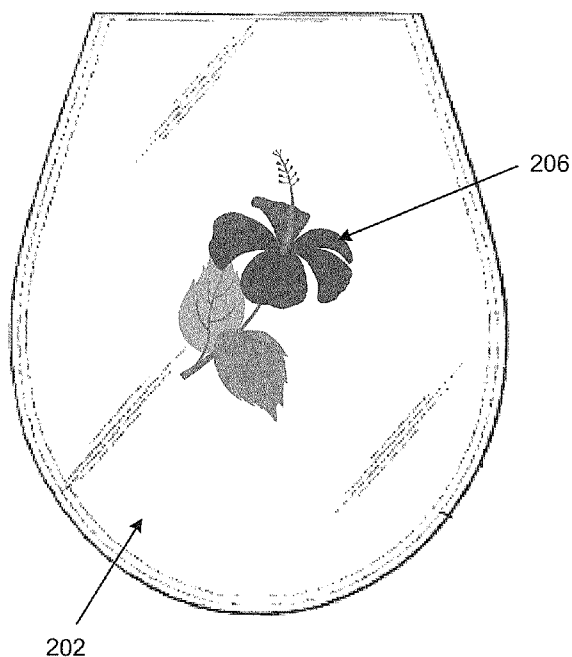

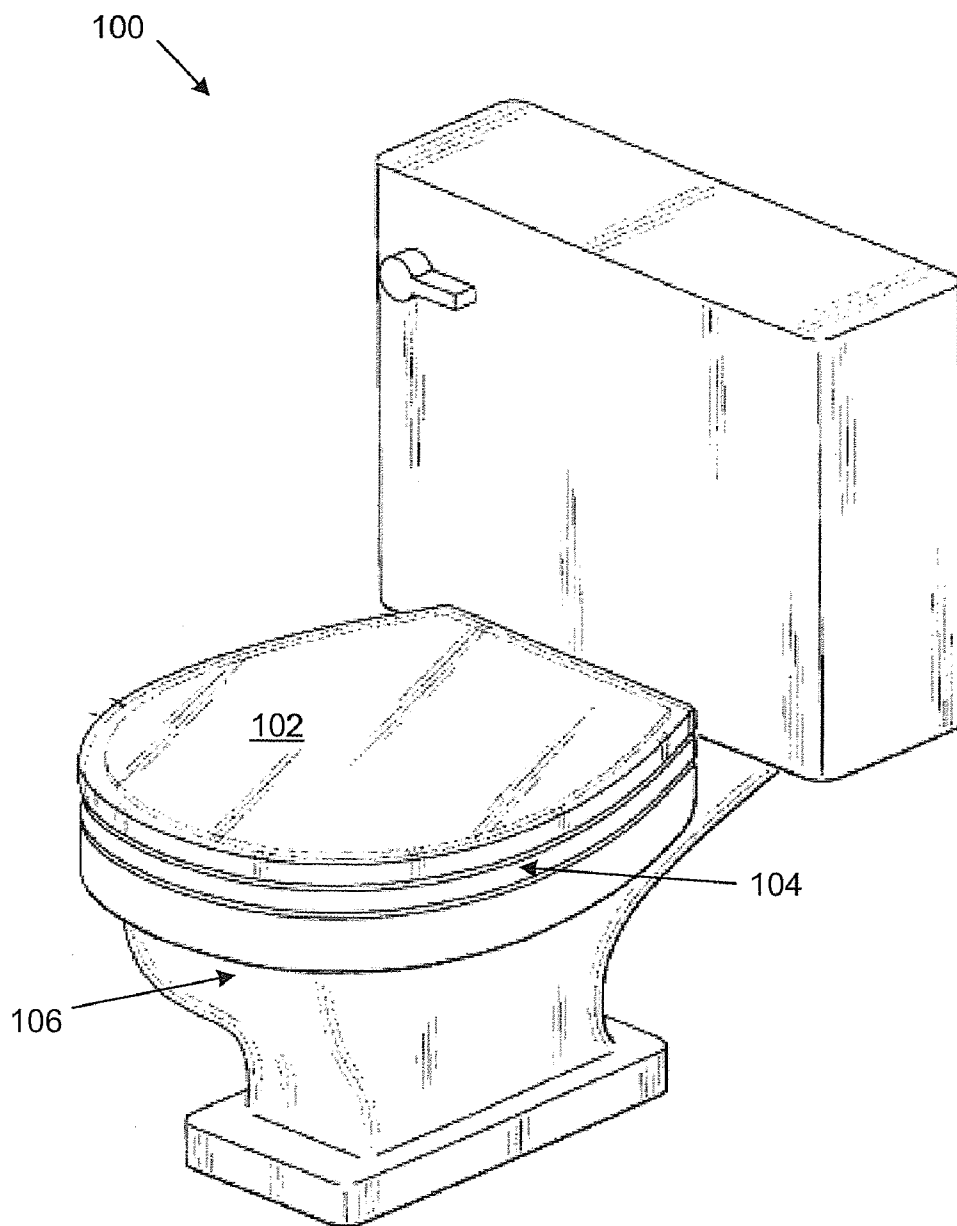


FIGURE 1

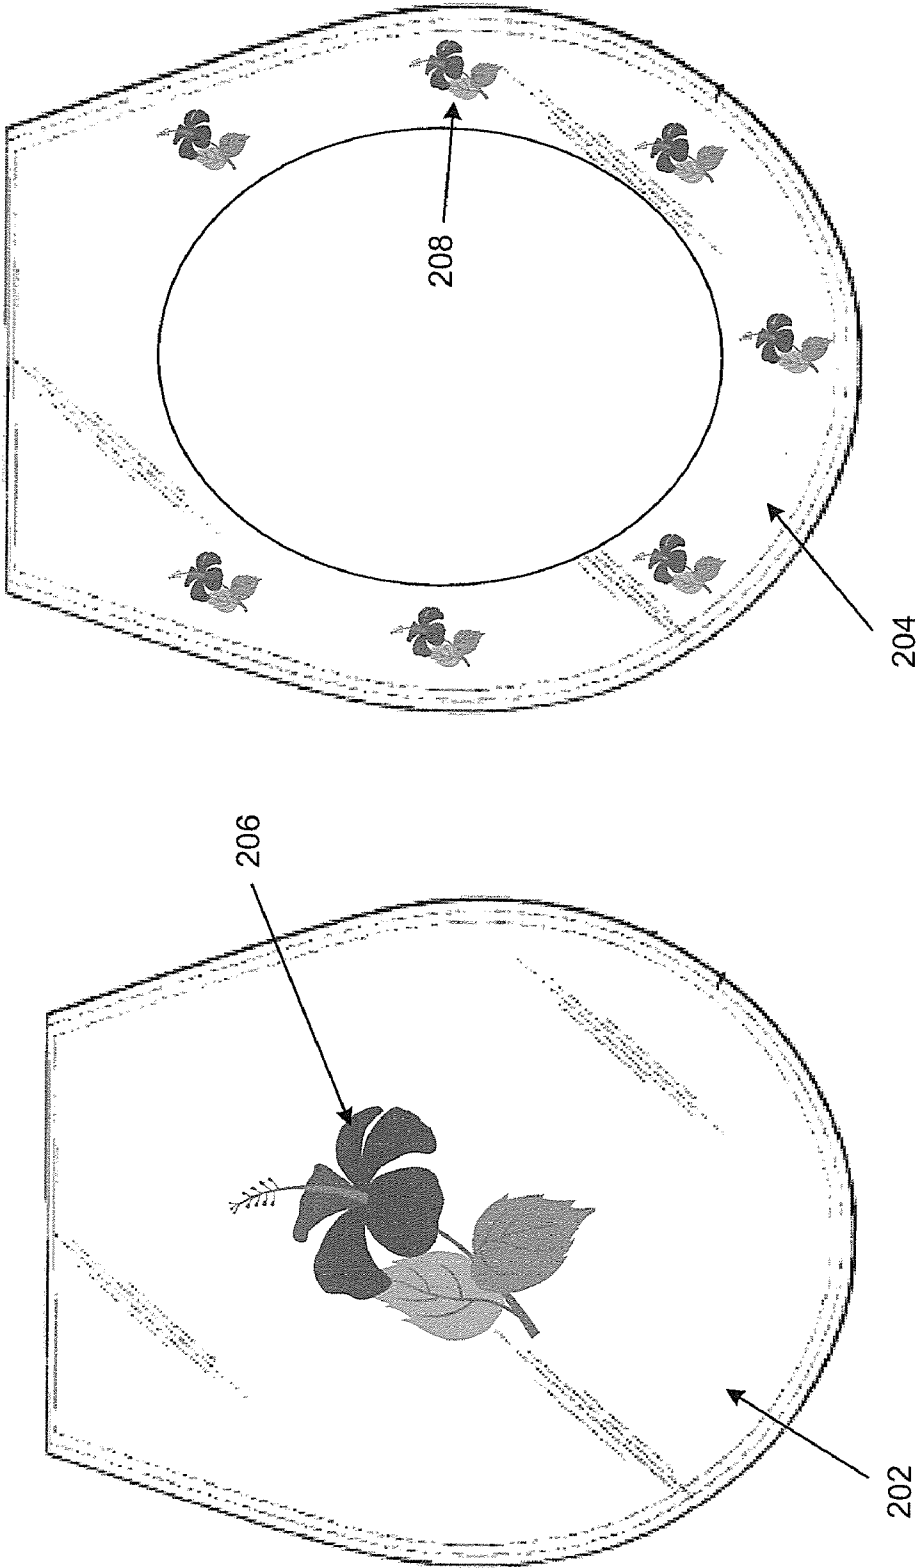


FIGURE 2

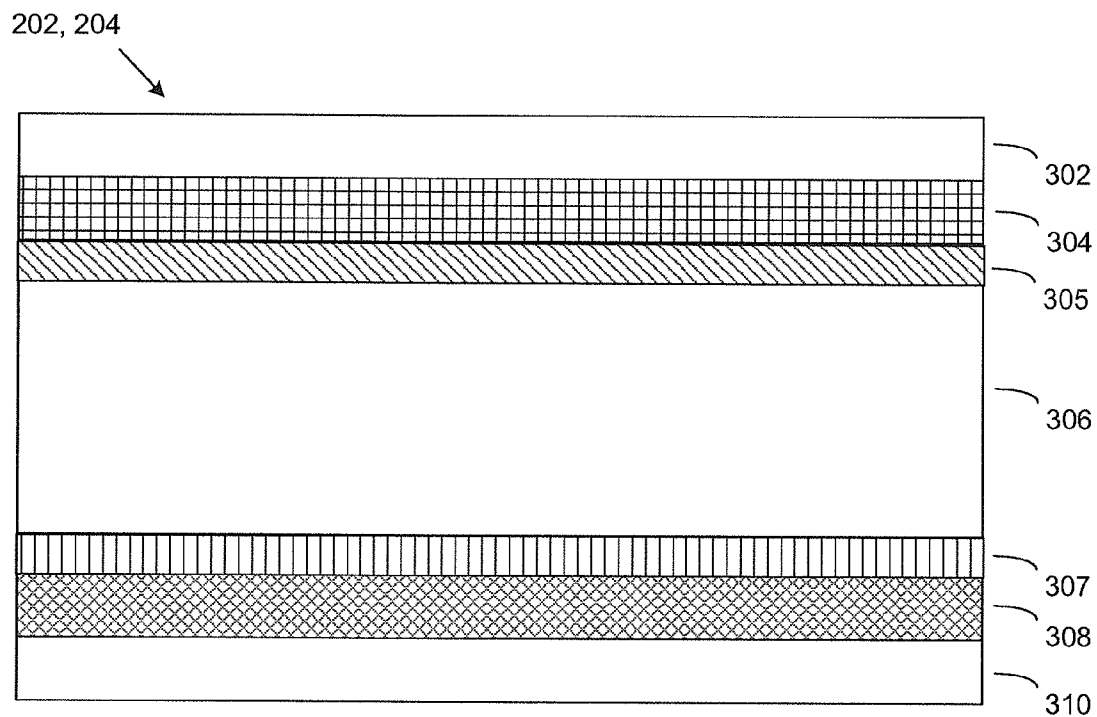


FIGURE 3A

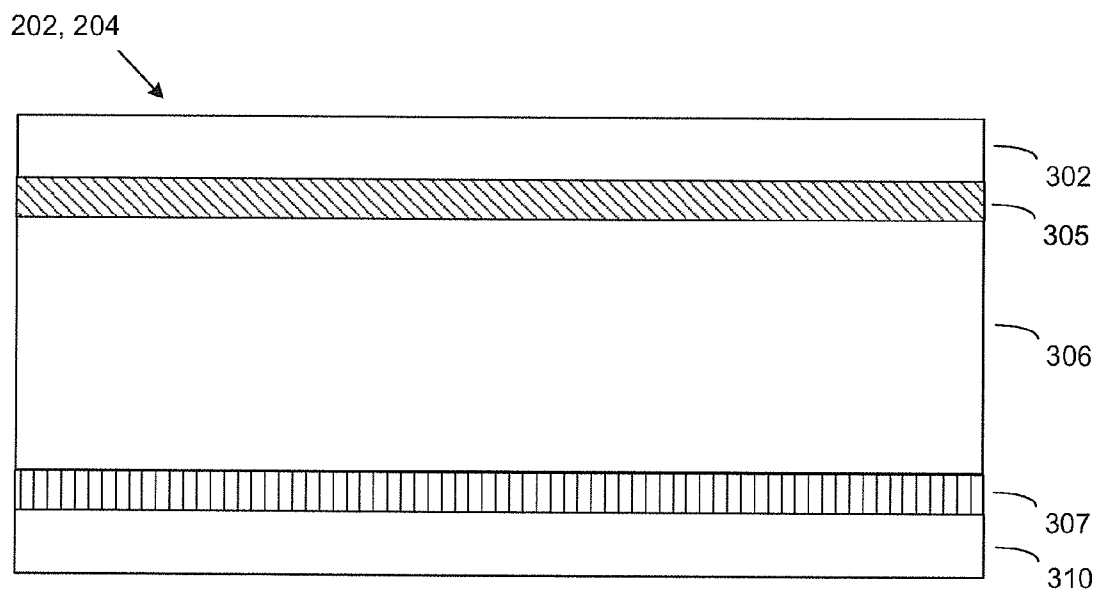


FIGURE 3B

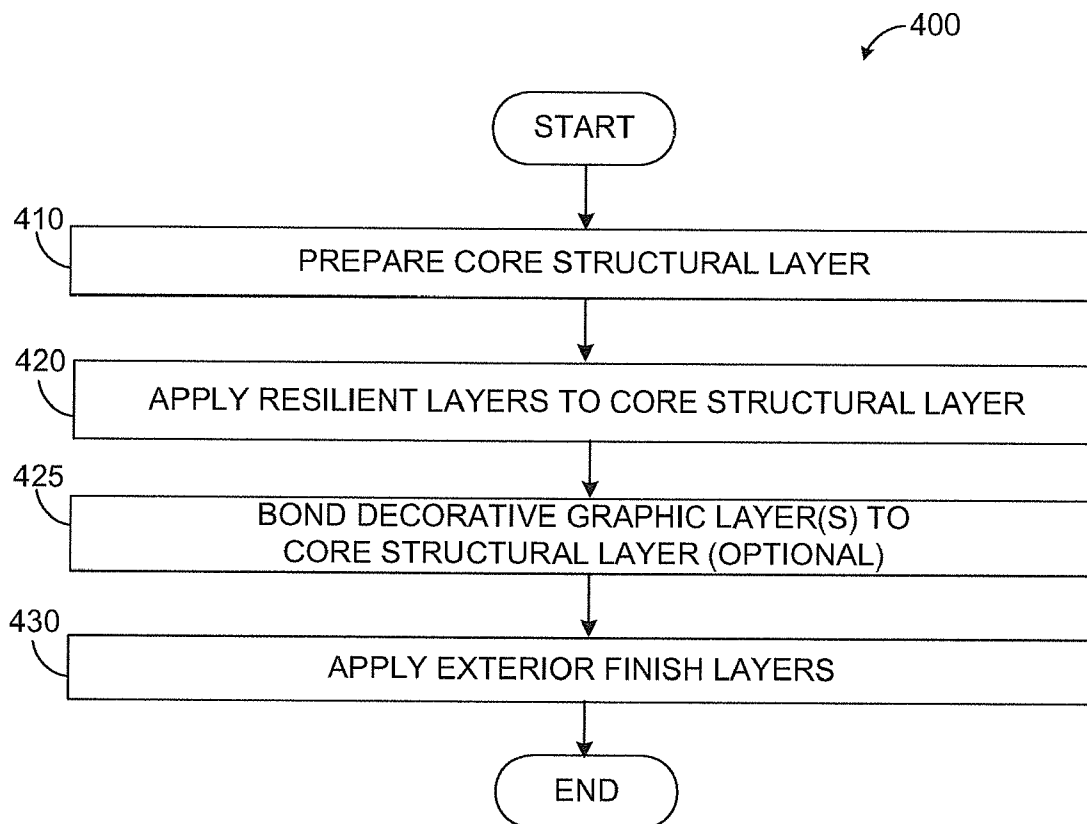


FIGURE 4

LAMINAR COMPOSITE TOILET LID AND SEAT

CROSS REFERENCE TO RELATED APPLICATION

[0001] This patent application is a continuation-in-part that claims priority under 35 U.S.C. §120 to U.S. patent application Ser. No. 13/083,161 filed on Apr. 8, 2011, which is incorporated herein by reference.

TECHNICAL FIELD

[0002] This disclosure is generally directed to toilets and more particularly to a toilet lid and seat that are formed of a laminar composite material.

BACKGROUND

[0003] Toilet seats and lids have existed in various forms for many decades. A toilet seat provides a surface for an occupant to comfortably sit and a toilet lid provides a protective cover for the toilet facility. Generally, toilet seats and lids are made of wood or plastic materials. These materials can degrade, discolor, and/or become damaged over time. Thus, many toilet seats and lids may become unattractive, structurally unsound, or both.

[0004] Additionally, most toilet seats and lids have plain, unadorned surfaces that do not include any type of decoration or permit any artistic expression. Some conventional toilet seats have surfaces that are adorned with silk-screen printing, hand painting, water-transfer printing, heat transfer printing, and the like. However, the surfaces of these seats, like plain toilet seats, can wear, chip off, degrade, or otherwise become damaged over time. There are also polyresin toilet seats that are made from resin compounds and are typically clear with optional decorative inserts. However, polyresin toilet seats are typically heavy and expensive to manufacture.

SUMMARY

[0005] According to an embodiment of the present disclosure, a composite laminar material includes a core structural layer. The composite laminar material also includes first and second resilient layers disposed on first and second surfaces of the core structural layer. The composite laminar material further includes a plurality of exterior layers disposed on exterior surfaces of the core structural layer and the first and second resilient layers.

[0006] In another embodiment, a toilet lid includes a core structural layer having a shape and size associated with the toilet lid. The toilet lid also includes first and second resilient layers disposed on first and second surfaces of the core structural layer. The toilet lid further includes a plurality of exterior layers disposed on exterior surfaces of the core structural layer and the first and second resilient layers, the exterior layers configured to envelop the toilet lid.

[0007] In still another embodiment a method of manufacturing a toilet lid includes preparing a core structural layer of the toilet lid. The method also includes applying first and second resilient layers to first and second surfaces of the core structural layer. The method further includes applying a plurality of exterior layers to exterior surfaces of the core structural layer and the first and second resilient layers.

[0008] Other technical features may be readily apparent to one skilled in the art from the following figures, descriptions and claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] For a more complete understanding of this disclosure and its features, reference is now made to the following description, taken in conjunction with the accompanying drawings, in which:

[0010] FIG. 1 illustrates a toilet with a laminar composite toilet lid and seat, according to embodiments of the present disclosure;

[0011] FIG. 2 illustrates top plan views of a laminar composite toilet lid and toilet seat, according to embodiments of the present disclosure;

[0012] FIGS. 3A and 3B illustrate cross-section views of a laminar composite toilet lid and toilet seat, according to embodiments of the present disclosure; and

[0013] FIG. 4 depicts a method for manufacturing a laminar composite toilet lid and seat, according to embodiments of the present disclosure.

DETAILED DESCRIPTION

[0014] The present disclosure provides a laminar composite toilet lid and seat configured to include decorative or aesthetic elements. The composite toilet lid and seat according to this disclosure offers many advantages. The toilet lid and seat may be customized with one or more images to convey a message or impression that may be of interest to a user. In addition, the toilet lid and seat according to this disclosure is constructed to be more durable and retain its original appearance for a longer period than conventional toilet lids and seats.

[0015] The laminar composite toilet lid and seat according to embodiments of this disclosure may be constructed with seven (7) layers of material: a core structural layer, two resilient layers disposed on top and bottom surfaces of the core structural layer, two decorative graphic layers disposed on outside surfaces of the resilient layers, and two exterior finish layers disposed on outside surfaces of the decorative graphic layers and edges of all the layers. All of the layers are integrated together to form a durable, attractive product.

[0016] FIG. 1 illustrates a toilet with a laminar composite toilet lid and seat, according to the present disclosure. The embodiment of the toilet shown in FIG. 1 is for illustration only. Other embodiments of the toilet could be used without departing from the scope of this disclosure.

[0017] As shown in FIG. 1, a toilet 100 is fitted with a toilet lid 102 and toilet seat 104 over a bowl 106. The toilet 100 may be any suitable toilet with a bowl that is configured to be covered by a seat and lid. The bowl 106 has an opening that is generally round or oval in shape. The toilet lid 102 and toilet seat 104 have a size and shape configured to generally match the size and shape of the bowl 106 and to cover the opening of the bowl 106. The toilet lid 102 and toilet seat 104 attach to a rear portion of the bowl 106 or toilet 100 using hinged hardware that allow the toilet lid 102 and toilet seat 104 to raise and lower independently with respect to the bowl 106 and to each other, as is known in the art.

[0018] Although FIG. 1 depicts one example of a toilet 100 with a toilet lid 102 and toilet seat 104, various changes may be made to FIG. 1. For example, while the bowl 106 is depicted as generally round or oval in shape, the bowl 106

could include other shapes, such as a rectangle or octagon. Likewise, the toilet lid **102** and toilet seat **104** could also include other shapes in order to match, or be different from, the bowl **106**.

[0019] FIG. 2 illustrates top plan views of a laminar composite toilet lid and toilet seat, according to the present disclosure. The embodiment of the toilet lid **202** and toilet seat **204** shown in FIG. 2 is for illustration only. Other embodiments of the toilet lid **202** and seat **204** could be used without departing from the scope of this disclosure. For ease of explanation, the toilet lid **202** and toilet seat **204** may represent the toilet lid **102** and toilet seat **104** of FIG. 1. It will be understood, however, that the toilet lid **202** and toilet seat **204** may represent any other suitable toilet lid and toilet seat.

[0020] As shown in FIG. 2, the top surface of the toilet lid **202** includes a decorative graphic **206**. Likewise, the top surface of the toilet seat **204** includes one or more decorative graphics **208**. The decorative graphics **206**, **208** may represent any picture, graphic, text, or other image, and are customizable to appeal to a user of a toilet where the toilet lid **202** and seat **204** are installed. In certain embodiments, the decorative graphics **206**, **208** may be chosen to match or coordinate with a particular decorative scheme of a bathroom or restroom where the toilet is installed. In other embodiments, the decorative graphics **206**, **208** may be chosen to display or feature a logo or trademark of a business. In still other embodiments, the decorative graphics **206**, **208** may be chosen to display or feature a picture or design that reflects an interest or hobby of a homeowner. The decorative graphics **206**, **208** are integrated into the laminar composition of the toilet lid **202** and toilet seat **204**, as explained in greater detail below. Thus, the decorative graphics **206**, **208** are protected from degradation and wear.

[0021] Although FIG. 2 depicts one example of a toilet lid **202** and toilet seat **204**, various changes may be made to FIG. 2. For example, while the toilet lid **202** and toilet seat **204** are both shown with decorative graphics, in other embodiments, only one of the toilet lid **202** and toilet seat **204** may include a graphic. As another example, while only the top surfaces of the toilet **202** and toilet seat **204** are shown with a decorative graphic, the bottom surfaces of the toilet lid **202** and/or toilet seat **204** may also include a decorative graphic. As yet another example, while the decorative graphics **206**, **208** are depicted as having the same image, in other embodiments, the decorative graphics **206**, **208** could include different images or coordinating images.

[0022] FIGS. 3A and 3B illustrate cross-section views of either the laminar composite toilet lid **202** or the toilet seat **204**, according to embodiments of the present disclosure. The embodiments of the toilet lid **202** or toilet seat **204** shown in FIGS. 3A and 3B are for illustration only. Other embodiments of the toilet lid **202** or toilet seat **204** could be used without departing from the scope of this disclosure. For ease of explanation, the following disclosure will refer only to the toilet lid **202**. However, it will be understood that the embodiments described below are also applicable to the toilet seat **204**.

[0023] As shown in FIG. 3A, the toilet lid **202** comprises seven layers **302-310**. For clarity of illustration, the thickness of each layer **302-310** may not be drawn to scale. Layer **302** is an exterior finish or coating layer. Layer **304** is a decorative graphic layer. Layer **305** is a resilient layer. Layer **306** is a core structural layer. Layer **307** is a second resilient layer. In certain embodiments, the layer **307** may be composed of the same material as the layer **305**. In other embodiments, the

layer **307** may be composed of a different material than layer **305**. Layer **308** is a second decorative layer. In certain embodiments, the layer **308** may be composed of the same material as the layer **304**. In other embodiments, the layer **308** may be composed of a different material than layer **304**. Layer **310** is a second exterior finish or coating layer. FIG. 3B illustrates an embodiment of the toilet lid **202** without the decorative graphic layers **304**, **308**.

[0024] In accordance with the present disclosure, the exterior finish layers **302**, **310** may be formed of polymethylmethacrylate (PMMA). PMMA is a transparent, thermoplastic material that is very durable and exhibits excellent optical properties. PMMA is also scratch resistant, can be CNC (computer numerical control) machined, and is more impact resistant than ordinary glass. PMMA is also known by its trade names Plexiglas™ and Lucite™. The thickness of each finish layer **302**, **310** may be selected according to the requirements of the application. In one embodiment, the thickness of each finish layer **302**, **310** is approximately two millimeters (2 mm). While the exterior finish layers **302**, **310** are described as PMMA, the layers **302**, **310** may be formed of another special function glass or any other suitable material that exhibits the advantageous properties of PMMA.

[0025] In some embodiments, each exterior finish layer **302**, **310** is clear and colorless. However, the exterior finish layers **302**, **310** are not limited thereto. For example, either one or both of the exterior finish layers **302**, **310** may be colored, tinted and/or mirrored. Either one or both of the exterior finish layers **302**, **310** may be smooth or textured, and have a glossy or matte finish.

[0026] The core layer **306** may be formed of a medium density fiberboard (MDF). As is known in the art, MDF is formed of wood fibers that are held together with one or more waxes or resins such as epoxies, formaldehyde resins, or phenolic resins. The fiber content and thickness of the MDF core layer **306** may vary based on application requirements. The core layer **306** accounts for the majority of the thickness of the toilet lid **202** and provides most of the rigidity of the toilet lid **202**. In one embodiment, the thickness of the core layer **306** is approximately nine millimeters (9 mm). In an embodiment, one or both sides of the core layer **306** are painted to hide or protect the finish of the MDF material.

[0027] Although the core layer **306** is described as being formed of MDF, other materials may be used. For example, the core layer **306** may be formed of another composite wood, such as hardwood plywood (HWPW), particleboard (PB), high density fiber board (HDF), molded wood, or any other suitable material. In an embodiment, the core layer **306** may be formed of two or more sub-layers, each sub-layer comprising one of the materials described above.

[0028] Each of the decorative graphic layers **304**, **308** shown in FIG. 3A is formed of a paper or thin plastic material or film onto which an image has been printed, painted, or otherwise formed. Each decorative graphic layer **304**, **308** may be sized to cover all, or only a portion, of a surface of the toilet lid **202**. In an embodiment, each decorative graphic layer **304**, **308** may be completely opaque, thus hiding the underlying surface of the toilet lid **202**. In another embodiment, each decorative graphic layer **304**, **308**, or some portion thereof, may be partially or completely transparent, thus exposing at least part of the underlying surface of the toilet lid **202**.

[0029] Although the decorative graphic layers **304**, **308** have been described as including a particular image, the deco-

rative graphic layers **304, 308** are not limited thereto. For example, in lieu of displaying a decorative or graphic image, one or both layers **304, 308** may be a plain colored paper or film in any suitable color. Thus, a solid white paper could be used to make a white toilet seat. A solid blue paper could be used to make a blue toilet seat.

[0030] Each of the resilient layers **305, 307** is formed of a resilient material such as polychloroprene, styrene, butadiene rubber, silicon rubber, or another suitable material with elastic properties. The resilient layers **305, 307** are disposed on top and bottom surfaces of the core layer **306**. In one embodiment, each resilient layer **305, 307** is approximately 1 mm thick, although each resilient layer **305, 307** may be thicker or thinner as needed for particular applications.

[0031] The resilient layers **305, 307** serve as a resilient interface between the core layer **306** and a layer adjacent to the core layer **306**, such as the decorative graphic layers **304, 308** (as shown in FIG. 3A) or the exterior finish layers **302, 310** (as shown in FIG. 3B). Due to differences in thermal properties between the materials comprising the core layer **306** and its adjacent layers, the layers of the toilet lid **202** may contract and expand at different rates due to changes in temperature, humidity, or other environmental conditions. These different rates of expansion and contraction among the layers of the toilet lid **202** may result in a slight separation of the layers at the edges. This in turn may cause cracks to form in any additional finish layers, such as a layer of paint that coats the outside surfaces of the toilet lid **202**.

[0032] To counter the separation and cracking effects that may result from different thermal properties of adjacent layers, the resilient layers **305, 307** are formed between the adjacent layers, such as between the core layer **306** and the exterior finish layers **302, 310**. The elastic properties of the resilient layers **305, 307** allow each resilient layer **305, 307** to flex across its cross section. Thus, the surfaces of the adjacent layers that contact each resilient layer **305, 307** can contract and expand at different rates while still maintaining full contact with the resilient layer **305, 307** and without separating from the resilient layer **305, 307**. In addition, the outer surfaces of the toilet lid **202** can be coated with a resilient paint that resists cracking or separation.

[0033] Although FIGS. 3A and 3B depict examples of a laminar composite toilet lid **202**, various changes may be made to FIGS. 3A and 3B. For example, while shown composed of five or seven layers, the laminar composite toilet lid **202** may include more or fewer layers. Layers **302-310** shown in FIGS. 3A and 3B may be removed, repeated, or arranged in a different order. As a particular example, when one or both exterior finish layers **302, 310** are not clear, the adjacent decorative graphic layer **304, 308** may not be visible and may be removed (as in FIG. 3B). Each layer **302-310** may be thicker or thinner than depicted in FIGS. 3A and 3B. Each layer **302-310** may include one or more sub-layers. Other layers, composed of the same or different materials, may be added to the laminar composite toilet lid **202**.

[0034] FIG. 4 depicts a method for manufacturing a laminar composite toilet lid and seat (e.g., toilet lid **202** and toilet seat **204**), according to the present disclosure. The method shown in FIG. 4 is for illustration only. Other embodiments of the method could be used without departing from the scope of this disclosure.

[0035] First, a core structural layer (e.g., layer **306**) is prepared having a size and shape suitable for its application (step **410**). Preparation of the core structural layer may include

painting one or more surfaces of the core structural layer. Next, resilient layers (e.g., layers **305, 307**) are applied to the top side, bottom side, or both top and bottom sides of the core structural layer (step **420**). Next, in an optional step, a decorative graphic layer (e.g., layers **304, 308**) is bonded to the exposed outward surfaces of the resilient layers (step **425**). Each decorative graphic layer is bonded to the resilient layers using an adhesive or heat bonding process. If an adhesive is used, the adhesive may be sprayed on, brushed on, or applied in any other suitable manner. In some embodiments, the resilient layers and decorative layers may also be applied to or otherwise cover the edges of the core structural layer.

[0036] Next, exterior finish layers (e.g., layers **302, 310**) are applied to the externally visible surfaces of the core structural layer, the resilient layers, and/or the decorative graphic layers (step **430**). The exterior finish layers may be configured to come together along one or more edges, thus forming one or more seams. The seams may be finished according to known techniques in order to create a smooth transition. In some embodiments, the “top” finish layer is machined or formed such that the “top” layer curves into the “bottom” layer such that there is no distinct edge. In such embodiments, any one or more of the various layers can follow any such contouring. Once the exterior finish layers are completely applied, the exterior finish layers envelop the toilet lid or seat and provide a protective layer that resists wear and damage, but allows the decorative image or images to be seen.

[0037] Although FIG. 4 illustrates one example of a method for manufacturing a laminar composite toilet lid and seat, various changes may be made to FIG. 4. For example, while shown as a series of steps, various steps in FIG. 4 may overlap, occur in parallel, occur in a different order, or occur multiple times.

[0038] It may be advantageous to set forth definitions of certain words and phrases used throughout this patent document. The terms “include” and “comprise,” as well as derivatives thereof, mean inclusion without limitation. The term “or” is inclusive, meaning and/or. The phrases “associated with” and “associated therewith,” as well as derivatives thereof, may mean to include, be included within, interconnect with, contain, be contained within, connect to or with, couple to or with, be communicable with, cooperate with, interleave, juxtapose, be proximate to, be bound to or with, have, have a property of, or the like.

[0039] While this disclosure has described certain embodiments and generally associated methods, alterations and permutations of these embodiments and methods will be apparent to those skilled in the art. Accordingly, the above description of example embodiments does not define or constrain this disclosure. Other changes, substitutions, and alterations are also possible without departing from the spirit and scope of this disclosure, as defined by the following claims.

What is claimed is:

1. A composite laminar material, comprising:
 - a core structural layer;
 - first and second resilient layers disposed on first and second surfaces of the core structural layer; and
 - a plurality of exterior layers disposed on exterior surfaces of the core structural layer and the first and second resilient layers.
2. The composite laminar material of claim 1, wherein the core layer comprises medium density fiberboard (MDF).
3. The composite laminar material of claim 1, wherein each exterior layer comprises polymethyl-methacrylate (PMMA).

4. The composite laminar material of claim 1, wherein each of the resilient layers comprises one of polychloroprene, styrene, butadiene rubber, and silicon rubber.

5. The composite laminar material of claim 1, further comprising at least one decorative graphic layer disposed between one of the exterior layers and one of the resilient layers.

6. The composite laminar material of claim 5, wherein the at least one decorative graphic layer is bonded to the core structural layer using a liquid adhesive.

7. The composite laminar material of claim 5, wherein the at least one decorative graphic layer comprises a paper or plastic film comprising at least one image.

8. A toilet lid, comprising:

a core structural layer having a shape and size associated with the toilet lid;

first and second resilient layers disposed on first and second surfaces of the core structural layer; and

a plurality of exterior layers disposed on exterior surfaces of the core structural layer and the first and second resilient layers, the exterior layers configured to envelop the toilet lid.

9. The toilet lid of claim 8, wherein the core layer comprises medium density fiberboard (MDF).

10. The toilet lid of claim 8, wherein each exterior layer comprises polymethyl-methacrylate (PMMA).

11. The toilet lid of claim 8, wherein each of the resilient layers comprises one of polychloroprene, styrene, butadiene rubber, and silicon rubber.

12. The toilet lid of claim 8, further comprising at least one decorative graphic layer disposed between one of the exterior layers and one of the resilient layers.

13. The toilet lid of claim 12, wherein the at least one decorative graphic layer is bonded to the core structural layer using a liquid adhesive.

14. The toilet lid of claim 12, wherein the at least one decorative graphic layer comprises a paper or plastic film comprising at least one image.

15. A method of manufacturing a toilet lid, the method comprising:

preparing a core structural layer of the toilet lid;

applying first and second resilient layers to first and second surfaces of the core structural layer; and

applying a plurality of exterior layers to exterior surfaces of the core structural layer and the first and second resilient layers.

16. The method of claim 15, wherein the core layer comprises medium density fiberboard (MDF).

17. The method of claim 15, wherein each exterior layer comprises polymethyl-methacrylate (PMMA).

18. The method of claim 15, wherein each of the resilient layers comprises one of polychloroprene, styrene, butadiene rubber, and silicon rubber.

19. The method of claim 15, further comprising:

applying at least one decorative graphic layer between one of the exterior layers and one of the resilient layers.

20. The method of claim 19, wherein the at least one decorative graphic layer is bonded to the core structural layer using a liquid adhesive.

* * * * *