
(12) PATENT ABRIDGMENT (11) Document No. AU-B-52788/90
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 630940

(54) Title
STEEL CORD WITH IMPROVED FATIGUE STRENGTH

International Patent Classification(s)

(51)⁵ **D07B 001/06**

(21) Application No. : **52788/90**

(22) Application Date : **22.03.90**

(87) PCT Publication Number : **WO90/12145**

(30) Priority Data

(31) Number	(32) Date	(33) Country
89200838	03.04.89	EP EUROPE

(43) Publication Date : **05.11.90**

(44) Publication Date of Accepted Application : **12.11.92**

(71) Applicant(s)
N.V. BEKAERT S.A.

(72) Inventor(s)
FREDDY BAILLIEVIER; HUYSENTRUYT BERNARD

(74) Attorney or Agent
SPRUSON & FERGUSON , GPO Box 3898, SYDNEY NSW 2001

(57) Claim

1. *A steel cord for the reinforcement of elastomers, said steel cord comprising two strands of at least two filaments each, said strands being twisted around each other and forming helicoids of a same pitch, the filaments of the first strand having a pitch differing from the pitch of said helicoids and having a value of more than 300 mm, the filaments of the second strand having the same pitch as said helicoids and being twisted in the same sense as said helicoids, all the filaments of both of said strands having a diameter between 0.08 and 0.45 mm, characterized in that the diameter of the filaments of one of said strands is at least 0.02 mm greater than the diameter of the filaments of the other of said strands.*

OPI DATE 05/11/90 APPLN. ID 52788 / 90
 AOJP DATE 06/12/90 PCT NUMBER PCT/EP90/00493


PCT

630940

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁵ : D07B 1/06</p>	<p>A1</p>	<p>(11) International Publication Number: WO 90/12145 (43) International Publication Date: 18 October 1990 (18.10.90)</p>
<p>(21) International Application Number: PCT/EP90/00493 (22) International Filing Date: 22 March 1990 (22.03.90) (30) Priority data: 89200838.4 3 April 1989 (03.04.89) EP (34) Countries for which the regional or international application was filed: AT et al. (71) Applicant (for all designated States except US): N.V. BEKAERT S.A. [BE/BE]; Bekaertstraat 2, B-8550 Zwevegem (BE). (72) Inventors; and (75) Inventors/Applicants (for US only): BAILLIEVIER, Freddy [BE/BE]; Vredelaan 29, B-8550 Zwevegem (BE). BERNARD, Huysentruyt [BE/BE]; Meiweg 19, B-8550 Zwevegem (BE).</p>	<p>(74) Agents: VANDEVELDE, Willy et al.; Department Industrial Property, N.V. Bekaert S.A., Bekaertstraat 2, B-8550 Zwevegem (BE). (81) Designated States: AT (European patent), AU, BE (European patent), BR, CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), IT (European patent), JP, KR, LU (European patent), NL (European patent), SE (European patent), US. Published With international search report.</p>	

(54) Title: STEEL CORD WITH IMPROVED FATIGUE STRENGTH

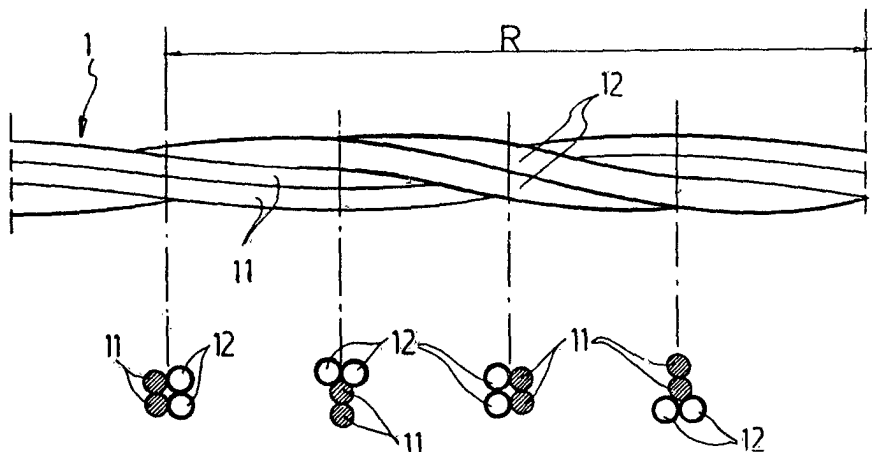

(57) Abstract

A steel cord (1) for the reinforcement of elastomers, especially for the reinforcement of breaker layers in a tire, said steel cord comprising two strands of at least two filaments (11, 12) each, said strands being twisted around each other and forming helicoids of a same pitch, the filaments (11) of the first strand having a pitch differing from the pitch of said helicoids and having a value of more than 300 mm, the filaments (12) of the second strand having the same pitch as said helicoids and being twisted in the same sense as said helicoids, all the filaments of both of said strands having a diameter between 0.08 and 0.45 mm, wherein the diameter of the filaments of one of said strands is at least 0.02 mm greater than the diameter of the filaments of the other of said strands. Preferably the diameter of the filaments (12) of said second strand is at least 0.02 mm greater than the diameter of the filaments (11) of said first strand.

- 1 -

STEEL CORD WITH IMPROVED FATIGUE STRENGTH

5 The invention relates to a steel cord for the reinforcement of elastomers, comprising two strands of at least two filaments each so as to form an $m + n$ -structure, where m is the number of filaments of the first strand and n the number of filaments of the second strand, m and n being greater than or equal to two.

10 The steel cord according to the invention is particularly suitable for use as a reinforcement of rubber articles such as tires, and more particularly for use as a reinforcement of breaker layers in a tire.

15 Steel cords for use as a reinforcement of breaker layers in a tire conveniently comprise steel filaments having a diameter between 0.05 mm and 0.60mm, preferably between 0.15 and 0.45 mm. A conventional steel composition for such steel cords is a carbon content above 0.65 %, preferably above 0.80 %, e.g. 0.83 % or 0.85 %, a manganese content between 0.40 and 20 0.70 %, a silicon content between 0.15 and 0.30 %, and maximum sulphur and phosphorus contents of 0.03 %. However, the invention is not limited to such a steel composition. Other elements such as chromium, nickel or boron may also be added. The steel cord usually has a rubber adherable layer such as a 25 copper, zinc, or brass alloy.

The state of the art of steel cords for reinforcement of elastomers, and more particularly for reinforcement of a breaker layer of a tire provides several different constructions.

30 Among these constructions the $n \times 1$ -constructions occupy a special place. These are constructions with n filaments twisted together with the same twist pitch and in the same twist sense, n is an integer number between 3 and 5. The

- 2 -

problem with these constructions is that they have a central void where rubber cannot penetrate during vulcanisation and where moisture may easily enter and cause corrosion.

5 A solution to this problem has been given by the open $n \times 1$ -constructions. These are constructions where one or more filaments are kept apart from each other by giving them a specified preformation during the twisting process. However, this preformation must exceed a certain limit in order to avoid closing the steel cord when this is put under tension
10 during the vulcanisation process. The problem is then that too high a preformation may cause an irregular cord aspect and instability.

15 In addition to the $n \times 1$ -constructions the $2 + 2$ -construction which is disclosed in US-A-4,408,444 has been widely used in the tire manufacturing industry too. This cord has the advantage of having full rubber penetration whether brought under tension or not, but has the drawbacks of a poor fatigue limit and a still too great cord diameter. As a consequence this cord is less suitable when a high fatigue performance is required or when a thin rubber ply is a priority.
20

It is an object of the present invention to avoid one or more drawbacks of the prior art.

25 It is also an object of the present invention to provide a cord with a high fatigue performance whilst still enabling full rubber penetration.

30 According to the present invention there is provided a steel cord for the reinforcement of elastomers, which comprises two strands of at least two filaments each. These strands are twisted around each other and form helicoids of a same pitch. The filaments of the first strand have a pitch differing from the pitch of said helicoids and have a value of more than

300 mm. The filaments of the second strand have the same pitch as the helicoids and are twisted in the same sense as the helicoids. All the filaments of both strands have a diameter between 0.08 and 0.45 mm. The diameter of the filaments of one of the strands is at least 0.02 mm greater than the diameter of the filaments of the other of the strands.

According to a preferable embodiment of the invention the diameter of the filaments of the second strand is at least 0.02 mm greater than the diameter of the filaments of the first strand, and preferably up to 0.12 mm greater than the diameter of the filaments of the first strand.

In this way an alternative $m + n$ -construction is provided, where m is the number of filaments of the first strand and n the number of filaments of the second strand.

The filaments conveniently have a circular cross-section, but this is not necessary. In cases where the filaments don't have a circular cross-section, "diameter" means the diameter of a circular cross-section with the same surface as the cross-section of the filaments.

The filaments within one strand conveniently have the same diameter, but small differences in the range of 0.01 mm - 0.02 mm may occur.

As will be shown below the inventors have surprisingly found that the fatigue limit of the cord according to the invention is much higher than the fatigue limit of a conventional $m + n$ -construction with the same cross-sectional surface. This is surprising because the diameter of the filaments of one strand has been decreased with respect to the conventional $m + n$ -construction and the diameter of the filaments of the other strand has been increased with respect to the conven-

5 tional $m + n$ -construction in order to obtain about the same cross-sectional surface and hence reinforcing effect. It is hereby understood that, as is generally known in the art, decreasing the diameter of filaments increases the fatigue limit and increasing the diameter of filaments decreases the fatigue limit.

10 Preferably the number of steel filaments in the first strand is equal to the number of steel filaments in the second strand and most preferably this number is equal to two.

The steel filaments in both strands may have a normal tensile strength, i.e. a tensile strength below the value of

15
$$R_m = 2250 - 1130 \log d \quad (\text{N/mm}^2) \quad (I),$$

where d is the diameter expressed in mm, or they may have a high tensile strength, i.e. a tensile strength above the value of formula (I).

20 In a special way of carrying out the invention the filaments of one strand have a normal tensile strength and the filaments of the other strength have a high tensile strength.

25 If the filaments of the first strand have the smaller diameter and have a high tensile strength and the filaments of the second strand have the greater diameter and have a normal tensile strength then the loss in reinforcing strength of the first strand with regard to the second strength due to the smaller diameters may be compensated so that both strands equally contribute to the tensile strength of the whole cord.

30 However, this is not necessary : the filaments of the first strand having the smaller diameter may also have a normal tensile strength while the filaments of the second strand having the greater diameter have a high tensile strength.

5 It is further clear that by using filaments with a high tensile strength, the overall diameter of the cord may be decreased without loss of tensile strength with regard to m + n-cords with all filaments having a normal tensile strength.

The invention will now be described in more detail with reference to the accompanying drawings wherein :

10 FIGURE 1 represents a side view and subsequent cross-sections of a cord according to the present invention;

FIGURE 2 represents an apparatus for manufacturing a cord according to the present invention.

15 FIGURE 1 represents a cord 1 according to the present invention. The cord consists of a first strand having two filaments 11 and a second strand also having two filaments 12. The cross-section of the filaments 11 of the first strand is shaded. The filaments 11 have a diameter of 0.24 mm and the
20 filaments 12 have a diameter of 0.28 mm. The two strands are twisted around each other with a twist pitch p of 15 mm. The twist pitch p conveniently lies between 30 and 100 times the average diameter of the filaments and preferably between 40 and 80 times the average diameter of the filaments. The fila-
25 ments 12 of the second strand are twisted in the same sense with the same twist pitch p while the filaments 11 of the first strand remain substantially parallel to each other, i.e. they have an infinite twist pitch.

30 FIGURE 2 represents a double-twisting apparatus 2 for manufacturing a cord according to the present invention. The filaments 11 of the first strand are drawn from bobbins 21 and pass through the holes 231 of a guiding plate 23 and come together at a first guiding pulley 24 of the double-twister 2

where they are provisionally twisted together. They pass further over a flyer 25 and over a reversing pulley 26. Two bobbins 27 are stationarily mounted inside the rotor of the double-twister 2. The filaments 12 of the second strand are drawn from these bobbins 27 and pass through the holes 281 of a guiding plate 28 and come together with the provisionally twisted filaments 11 at the cabling die 29. The filaments 11 and 12 pass over reversing pulley 210, flyer 211 and guiding pulley 212 to the winding unit 213. Between the cabling die 29 and the guiding pulley 212 the filaments 11 are untwisted so as to form a first strand consisting of substantially parallel filaments 11, while the filaments 12 are twisted with the same pitch and in the same direction as the two strands.

15

TEST 1

The fatigue properties of two prior art cords have been compared with a cord according to the present invention (NT = normal tensile, i.e. a tensile strength below the value of formula (I); HT = high tensile, i.e. a tensile strength above the value of formula (I)) :

1. prior art cord : $2 \times 0.25 \text{ NT} + 2 \times 0.25 \text{ NT}$;
pitch = 14 mm
2. prior art cord : $2 \times 0.25 \text{ HT} + 2 \times 0.25 \text{ HT}$;
pitch = 14 mm
3. invention cord : $2 \times 0.22 \text{ NT} + 2 \times 0.28 \text{ HT}$;
pitch = 14 mm

It is understood that in these constructions the first strand with substantially parallel filaments is named first and the second strand with twisted filaments is named second.

30

TABLE 1

	cord	cross-section (mm ²)	breaking load (N)	fatigue limit (N/mm ²)
5	A. 1.	0.196	530	< 600
	2.	0.196	605	< 600
	3.	0.199	604	850
10	B. 1.	0.196	520	800
	2.	0.196	633	700
	3.	0.199	621	900
	3.	0.199	581	900

15 The fatigue limit has been measured with the well-known Hunter test.

The second series B. of tests has been made on cords from a slightly different steel rod type than this of series A.

20 In both series it may be easily seen that the cord 3. according to the invention has a much higher fatigue limit than the cords 1. and 2. according to the prior art,

TEST 2

25 A second test reveals an additional advantage of the cord according to the invention, namely a better behaviour under compression.

30 The same cords as mentioned under Test 1 have been compared with each other. The buckling stress, the deformation at the buckling stress, and the Young's modulus in compression have been measured for these cords.

The buckling stress is a measure for the maximum compression force taken up by the steel cord when embedded in rubber. The greater the buckling stress the greater this maximum compression force.

The deformation is the deformation of the cord in rubber when subjected to this maximum compression.

A high Young's modulus in compression means a cord which does not allow high deformations under compression whereas a low Young's modulus in compression allows high deformations under compression.

Further details about these features and their method of measurement may be found in the paper by Bourgois L., Survey of Mechanical Properties of Steel Cord and Related Test Methods, Tire Reinforcement and Tire Performance, ASTM STP 694, R.A. Fleming and D.I. Livingston, Eds., American Society for Testing and Materials, 1979, pp. 19-46.

Table 2 mentions the results :

TABLE 2

cord	COMPRESSION BEHAVIOUR		
	buckling stress (N/mm ²)	deformation (%)	compression modulus (kN/mm ²)
1.	430	0.40	125
2.	447	0.40	125
3.	475	1.12	66

TEST 3

A third test has evaluated the influence of the diameter difference between the two strands on the cord properties.

Following cords have been evaluated :

1. invention cord : 2 x 0.22 HT + 2 x 0.25 HT
pitch : 14 mm

2. invention cord : 2 x 0.25 NT + 2 x 0.28 HT
pitch : 14 mm

- 9 -

3. invention cord : 2 x 0.20 HT + 2 x 0.25 HT
pitch : 14 mm
4. invention cord : 2 x 0.25 HT + 2 x 0.30 HT
pitch : 16 mm
- 5 5. invention cord : 2 x 0.22 NT + 2 x 0.28 HT
pitch : 14 mm
6. invention cord : 2 x 0.22 HT + 2 x 0.30 HT
pitch : 14 mm
- 10 7. invention cord : 2 x 0.20 HT + 2 x 0.30 HT
pitch : 14 mm
8. invention cord : 2 x 0.22 HT + 2 x 0.35 HT
pitch : 16 mm

15 Table 3 summarizes the results of the P.L.E. values and of
the fatigue properties of these cords.

P.L.E. means here part load elongation. It is defined as the
increase in length of a gauge length between a tension of 2.5
N and a tension of 50 N and may be expressed as a percentage
of the original gauge length. It is a measure of the openness
20 of the steel cord.

25

30

TABLE 3

	cord	diameter difference (mm)	P.L.E. 2.5-50 N (%)	fatigue limit Hunter test (N/mm ²)
5	1.	0.03	0.16	850
	2.	0.03	0.16	850
	3.	0.05	0.17	850
10	4.	0.05	0.14	900
	5.	0.06	0.14	850
		0.06	0.18	900
		0.06	0.17	900
	6.	0.08	0.13	900
15	7.	0.10	0.14	1050
	8.	0.13	0.40	950

The fatigue limit remains high with increasing diameter difference. However, with a diameter difference of 0.13 mm a P.L.E. value of 0.40 has been measured. This means that the cord is open : the different filaments do no longer make contact with other filaments over the whole length. In contradiction to $n \times 1$ -cords, this is not desired with $m + n$ -cords. And this is the reason why in a preferred embodiment of the invention the diameter difference is kept below 0.12 mm (see claim 3).

The claims defining the invention are as follows:-

1. A steel cord for the reinforcement of elastomers, said steel cord comprising two strands of at least two filaments each, said strands being twisted around each other and forming helicoids of a same pitch, the filaments
5 of the first strand having a pitch differing from the pitch of said helicoids and having a value of more than 300 mm, the filaments of the second strand having the same pitch as said helicoids and being twisted in the same sense as said helicoids, all the filaments of both of said strands having a diameter
10 filaments of one of said strands is at least 0.02 mm greater than the diameter of the filaments of the other of said strands.

2. A steel cord according to claim 1, characterized in that the diameter of the filaments of said second strand is at least 0.02 mm greater than the diameter of the filaments of said first strand.

15 3. A steel cord according to claim 1 or 2, characterized in that the diameter of the filaments of said second strand is up to 0.12 mm greater than the diameter of the filaments of said first strand.

4. A steel cord according to any one of claims 1 to 3, characterized in that the number of filaments in said first strand is equal to the number of
20 filaments in said second strand.

5. A steel cord according to any one of claims 1 to 4, characterized in that each of said strands consists of two filaments.

6. A steel cord according to any one of claims 1 to 5, characterized in that the filaments of one of said strands have a high tensile strength while
25 the filaments of the other of said strands have a normal tensile strength.

7. A rubber product comprising steel cords according to any one of claims 1 to 6.

8. A rubber tire comprising steel cords according to any one of claims 1 to 6.

30 9. A steel cord for the reinforcement of elastomers, substantially as hereinbefore described with reference to the accompanying drawings.

DATED this TWENTY-FOURTH day of JULY 1992


N.V. Bekaert S.A.

Patent Attorneys for the Applicant

SPRUSON & FERGUSON



FIG. 1

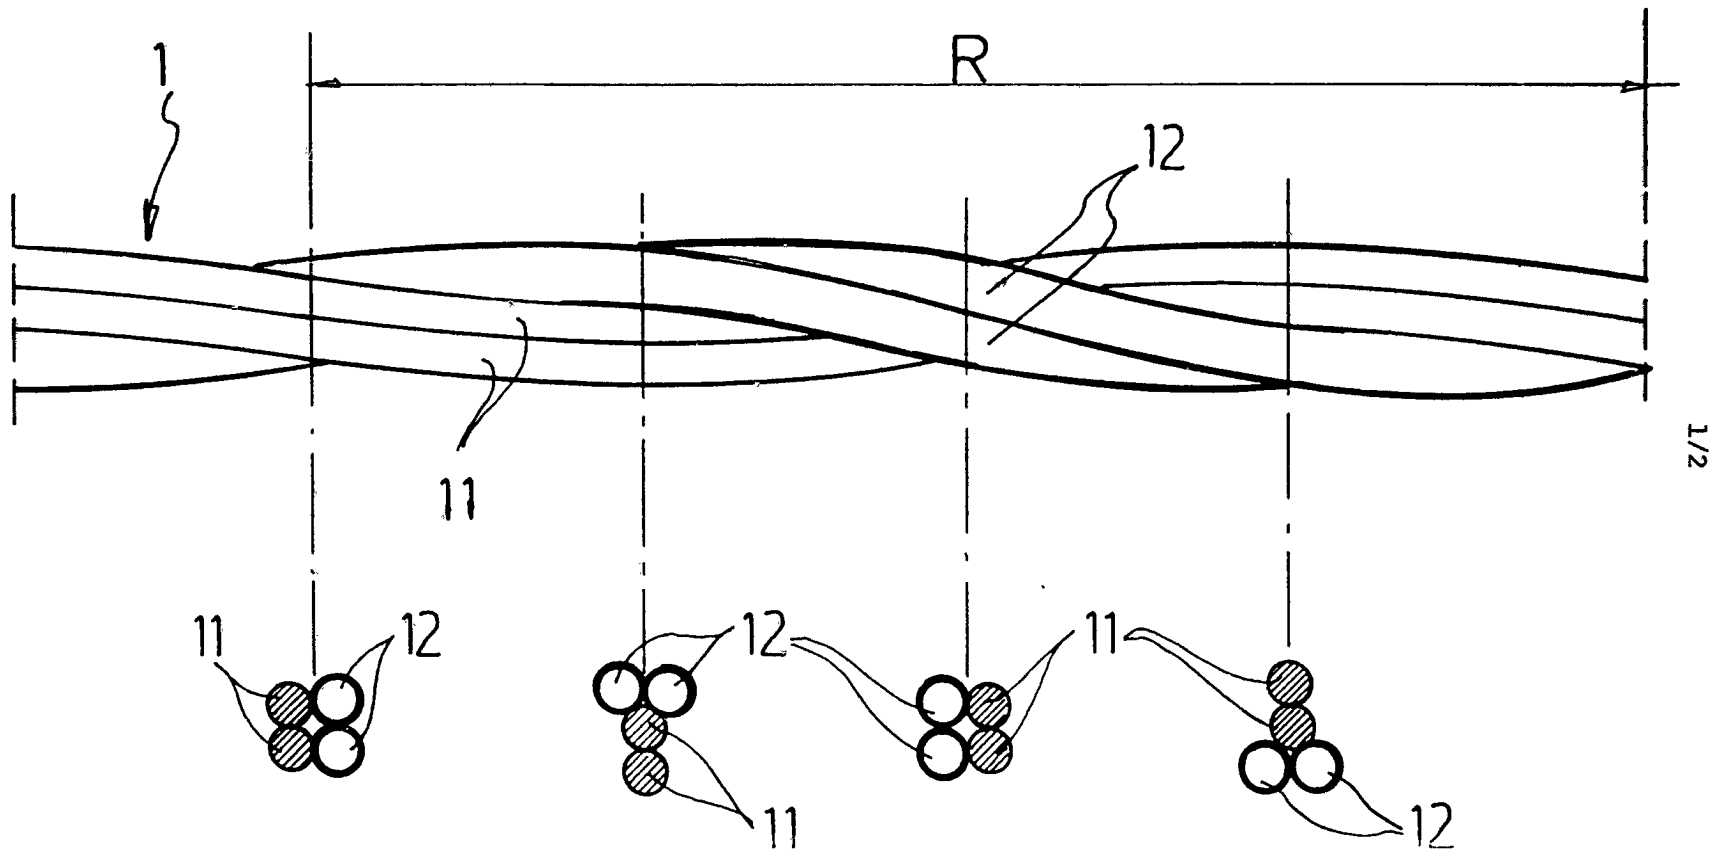

WO 90/12145

S 2786/90

PCT/EP90/00493

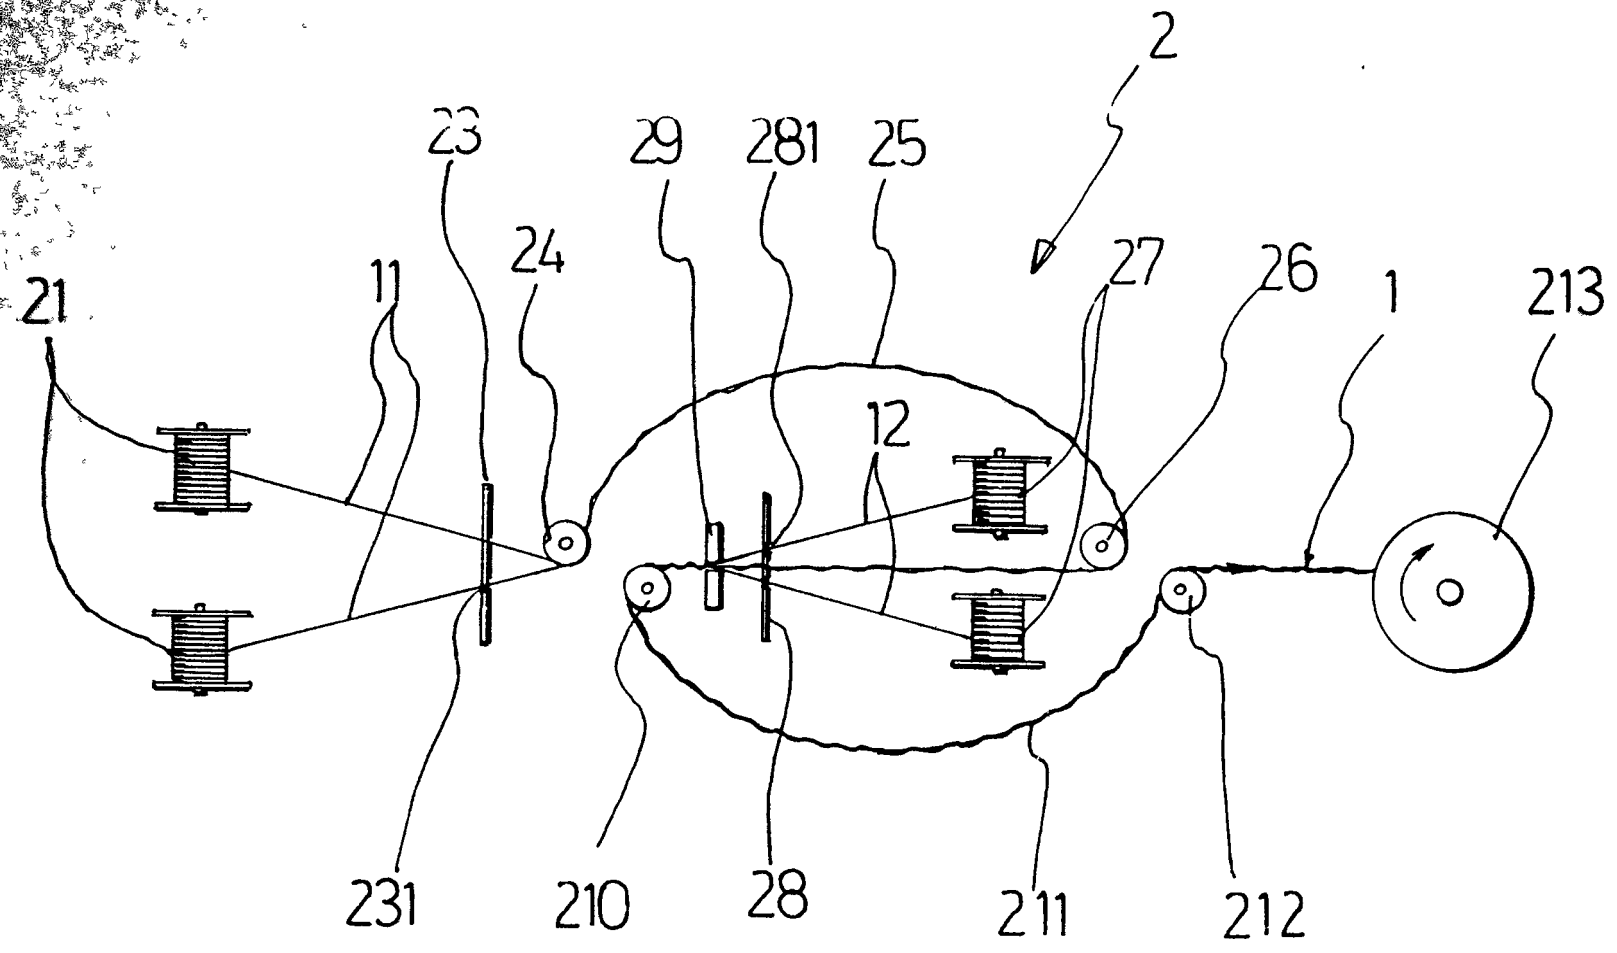



FIG. 2

INTERNATIONAL SEARCH REPORT

PCT/EP 90/00493

International Application No.

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC		
Int.Cl. 5	D07B1/06	
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
Int.Cl. 5	D07B ; B60C	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸		
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹		
Category ⁹	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
Y	US,A,4408444 (F. BAILLEVIER) 11 October 1983 see claims 1-4 (cited in the application) ---	1-5, 7, 8
Y	US,A,4506500 (T. MIYAUCHI; O. YONEDA) 26 March 1985 see column 3, lines 37 - 65 ---	1-5, 7, 8
A	FR,A,2477584 (SODETAL, SOCIETE POUR LE DEVELOPPEMENT DU FIL METALLIQUE) 11 September 1981 see page 2, line 17 - page 3, line 22 see page 9, lines 6 - 25 ---	1-5, 7, 8
A	LU,A,84844 (L. SEYWERT) 17 November 1983 see page 3, lines 24 - 30 ---	1-5, 7, 8
<p>⁹ Special categories of cited documents: ¹⁰</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p>		
IV. CERTIFICATION		
2	Date of the Actual Completion of the International Search 15 JUNE 1990	Date of Mailing of this International Search Report 10.07.90
International Searching Authority EUROPEAN PATENT OFFICE		Signature of Authorized Officer D HULSTER E.W.F. 

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO. PCT/EP 90/00493**

SA 35330

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office (EPO) file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 15/06/90

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-4408444	11-10-83	NL-A- 8102273	01-12-82
		AT-B- 384043	25-09-87
		BE-A- 893105	08-11-82
		CA-A- 1174565	18-09-84
		DE-A- 3215638	25-11-82
		FR-A, B 2505372	12-11-82
		GB-A, B 2098251	17-11-82
		JP-A- 57193253	27-11-82
		LU-A- 84130	13-09-82
US-A-4506500	26-03-85	JP-A, B, C 58180690	22-10-83
		JP-A- 58191608	08-11-83
		JP-A- 58191609	08-11-83
FR-A-2477584	11-09-81	None	
LU-A-84844	17-11-83	BE-A- 899724	17-09-84
		FR-A, B 2546922	07-12-84