



US011921417B2

(12) **United States Patent**
Chen et al.

(10) **Patent No.:** **US 11,921,417 B2**

(45) **Date of Patent:** **Mar. 5, 2024**

(54) **CONTROLLABLE APERTURE STOP,
COMPACT CAMERA MODULE AND
ELECTRONIC DEVICE**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **LARGAN PRECISION CO., LTD.**,
Taichung (TW)

4,731,626 A	3/1988	Kawamoto	
9,223,118 B2 *	12/2015	Mercado	G02B 13/02
10,969,653 B2	4/2021	Kim	
2006/0120644 A1 *	6/2006	Smith	C23C 8/36 384/276

(72) Inventors: **Hao Jan Chen**, Taichung (TW); **Yu Chen Lai**, Taichung (TW)

(Continued)

(73) Assignee: **LARGAN PRECISION CO., LTD.**,
Taichung (TW)

FOREIGN PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

CN	108933886 A	12/2018
CN	110579926 A	12/2019
CN	110858048 A	3/2020

(Continued)

OTHER PUBLICATIONS

(21) Appl. No.: **17/833,959**

European Search Report dated Apr. 3, 2023 as received in application No. 22188730.0.

(22) Filed: **Jun. 7, 2022**

Primary Examiner — Leon W Rhodes, Jr.

(65) **Prior Publication Data**

US 2023/0273504 A1 Aug. 31, 2023

(74) *Attorney, Agent, or Firm* — Maschoff Brennan

(30) **Foreign Application Priority Data**

Feb. 25, 2022 (TW) 111107076

(57) **ABSTRACT**


(51) **Int. Cl.**
G03B 9/06 (2021.01)
G03B 30/00 (2021.01)

A controllable aperture stop includes a light pass portion, a fixed portion, a driving part and rollable elements. The light pass portion includes movable blades together surrounding a light pass aperture. The fixed portion has shaft structures corresponding to the movable blades. The driving part includes a rotatable element, a magnet and a coil. The rotatable element is for driving the movable blades to rotate relative to the shaft structures to adjust the size of the light pass aperture. The magnet is disposed on the rotatable element. The coil corresponds to the magnet. The magnet and the coil are to drive the rotatable element to rotate around the light pass aperture. The rollable elements are disposed between the fixed portion and the rotatable element and arranged around the light pass aperture, so the rotatable element is rotatable relative to the fixed portion.

(52) **U.S. Cl.**
CPC **G03B 9/06** (2013.01); **G03B 30/00** (2021.01)

65 Claims, 43 Drawing Sheets

(58) **Field of Classification Search**
CPC G03B 9/05; G02B 27/646–648; G02B 7/04–105; G02B 5/005
See application file for complete search history.

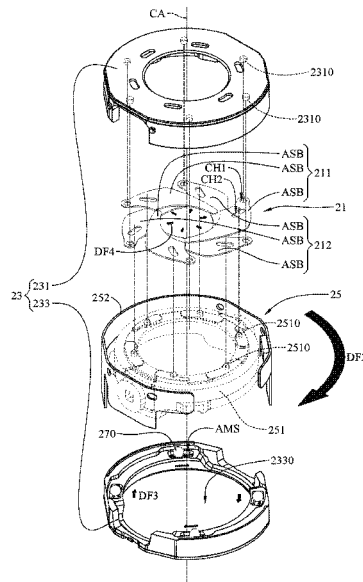

(56)

References Cited

U.S. PATENT DOCUMENTS

2012/0251095 A1 10/2012 Ono
2019/0373145 A1 12/2019 Yu

FOREIGN PATENT DOCUMENTS

CN 112099225 A 12/2020
CN 112147772 A 12/2020
CN 112262566 A 1/2021
CN 113259545 A 8/2021
EP 3805817 A1 4/2021
JP 2005249812 A * 9/2005
JP 2009-195084 8/2009
KR 20200107457 A 9/2020
WO WO-2022257989 A1 * 12/2022

* cited by examiner

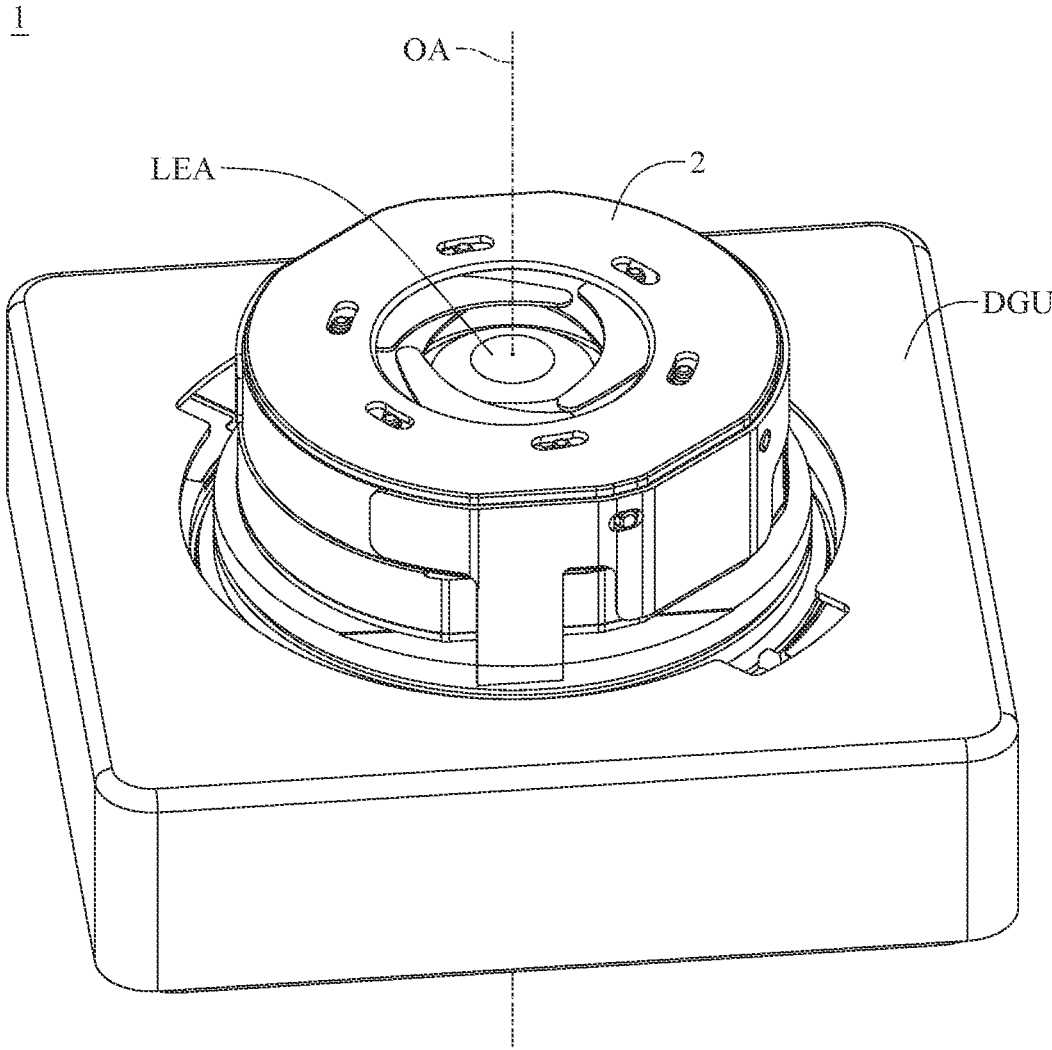


FIG. 1

1

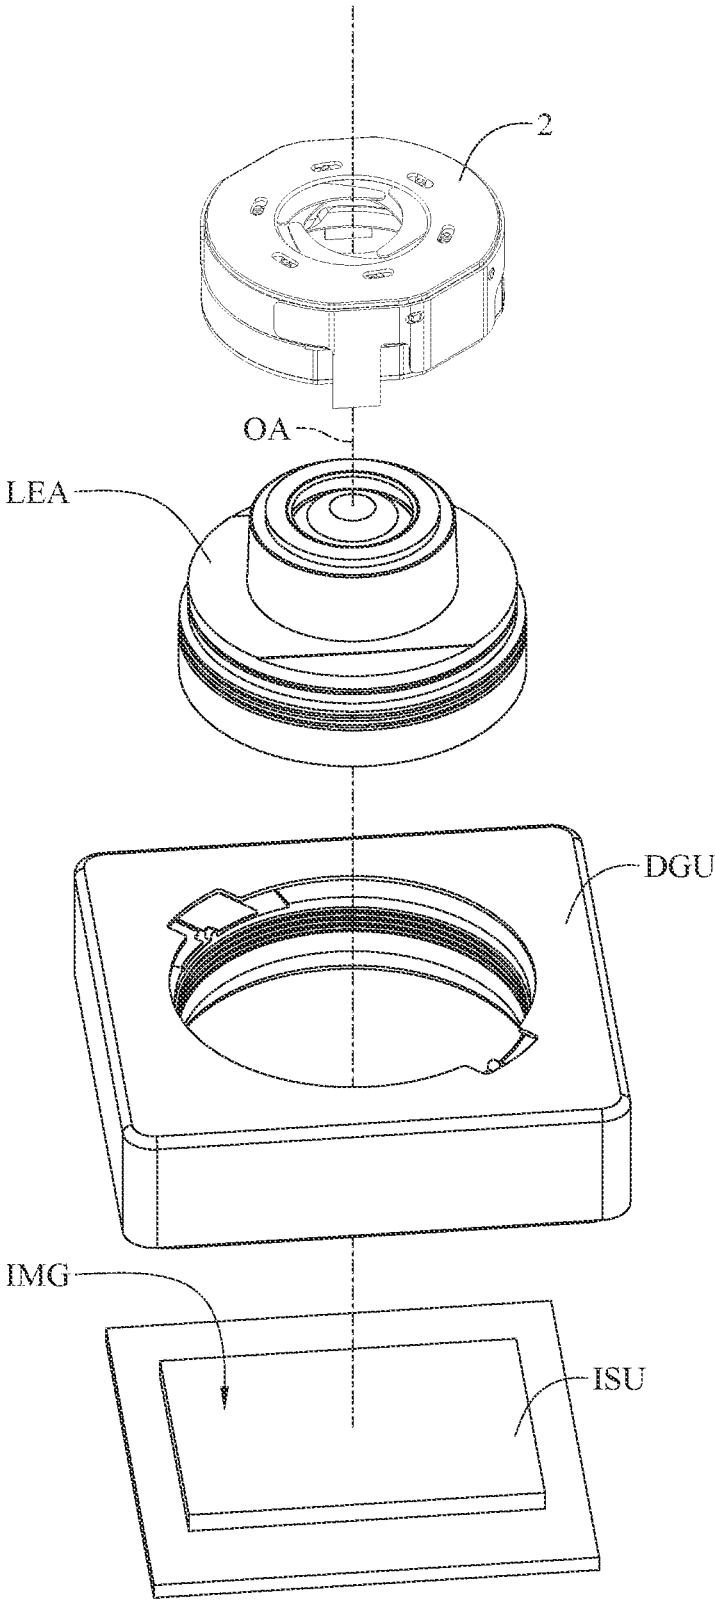


FIG. 2

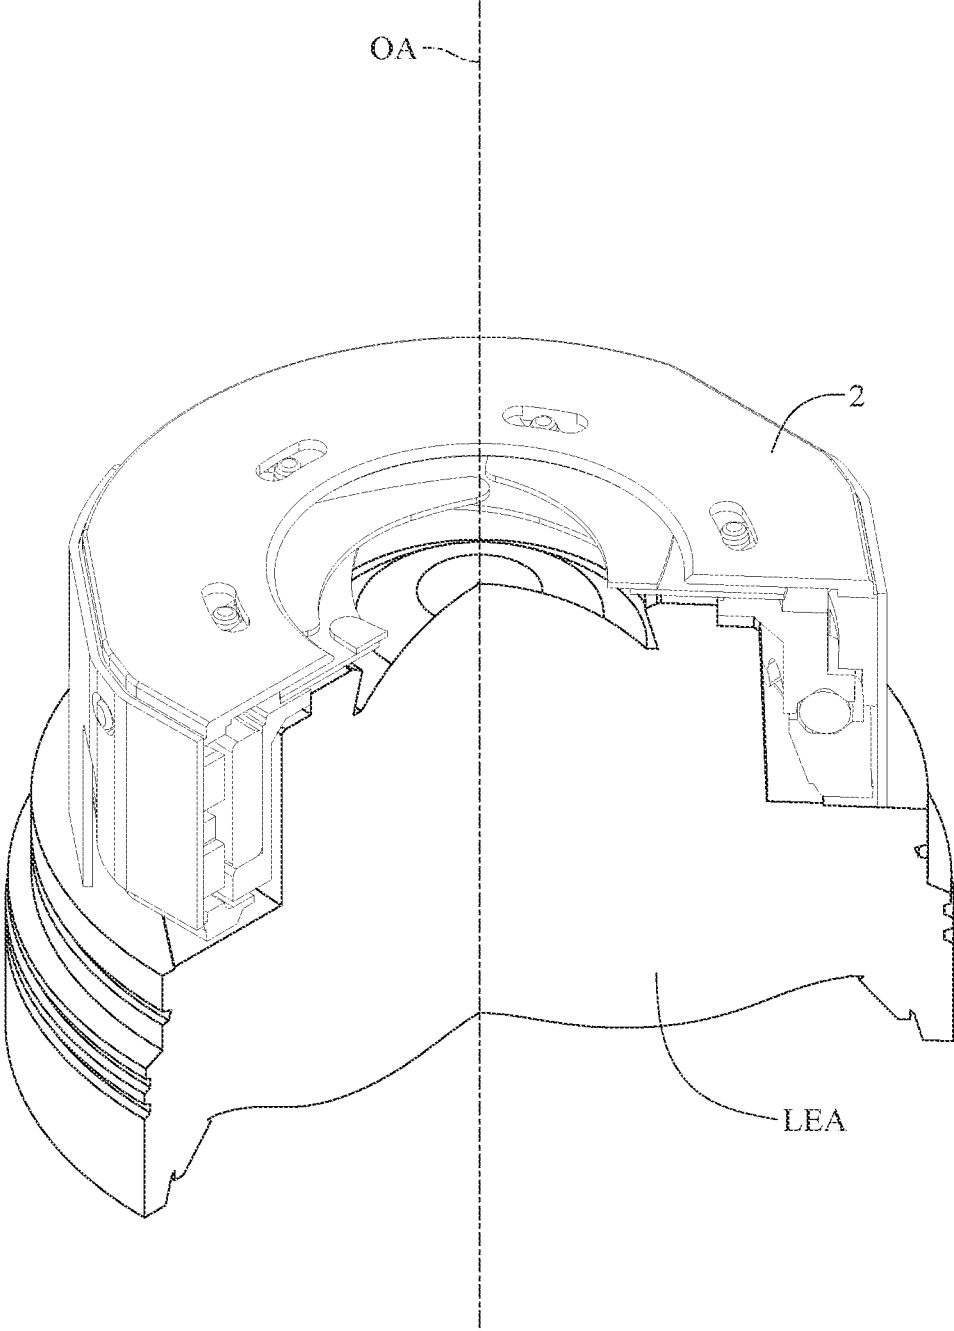


FIG. 3

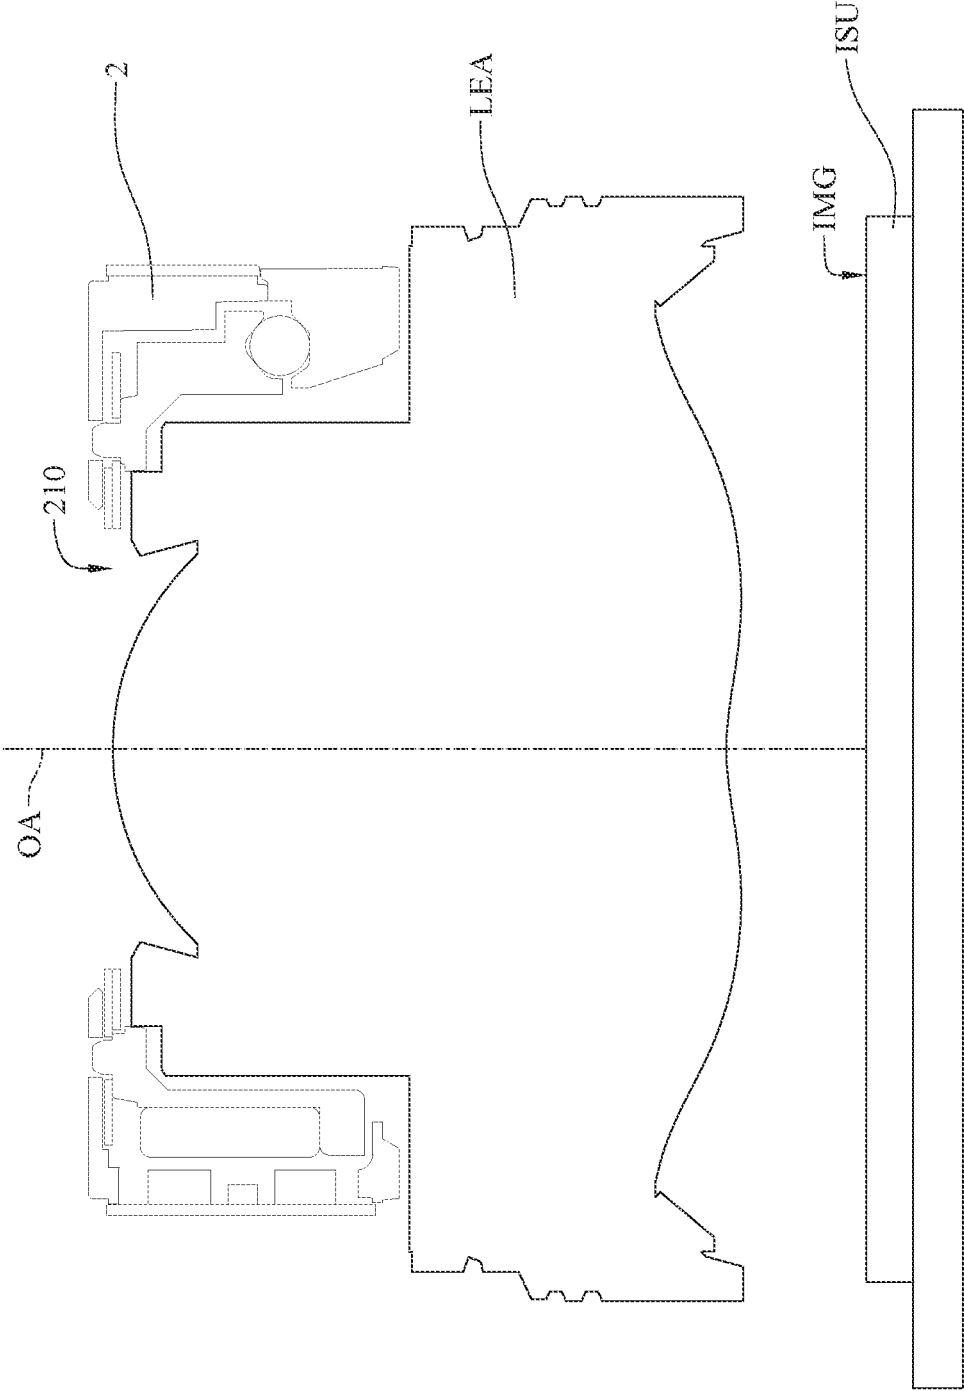


FIG. 4

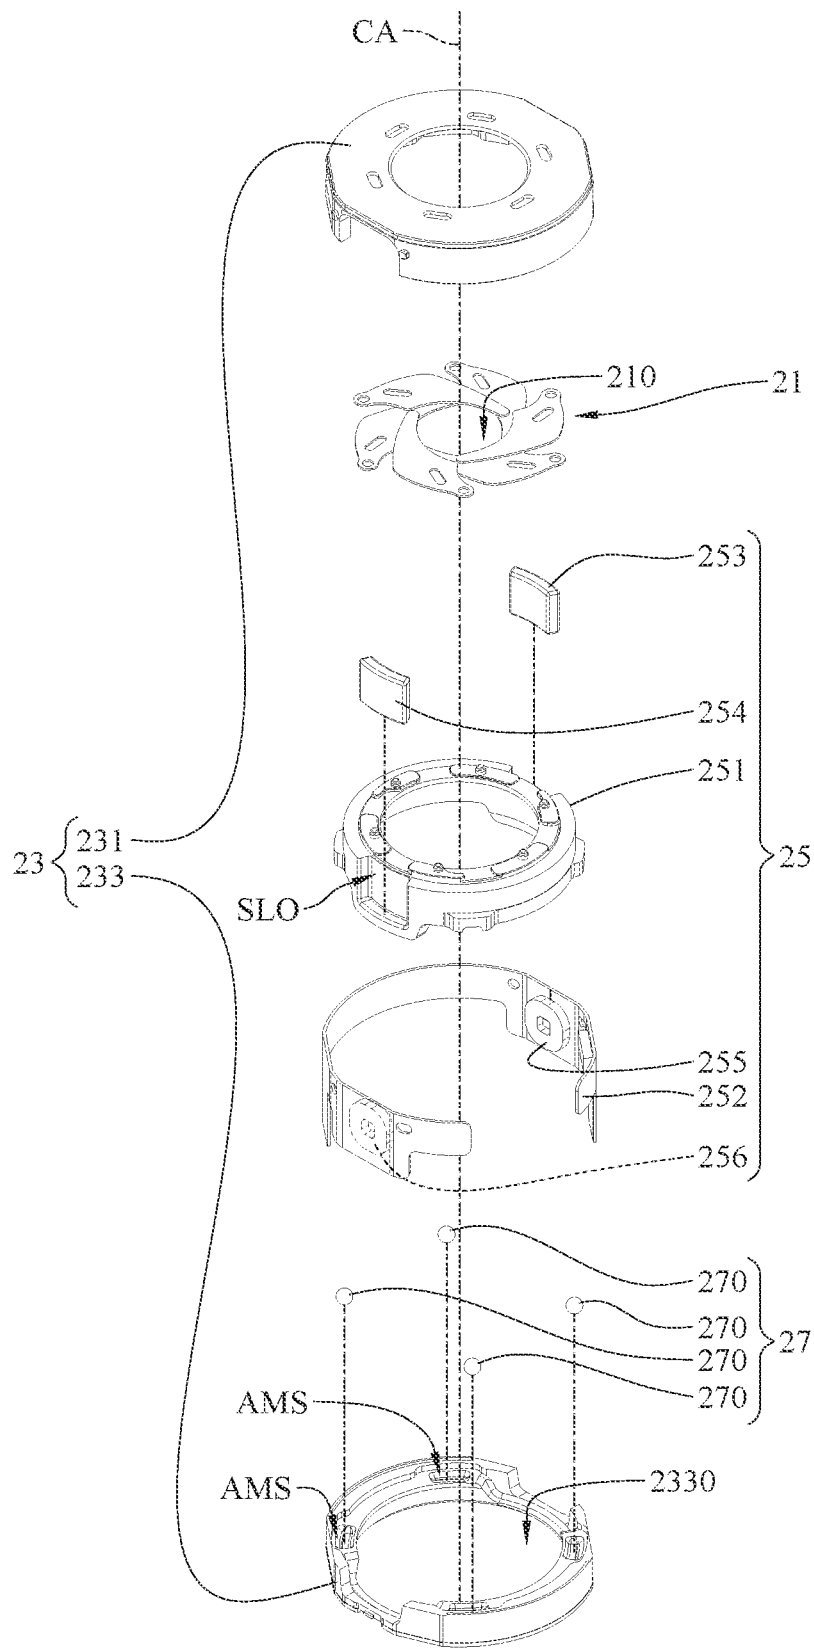


FIG. 5

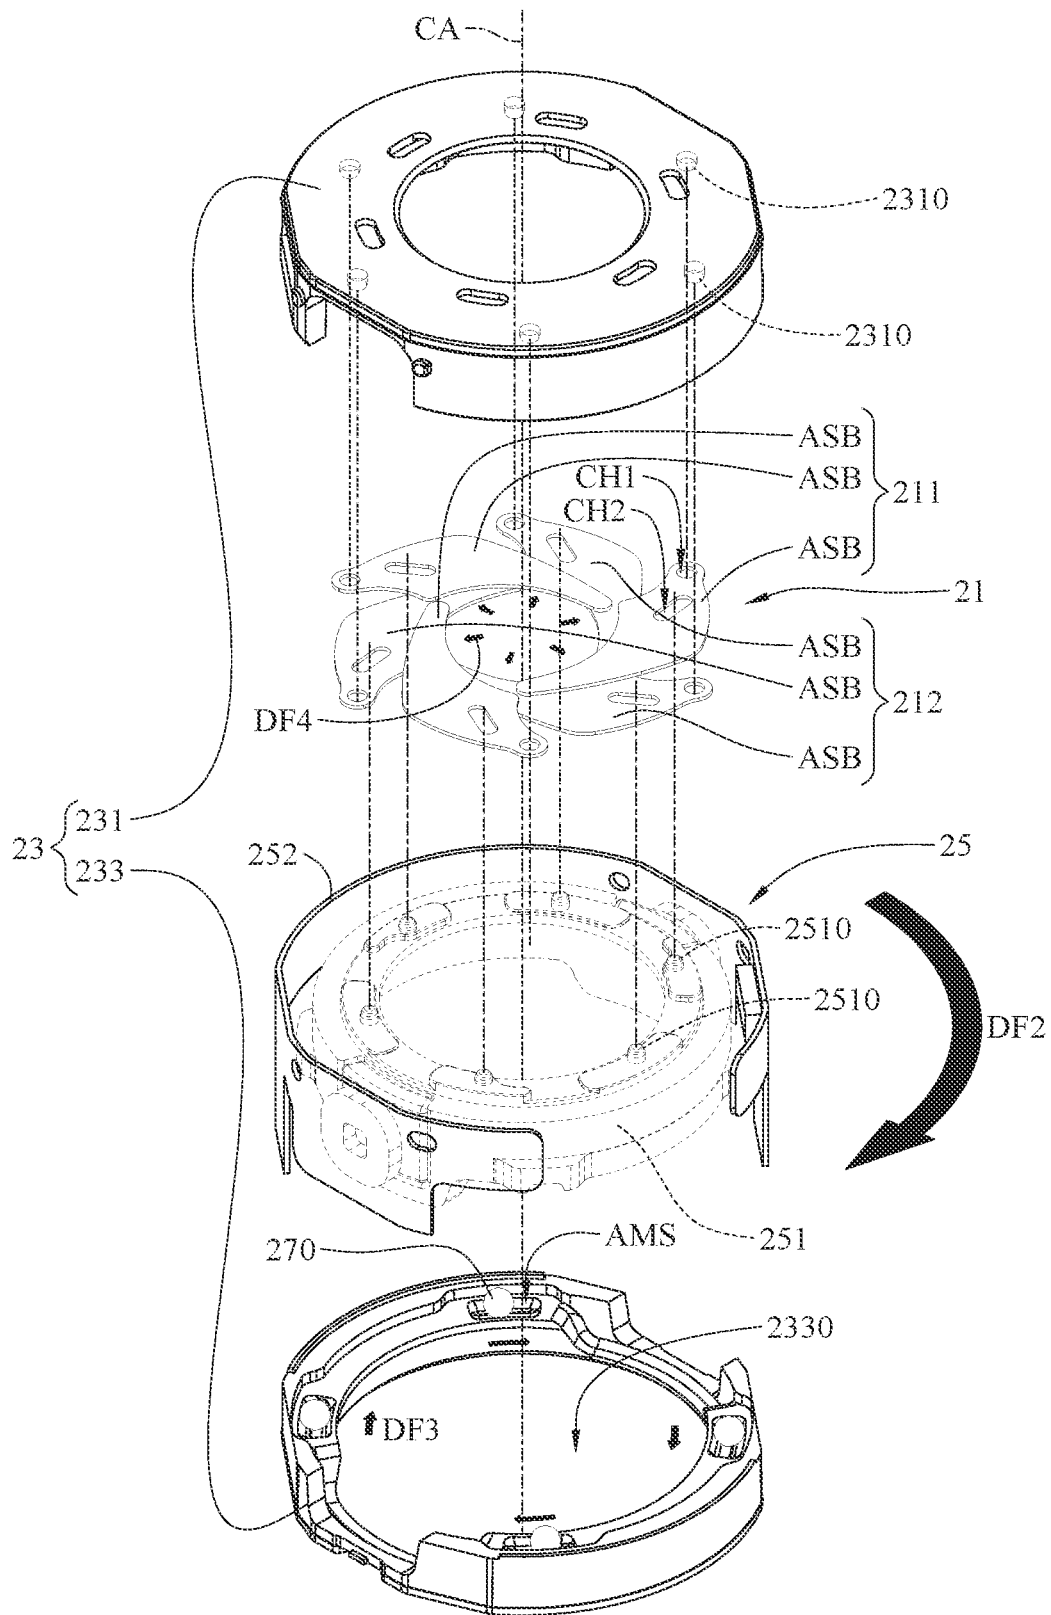


FIG. 6

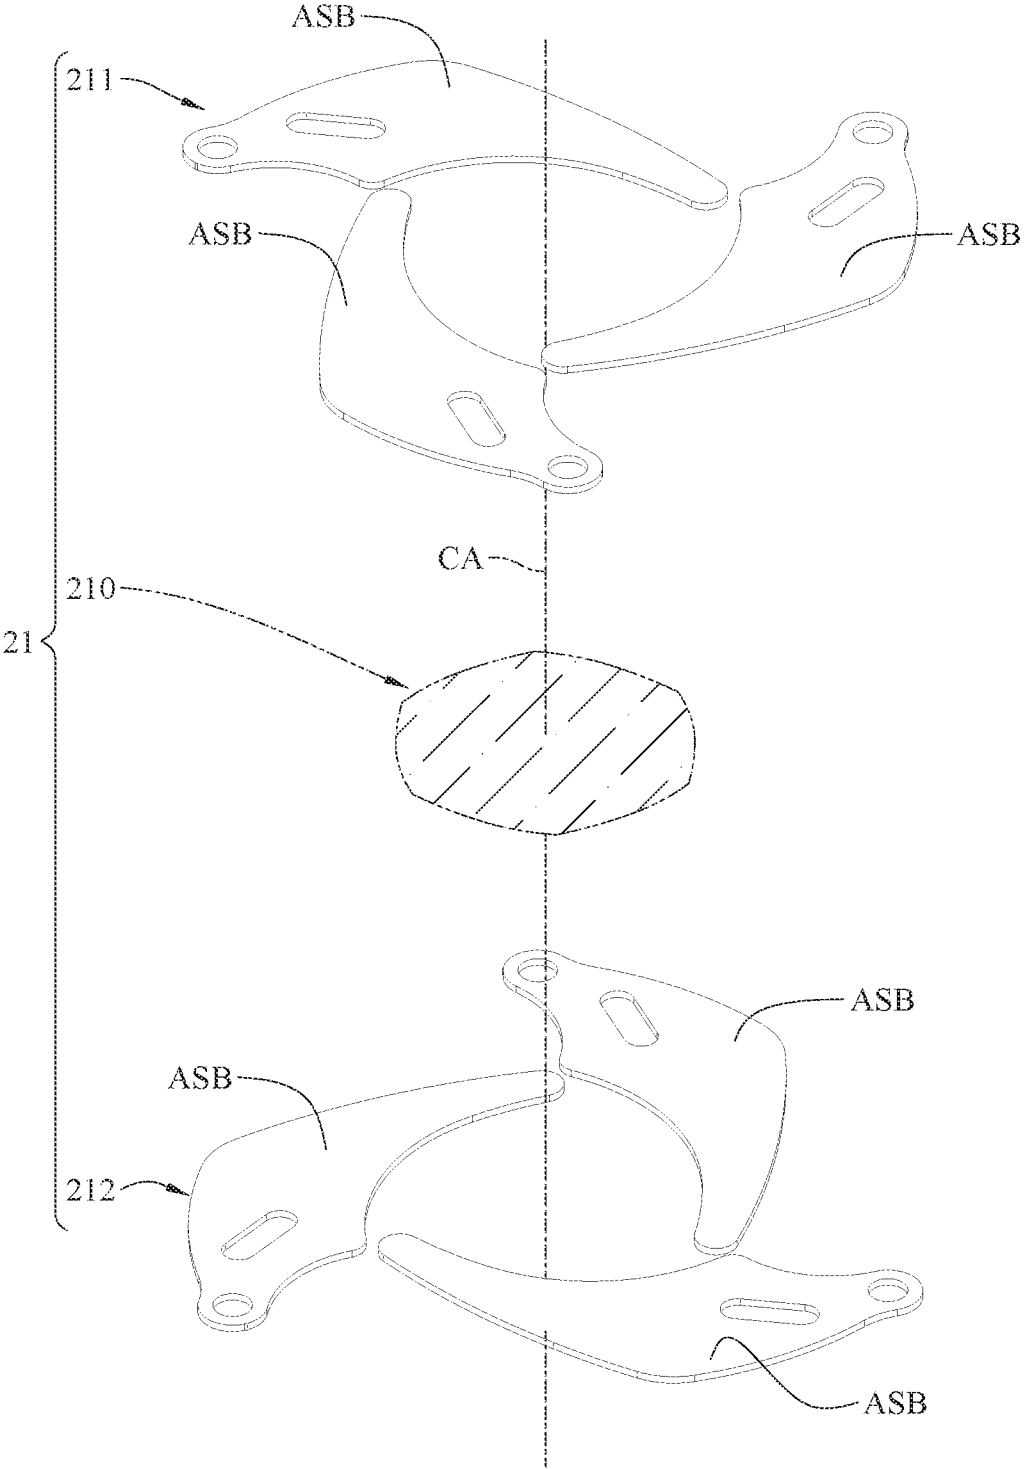


FIG. 7

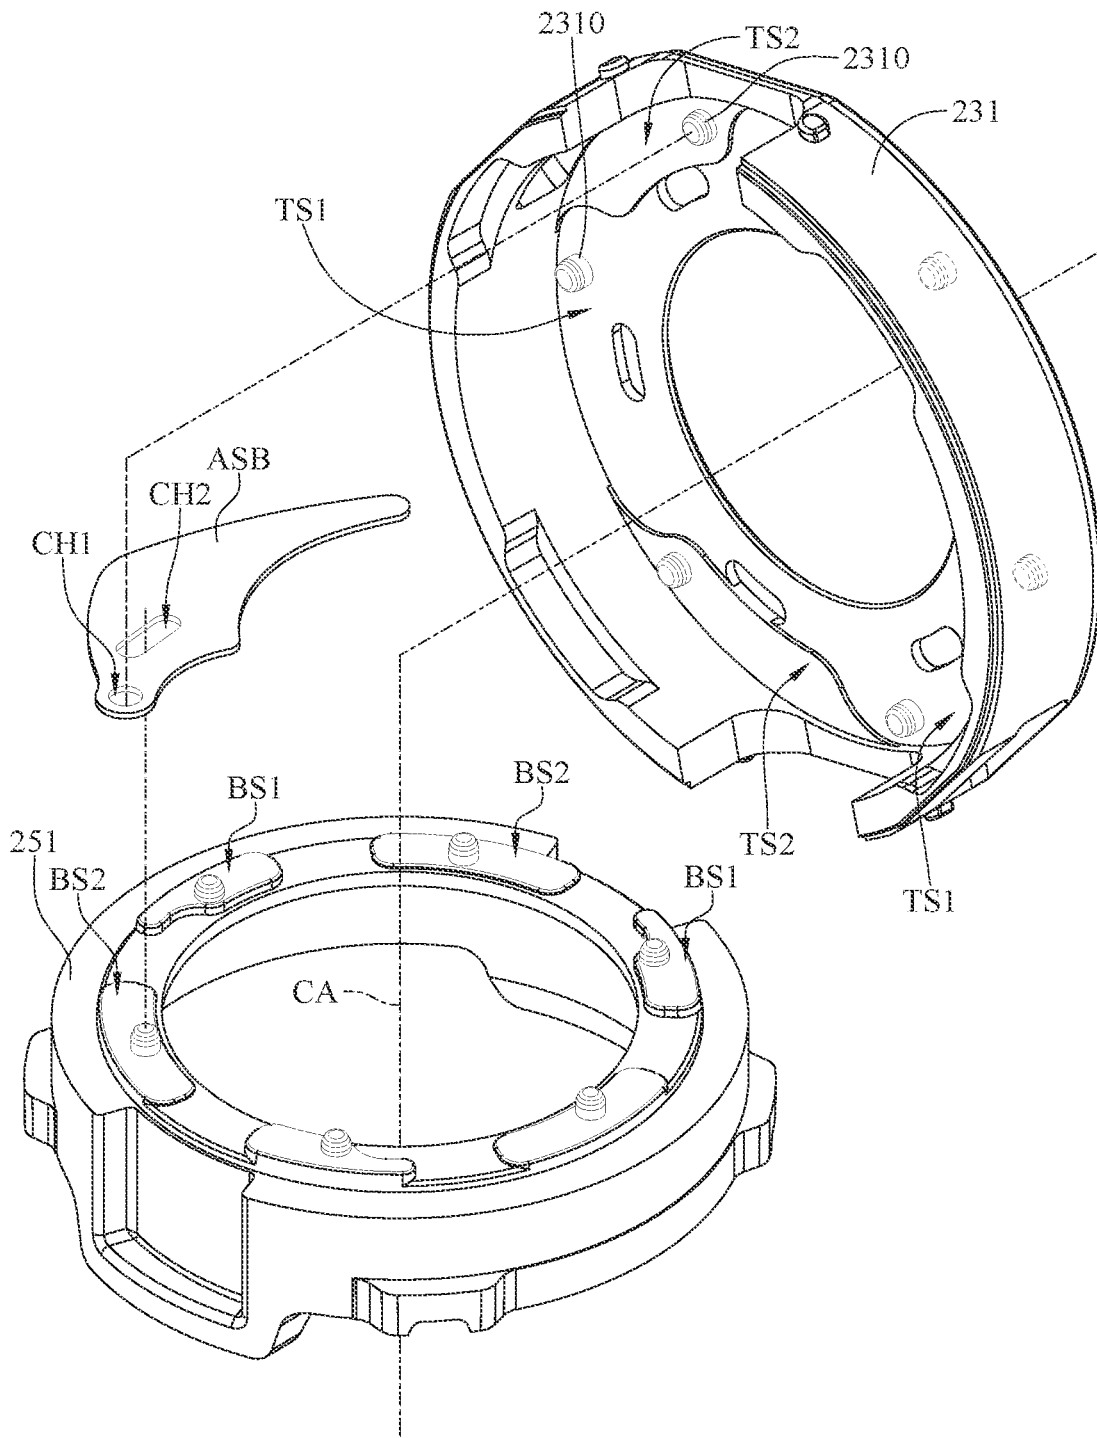


FIG. 8

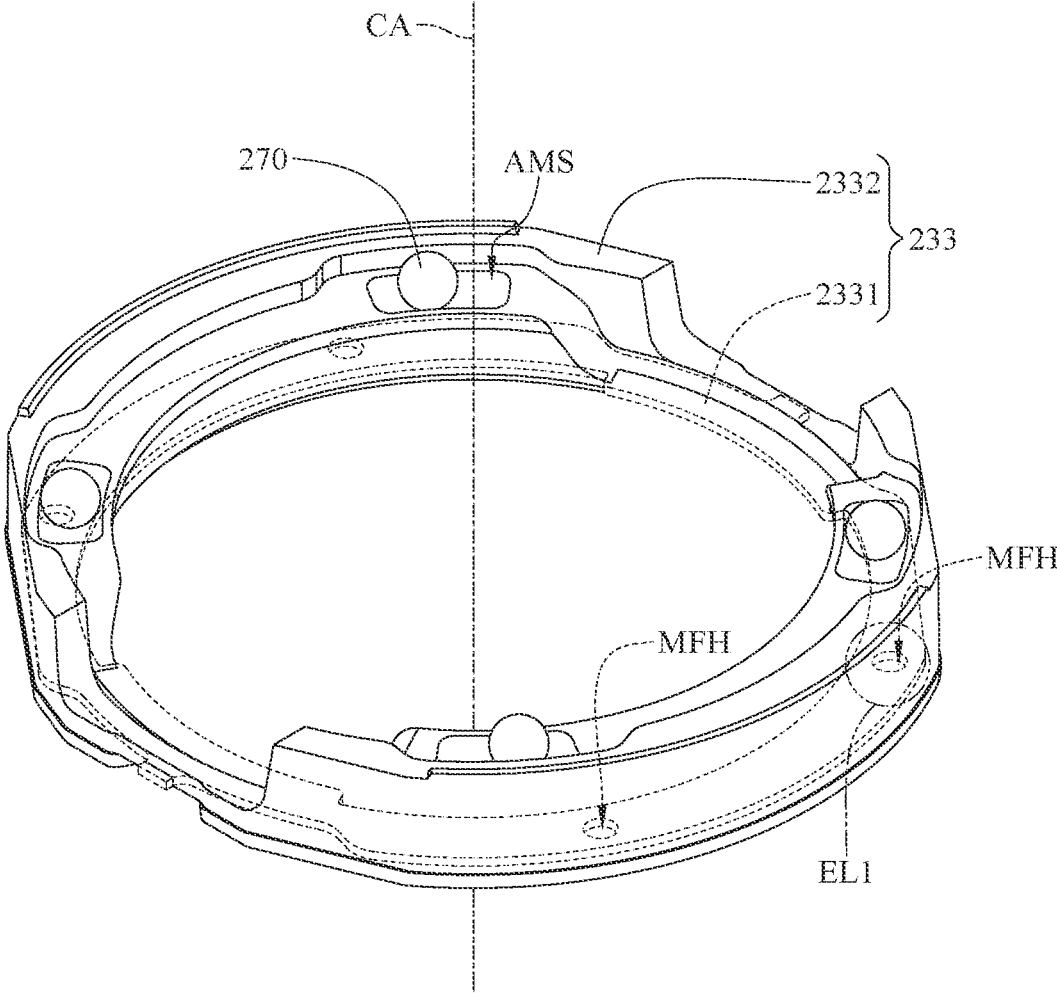


FIG. 9

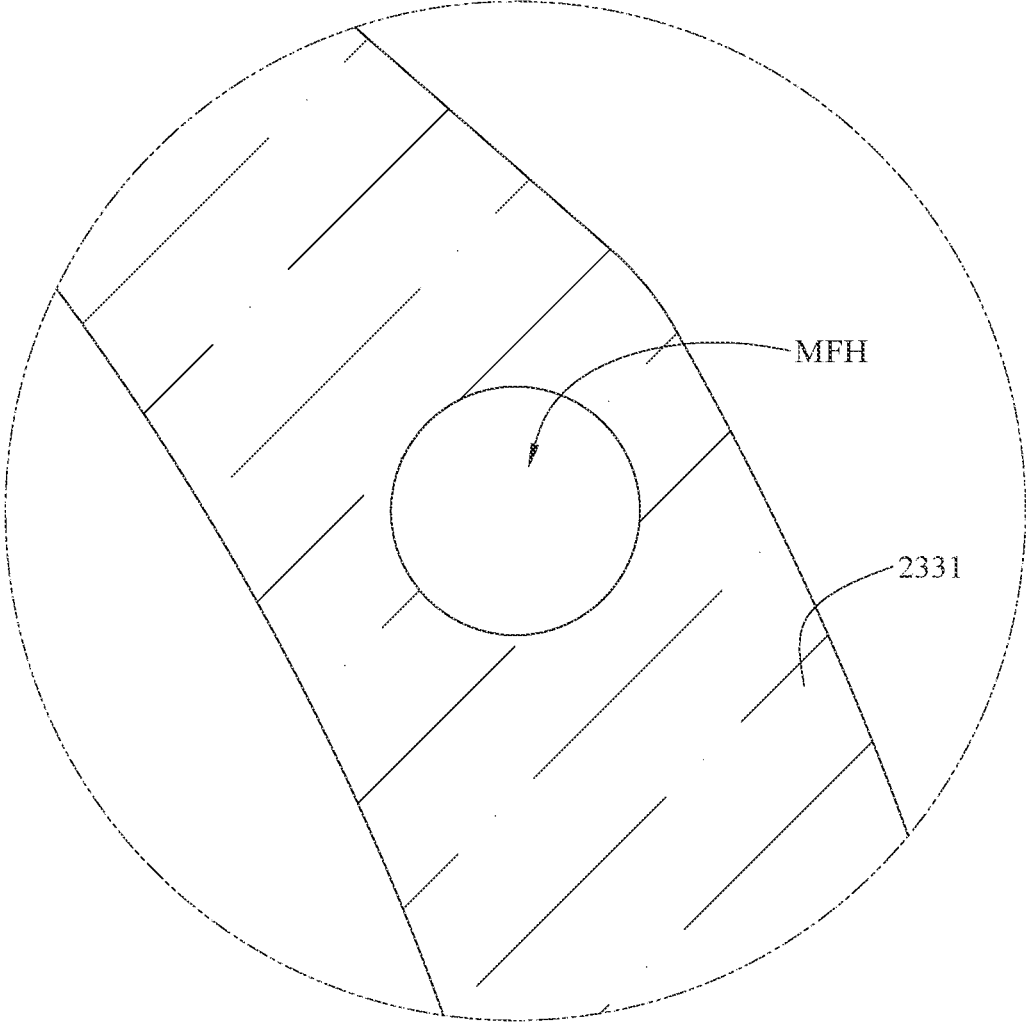


FIG. 10

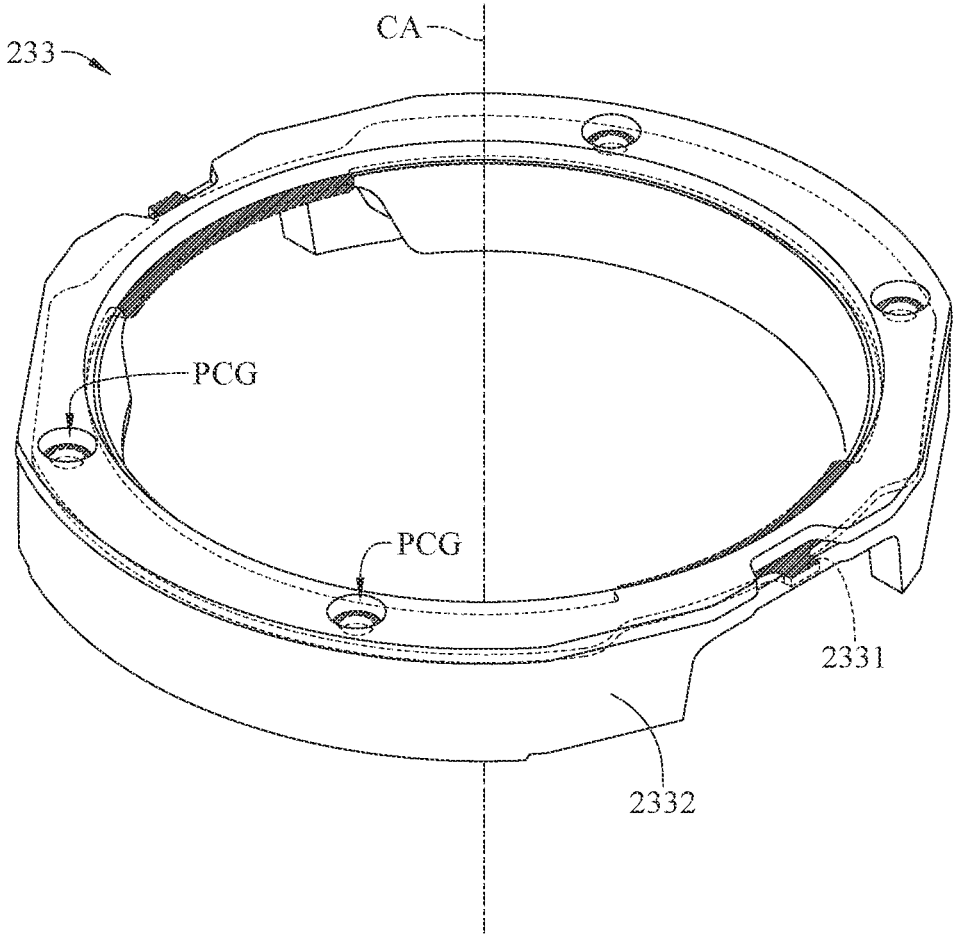


FIG. 11

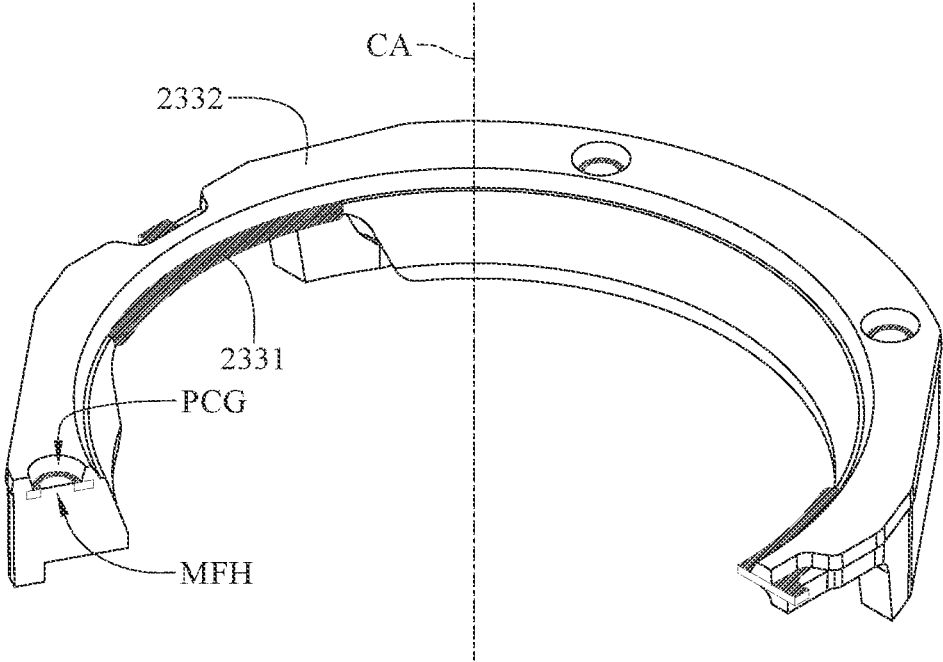


FIG. 12

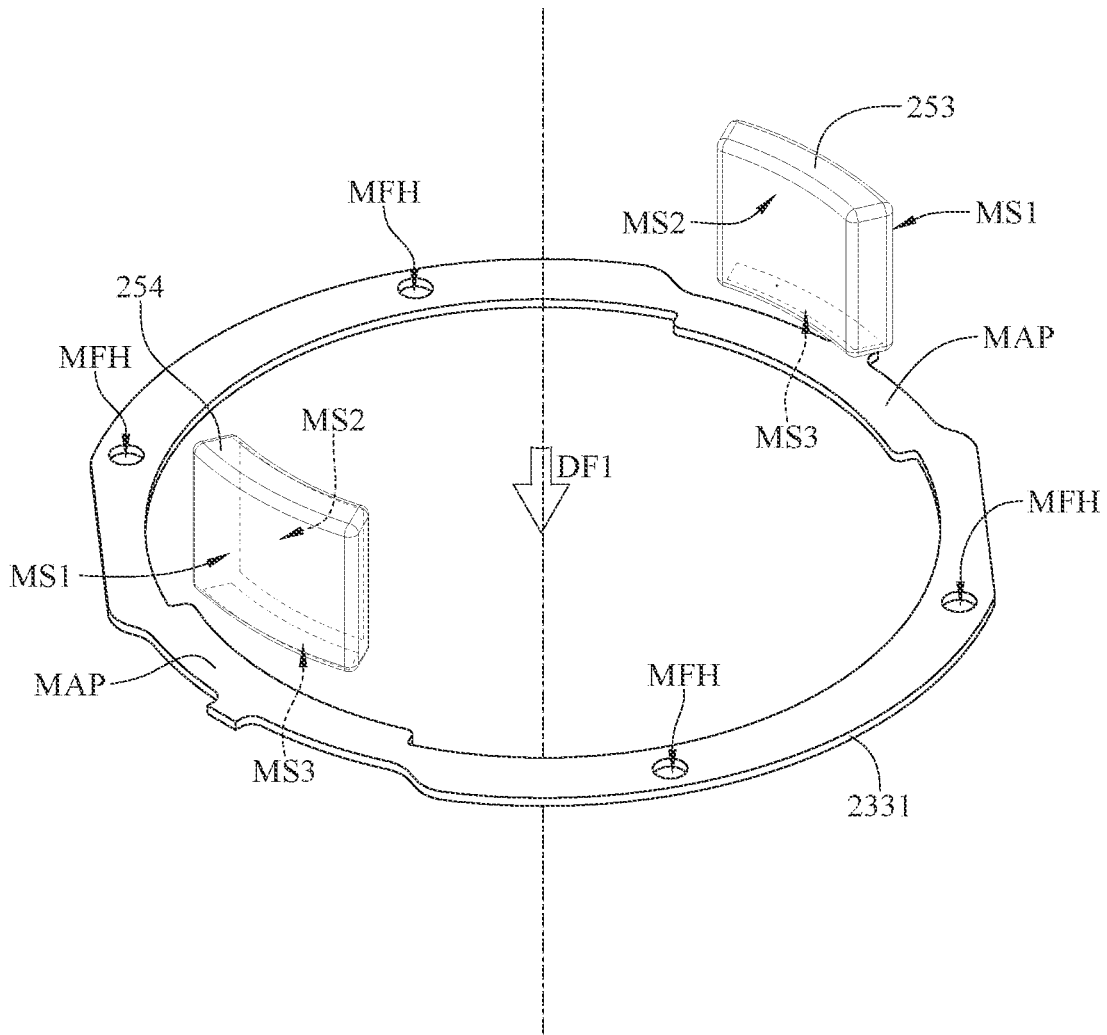


FIG. 13

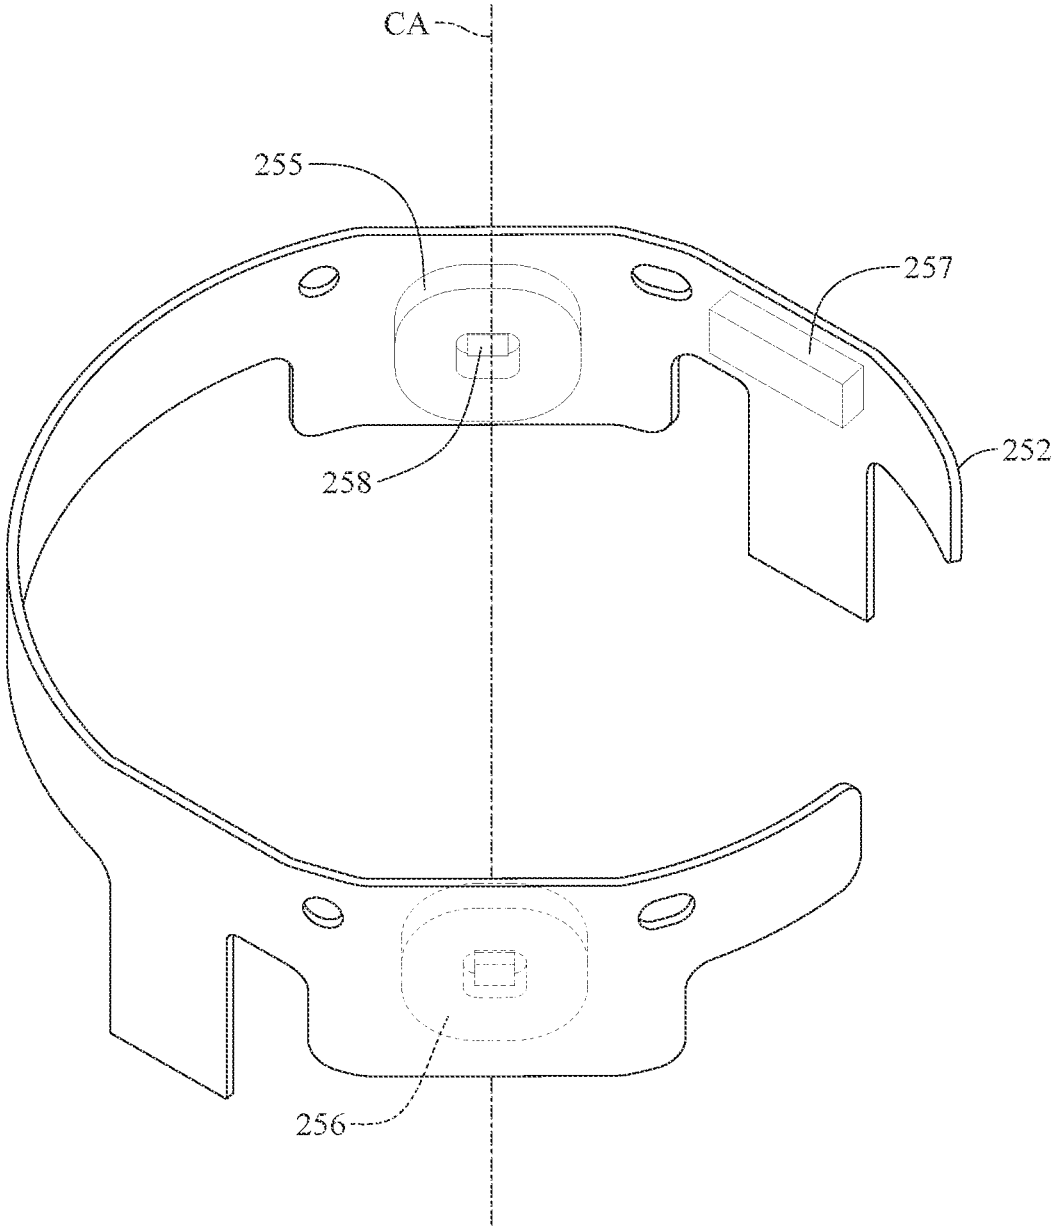


FIG. 14

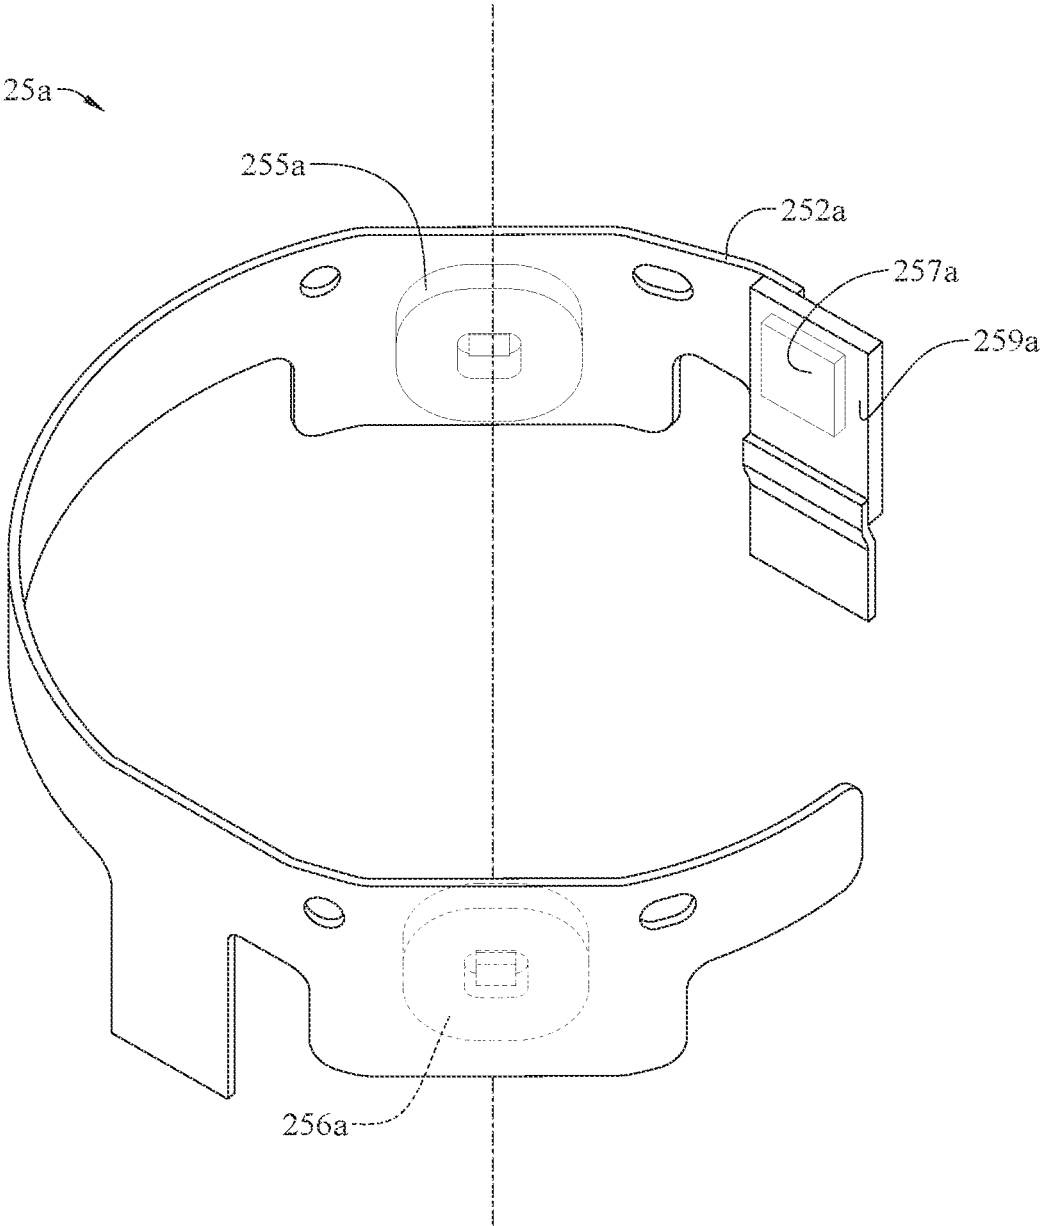


FIG. 15

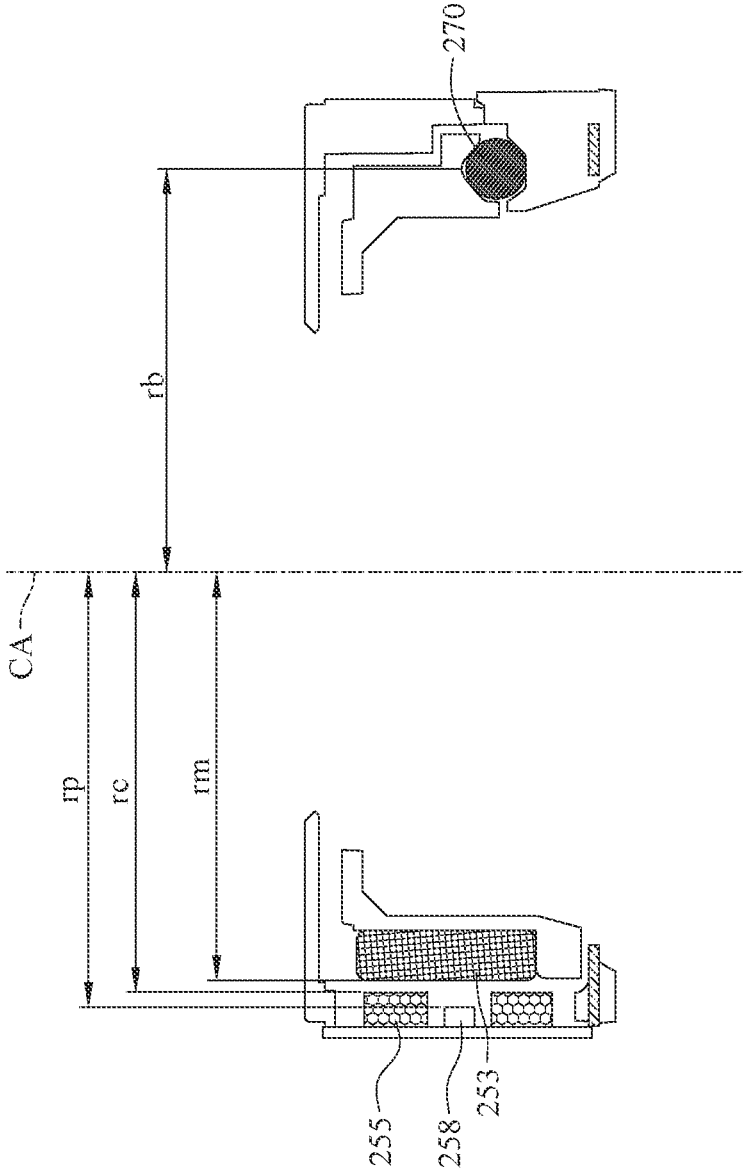


FIG. 16

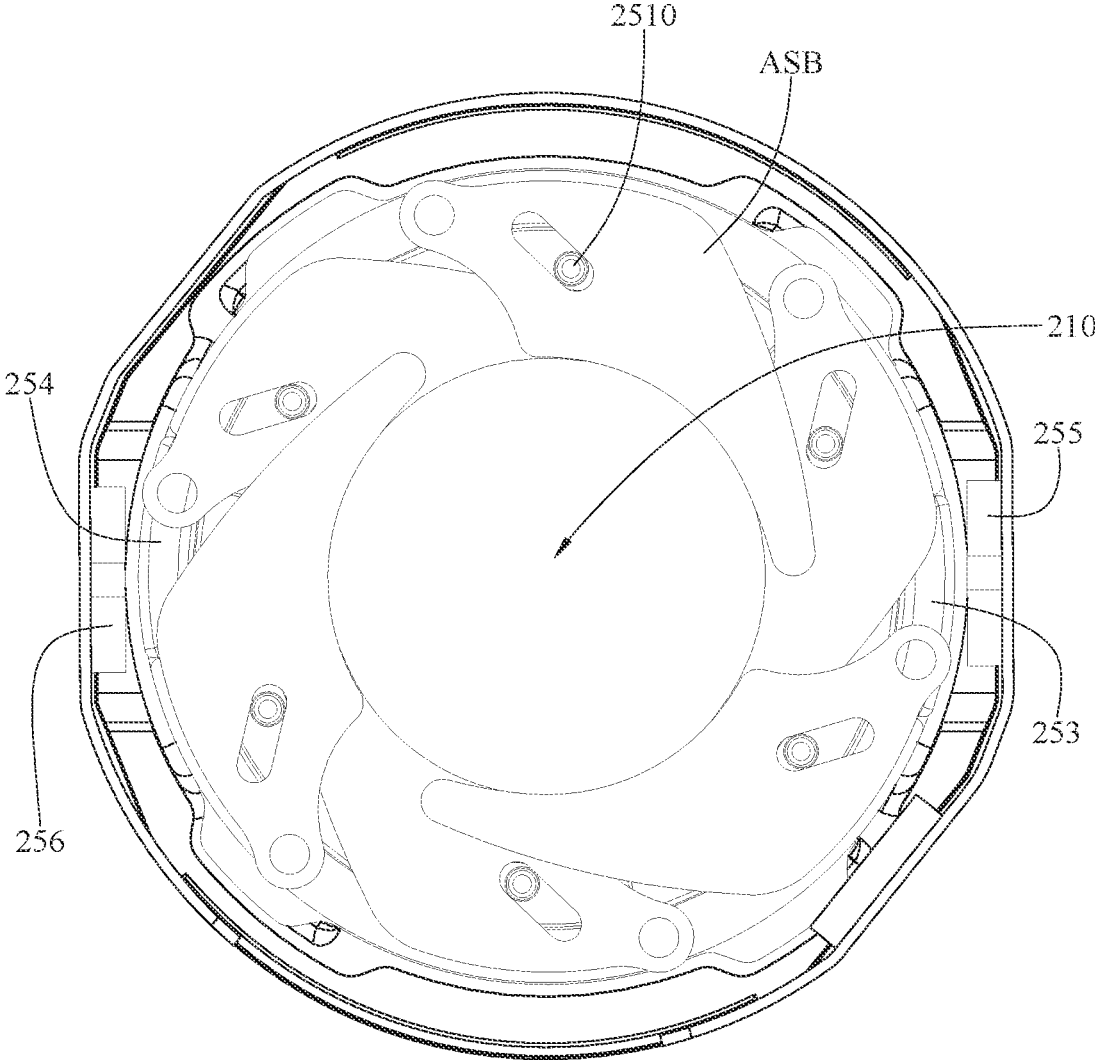


FIG. 17

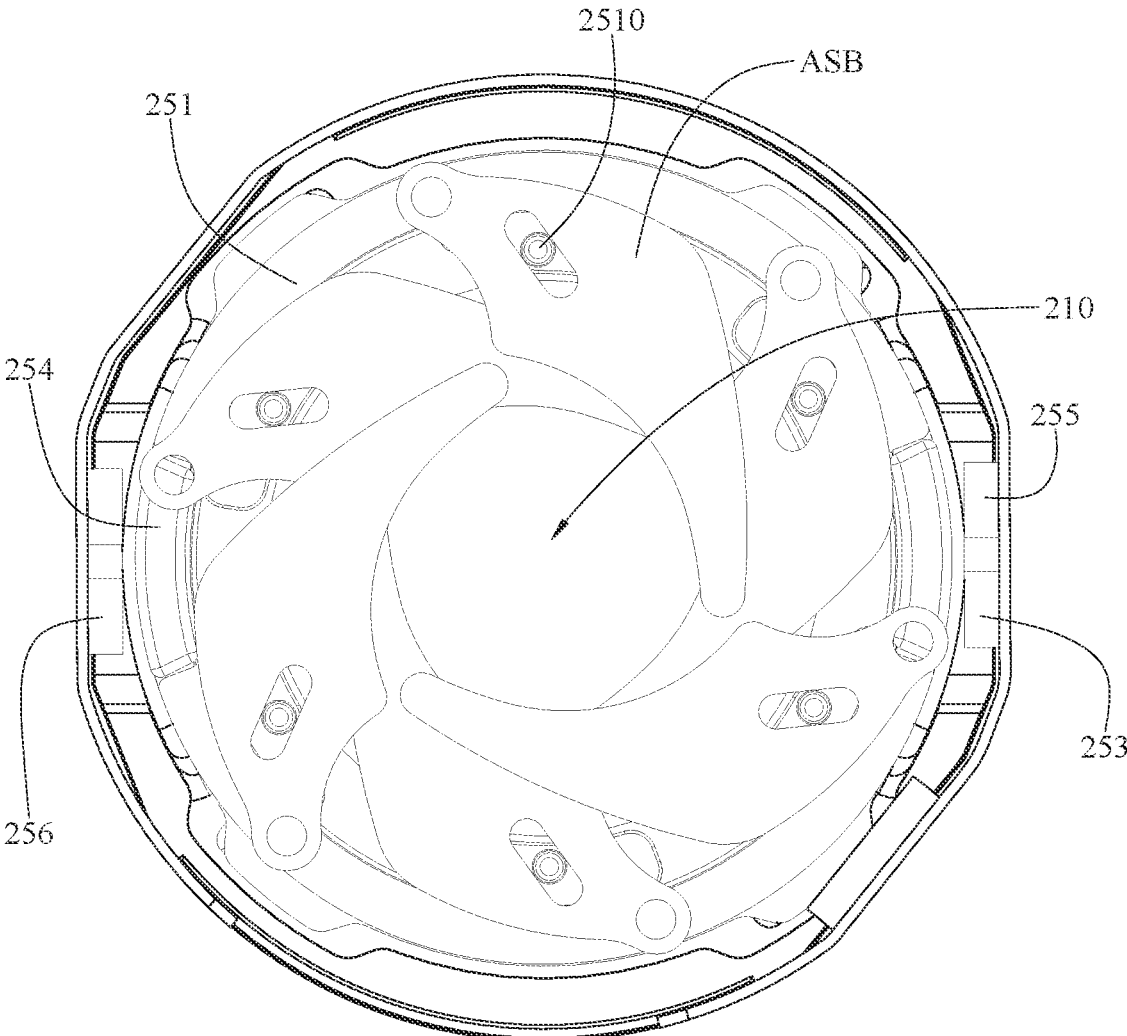


FIG. 18

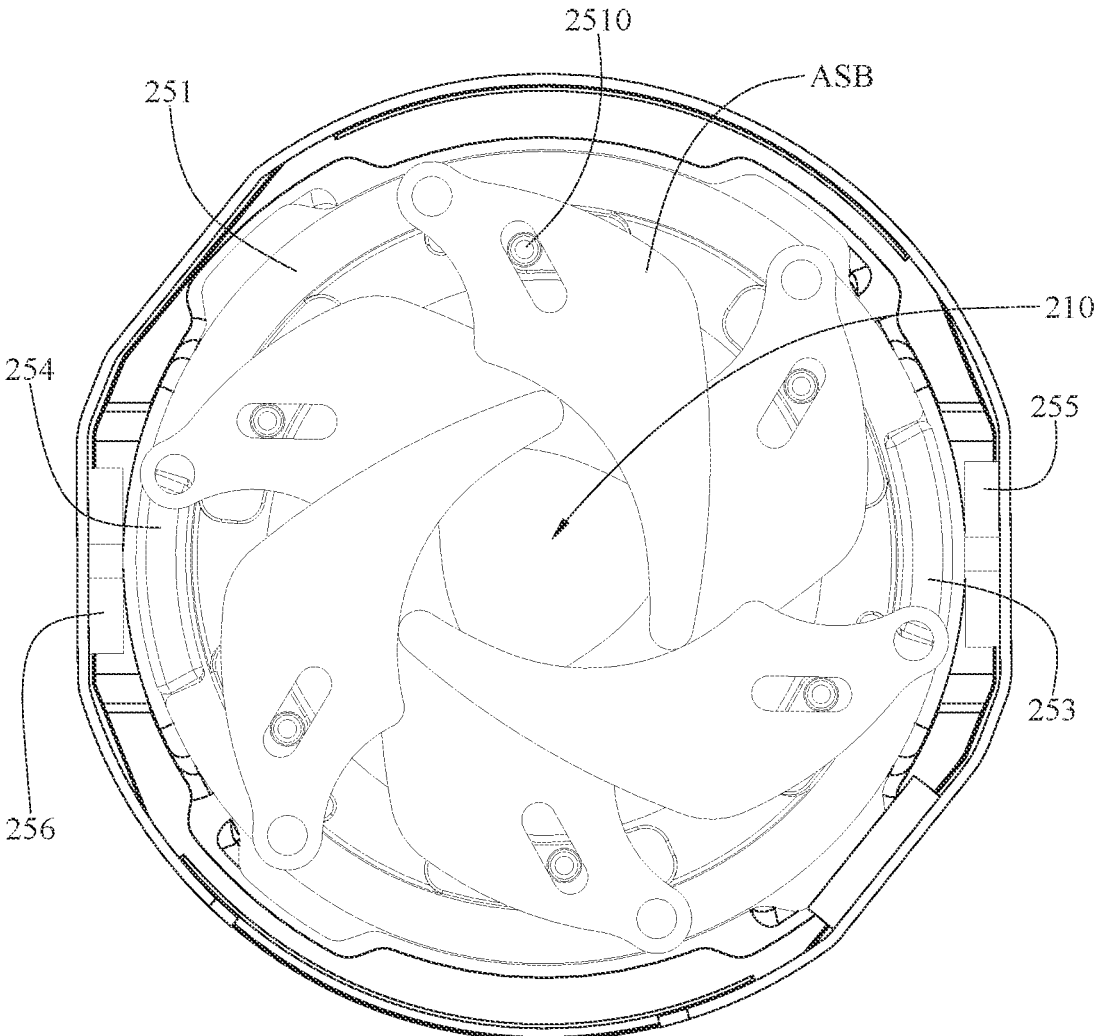


FIG. 19

1b

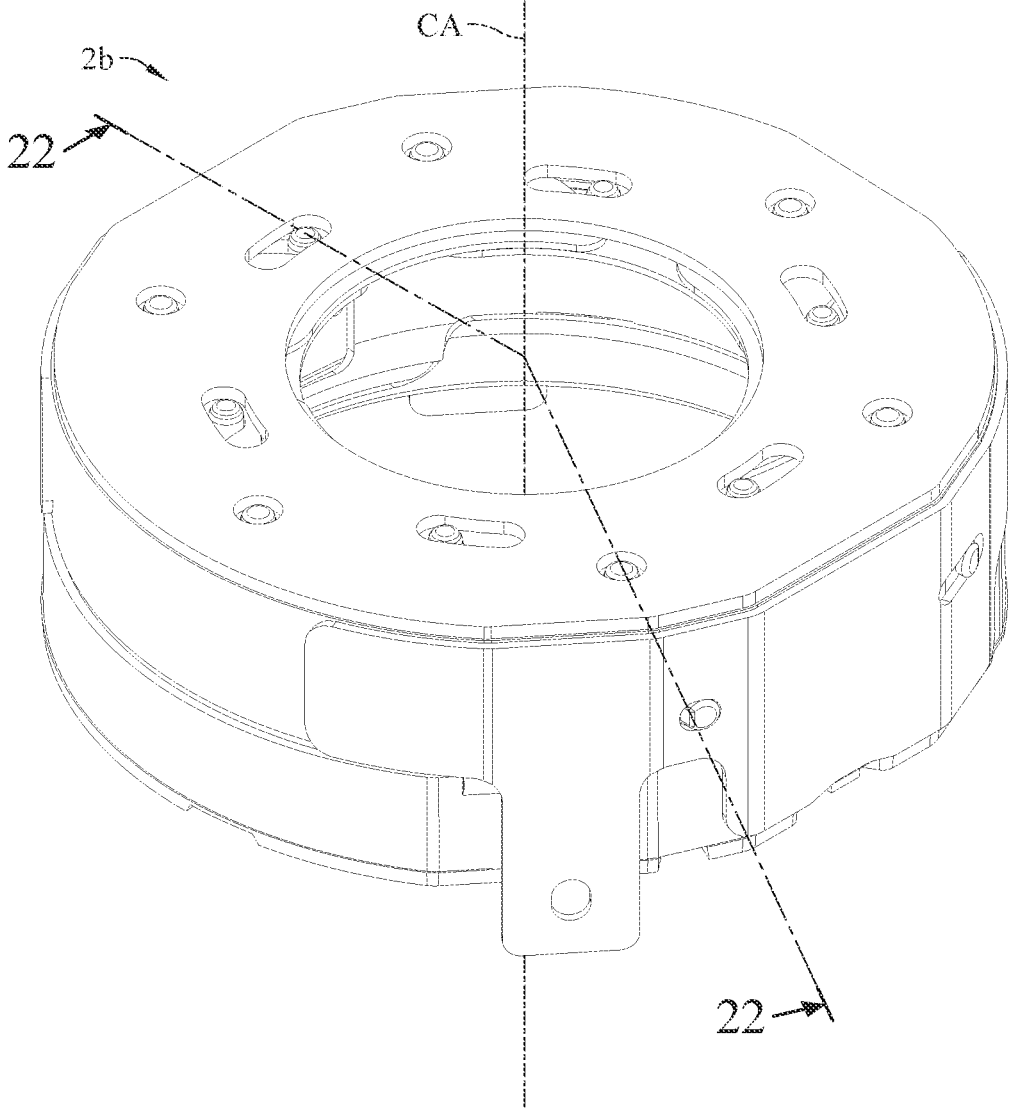


FIG. 20

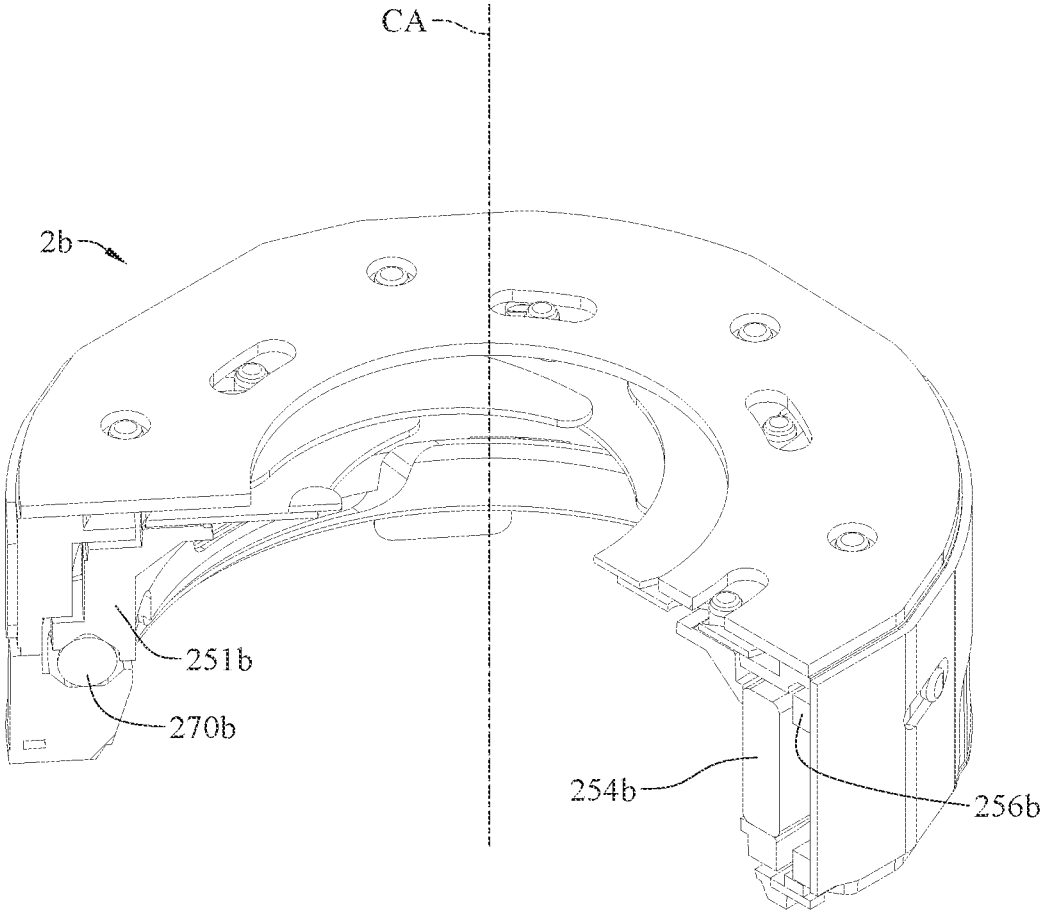


FIG. 21

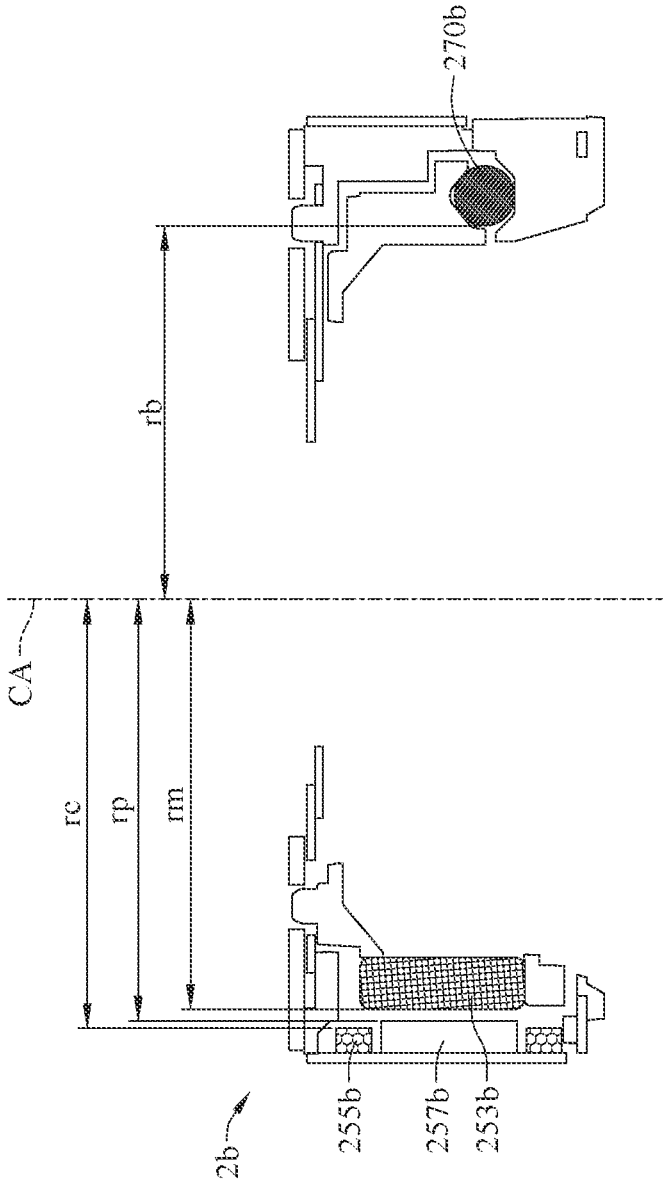


FIG. 22

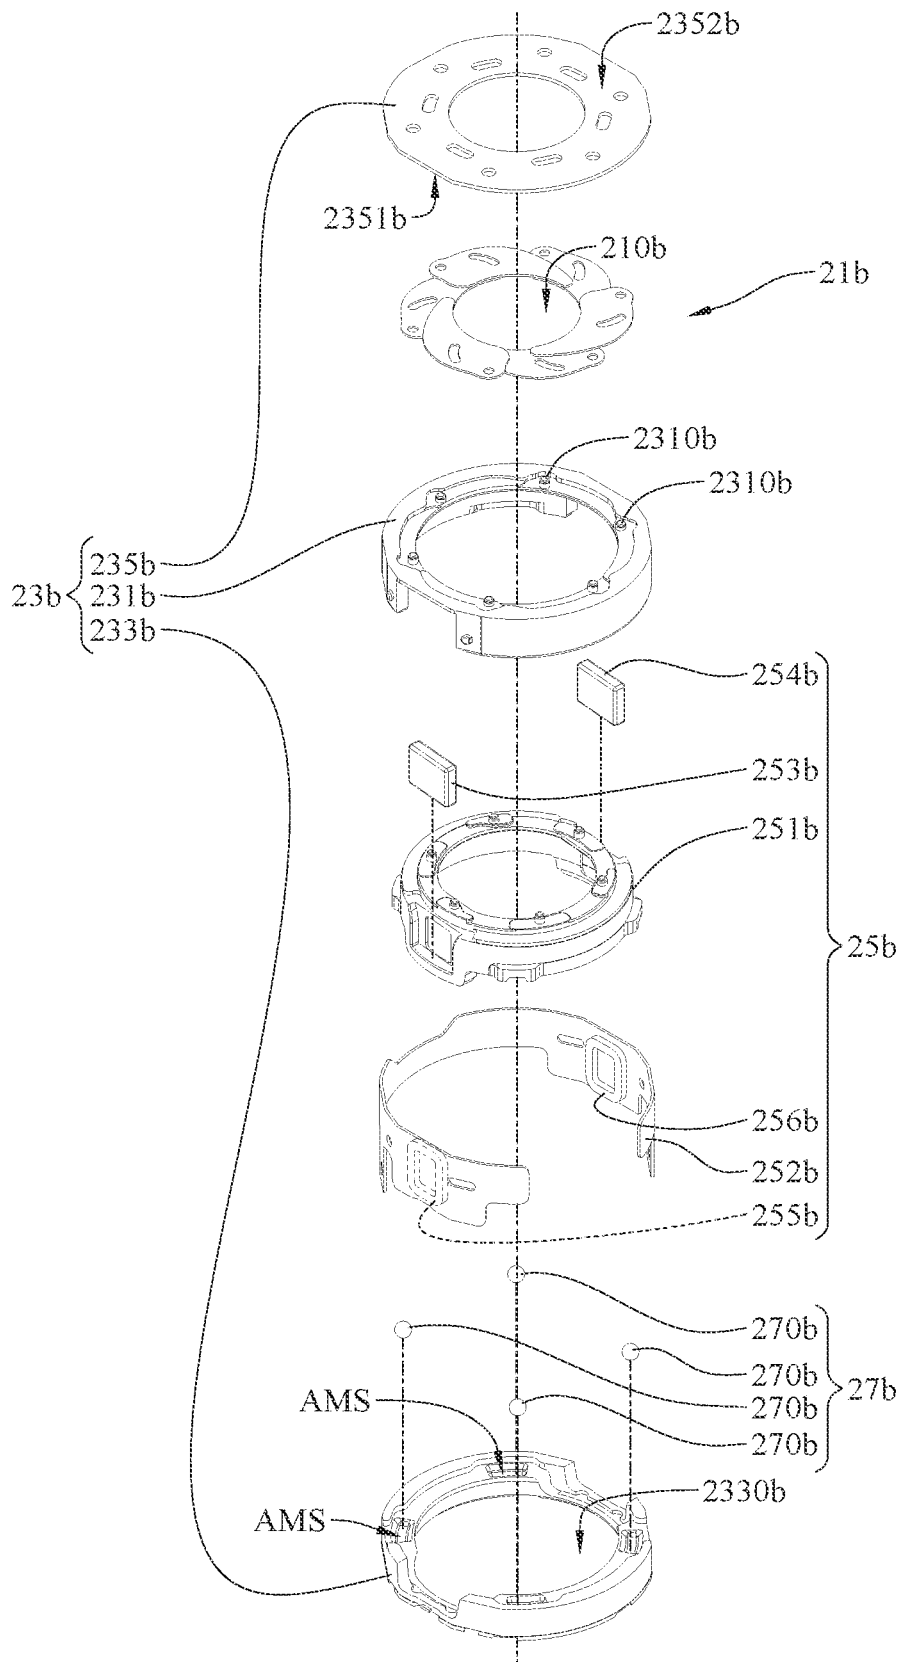


FIG. 23

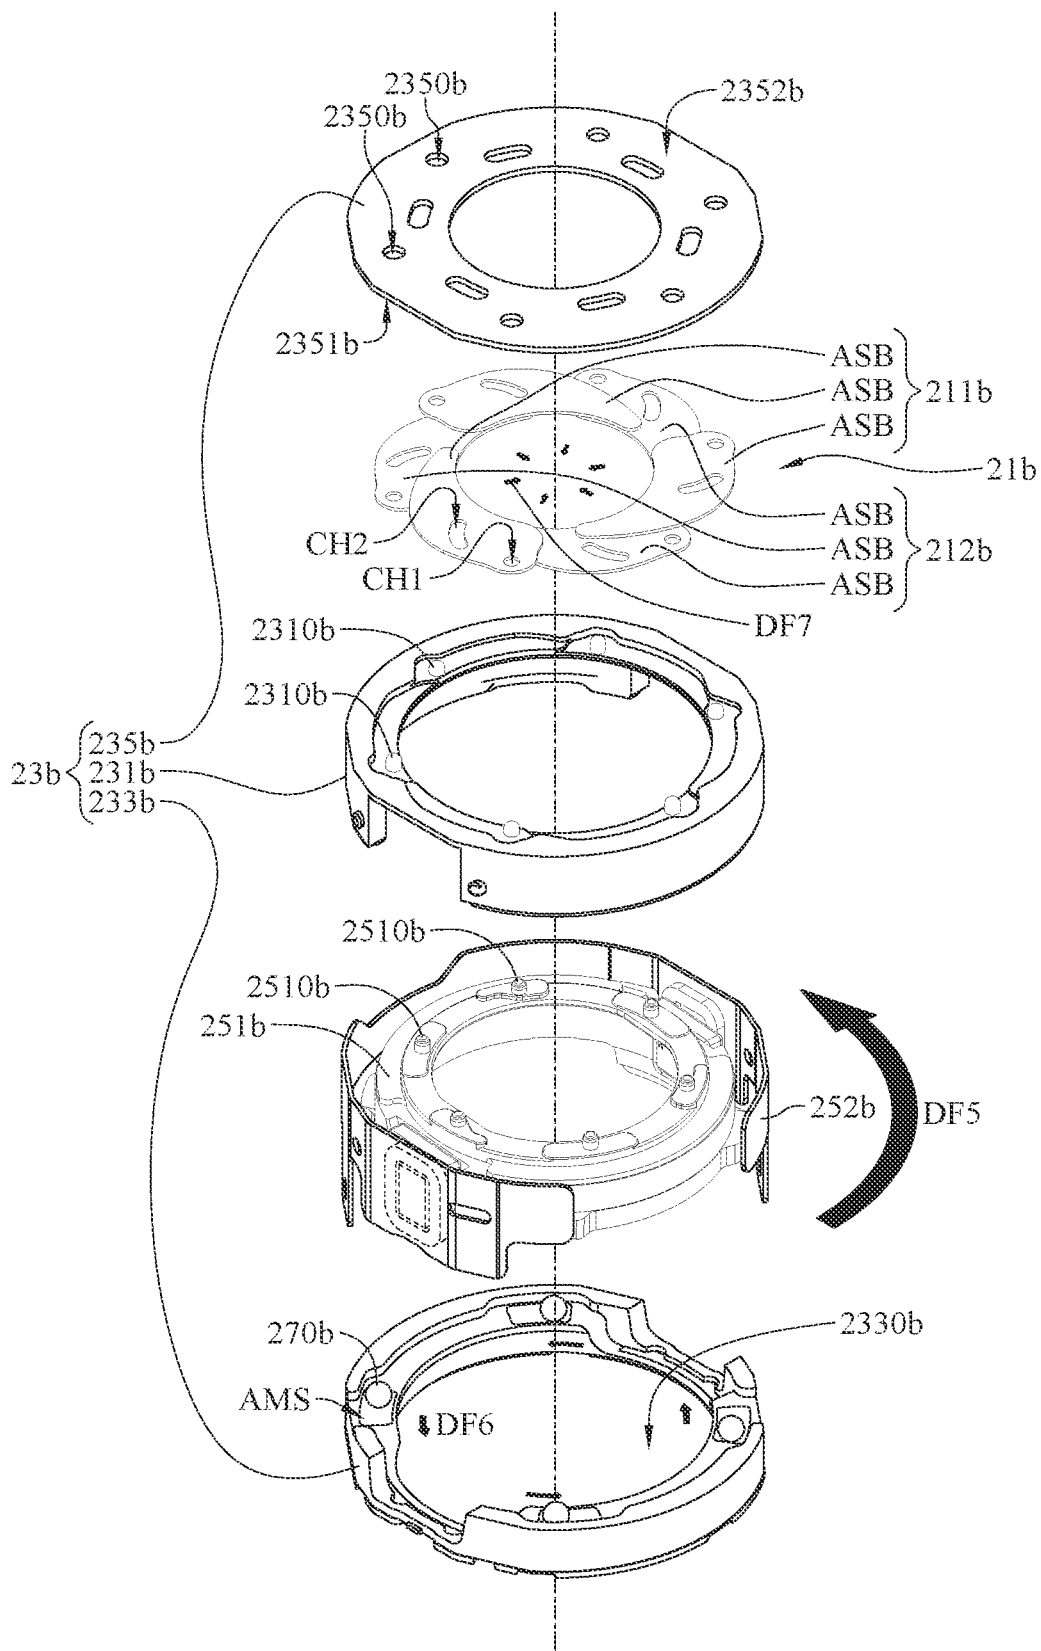


FIG. 24

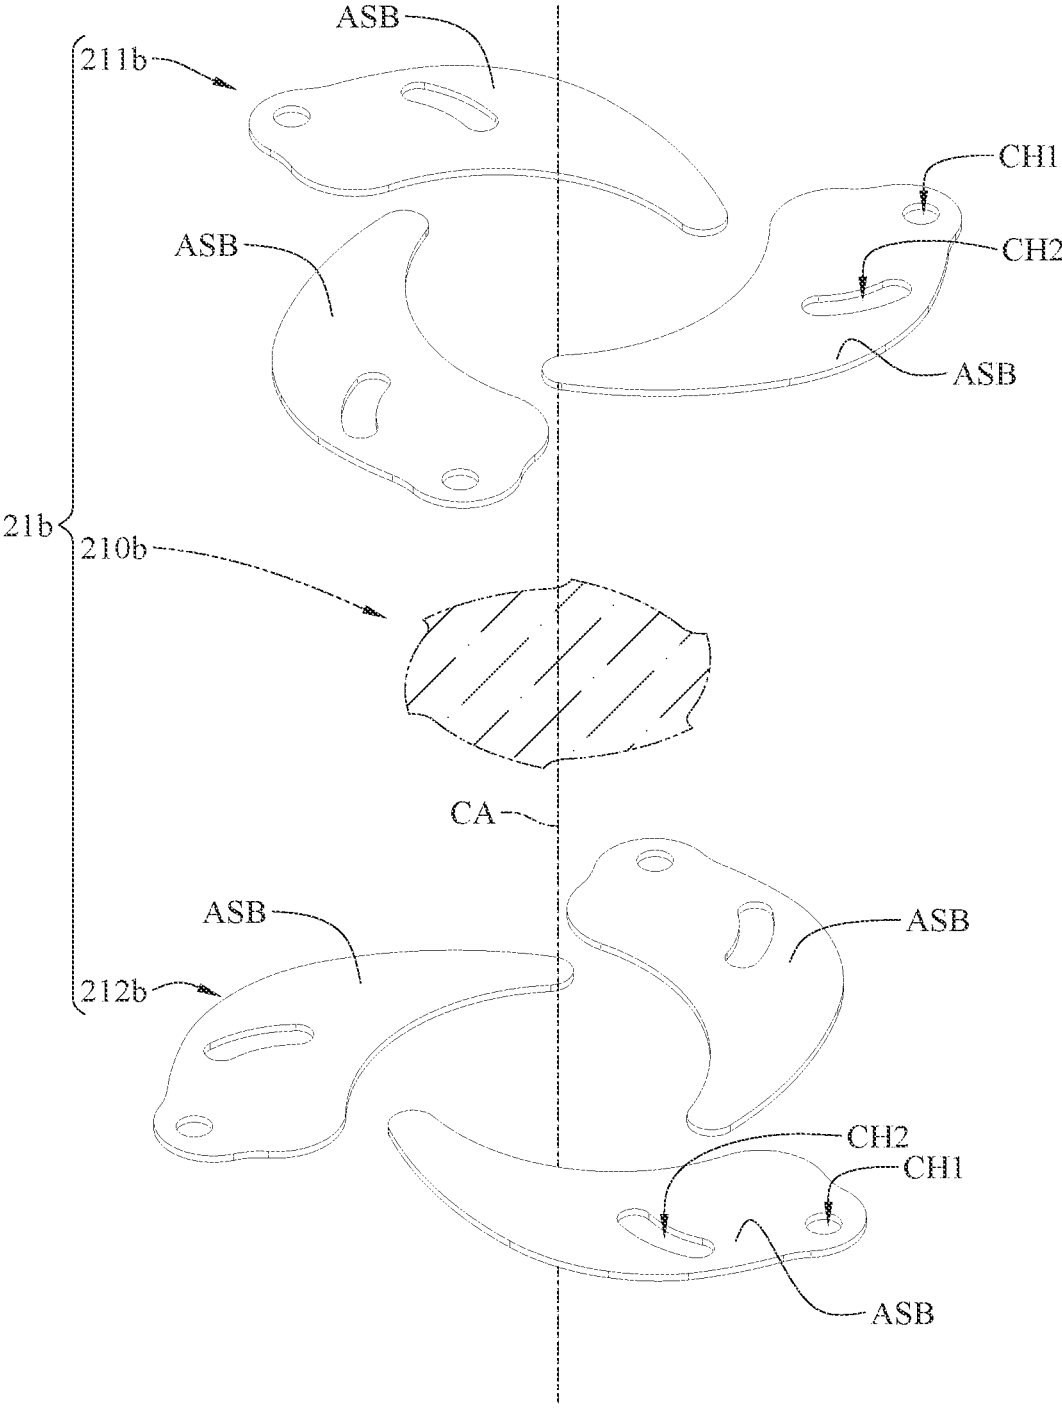


FIG. 25

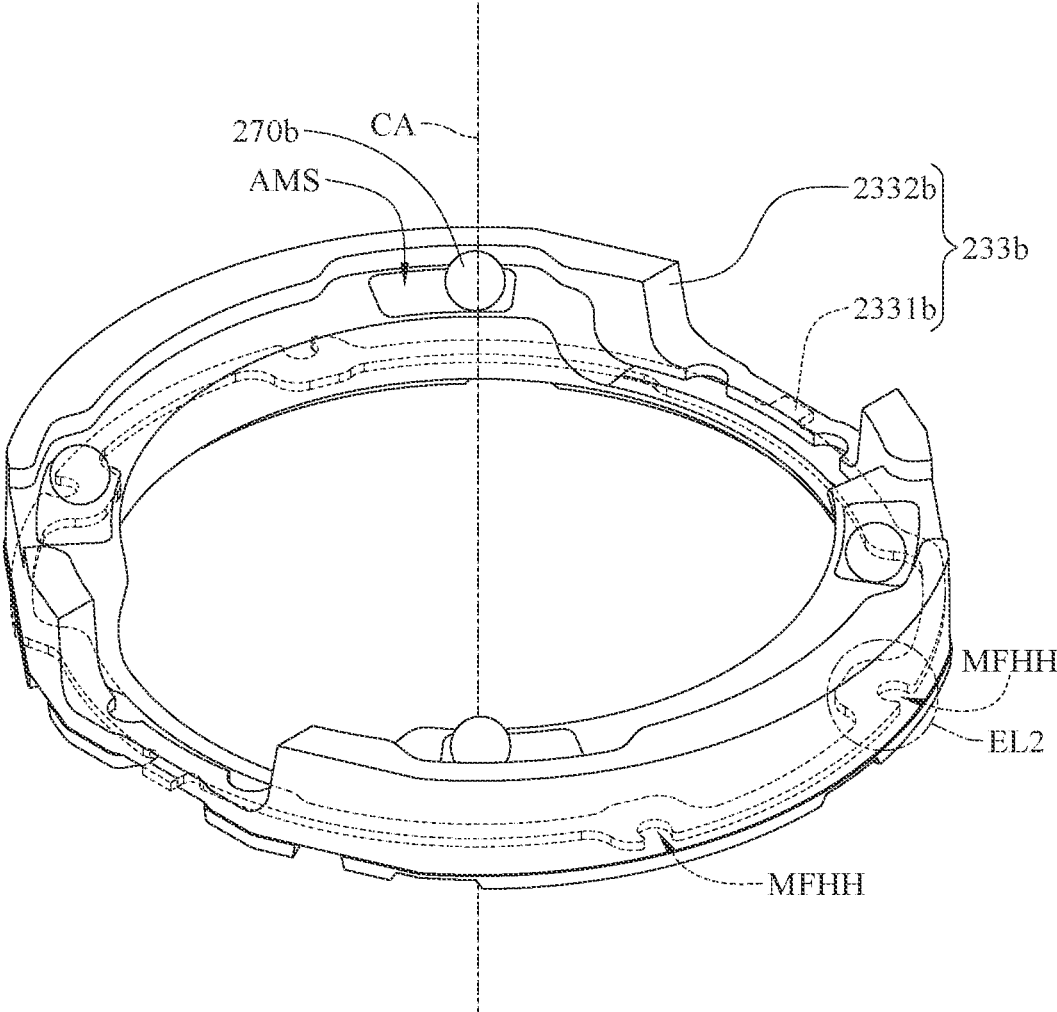


FIG. 26

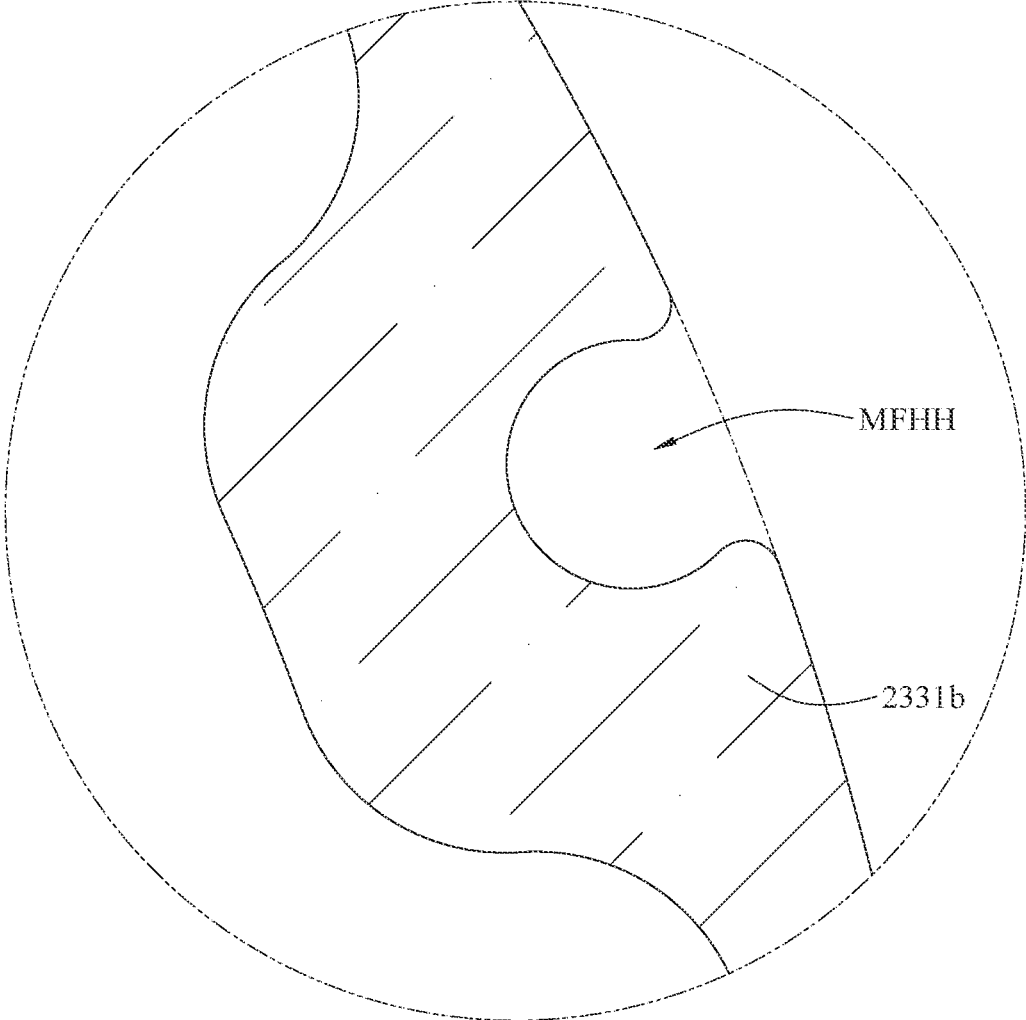


FIG. 27

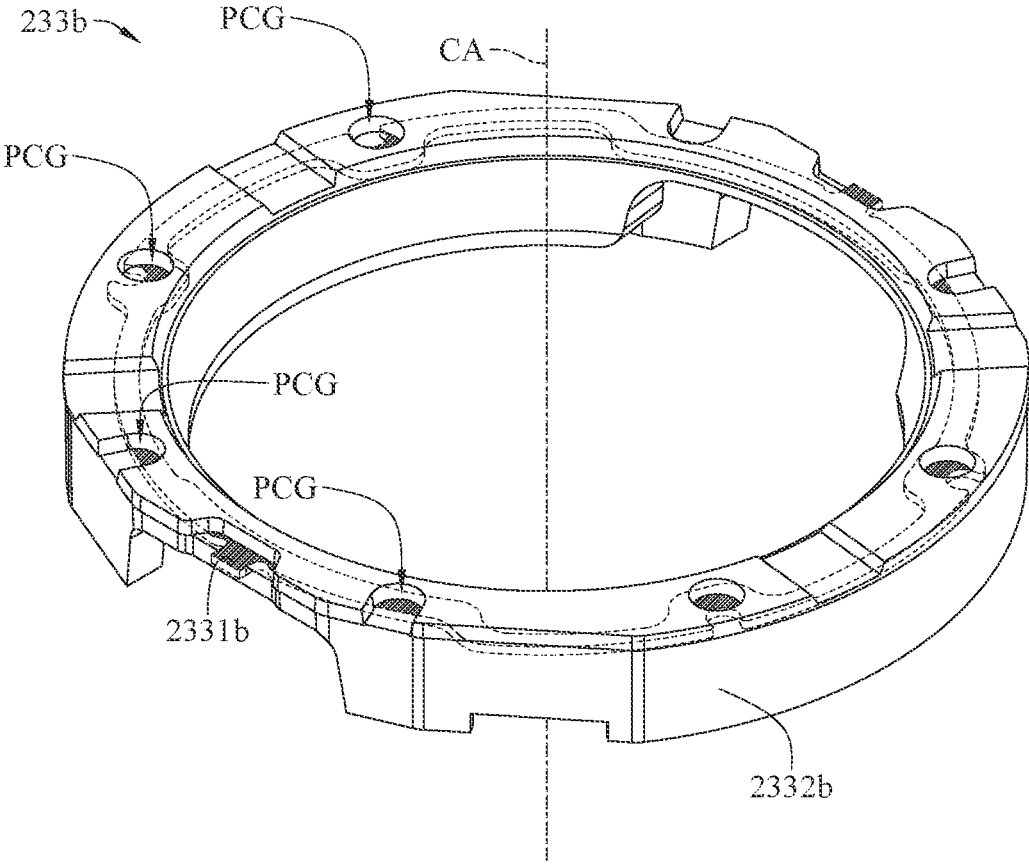


FIG. 28

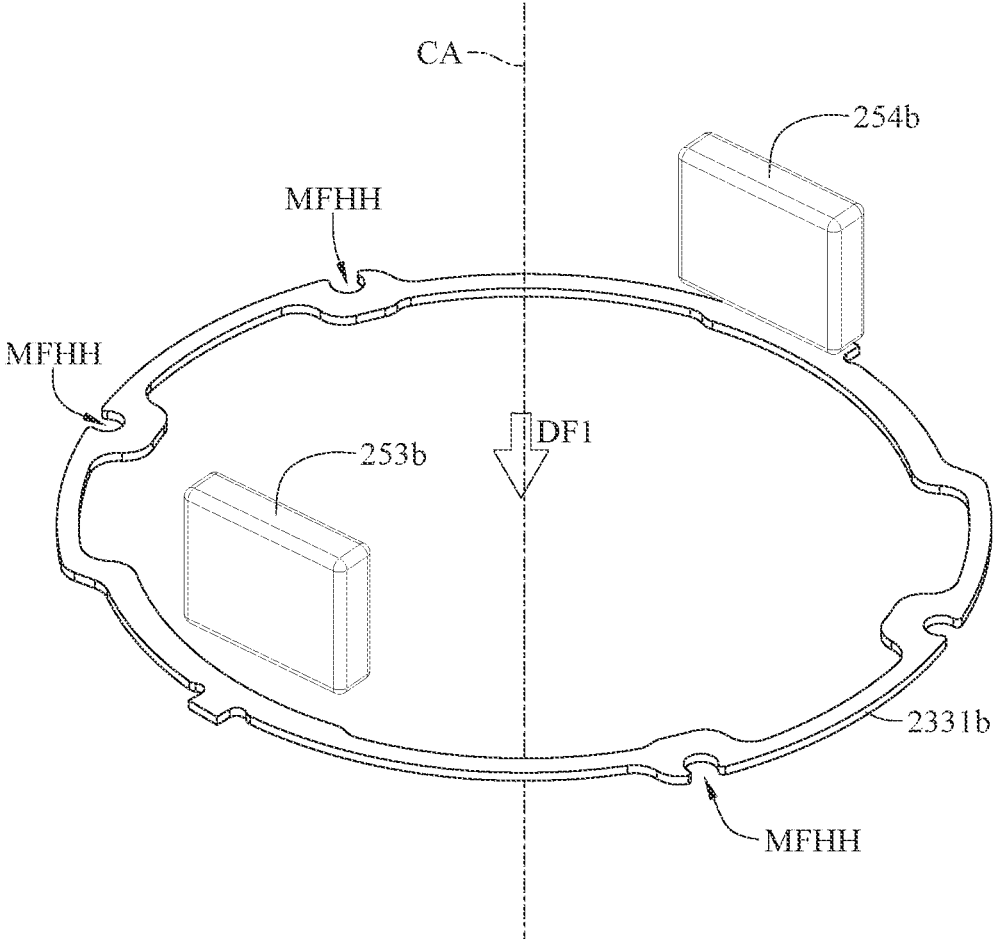


FIG. 29

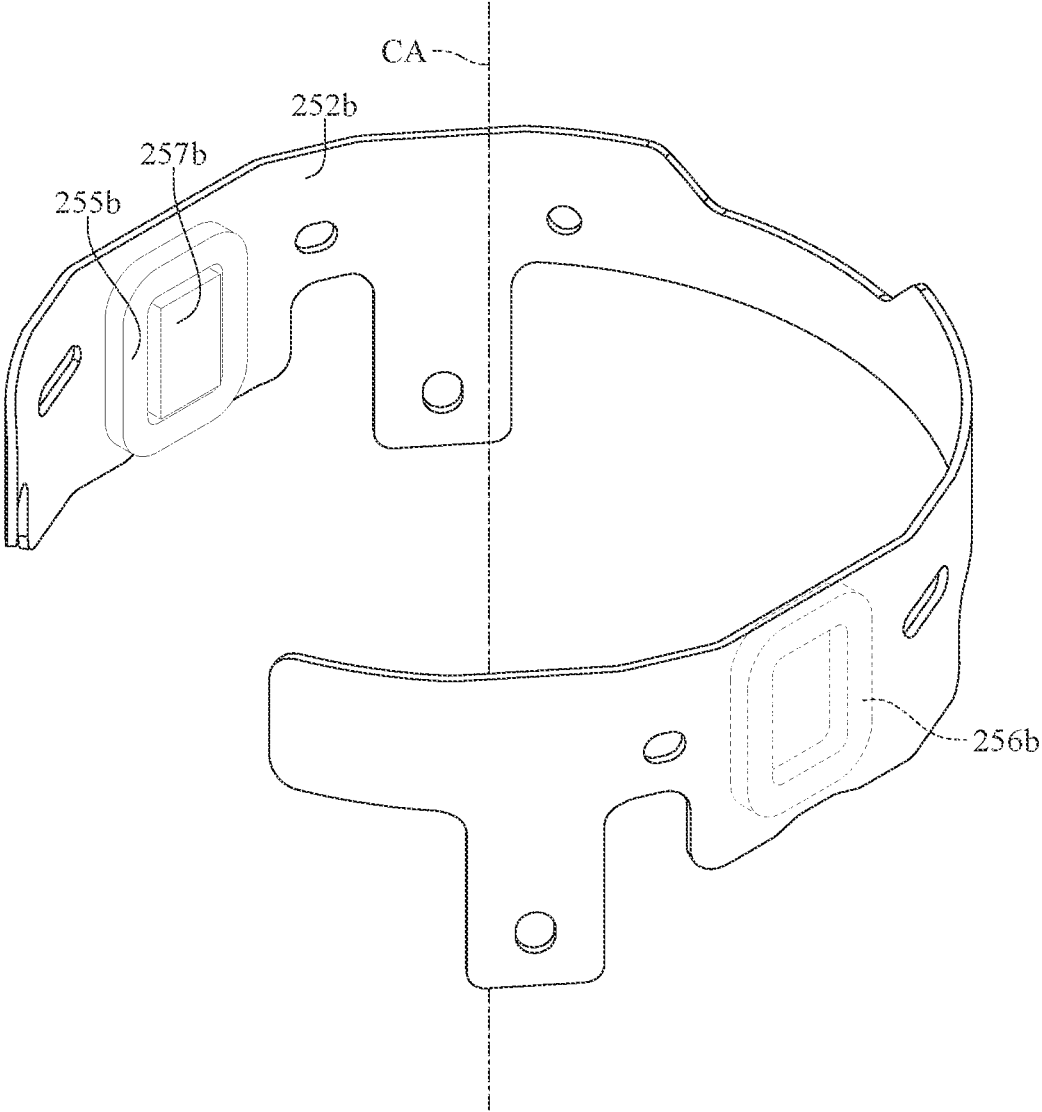


FIG. 30

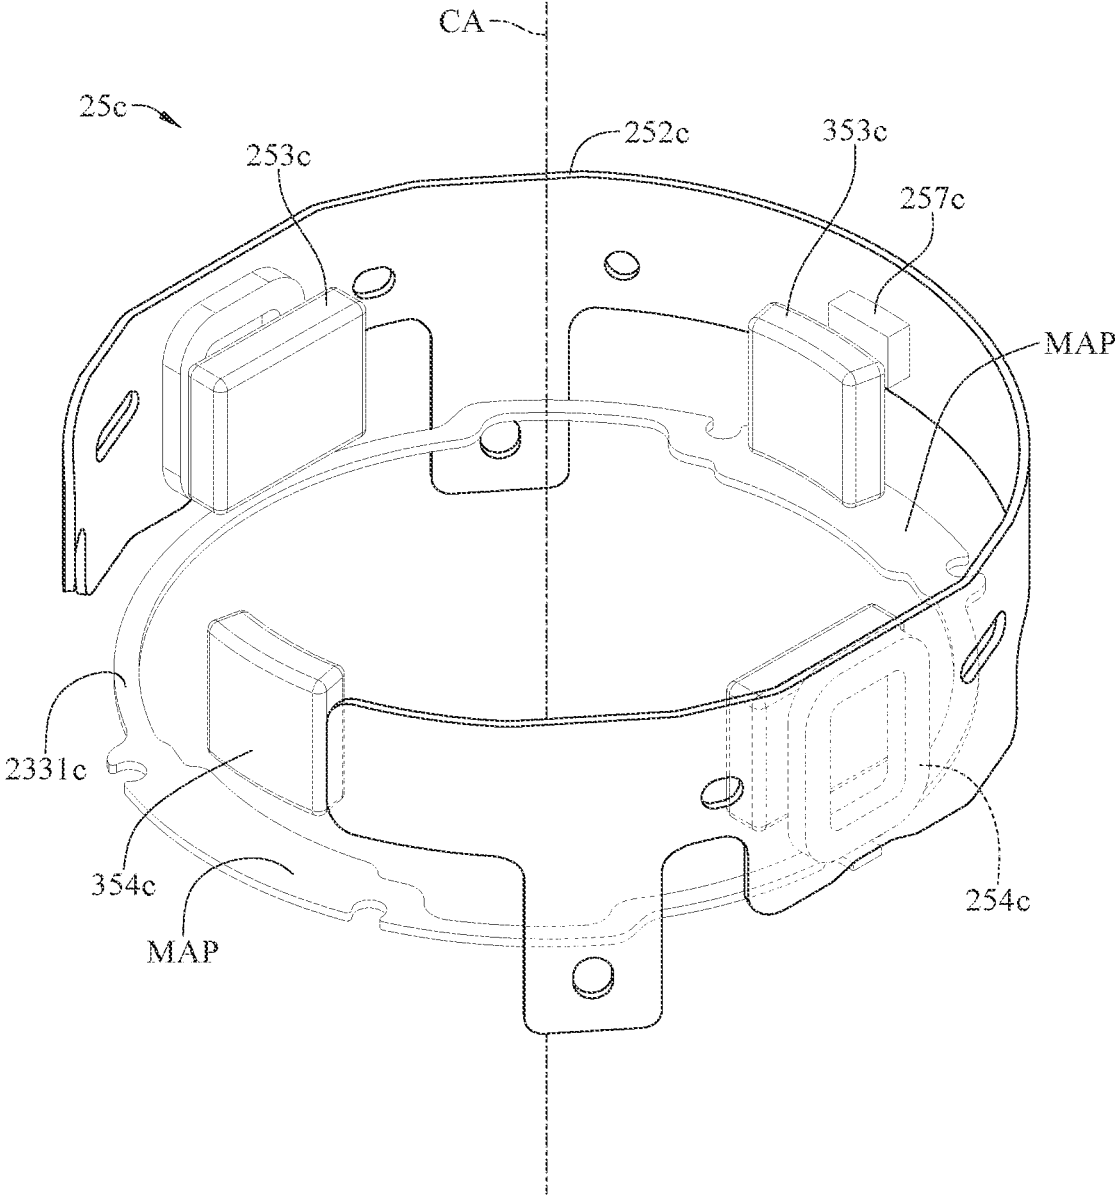


FIG. 31

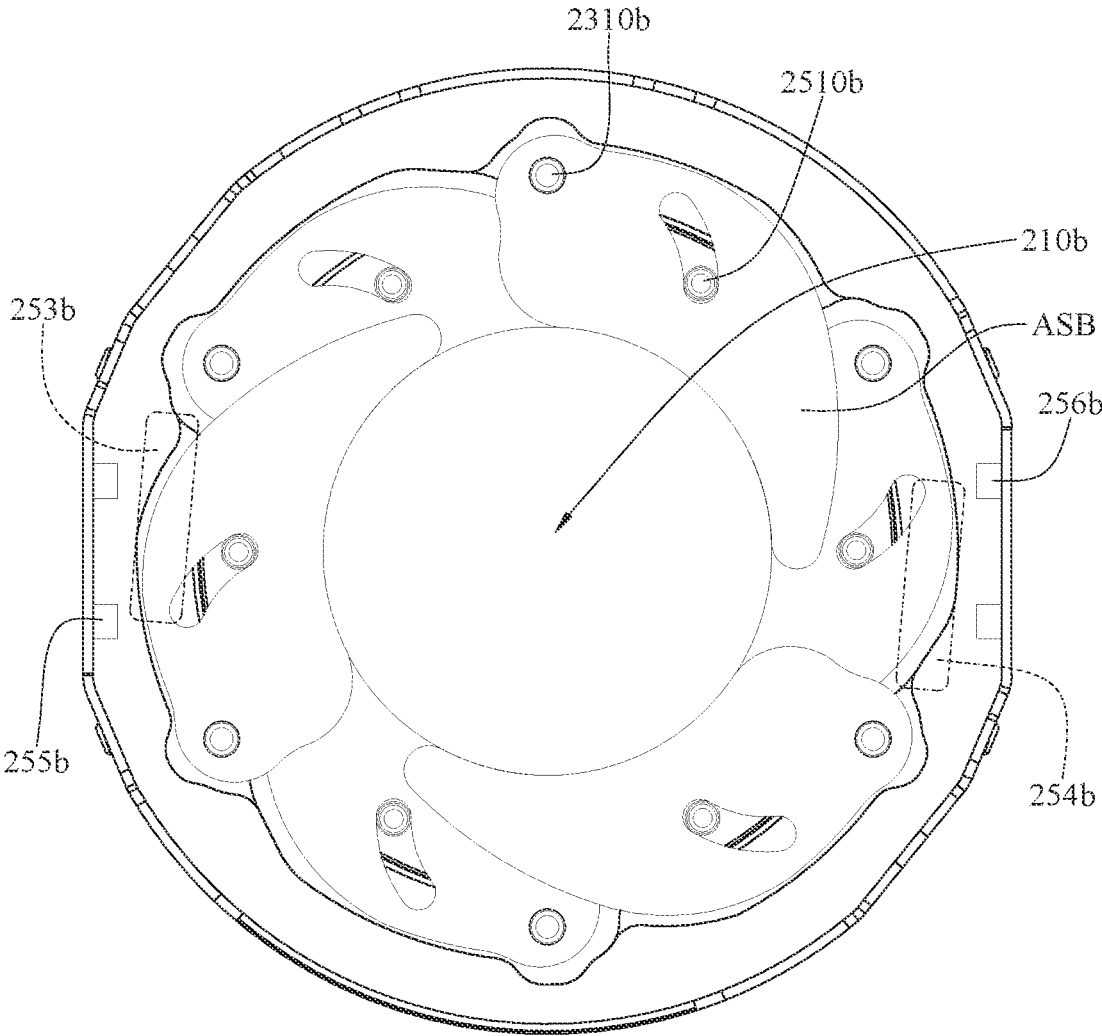


FIG. 32

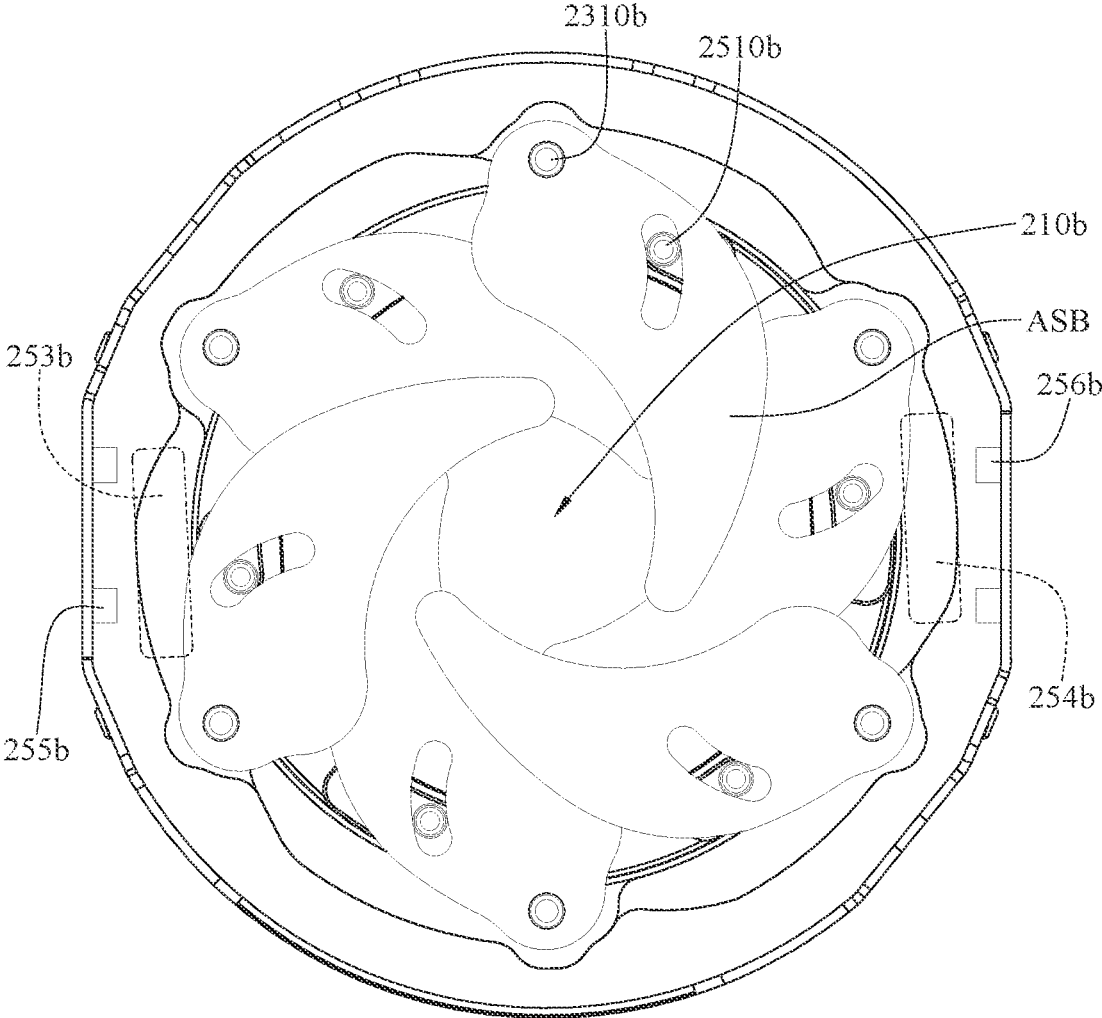


FIG. 33

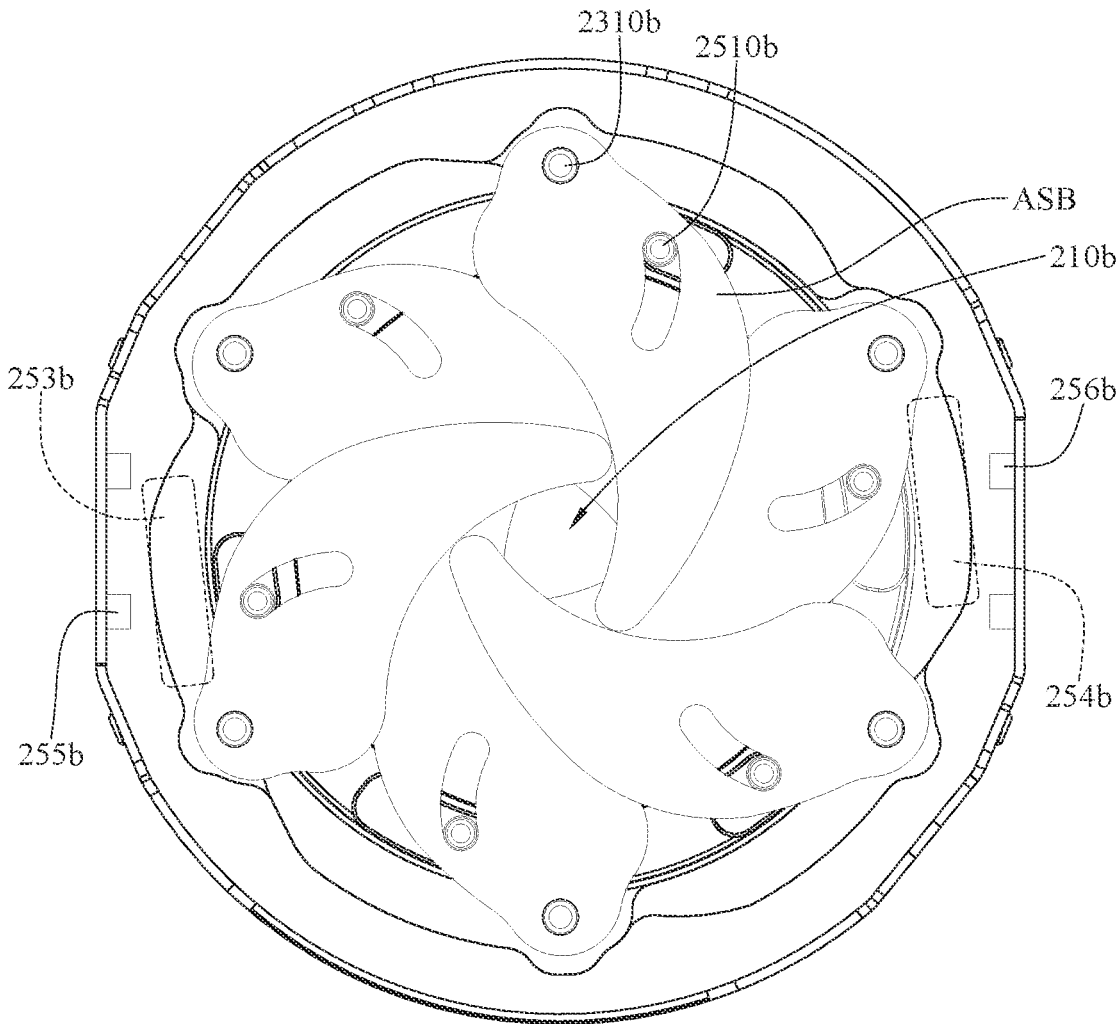


FIG. 34

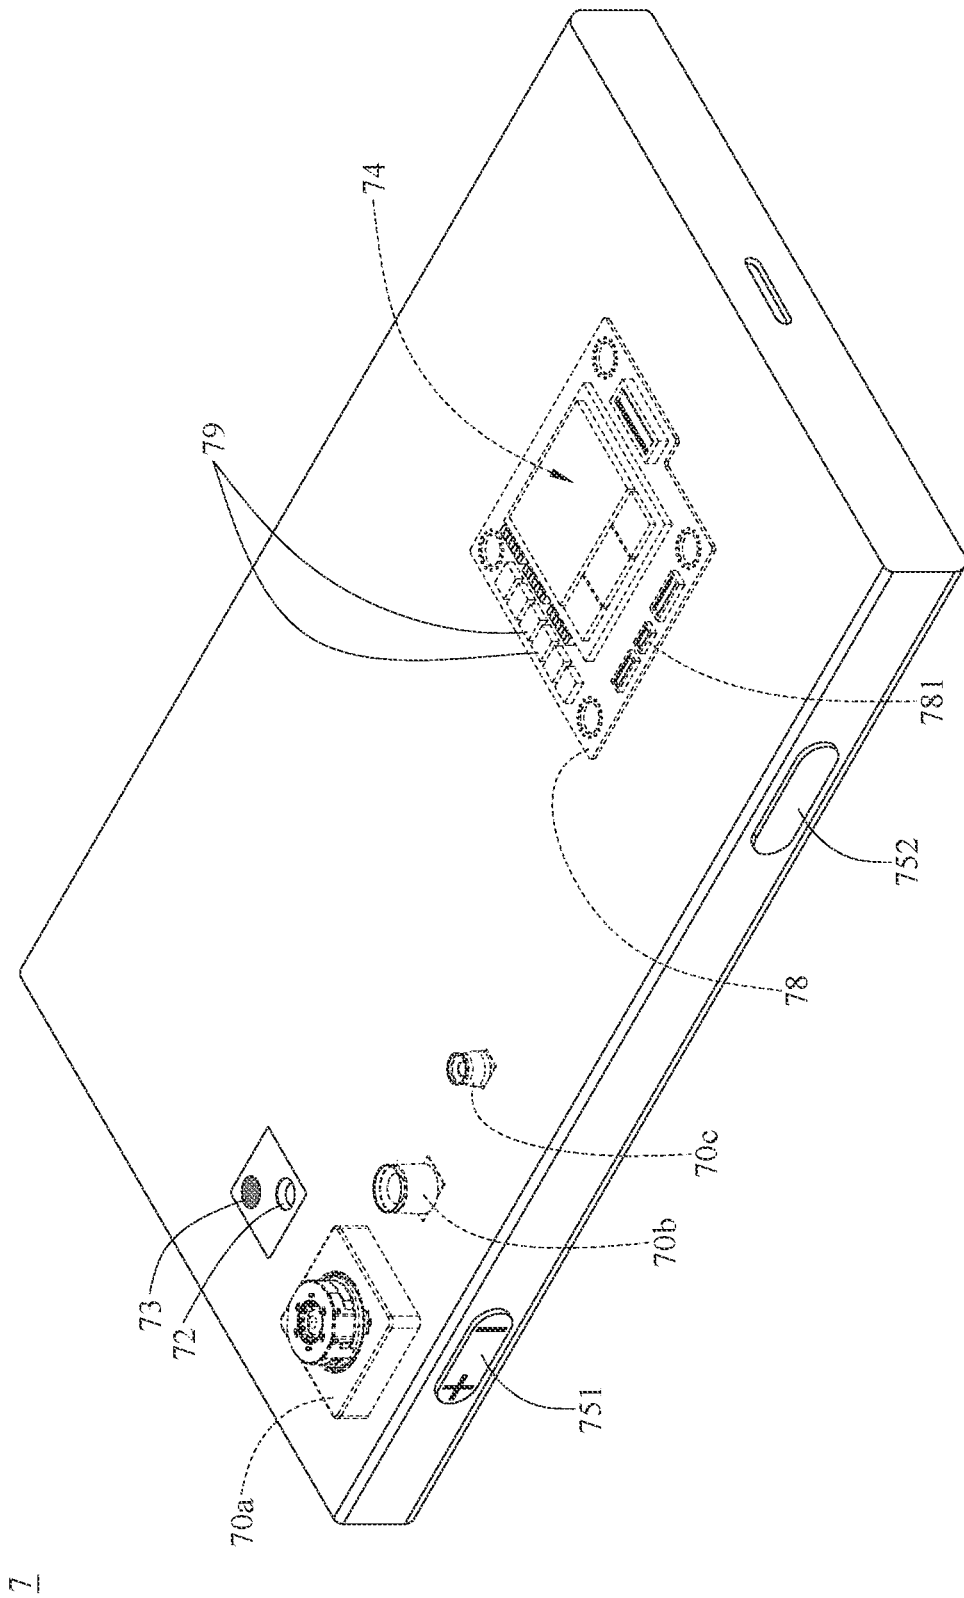


FIG. 35

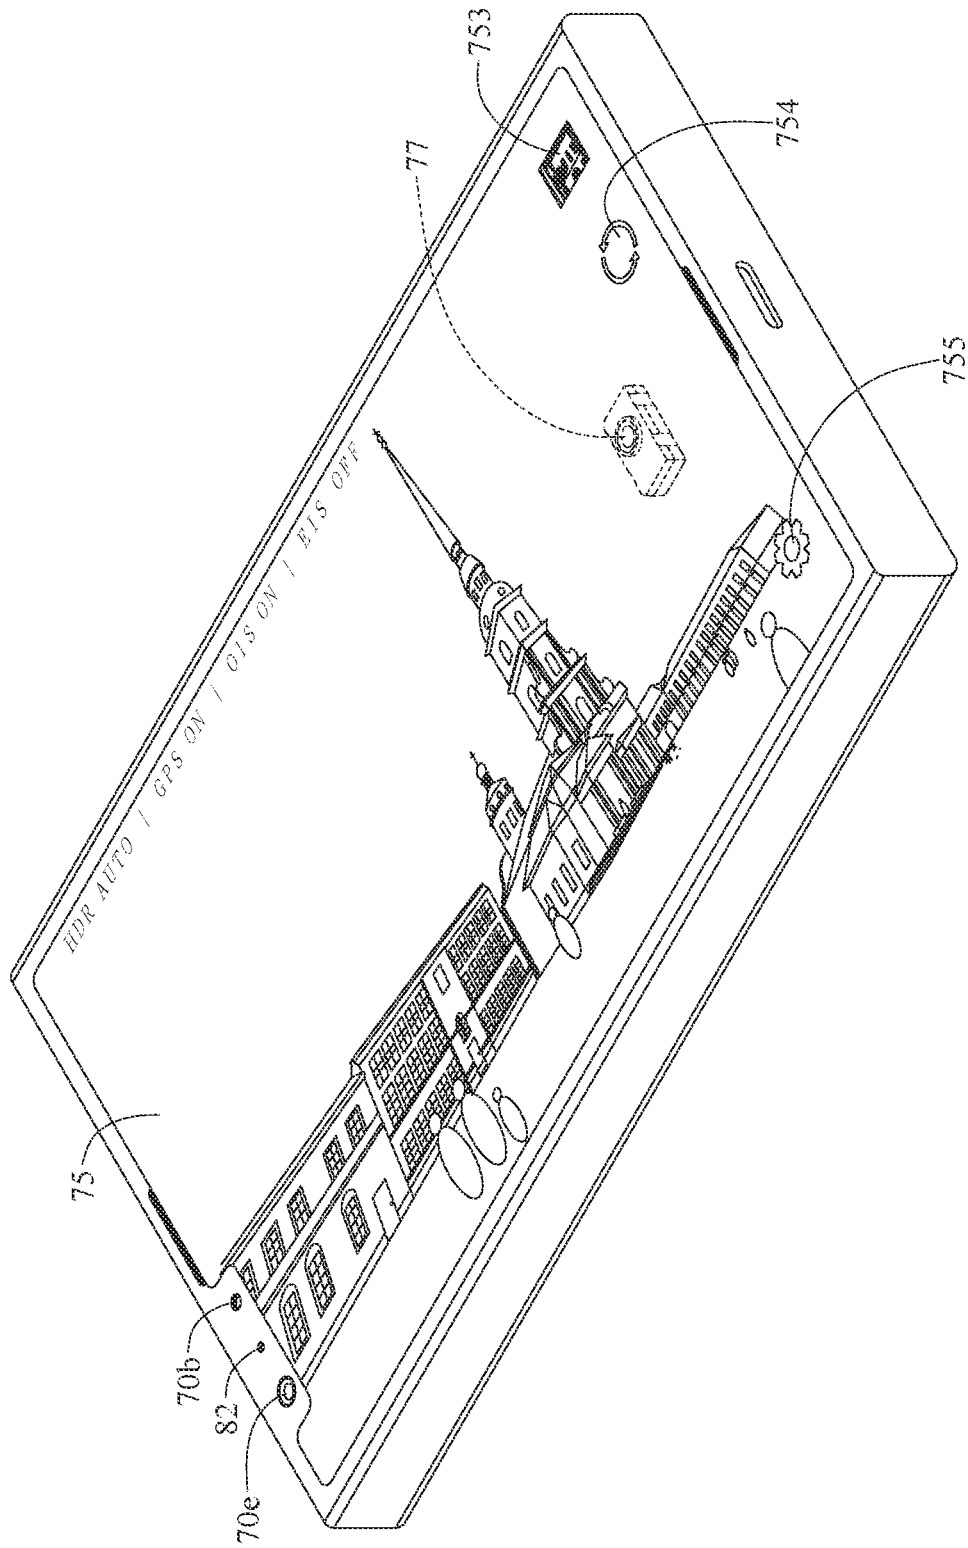


FIG. 36

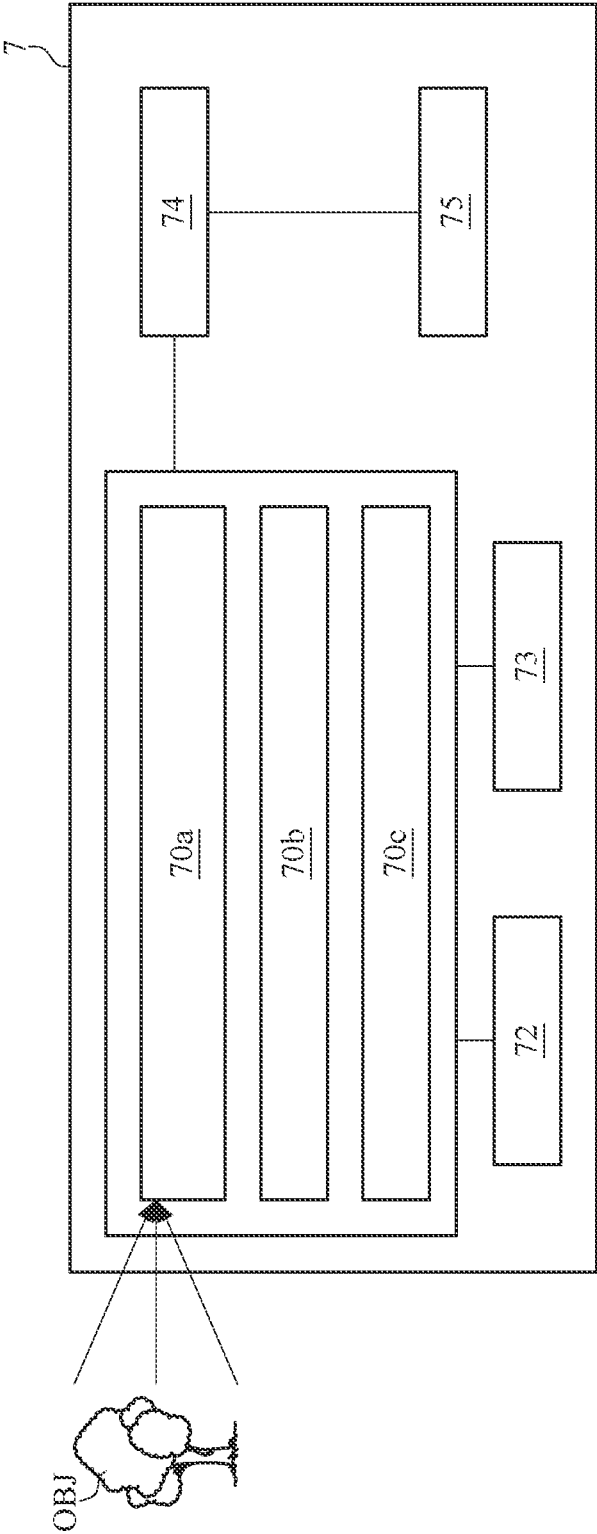


FIG. 37

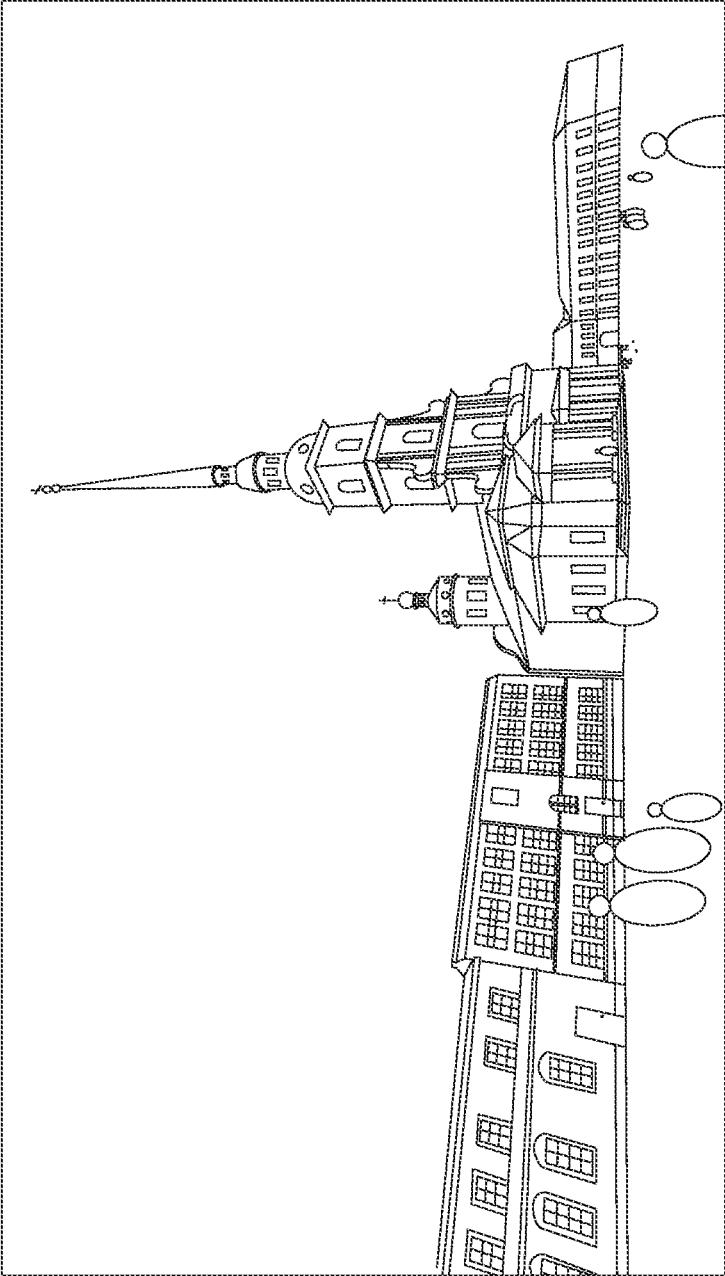


FIG. 38

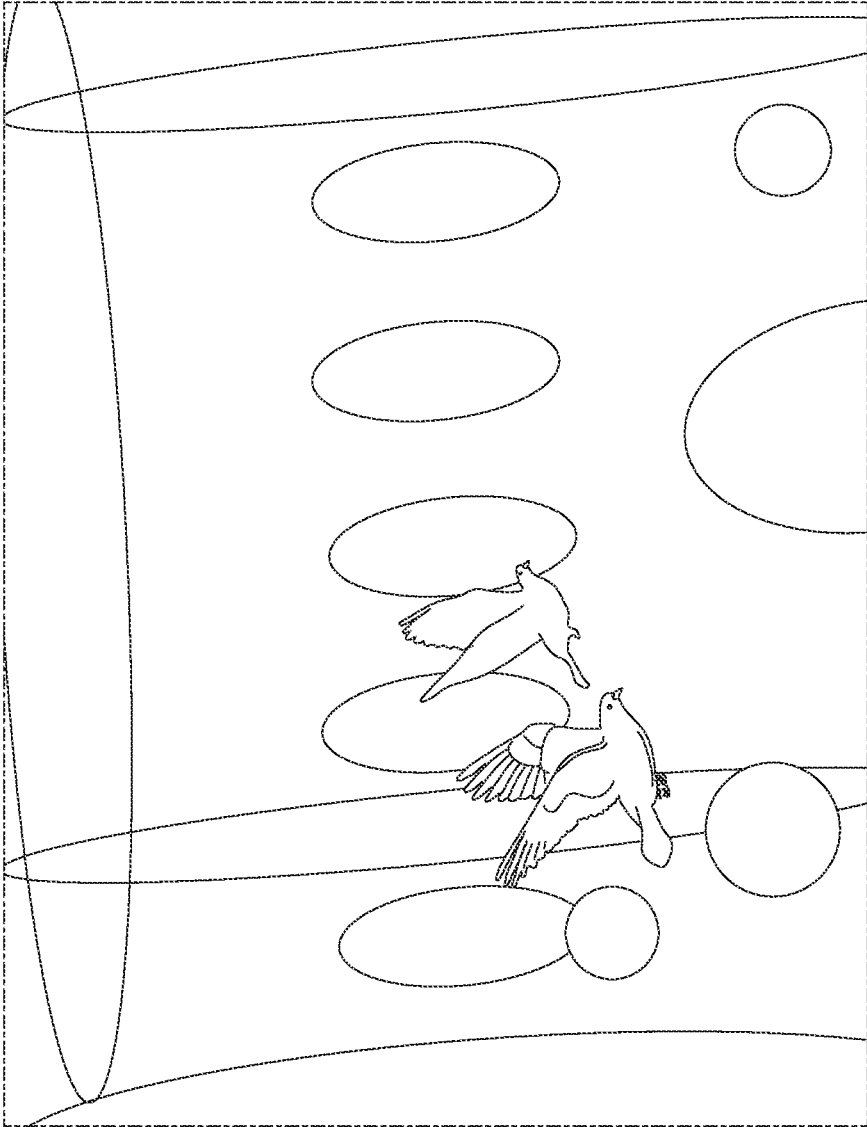


FIG. 39

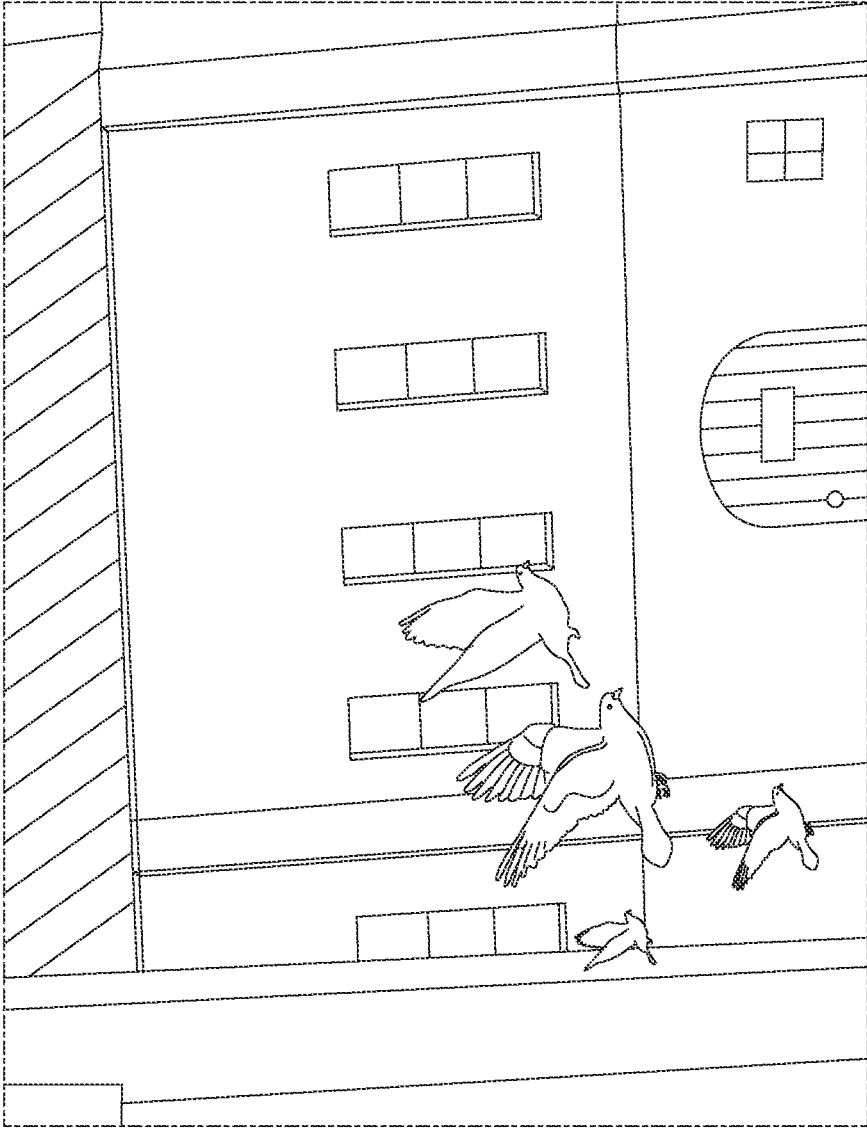


FIG. 40

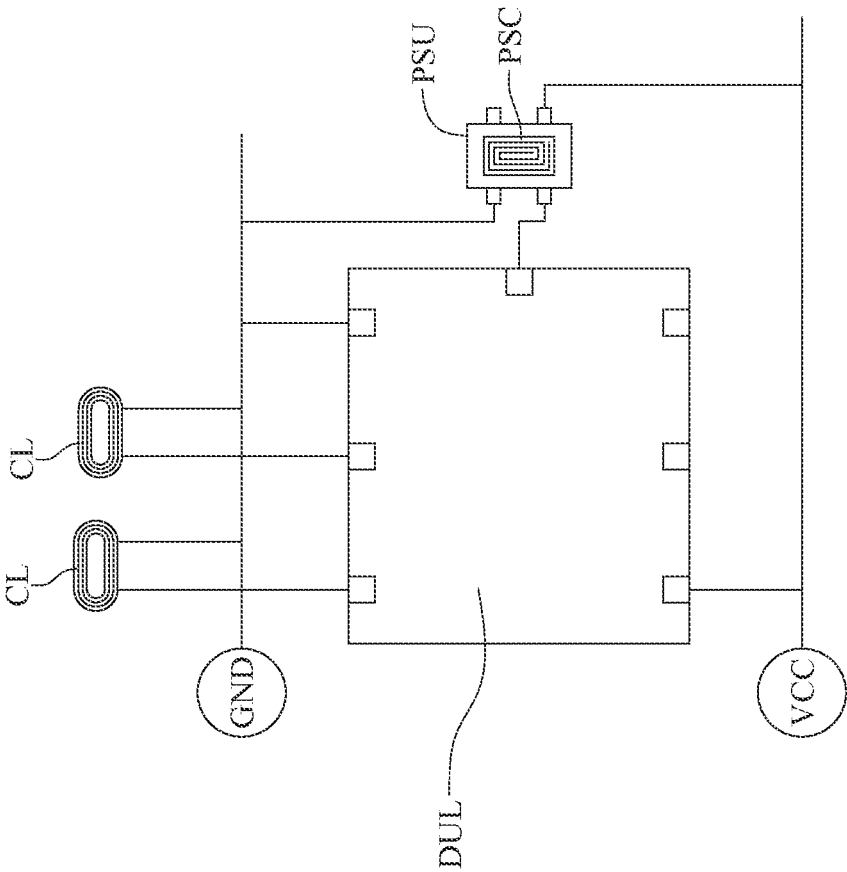


FIG. 41

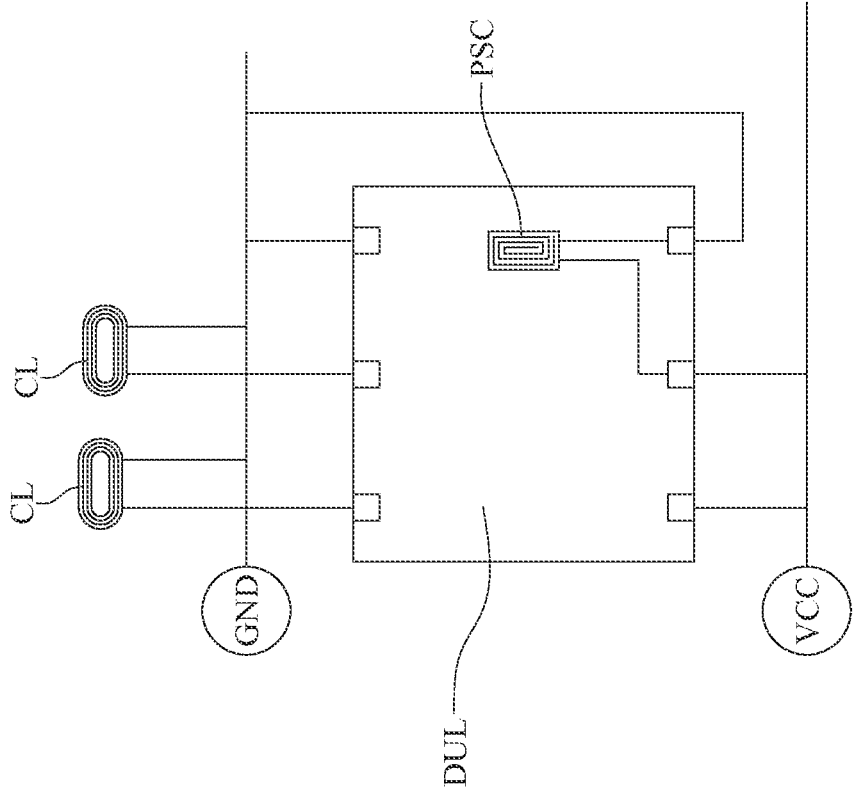


FIG. 42

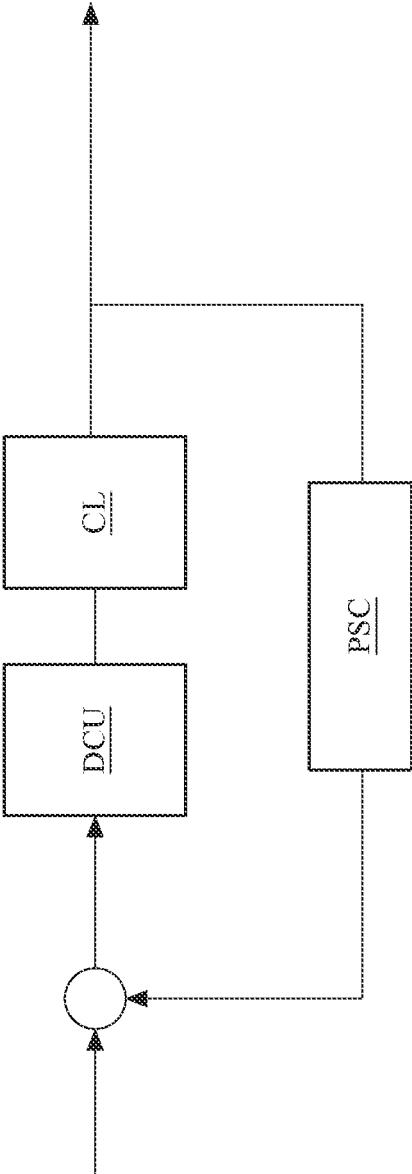


FIG. 43

1

**CONTROLLABLE APERTURE STOP,
COMPACT CAMERA MODULE AND
ELECTRONIC DEVICE**

RELATED APPLICATIONS

This application claims priority to Taiwan Application 111107076, filed on Feb. 25, 2022, which is incorporated by reference herein in its entirety.

BACKGROUND

Technical Field

The present disclosure relates to a controllable aperture stop, a compact camera module and an electronic device, more particularly to a controllable aperture stop and a compact camera module applicable to an electronic device.

Description of Related Art

With the development of semiconductor manufacturing technology, the performance of image sensors has been improved, and the pixel size thereof has been scaled down. Therefore, featuring high image quality becomes one of the indispensable features of an optical system nowadays. Furthermore, due to the rapid changes in technology, electronic devices equipped with optical systems are trending towards multi-functionality for various applications, and therefore the functionality requirements for the optical systems have been increasing.

Recently, compact camera modules are applied in more and more fields, such as portable devices (e.g., smartphones, action cameras), augmented reality and virtual reality head-mounted devices or aerial cameras. Moreover, the hardwares of the compact camera modules are constantly upgraded, such as larger image sensors and imaging lenses with better image quality. A larger image sensor provides better image quality, but the background in the pictures may become blurry. Conventionally, controllable aperture stops can be used to adjust the blur degree of the background and control the amount of incident light. However, due to the limitation of the size, it is difficult for the camera modules to be equipped with controllable aperture stops. In specific, there are some problems occurring when conventional controllable aperture stops are applied to compact camera modules. For example, light-blocking blades can be easily damaged with the reduction of the size of camera modules, the total weight may be too heavy, and several precision requirements (e.g., the size and position precisions of light pass aperture) cannot be satisfied.

SUMMARY

According to one aspect of the present disclosure, a controllable aperture stop includes a light pass portion, a fixed portion, a driving part and a plurality of rollable elements. The light pass portion includes a plurality of movable blades, and the movable blades together surround a light pass aperture. The fixed portion has a plurality of shaft structures respectively disposed corresponding to the movable blades. The driving part includes a rotatable element, a first magnet and a first coil. The rotatable element is connected to the movable blades, and the rotatable element is configured to drive the movable blades to rotate respectively relative to the shaft structures so as to adjust a size of the light pass aperture. The first magnet is disposed on the

2

rotatable element. The first coil is disposed corresponding to the first magnet, and the first coil is located farther away from the light pass aperture than the first magnet to the light pass aperture. The first magnet and the first coil are configured to drive the rotatable element to rotate around the light pass aperture. The rollable elements are disposed between the fixed portion and the rotatable element and arranged around the light pass aperture, so that the rotatable element can be rotated relative to the fixed portion. In addition, when a farthest distance between the first magnet and a central axis of the light pass aperture is rm , a shortest distance between the first coil and the central axis is rc , and a shortest distance between the rollable elements and the central axis is rb , the following conditions are satisfied:

$$0.5 \leq rm/rc < 1; \text{ and}$$

$$0.6 \leq rb/rm \leq 1.8.$$

According to another aspect of the present disclosure, a controllable aperture stop includes a light pass portion, a fixed portion, a driving part and a plurality of rollable elements. The light pass portion includes a plurality of movable blades, and the movable blades together surround a light pass aperture. The fixed portion has a plurality of shaft structures respectively disposed corresponding to the movable blades. The driving part includes a rotatable element, a first magnet and a first coil. The rotatable element is connected to the movable blades, and the rotatable element is configured to drive the movable blades to rotate respectively relative to the shaft structures so as to adjust a size of the light pass aperture. The first magnet is disposed on the rotatable element. The first coil is disposed corresponding to the first magnet, and the first coil is located farther away from the light pass aperture than the first magnet to the light pass aperture. The first magnet and the first coil are configured to drive the rotatable element to rotate around the light pass aperture. The rollable elements are disposed between the fixed portion and the rotatable element and arranged around the light pass aperture, so that the rotatable element can be rotated relative to the fixed portion. In addition, the fixed portion includes a frame element, and the frame element is in physical contact with the rollable elements so as to support the rollable elements and the rotatable element. The frame element includes a metal component and a clad component, and the metal component is insert-molded with the clad component to together form the frame element. The metal component has a plurality of filled holes, and the clad component is filled into the filled holes. The filled holes and the first magnet do not overlap with each other in a direction parallel to a central axis of the light pass aperture.

According to another aspect of the present disclosure, a controllable aperture stop includes a light pass portion, a fixed portion, a driving part and a plurality of rollable elements. The light pass portion includes a plurality of movable blades, and the movable blades together surround a light pass aperture. The fixed portion has a plurality of shaft structures respectively disposed corresponding to the movable blades. The driving part includes a rotatable element, a first magnet and a first coil. The rotatable element is connected to the movable blades, and the rotatable element is configured to drive the movable blades to rotate respectively relative to the shaft structures so as to adjust a size of the light pass aperture. The first magnet is disposed on the rotatable element. The first coil is disposed corresponding to the first magnet, and the first coil is located farther away from the light pass aperture than the first magnet to the light pass aperture. The first magnet and the first coil are config-

ured to drive the rotatable element to rotate around the light pass aperture. The rollable elements are disposed between the fixed portion and the rotatable element and arranged around the light pass aperture, so that the rotatable element can be rotated relative to the fixed portion. In addition, the fixed portion includes a frame element, and the frame element is in physical contact with the rollable elements so as to support the rollable elements and the rotatable element. The frame element includes a metal component and a clad component, and the metal component is insert-molded with the clad component to together form the frame element. The metal component includes an attraction portion. The attraction portion is ferromagnetic and disposed corresponding to the first magnet so as to generate a magnetic attraction, and the magnetic attraction forces the first magnet and the rotatable element to exert a pressure on the rollable elements. The first magnet includes a first surface, a second surface and a connection surface. The first surface faces the first coil, and the second surface is located closer to the light pass aperture than the first surface to the light pass aperture. The connection surface is connected to the first surface and the second surface, and the attraction portion is disposed corresponding to the connection surface.

According to another aspect of the present disclosure, a controllable aperture stop includes a light pass portion, a fixed portion and a driving part. The light pass portion includes a plurality of movable blades, and the movable blades together surround a light pass aperture. The fixed portion has a plurality of shaft structures respectively disposed corresponding to the movable blades. The driving part includes a rotatable element, a first magnet, a first coil and an electronic component. The rotatable element is connected to the movable blades, and the rotatable element is configured to drive the movable blades to rotate respectively relative to the shaft structures so as to adjust a size of the light pass aperture. The first magnet is disposed on the rotatable element. The first coil is disposed corresponding to the first magnet, and the first coil is located farther away from the light pass aperture than the first magnet to the light pass aperture. The first magnet and the first coil are configured to drive the rotatable element to rotate around the light pass aperture. The electronic component has a position sensing circuit, the electronic component is disposed corresponding to the first magnet, and the electronic component is located farther away from the light pass aperture than the first magnet to the light pass aperture. In addition, when a farthest distance between the first magnet and a central axis of the light pass aperture is r_m , a shortest distance between the first coil and the central axis is r_c , and a shortest distance between the electronic component and the central axis is r_p , the following conditions are satisfied:

$$0.5 \leq r_m/r_c < 1; \text{ and}$$

$$0.5 \leq r_m/r_p < 1.$$

According to another aspect of the present disclosure, a controllable aperture stop includes a light pass portion, a fixed portion, a driving part and a plurality of rollable elements. The light pass portion includes a plurality of movable blades, and the movable blades together surround a light pass aperture. The fixed portion has a plurality of shaft structures respectively disposed corresponding to the movable blades. The driving part includes a rotatable element, a first magnet and an electronic component. The rotatable element is rotatable around the light pass aperture, and the rotatable element is connected to the movable blades. The rotatable element is configured to drive the

movable blades to rotate respectively relative to the shaft structures so as to adjust a size of the light pass aperture. The first magnet is disposed on the rotatable element. The electronic component has a position sensing circuit. The electronic component is disposed corresponding to the first magnet, and the electronic component is located farther away from the light pass aperture than the first magnet to the light pass aperture. The rollable elements are disposed between the fixed portion and the rotatable element and arranged around the light pass aperture, so that the rotatable element can be rotated relative to the fixed portion. In addition, when a farthest distance between the first magnet and a central axis of the light pass aperture is r_m , a shortest distance between the electronic component and the central axis is r_p , and a shortest distance of the plurality of rollable elements and the central axis is r_b , the following conditions are satisfied:

$$0.5 \leq r_m/r_p < 1; \text{ and}$$

$$0.6 \leq r_b/r_m \leq 1.8.$$

According to another aspect of the present disclosure, a compact camera module includes one of the aforementioned controllable aperture stops, and the controllable aperture stop is disposed on an aperture position of the compact camera module. In addition, when a focal length of the compact camera module is f , and an aperture area of the light pass aperture is a_1 , the following condition is satisfied:

$$1.19 \leq f/\sqrt{a_1} \leq 11.99.$$

According to another aspect of the present disclosure, an electronic device includes the aforementioned compact camera module.

BRIEF DESCRIPTION OF THE DRAWINGS

The disclosure can be better understood by reading the following detailed description of the embodiments, with reference made to the accompanying drawings as follows:

FIG. 1 is a perspective view of a compact camera module according to the 1st embodiment of the present disclosure;

FIG. 2 is an exploded view of the compact camera module in FIG. 1;

FIG. 3 is a sectional view of a controllable aperture stop and a lens assembly of the compact camera module in FIG. 1;

FIG. 4 is a side view of the controllable aperture stop and the lens assembly of the compact camera module in FIG. 3;

FIG. 5 is an exploded view of the controllable aperture stop of the compact camera module in FIG. 1;

FIG. 6 is another exploded view of the controllable aperture stop of the compact camera module in FIG. 1;

FIG. 7 is an exploded view of a light pass portion of the controllable aperture stop in FIG. 5;

FIG. 8 is an exploded view of a shaft element of a fixed portion, a rotatable element of a driving part and one movable blade of the light pass portion in FIG. 5;

FIG. 9 is a perspective view of rollable elements and the frame element of the fixed portion in FIG. 5;

FIG. 10 is an enlarged top view of region EL1 in FIG. 9;

FIG. 11 is another perspective view of the frame element of the fixed portion in FIG. 5;

FIG. 12 is a sectional view of the frame element in FIG. 11;

FIG. 13 is a schematic view of the relative position of a metal component of the frame element of the fixed portion and magnets of the driving part in FIG. 5;

5

FIG. 14 is a perspective view of a flexible printed circuit board, coils and an electronic component of the driving part in FIG. 5;

FIG. 15 is a perspective and partial view of a driving part of the compact camera module according to another configuration of the 1st embodiment of the present disclosure;

FIG. 16 is a cross-sectional view of the controllable aperture stop in FIG. 4;

FIG. 17 is a top view of the controllable aperture stop of the compact camera module in a maximum aperture state according to the 1st embodiment of the present disclosure;

FIG. 18 is a top view of the controllable aperture stop of the compact camera module in another aperture state according to the 1st embodiment of the present disclosure;

FIG. 19 is a top view of the controllable aperture stop of the compact camera module in another aperture state according to the 1st embodiment of the present disclosure;

FIG. 20 is a perspective view of a compact camera module according to the 2nd embodiment of the present disclosure;

FIG. 21 is a sectional view of a controllable aperture stop of the compact camera module in FIG. 20;

FIG. 22 is a side view of the controllable aperture stop of the compact camera module along line 22-22 in FIG. 21;

FIG. 23 is an exploded view of the controllable aperture stop of the compact camera module in FIG. 20;

FIG. 24 is another exploded view of the controllable aperture stop of the compact camera module in FIG. 20;

FIG. 25 is an exploded view of a light pass portion of the controllable aperture stop in FIG. 23;

FIG. 26 is a perspective view of rollable elements and a frame element of a fixed portion in FIG. 23;

FIG. 27 is an enlarged top view of region EL2 in FIG. 26;

FIG. 28 is another perspective view of the frame element of the fixed portion in FIG. 23;

FIG. 29 is a schematic view of the relative position of a metal component of the frame element of the fixed portion and magnets of a driving part in FIG. 23;

FIG. 30 is a perspective view of a flexible printed circuit board, coils and an electronic component of the driving part in FIG. 23;

FIG. 31 is a perspective and partial view of a driving part and a metal component of the compact camera module according to another configuration of the 2nd embodiment of the present disclosure;

FIG. 32 is a top view of the controllable aperture stop of the compact camera module in a maximum aperture state according to the 2nd embodiment of the present disclosure;

FIG. 33 is a top view of the controllable aperture stop of the compact camera module in another aperture state according to the 2nd embodiment of the present disclosure;

FIG. 34 is a top view of the controllable aperture stop of the compact camera module in another aperture state according to the 2nd embodiment of the present disclosure;

FIG. 35 is one perspective view of an electronic device according to the 3rd embodiment of the present disclosure;

FIG. 36 is another perspective view of the electronic device in FIG. 35;

FIG. 37 is a block diagram of the electronic device in FIG. 35;

FIG. 38 shows an image captured by the electronic device using a wide-angle compact camera module in FIG. 35;

FIG. 39 shows an image captured by the electronic device using a compact camera module having controllable aperture stop in FIG. 35 with an F-number of 1.4;

6

FIG. 40 shows an image captured by the electronic device using a compact camera module having controllable aperture stop in FIG. 35 with an F-number of 5.6;

FIG. 41 is a schematic view of an electrical connection of a driver controller, a position sensor and coils according to one embodiment of the present disclosure;

FIG. 42 is a schematic view of an electrical connection of a driver controller and coils according to one embodiment of the present disclosure; and

FIG. 43 is a block diagram of a feedback control system of the driver controller, the coils and a position sensing circuit in FIG. 41 or FIG. 42.

DETAILED DESCRIPTION

In the following detailed description, for purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the disclosed embodiments. It will be apparent, however, that one or more embodiments may be practiced without these specific details. In other instances, well-known structures and devices are schematically shown in order to simplify the drawing.

The present disclosure provides a controllable aperture stop. The controllable aperture stop includes a light pass portion, a fixed portion and a driving part. The light pass portion includes a plurality of movable blades, and the movable blades together surround a light pass aperture. The fixed portion has a plurality of shaft structures respectively disposed corresponding to the movable blades. The driving part includes a rotatable element and a first magnet. The rotatable element is rotatable around the light pass aperture and connected to the movable blades, and the rotatable element is configured to drive the movable blades to rotate respectively relative to the shaft structures so as to adjust the size of the light pass aperture. In addition, the first magnet is disposed on the rotatable element so as to prevent a backlash between mechanical parts, thereby increasing the dimensional accuracy of the light pass aperture.

The driving part can further include a first coil disposed corresponding to the first magnet. In addition, the first coil is located farther away from the light pass aperture than the first magnet to the light pass aperture, so that the overlapping between components can be reduced, thereby allowing the components to be more easily positioned during assembling and reducing the height of the controllable aperture stop in a direction of a central axis of the light pass aperture. Moreover, the first magnet and the first coil are configured to drive the rotatable element to rotate around the light pass aperture. Moreover, when a farthest distance between the first magnet and the central axis of the light pass aperture is r_m , and a shortest distance between the first coil and the central axis is r_c , the following condition can be satisfied: $0.5 \leq r_m/r_c < 1$. Therefore, a proper corresponsive position between the first magnet and the first coil is favorable for the operation of the driving part. Moreover, the following condition can also be satisfied: $0.8 \leq r_m/r_c \leq 0.99$. Moreover, the following condition can also be satisfied: $0.9 \leq r_m/r_c \leq 0.97$. Please refer to FIG. 14, which shows a schematic view of r_m and r_c according to the 1st embodiment of the present disclosure. Said farthest distance between the first magnet and the central axis can refer to a distance between one side of the first magnet located farthest away from the light pass aperture and the central axis of the light pass aperture.

The controllable aperture stop can further include a plurality of rollable elements, and the rollable elements are disposed between the fixed portion and the rotatable element

and arranged around the light pass aperture, so that the rotatable element is rotatable relative to the fixed portion. Moreover, the rollable elements can be, for example, balls, cylinders or frustums, but the present disclosure is not limited thereto. Furthermore, the rollable elements can be made of materials, such as metal, ceramic or plastic materials, but the present disclosure is not limited thereto. Moreover, when a shortest distance between the rollable elements and the central axis is r_b , and the farthest distance between the first magnet and the central axis is r_m , the following condition can be satisfied: $0.6 \leq r_b/r_m \leq 1.8$. Therefore, a proper corresponsive position between the first magnet and the rollable elements is favorable for preventing deformation of the rotatable element caused by the first magnet. Moreover, the following condition can also be satisfied: $0.7 \leq r_b/r_m \leq 1.5$. Moreover, the following condition can also be satisfied: $0.8 \leq r_b/r_m \leq 1.2$. Please refer to FIG. 14, which shows a schematic view of r_b and r_m according to the 1st embodiment of the present disclosure.

The fixed portion can include a frame element in physical contact with the rollable elements so as to support the rollable elements and the rotatable element. The frame element can have a through hole disposed corresponding to the light pass aperture. In addition, the frame element can include a metal component and a clad component, and the metal component is insert-molded with the clad component to together form the frame element. The metal component is configured to enhance the mechanical strength of the frame element, so that the frame element can carry the rollable elements and the rotatable element, and the size of the frame element can be reduced. The metal component can have a plurality of filled holes, and the clad component is filled into the filled holes. The filled holes are configured to increase the molding accuracy of the frame element so as to prevent misalignment and warpage of the metal component. Moreover, the clad component can be made of, for example, plastic or ceramic materials, but the present disclosure is not limited thereto. Moreover, the filled holes and the first magnet may not overlap with each other in the direction parallel to the central axis of the light pass aperture, such that the filled holes are not corresponding to the first magnet, thereby preventing influences on the uniformity of the magnetic field of the first magnet. Moreover, the filled holes can be half holes or full holes. Moreover, the shape of each of the filled holes can be circular, oval, oblong, C-shaped or U-shaped according to actual design requirements, and the present disclosure is not limited thereto. Moreover, the filled holes can be, for example, through holes or blind holes.

The frame element of the fixed portion can have a plurality of recesses, and a part of the metal component is exposed by the recesses. Therefore, it is favorable for positioning the metal component. In addition, the recesses are respectively disposed corresponding to the filled holes of the metal component, and the filled holes are respectively partially exposed by the recesses. Therefore, the filled holes of the metal component can be in contact with the mold so as to increase the flatness of the metal component. Furthermore, the recesses can be, for example, ejection holes disposed corresponding to ejector pins of a mold, so that the demolding force can be applied on the metal component during the demolding process of the frame element, thereby reducing deformation of the frame element. Moreover, the filled holes can be disposed corresponding to the ejection holes so as to reduce the number of holes (e.g., recesses) of the clad component, thereby reducing defect rate.

The metal component can include an attraction portion. The attraction portion is ferromagnetic and disposed corre-

sponding to the first magnet so as to generate a magnetic attraction, and the magnetic attraction forces the first magnet and the rotatable element to exert a pressure on the rollable elements. Therefore, the vibration of the rollable elements and the rotatable element in the direction parallel to the central axis of the light pass aperture can be reduced so as to stabilize the driving process and thus, prevent misalignment of the rotatable element. In some configurations, the metal component can be made of ferromagnetic material, such that the entire metal component is ferromagnetic; furthermore, the metal component is disposed corresponding to the first magnet so as to generate a magnetic attraction, and the magnetic attraction forces the first magnet and the rotatable element to exert a pressure on the rollable elements so as to reduce the vibration of the rollable elements and the rotatable element in the direction parallel to the central axis of the light pass aperture, thereby stabilizing the driving process and therefore preventing misalignment of the rotatable element. Moreover, the magnetic field direction generated by the first coil is different from the attraction direction between the metal component and the first magnet so as to prevent the pressure maintaining the rollable elements from being changed during the movement of the rotatable element, such that the rotatable element can move stably. Moreover, the filled holes and the first magnet may not overlap with each other in the direction parallel to the central axis of the light pass aperture, so that the filled holes and the first magnet do not correspond to each other, thereby ensuring the uniformity of the magnetic attraction.

The first magnet can include a first surface, a second surface and a connection surface. The first surface faces the first coil, the second surface is located closer to the light pass aperture than the first surface to the light pass aperture, and the connection surface is connected to the first surface and the second surface. Moreover, the attraction portion of the metal component is disposed corresponding to the connection surface. Through the magnetic circuit arrangement, the pressure exerted on the rollable elements may not be influenced by the magnetic field change of the first coil, thereby stabilizing the driving process.

The driving part can further include an electronic component, and the electronic component has a position sensing circuit configured to obtain the position information of the rotatable element. The electronic component is disposed corresponding to the first magnet, and the electronic component is located farther away from the light pass aperture than the first magnet to the light pass aperture, so that the overlapping between components can be reduced, thereby allowing the components to be more easily positioned during assembling and reducing the height of the controllable aperture stop in the direction of the central axis of the light pass aperture. Moreover, when the farthest distance between the first magnet and the central axis of the light pass aperture is r_m , and a shortest distance between the electronic component and the central axis is r_p , the following condition can be satisfied: $0.5 \leq r_m/r_p < 1$. Therefore, a proper corresponsive position between the first magnet and the electronic component is favorable for ensuring normal operation of the driving part. Moreover, the following condition can also be satisfied: $0.8 \leq r_m/r_p \leq 0.99$. Moreover, the following condition can also be satisfied: $0.9 \leq r_m/r_p \leq 0.97$. Please refer to FIG. 14, which shows a schematic view of r_m and r_p according to the 1st embodiment of the present disclosure. In some configurations, the electronic component can be a driver controller, and the driver controller is electrically connected to the first coil so as to control the first coil to generate a desired magnet field. Therefore, the driver con-

troller being disposed in the controllable aperture stop is favorable for reducing the number of required cables connected to external components, thereby simplifying manufacturing process.

The fixed portion can further include a shaft element, and the shaft element has the shaft structures. The shaft element and the frame element of the fixed portion are fixed to each other, and the rollable elements are disposed between the frame element and the rotatable element. Moreover, the shaft structures and the rollable elements are respectively disposed on the shaft element and the frame element, preventing the assembling errors from influencing the dimensional accuracy of the light pass aperture.

The frame element can further include a curved installation structure, and at least one of the rollable elements is disposed on the curved installation structure and movable along the curved installation structure in a direction around the light pass aperture. Therefore, a degree of freedom of movement of the rotatable element around the light pass aperture can be provided, and the movement of the rotatable element in a direction perpendicular to the central axis of the light pass aperture can be reduced, thereby increasing the movement stabilization of the rotatable element.

The fixed portion can further include a cover, and the movable blades are disposed between the cover and the rotatable element. Therefore, it is favorable for reducing misalignment of the movable blades in the direction parallel to the central axis of the light pass aperture so as to ensure the quality of the light pass aperture. Moreover, the cover can include a positioning hole, and the positioning hole is disposed corresponding to one of the shaft structures. Therefore, it is favorable for the cover to be positioned in a specific position. In some configurations, the cover can include a plurality of positioning holes, and the positioning holes are respectively disposed corresponding to the shaft structures. Moreover, the positioning hole can be, for example, a through hole or a blind hole.

The cover can further include an inner surface facing the movable blades. Moreover, an arithmetic average roughness (Ra) of the inner surface can be smaller than 0.25 μm . Therefore, it is favorable for reducing the friction between the cover and the movable blades so as to extend the service life of the controllable aperture stop. Moreover, the arithmetic average roughness (Ra) of the inner surface can also be smaller or equal to 0.2 μm . Moreover, the arithmetic average roughness (Ra) of the inner surface can also be smaller or equal to 0.17 μm .

The cover can further include an outer surface, and the outer surface is located farther away from the movable blades than the inner surface to the movable blades. In addition, a reflectivity of the outer surface is smaller than a reflectivity of the inner surface. Therefore, it is favorable for improving assembling efficiency so as to prevent the cover from being installed in a wrong direction, and reducing reflection of light on the outer surface so as to ensure the appearance and prevent glare. Furthermore, the outer surface can have various roughnesses to achieve a low reflectivity feature, or the outer surface can be provided with a low reflection layer, anti-reflection layer or light absorbing layer to achieve a low reflectivity feature but the present disclosure is not limited thereto.

The first magnet can be in an arc shape, and a direction of the arc shape corresponds to a rotation direction of the first magnet. Therefore, it is favorable for reducing the distance change between the first magnet and the first coil during movement so as to stabilize the magnetic field generated by the first magnet and the first coil.

The fixed portion can further include a top contact surface, and the movable blades are disposed on the top contact surface. Moreover, an arithmetic average roughness (Ra) of the top contact surface can be smaller or equal to 0.25 μm . Therefore, it is favorable for reducing the friction between the top contact surface and the movable blades so as to extend the service life of the controllable aperture stop. Moreover, the arithmetic average roughness (Ra) of the top contact surface can also be smaller or equal to 0.2 μm . Moreover, the arithmetic average roughness (Ra) of the top contact surface can also be smaller or equal to 0.17 μm .

The rotatable element can include a bottom contact surface, and the movable blades are disposed on the bottom contact surface. Moreover, an arithmetic average roughness (Ra) of the bottom contact surface can be smaller than 0.25 μm . Therefore, it is favorable for reducing the friction between the bottom contact surface and the movable blades so as to extend the service life of the controllable aperture stop.

The driving part can further include a driver controller electrically connected to the first coil so as to control the first coil to generate a required magnetic field. Therefore, the driver controller being disposed in the controllable aperture stop is favorable for reducing the number of required cables connected to external components, thereby simplifying manufacturing process.

The driver controller can have a position sensing circuit configured to obtain the position information of the rotatable element. Therefore, the function of position sensing being integrated into the driver controller is favorable for reducing the number of electronic component so as to improve assembling efficiency. Furthermore, the position sensing function of the position sensing circuit can be achieved by sensing the magnetic field change, and said magnetic field can be generated by magnets, but the present disclosure is not limited thereto. In other configurations, the position sensing function of the position sensing circuit can also be achieved by sensing light rays or sound signals, and the present disclosure is not limited thereto.

The plurality of movable blades can consist of a first blade assembly and a second blade assembly, the first blade assembly includes some of the movable blades, and the second blade assembly includes the other of the movable blades. Moreover, in the direction parallel to the central axis, the movable blades of the first blade assembly do not overlap with one another, the movable blades of the second blade assembly do not overlap with one another, and the first blade assembly and the second blade assembly at least partially overlap with each other. Moreover, in the direction around the light pass aperture, the movable blades of the first blade assembly at least partially overlap with one another, the movable blades of the second blade assembly at least partially overlap with one another, and the first blade assembly and the second blade assembly do not overlap with each other. Therefore, it is favorable for preventing friction between edges of the movable blades when the movable blades move so as to prevent wear of the movable blades, thereby extending the service life of the movable blades.

The driving part can further include a second magnet, and the second magnet and the first magnet are symmetrically arranged. Moreover, the driving part can further include a second coil, and the second magnet and the second coil are disposed symmetrical to the first magnet and the first coil. Therefore, it is favorable for balancing the force so as to prevent movement of the rotatable element in the direction perpendicular to the central axis, thereby increasing the stability of the rotatable element.

When the controllable aperture stop is in a maximum aperture state, a difference between a farthest distance between a periphery of the light pass aperture and the central axis of the light pass aperture and a shortest distance between the periphery of the light pass aperture and the central axis of the light pass aperture can be smaller than 9.8%. Therefore, it is favorable for preventing glare caused by an unsmooth shape of light pass aperture, thereby ensuring optical quality. Moreover, when the controllable aperture stop is in the maximum aperture state, the difference between the farthest distance and the shortest distance between the periphery of the light pass aperture and the central axis of the light pass aperture can also be smaller than 7.4%. Furthermore, in a configuration where the light pass aperture is circular when the controllable aperture stop is in the maximum aperture state, distances between the periphery of the light pass aperture and the central axis are the same, and said distance between the periphery of the light pass aperture and the central axis is a radius of the light pass aperture.

The present disclosure provides a compact camera module including the aforementioned controllable aperture stop, and the controllable aperture stop is disposed on an aperture position of the compact camera module. In addition, when a focal length of the compact camera module is f , and an aperture area of the light pass aperture is $a1$, the following condition can be satisfied: $1.19 \leq f/\sqrt{a1} \leq 11.99$.

The present disclosure provides an electronic device including the aforementioned compact camera module.

According to the present disclosure, the aforementioned features and conditions can be utilized in numerous combinations so as to achieve corresponding effects.

According to the above description of the present disclosure, the following specific embodiments are provided for further explanation.

1st Embodiment

FIG. 1 is a perspective view of a compact camera module according to the 1st embodiment of the present disclosure, FIG. 2 is an exploded view of the compact camera module in FIG. 1, FIG. 3 is a sectional view of a controllable aperture stop and a lens assembly of the compact camera module in FIG. 1, FIG. 4 is a side view of the controllable aperture stop and the lens assembly of the compact camera module in FIG. 3, FIG. 5 is an exploded view of the controllable aperture stop of the compact camera module in FIG. 1, FIG. 6 is another exploded view of the controllable aperture stop of the compact camera module in FIG. 1, and FIG. 7 is an exploded view of a light pass portion of the controllable aperture stop in FIG. 5.

In this embodiment, a compact camera module 1 includes a controllable aperture stop 2, a lens assembly LEA, a lens driving unit DGU and an image sensor ISU. Moreover, the controllable aperture stop 2 is disposed on an aperture position of the compact camera module 1, the lens driving unit DGU is configured to drive the lens assembly LEA to move along an optical axis OA of the lens assembly LEA, and the image sensor ISU is disposed on an image surface IMG of the lens assembly LEA.

The controllable aperture stop 2 includes a light pass portion 21, a fixed portion 23, a driving part 25 and a support portion 27.

The light pass portion 21 includes a first blade assembly 211 and a second blade assembly 212. The first blade assembly 211 includes three movable blades ASB, and the second blade assembly 212 includes three movable blades

ASB. The movable blades ASB of the first blade assembly 211 and the second blade assembly 212 together surround a light pass aperture 210. Moreover, the size of the light pass aperture 210 can be adjusted through the rotation of the movable blades ASB driven by the driving part 25.

As shown in FIG. 6 and FIG. 7, in a direction of a central axis CA of the light pass aperture 210, the movable blades ASB of the first blade assembly 211 do not overlap with one another, the movable blades ASB of the second blade assembly 212 do not overlap with one another, and the first blade assembly 211 and the second blade assembly 212 at least partially overlap with each other. Furthermore, in a direction around the light pass aperture 210 (e.g., in a circumferential direction of the central axis CA), the movable blades ASB of the first blade assembly 211 at least partially overlap with one another, the movable blades ASB of the second blade assembly 212 at least partially overlap with one another, and the first blade assembly 211 and the second blade assembly 212 do not overlap with each other. In FIG. 7, an area of the light pass aperture 210 is an overlapping area of a projection of an opening surrounded by the movable blades ASB of the first blade assembly 211 in the direction of the central axis CA and a projection of an opening surrounded the movable blades ASB of the second blade assembly 212 in the direction of the central axis CA. In FIG. 7, that the light pass aperture 210 is separated from the first blade assembly 211 and the second blade assembly 212 is only illustrated for descriptive purpose. The light pass aperture 210 is not a real element, but a light permeable hole defined by the movable blades ASB as described above. Moreover, that the controllable aperture stop 2 is disposed on a position where the aperture of the compact camera module 1 exists can indicate that the light pass aperture 210 is disposed on said position for the aperture of the compact camera module 1. In addition, the optical axis OA of the lens assembly LEA and the central axis CA of the light pass aperture 210 are substantially totally overlapping each other.

The fixed portion 23 includes a shaft element 231 and a frame element 233 which are fixed to each other. The shaft element 231 has six shaft structures 2310, and the shaft structures 2310 are respectively disposed corresponding to the three movable blades ASB of the first blade assembly 211 and the three movable blades ASB of the second blade assembly 212. The frame element 233 has a through hole 2330 disposed corresponding to the light pass aperture 210, such that the frame element 233 can be sleeved on the lens assembly LEA.

The driving part 25 includes a rotatable element 251, a flexible printed circuit board 252, a first magnet 253, a second magnet 254, a first coil 255 and a second coil 256.

The rotatable element 251 is rotatable around the light pass aperture 210 and connected to the movable blades ASB, and the rotatable element 251 is configured to drive the movable blades ASB to rotate respectively relative to the shaft structures 2310 so as to adjust the size of the light pass aperture 210. In detail, please refer to FIG. 6 and FIG. 8, where FIG. 8 is an exploded view of a shaft element of a fixed portion, a rotatable element of a driving part and one movable blade of the light pass portion in FIG. 5. The first blade assembly 211 and the second blade assembly 212 are disposed between the shaft element 231 and the rotatable element 251. The fixed portion 23 further includes three first top contact surfaces TS1 and three second top contact surfaces TS2. The first top contact surfaces TS1 and the second top contact surfaces TS2 are located at the shaft element 231 and face the movable blades ASB. There is a step between the first top contact surfaces TS1 and the

second top contact surfaces TS2, and the first top contact surfaces TS1 and the second top contact surfaces TS2 are arranged in a staggered manner around the central axis CA. The rotatable element 251 includes three first bottom contact surfaces BS1, three second bottom contact surfaces BS2 and six connection protrusions 2510. The first bottom contact surfaces BS1 and the second bottom contact surfaces BS2 face the movable blades ASB, and there is a step between the first bottom contact surfaces BS1 and the second bottom contact surfaces BS2. The first bottom contact surfaces BS1 and the second bottom contact surfaces BS2 are arranged in a staggered manner around the central axis CA. The connection protrusions 2510 are respectively disposed corresponding to the three movable blades ASB of the first blade assembly 211 and the three movable blades ASB of the second blade assembly 212. The movable blades ASB of the first blade assembly 211 are disposed between the first top contact surfaces TS1 and the first bottom contact surfaces BS1, and the movable blades ASB of the second blade assembly 212 are disposed between the second top contact surfaces TS2 and the second bottom contact surfaces BS2. Moreover, each of the movable blades ASB has a shaft structure corresponsive hole CH1 and a protrusion corresponsive groove CH2. The shaft structures 2310 of the shaft element 231 are respectively disposed through the shaft structure corresponsive holes CH1 of the movable blades ASB, such that the movable blades ASB can be rotated respectively around the shaft structures 2310 as rotation axes. The connection protrusions 2510 of the rotatable element 251 are respectively slidably disposed in the protrusion corresponsive grooves CH2 of the movable blades ASB, so that the rotatable element 251 can drive the movable blades ASB to rotate respectively around the shaft structures 2310 as rotation axes so as to adjust the size of the light pass aperture 210.

In this embodiment, the number of the movable blades ASB is six, but the present disclosure is not limited thereto. In other embodiments, the number of movable blades may be, for example, four or eight, and the numbers of shaft structures, connection protrusions and contact surfaces may be corresponsive.

In this embodiment, an arithmetic average roughness (Ra) of each of the first top contact surfaces TS1 and the second top contact surfaces TS2 of the fixed portion 23 can be smaller or equal to 0.25 μm , and an arithmetic average roughness (Ra) of each of the first bottom contact surfaces BS1 and the second bottom contact surfaces BS2 of the rotatable element 251 can be smaller than 0.25 μm .

The flexible printed circuit board 252 is arranged around the rotatable element 251. The first magnet 253 and the second magnet 254 are disposed on a side wall SLO of the rotatable element 251 extending in the direction of the central axis CA, and the first coil 255 and the second coil 256 are disposed on the flexible printed circuit board 252 and electrically connected to the flexible printed circuit board 252, thereby improving assembling yield rate. The first coil 255 and the second coil 256 respectively correspond to the first magnet 253 and the second magnet 254 so as to increase space utilization, thereby reducing the thickness of the controllable aperture stop 2. Moreover, the first coil 255 is located farther away from the light pass aperture 210 than the first magnet 253 to the light pass aperture 210, and the second coil 256 is located farther away from the light pass aperture 210 than the second magnet 254 to the light pass aperture 210. The first magnet 253, the second magnet 254, the first coil 255 and the second coil 256 are configured to drive the rotatable element 251 to rotate around the light

pass aperture 210. In this embodiment, the second magnet 254 and the second coil 256 are disposed symmetrical to the first magnet 253 and the first coil 255.

The support portion 27 includes four rollable elements 270, and the rollable elements 270 are disposed between the fixed portion 23 and the rotatable element 251 and arranged around the light pass aperture 210. In detail, the frame element 233 of the fixed portion 23 further has four curved installation structures AMS, the rollable elements 270 are respectively disposed on the curved installation structures AMS of the frame element 233 and movable along the curved installation structures AMS in the direction around the light pass aperture 210, and the frame element 233 is in physical contact with the rollable elements 270 so as to support the rollable elements 270 and the rotatable element 251, such that the rotatable element 251 is rotatable relative to the fixed portion 23 in the circumferential direction of the central axis CA. In this embodiment, the curved installation structures AMS of the frame element 233 are arc-shaped recesses, but the present disclosure is not limited thereto. The rollable elements 270 are balls, and are made of metal material, ceramic material or plastic material. In this embodiment, the shaft structures 2310 and the rollable elements 270 are respectively disposed on the shaft element 231 and the frame element 233.

Please refer to FIG. 9 to FIG. 13. FIG. 9 is a perspective view of the rollable elements and the frame element of the fixed portion in FIG. 5, FIG. 10 is an enlarged top view of region EL1 in FIG. 9, FIG. 11 is another perspective view of the frame element of the fixed portion in FIG. 5, FIG. 12 is a sectional view of the frame element in FIG. 11, and FIG. 13 is a schematic view of the relative position of a metal component of the frame element of the fixed portion and the magnets of the driving part in FIG. 5.

In this embodiment, the frame element 233 includes a metal component 2331 and a clad component 2332, and the metal component 2331 is insert-molded with the clad component 2332 to together form the frame element 233. The metal component 2331 has a plurality of filled holes MFH, and the filled holes MFH are full holes and are circular through holes. The clad component 2332 is, for example, made of plastic material or ceramic material, and the clad component 2332 is filled into the filled holes MFH of the metal component 2331.

The frame element 233 further has a plurality of recesses PCG located at the clad component 2332, and a part of the metal component 2331 is exposed by the recesses PCG. Moreover, the recesses PCG are respectively disposed corresponding to the filled holes MFH of the metal component 2331 so as to reduce the number of holes (e.g., the recesses PCG) of the clad component 2332, and the filled holes MFH are respectively partially exposed by the recesses PCG. In this embodiment, the recesses PCG are, for example, ejection holes disposed corresponding to ejector pins of a mold.

The metal component 2331 includes two attraction portions MAP which are ferromagnetic. The attraction portions MAP are respectively disposed corresponding to the first magnet 253 and the second magnet 254 so as to generate a magnetic attraction in a direction DF1, and the magnetic attraction forces the first magnet 253, the second magnet 254 and the rotatable element 251 to exert a pressure on the rollable elements 270 in the direction DF1 so as to maintain the position of the rollable elements 270. In addition, a direction of the magnetic field generated by the first coil 255 and the second coil 256 is different from the direction DF1 of the magnetic attraction between the metal component 2331 and the magnets. Specifically, each of the first magnet

253 and the second magnet **254** includes a first surface MS1, a second surface MS2 and a connection surface MS3. The first surfaces MS1 respectively face the coils **255** and **256**, the second surfaces MS2 are located closer to the light pass aperture **210** than the first surfaces MS1 to the light pass aperture **210**, and each of the connection surfaces MS3 is connected to the corresponding first surface MS1 and second surface MS2. Moreover, the attraction portions MAP of the metal component **2331** respectively correspond to the connection surfaces MS3 of the first magnet **253** and the second magnet **254**. As shown in FIG. 13, the filled holes MFH of the metal component **2331** do not overlap with the first magnet **253** and the second magnet **254** in the direction parallel to the central axis CA, such that the filled holes MFH do not correspond to the magnets **253** and **254**. In this embodiment, each of the first magnet **253** and the second magnet **254** is in an arc shape, and a direction of the arc shape corresponds to a rotation direction of the magnets **253** and **254**.

Please refer to FIG. 14, is a perspective view of the flexible printed circuit board, coils and electronic component of the driving part in FIG. 5. The driving part further includes a first electronic component **257** and a second electronic component **258**. The first electronic component **257** is a driver controller disposed on the flexible printed circuit board **252** and electrically connected to the second coil **256** and the first coil **255** via the flexible printed circuit board **252**, and the first electronic component **257** is configured to control the coils **255** and **256** to generate required magnetic fields. The second electronic component **258** is a position sensor, and the position sensor includes a position sensing circuit configured to obtain the position information of the rotatable element **251**. The second electronic component **258** is disposed on the flexible printed circuit board **252** and electrically connected to the first electronic component **257** (i.e., the driver controller) via the flexible printed circuit board **252** so as to achieve feedback control, thereby ensuring the accuracy of size adjustment of the controllable aperture stop **2**. The electrical connection and feedback control process of the first electronic component **257**, the second electronic component **258**, the second coil **256** and the first coil **255** in this embodiment are illustrated in reference to FIG. 41 and FIG. 43, where FIG. 41 is a schematic view of an electrical connection of a driver controller, a position sensor and coils according to one embodiment of the present disclosure, and FIG. 43 is a block diagram of a feedback control system of the driver controller, the coils and a position sensing circuit in FIG. 41. In FIG. 41, a driver controller DCU and a position sensor PSU are two separate components and connected to a power VCC and ground GND. The driver controller DCU is electrically connected to coils CL so as to control the coils CL to generate required magnetic fields. One end of each of the coils CL is connected to ground GND. The position sensor PSU has a position sensing circuit PSC configured to obtain the position information of a rotatable element and magnets in a direction around a light pass aperture, and the position sensor PSU is electrically connected to the driver controller DCU so as to generate signals to the driver controller DCU according to the obtained position information. As shown in FIG. 43, in a closed loop feedback control system, the position sensing circuit PSC detects the position of the magnets on the rotatable element and feedbacks the same to the driver controller DCU, and therefore, the driver controller DCU may adjust the magnetic field generated by the coils CL so as to adjust the position of the rotatable element.

In this embodiment, the first electronic component **257** (i.e., the driver controller) is directly disposed on the flexible printed circuit board **252** and electrically connected to the second coil **256** and the first coil **255** via the flexible printed circuit board **252**, but the present disclosure is not limited thereto. For example, please refer to FIG. 15, which is a perspective and partial view of a driving part of the compact camera module according to another configuration of the 1st embodiment of the present disclosure. In other embodiments, a driving part **25a** further includes a printed circuit board **259a**, and the printed circuit board **259a** is electrically connected to a flexible printed circuit board **252a**. A first electronic component **257a** (e.g., a driver controller) is disposed on the printed circuit board **259a** and electrically connected to a first coil **255a** and a second coil **256a** via the printed circuit board **259a** and the flexible printed circuit board **252a** so as to improve assembling process.

In this embodiment, the second electronic component **258** (i.e., the position sensor) and the first magnet **253** are disposed corresponding to each other, and the second electronic component **258** is located farther away from the light pass aperture **210** than the first magnet **253** to the light pass aperture **210**. In this embodiment, the position sensing circuit detects the magnetic field change of the first magnet **253** to obtain position information of components.

Please refer to FIG. 16, which is a cross-sectional view of the controllable aperture stop in FIG. 4.

When a farthest distance between the first magnet **253** and the central axis CA is r_m , and a shortest distance between the first coil **255** and the central axis CA is r_c , the following conditions are satisfied: $r_m=4.10$ mm; $r_c=4.22$ mm; and $r_m/r_c=0.97$. In this embodiment, the distance relation between the second magnet **254**, the second coil **256** and the central axis CA can also satisfy the above conditions.

When a shortest distance between the rollable elements **270** and the central axis CA is r_b , and the farthest distance between the first magnet **253** and the central axis CA is r_m , the following conditions are satisfied: $r_b=3.75$ mm; $r_m=4.10$ mm; and $r_b/r_m=0.91$.

When the farthest distance between the first magnet **253** and the central axis CA is r_m , and a shortest distance between the second electronic component **258** and the central axis CA is r_p , the following conditions are satisfied: $r_m=4.10$ mm; $r_p=4.37$ mm; and $r_m/r_p=0.94$.

Please refer to FIG. 6 and FIG. 17 to FIG. 19, where FIG. 17 is a top view of the controllable aperture stop of the compact camera module in a maximum aperture state according to the 1st embodiment of the present disclosure, FIG. 18 is a top view of the controllable aperture stop of the compact camera module in another aperture state according to the 1st embodiment of the present disclosure, and FIG. 19 is a top view of the controllable aperture stop of the compact camera module in another aperture state according to the 1st embodiment of the present disclosure.

In this embodiment, the size of the light pass aperture **210** can be adjusted by the driving part **25**, so that the controllable aperture stop **2** can have various aperture states, and thus, the compact camera module **1** has different f-numbers.

For example, as shown in FIG. 6, when the size of the light pass aperture **210** is to be enlarged, the first magnet **253**, the second magnet **254**, the first coil **255** and the second coil **256** of the driving part **25** together generate a driving force to drive the rotatable element **251** to rotate in a rotation direction DF2. At this moment, the rollable elements **270** are driven by the rotatable element **251** to move in the curved installation structures AMS of the frame element **233** in a rolling direction DF3. Therefore, the rotatable element **251**

17

is rotatable relative to the frame element **233** of the fixed portion **23**. When the rotatable element **251** is rotated in the rotation direction DF2, the connection protrusions **2510** of the rotatable element **251** drive the movable blades ASB to rotate in a direction DF4 respectively around the shaft structures **2310** of the shaft element **231** as rotation axes, thereby enlarging the size of the light pass aperture **210**.

On the other hand, when the size of the light pass aperture **210** is to be reduced, the first magnet **253**, the second magnet **254**, the first coil **255** and the second coil **256** of the driving part **25** together generate a driving force to drive the rotatable element **251** to rotate in a direction opposite to the rotation direction DF2, and the connection protrusions **2510** of the rotatable element **251** drive the movable blades ASB to rotate respectively around the shaft structures **2310** of the shaft element **231** as rotation axes in a direction opposite to the direction DF4, thereby reducing the size of the light pass aperture **210**.

FIG. 17 to FIG. 19 respectively show three aperture states of the controllable aperture stop **2** in this embodiment.

As shown in FIG. 17, when the controllable aperture stop **2** is in a first aperture state, a focal length of the compact camera module **1** is f , and an aperture area of the light pass aperture **210** is a_1 , the following conditions are satisfied: $f=6.19$ mm; $a_1=15.34$ mm²; and $f/\sqrt{a_1}=1.58$. In the first aperture state, an f-number of the compact camera module **1** is f_{no} , and the following condition is satisfied: $f_{no}=1.4$. Moreover, a difference between a farthest distance and a shortest distance between a periphery of the light pass aperture **210** and the central axis CA is smaller than 9.8%. In this embodiment, the first aperture state is the maximum aperture state of the controllable aperture stop **2**, and the light pass aperture **210** is circular in the maximum aperture state.

As shown in FIG. 18, when the controllable aperture stop **2** is in a second aperture state, the focal length of the compact camera module **1** is f , and the aperture area of the light pass aperture **210** is a_1 , the following conditions are satisfied: $f=6.19$ mm; $a_1=7.52$ mm²; and $f/\sqrt{a_1}=2.26$. In the second aperture state, the f-number of the compact camera module **1** is f_{no} , and the following condition is satisfied: $f_{no}=2.0$.

As shown in FIG. 19, when the controllable aperture stop **2** is in a third aperture state, the focal length of the compact camera module **1** is f , and the aperture area of the light pass aperture **210** is a_1 , the following conditions are satisfied: $f=6.19$ mm; $a_1=3.58$ mm²; and $f/\sqrt{a_1}=3.27$. In the third aperture state, the f-number of the compact camera module **1** is f_{no} , and the following condition is satisfied: $f_{no}=2.9$.

2nd Embodiment

FIG. 20 is a perspective view of a compact camera module according to the 2nd embodiment of the present disclosure, FIG. 21 is a sectional view of a controllable aperture stop of the compact camera module in FIG. 20, FIG. 22 is a side view of the controllable aperture stop of the compact camera module along line 22-22 in FIG. 21, FIG. 23 is an exploded view of the controllable aperture stop of the compact camera module in FIG. 20, FIG. 24 is another exploded view of the controllable aperture stop of the compact camera module in FIG. 20, and FIG. 25 is an exploded view of a light pass portion of the controllable aperture stop in FIG. 23.

In this embodiment, a compact camera module **1b** includes a controllable aperture stop **2b**, a lens assembly, a lens driving unit and an image sensor (not shown in figures).

18

Moreover, the controllable aperture stop **2b** is disposed on an aperture position of the compact camera module **1b**, the lens driving unit is configured to drive the lens assembly to move along an optical axis of the lens assembly, and the image sensor is disposed on an image surface of the lens assembly. In addition, the arrangement of the lens assembly, the lens driving unit and the image sensor of the compact camera module **1b** is the same as that of the lens assembly LEA, the lens driving unit DGU and the image sensor ISU of the compact camera module **1** as disclosed in the 1st embodiment.

The controllable aperture stop **2b** includes a light pass portion **21b**, a fixed portion **23b**, a driving part **25b** and a support portion **27b**.

The light pass portion **21b** includes a first blade assembly **211b** and a second blade assembly **212b**. The first blade assembly **211b** includes three movable blades ASB, and the second blade assembly **212b** includes three movable blades ASB. The movable blades ASB of the first blade assembly **211b** and the second blade assembly **212b** together surround a light pass aperture **210b**. Moreover, the size of the light pass aperture **210b** can be adjusted through the rotation of the movable blades ASB driven by the driving part **25b**.

As shown in FIG. 24 and FIG. 25, in a direction of a central axis CA of the light pass aperture **210b**, the movable blades ASB of the first blade assembly **211b** do not overlap with one another, the movable blades ASB of the second blade assembly **212b** do not overlap with one another, and the first blade assembly **211b** and the second blade assembly **212b** at least partially overlap with each other. Furthermore, in a direction around the light pass aperture **210b** (e.g., in a circumferential direction of the central axis CA), the movable blades ASB of the first blade assembly **211b** at least partially overlap with one another, the movable blades ASB of the second blade assembly **212b** at least partially overlap with one another, and the first blade assembly **211b** and the second blade assembly **212b** do not overlap with each other. In FIG. 25, an area of the light pass aperture **210b** is an overlapping area of a projection of an opening surrounded by the movable blades ASB of the first blade assembly **211b** in the direction of the central axis CA and a projection of an opening surrounded the movable blades ASB of the second blade assembly **212b** in the direction of the central axis CA. In FIG. 25, that the light pass aperture **210b** is separated from the first blade assembly **211b** and the second blade assembly **212b** is only illustrated for descriptive purpose. The light pass aperture **210b** is not a real element, but a light permeable hole defined by the movable blades ASB as described above. Moreover, that the controllable aperture stop **2b** is disposed on a position where the aperture of the compact camera module **1b** exists can indicate that the light pass aperture **210b** is disposed on said position for the aperture of the compact camera module **1b**. In addition, the optical axis of the lens assembly and the central axis CA of the light pass aperture **210b** are substantially totally overlapping each other.

The fixed portion **23b** includes a shaft element **231b**, a frame element **233b** and a cover **235b** which are fixed to one another. The shaft element **231b** has six shaft structures **2310b**, and the shaft structures **2310b** are respectively disposed corresponding to the three movable blades ASB of the first blade assembly **211b** and the three movable blades ASB of the second blade assembly **212b**. The frame element **233b** has through hole **2330b** disposed corresponding to the light pass aperture **210b**, such that the frame element **233b** can be sleeved on the lens assembly. The cover **235b** includes six

positioning holes **2350b**, and the positioning holes **2350b** are respectively disposed corresponding to the shaft structures **2310b**.

The driving part **25b** includes a rotatable element **251b**, a flexible printed circuit board **252b**, a first magnet **253b**, a second magnet **254b**, a first coil **255b** and a second coil **256b**.

The rotatable element **251b** is rotatable around the light pass aperture **210b** and connected to the movable blades ASB, and the rotatable element **251b** is configured to drive the movable blades ASB to rotate respectively relative to the shaft structures **2310b** the light pass aperture **210b**. In detail, the first blade assembly **211b** and the second blade assembly **212b** are disposed between the cover **235b** and the rotatable element **251b**. The rotatable element **251b** includes six connection protrusions **2510b**, and the connection protrusions **2510b** are respectively disposed corresponding to the three movable blades ASB of the first blade assembly **211b** and the three movable blades ASB of the second blade assembly **212b**. Moreover, each of the movable blades ASB has a shaft structure corresponsive hole CH1 and a protrusion corresponsive groove CH2. The shaft structures **2310b** of the shaft element **231b** are respectively disposed through the shaft structure corresponsive holes CH1 of the movable blades ASB and fixed to the positioning holes **2350b** of the cover **235b**, such that the movable blades ASB can be rotated respectively around the shaft structures **2310b** as rotation axes. Therefore, the cover **235b** is maintained in a predetermined position, and with the collaboration of the cover **235b** and the rotatable element **251b**, the movable blades ASB are movable in a certain range. The connection protrusions **2510b** of the rotatable element **251b** are respectively slidably disposed in the protrusion corresponsive grooves CH2 of the movable blades ASB, so that the rotatable element **251b** can drive the movable blades ASB to rotate respectively around the shaft structures **2310b** as rotation axes so as to adjust the size of the light pass aperture **210b**. In this embodiment, the positioning holes **2350b** are through holes.

In this embodiment, the number of the movable blades ASB is six, but the present disclosure is not limited thereto. In other embodiments, the number of movable blades may be, for example, four or eight, and the numbers of shaft structures, connection protrusions and positioning holes may be corresponsive.

In this embodiment, the cover **235b** further includes an inner surface **2351b** and an outer surface **2352b**. The inner surface **2351b** faces the movable blades ASB, and the outer surface **2352b** is located farther away from the movable blades ASB than the inner surface **2351b** to the movable blades ASB. Moreover, a reflectivity of the outer surface **2352b** is smaller than a reflectivity of the inner surface **2351b**. An arithmetic average roughness (Ra) of the inner surface **2351b** is smaller than 0.25 μm .

The flexible printed circuit board **252b** is arranged around the rotatable element **251b**. The first magnet **253b** and the second magnet **254b** are disposed on a side wall SLO of the rotatable element **251b** in the direction of the central axis CA, and the first coil **255b** and the second coil **256b** are disposed on the flexible printed circuit board **252b** and electrically connected to the flexible printed circuit board **252b**, thereby improving assembling yield rate. The first coil **255b** and the second coil **256b** respectively correspond to the first magnet **253b** and the second magnet **254b**. Moreover, the first coil **255b** is located farther away from the light pass aperture **210b** than the first magnet **253b** to the light pass aperture **210b**, and the second coil **256b** is located

farther away from the light pass aperture **210b** than the second magnet **254b** to the light pass aperture **210b**. The first magnet **253b**, the second magnet **254b**, the first coil **255b** and the second coil **256b** are configured to drive the rotatable element **251b** to rotate around the light pass aperture **210b**. In this embodiment, the second magnet **254b** and the second coil **256b** are disposed symmetrical to the first magnet **253b** and the first coil **255b**.

The support portion **27b** includes four rollable elements **270b**, and the rollable elements **270b** are disposed between the fixed portion **23b** and the rotatable element **251b** and arranged around the light pass aperture **210b**. In detail, the frame element **233b** of the fixed portion **23b** further has four curved installation structures AMS, the rollable elements **270b** are respectively disposed on the curved installation structures AMS of the frame element **233b** and movable along the curved installation structures AMS in the direction around the light pass aperture **210b**, and the frame element **233b** is in physical contact with the rollable elements **270b** so as to support the rollable elements **270b** and the rotatable element **251b**, such that the rotatable element **251b** is rotatable relative to the fixed portion **23b** in the circumferential direction of the central axis CA. In this embodiment, the curved installation structures AMS of the frame element **233b** are arc-shaped recesses, but the present disclosure is not limited thereto. The rollable elements **270b** are balls, and are made of metal material, ceramic material or plastic material. In this embodiment, the shaft structures **2310b** and the rollable elements **270b** are respectively disposed on the shaft element **231b** and the frame element **233b**.

Please refer to FIG. 26 to FIG. 29. FIG. 26 is a perspective view of the rollable elements and the frame element of the fixed portion in FIG. 23, FIG. 27 is an enlarged top view of region EL2 in FIG. 26, FIG. 28 is another perspective view of the frame element of the fixed portion in FIG. 23, and FIG. 29 is a schematic view of the relative position of a metal component of the frame element of the fixed portion and the magnets of the driving part in FIG. 23.

In this embodiment, the frame element **233b** includes a metal component **2331b** and a clad component **2332b**, and the metal component **2331b** is insert-molded with the clad component **2332b** to together form the frame element **233b**. The metal component **2331b** has a plurality of filled holes MFHH, and the filled holes MFHH are half holes. The clad component **2332b** is, for example, made of plastic material or ceramic material, and the clad component **2332b** is filled into the filled holes MFHH of the metal component **2331b**.

The frame element **233b** further has a plurality of recesses PCG located at the clad component **2332b**, and a part of the metal component **2331b** is exposed by the recesses PCG so as to position the metal component **2331b**. Moreover, the recesses PCG are respectively disposed corresponding to the filled holes MFHH of the metal component **2331b** so as to reduce the number of holes (e.g., the recesses PCG) of the clad component **2332b**, and the filled holes MFHH are respectively partially exposed by the recesses PCG. In this embodiment, the recesses PCG are, for example, ejection holes disposed corresponding to ejector pins of a mold.

The metal component **2331b** is ferromagnetic, the metal component **2331b**, the first magnet **253b** and the second magnet **254b** together generate a magnetic attraction in a direction DF1, and the magnetic attraction forces the first magnet **253b**, the second magnet **254b** and the rotatable element **251b** to exert a pressure on the rollable elements **270b** in the direction DF1 so as to maintain the position of the rollable elements **270b**. In addition, a direction of the magnetic field generated by the first coil **255b** and the

second coil **256b** is different from the direction DF1 of the magnetic attraction between the metal component **2331b** and the magnets. As shown in FIG. 29, the filled holes MFHH of the metal component **2331b** do not overlap with the first magnet **253b** and the second magnet **254b** in the direction parallel to central axis CA, such that the filled holes MFHH do not correspond to the magnets **253b** and **254b**.

Please refer to FIG. 30, which is a perspective view of the flexible printed circuit board, the coils and an electronic component of the driving part in FIG. 23. The driving part **25b** further includes a third electronic component **257b**, and the third electronic component **257b** is a driver controller having a position sensing circuit, thereby simplifying cable arrangement. The third electronic component **257b** is disposed on the flexible printed circuit board **252b** and electrically connected to the first coil **255b** and the second coil **256b** via the flexible printed circuit board **252b**, and the third electronic component **257b** is configured to control the coils **255b** and **256b** to generate required magnetic fields. Moreover, the third electronic component **257b** is disposed corresponding to the first magnet **253b** so as to obtain the position information of the rotatable element **251b** and the first magnet **253b** in the direction around the light pass aperture **210b** through the position sensing circuit, thereby achieving feedback control so as to ensure the accuracy of size adjustment of the controllable aperture stop **2b**. The electrical connection and feedback control process of the third electronic component **257b**, the first coil **255b** and the second coil **256b** in this embodiment are illustrated in reference to FIG. 42 and FIG. 43, where FIG. 42 is a schematic view of an electrical connection of a driver controller and coils according to one embodiment of the present disclosure, and FIG. 43 is a block diagram of a feedback control system of the driver controller, the coils and a position sensing circuit in FIG. 42. In FIG. 42, a driver controller DCU has a position sensing circuit PSC, and the driver controller DCU and the position sensing circuit PSC are connected to a power VCC and GND. The driver controller DCU is electrically connected to coils CL so as to control the coils CL to generate required magnetic fields. One end of each of the coils CL is connected to ground GND. The position sensing circuit PSC of the driver controller DCU is configured to obtain the position information of a rotatable element and magnets in a direction around a light pass aperture. As shown in FIG. 43, in a closed loop feedback control system, the position sensing circuit PSC detects the position of the magnets on the rotatable element and feedbacks the same to the driver controller DCU, and therefore, the driver controller DCU may adjust the magnetic field generated by the coils CL so as to adjust the position of the rotatable element.

In this embodiment, the third electronic component **257b** is disposed corresponding to the first magnet **253b**, and the third electronic component **257b** is located farther away from the light pass aperture **210b** than the first magnet **253b** to the light pass aperture **210b**. In this embodiment, the position sensing circuit detects the magnetic field change of the first magnet **253b** to obtain position information of components.

In this embodiment, the number of magnets of the driving part **25b** is two, the third electronic component **257b** is disposed corresponding to the first magnet **253b**, and the metal component **2331b** is made of ferromagnetic material such that the whole metal component **2331b** is ferromagnetic, but the present disclosure is not limited thereto. For example, please refer to FIG. 31, which is a perspective and partial view of a driving part and a metal component of the

compact camera module according to another configuration of the 2nd embodiment of the present disclosure. In other embodiments, the number of magnets of a driving part **25c** is four; that is, the driving part **25c** further includes a third magnet **353c** and a fourth magnet **354c** disposed on the side wall of a rotatable element, and the third magnet **353c** and the fourth magnet **354c** are respectively disposed between a first magnet **253c** and a second magnet **254c**, such that the first magnet **253c**, the second magnet **254c**, the third magnet **353c** and the fourth magnet **354c** together surround the rotatable element. Moreover, a third electronic component **257c** disposed on a flexible printed circuit board **252c** is disposed corresponding to the third magnet **353c**, and the third electronic component **257c** is configured to detect the magnetic field change of the third magnet **353c** through a position sensing circuit thereof so as to obtain the position information of the rotatable element and the third magnet **353c** in a direction around the light pass aperture. In addition, a metal component **2331c** is not entirely ferromagnetic but includes two attraction portions MAP that are ferromagnetic at some portions thereof. The attraction portions MAP are respectively disposed corresponding to the third magnet **353c** and the fourth magnet **354c** so as to together generate a magnetic attraction in the direction DF1, and the magnetic attraction forces the third magnet **353c**, the fourth magnet **354c** and the rotatable element to exert a pressure on rollable elements in the direction DF1 so as to stabilize the operation process.

When a shortest distance between the first magnet **253b** and the central axis CA is r_m , and a shortest distance between the first coil **255b** and the central axis CA is r_c , the following conditions are satisfied: $r_m=4.12$ mm; $r_c=4.31$ mm; and $r_m/r_c=0.96$. In this embodiment, the distance relation between the second magnet **254b**, the second coil **256b** and the central axis CA can also satisfy the above conditions.

When a shortest distance between the rollable elements **270b** and the central axis CA is r_b , and the farthest distance between the first magnet **253b** and the central axis CA is r_m , the following conditions are satisfied: $r_b=3.75$ mm; $r_m=4.12$ mm; and $r_b/r_m=0.91$.

When the farthest distance between the first magnet **253b** and the central axis CA is r_m , and a shortest distance between the third electronic component **257b** and the central axis CA is r_p , the following conditions are satisfied: $r_m=4.12$ mm; $r_p=4.25$ mm; and $r_m/r_p=0.97$.

Please refer to FIG. 24 and FIG. 32 to FIG. 34, where FIG. 32 is a top view of the controllable aperture stop of the compact camera module in a maximum aperture state according to the 2nd embodiment of the present disclosure, FIG. 33 is a top view of the controllable aperture stop of the compact camera module in another aperture state according to the 2nd embodiment of the present disclosure, and FIG. 34 is a top view of the controllable aperture stop of the compact camera module in another aperture state according to the 2nd embodiment of the present disclosure.

In this embodiment, the size of the light pass aperture **210b** can be adjusted by the driving part **25b**, so that the controllable aperture stop **2b** can have various aperture states, and thus, the compact camera module **1b** has different f-numbers.

For example, as shown in FIG. 24, when the size of the light pass aperture **210b** is to be reduced, the first magnet **253b**, the second magnet **254b**, the first coil **255b** and the second coil **256b** of the driving part **25b** together generate a driving force to drive the rotatable element **251b** to rotate in a rotation direction DF5. At this moment, the rollable

23

elements **270b** are driven by the rotatable element **251b** to move in the curved installation structures AMS of the frame element **233b** in a rolling direction DF6. Therefore, the rotatable element **251b** is rotatable relative to the frame element **233b** of the fixed portion **23b**. When the rotatable element **251b** is rotated in the rotation direction DF5, the connection protrusions **2510b** of the rotatable element **251b** drive the movable blades ASB to rotate in a direction DF7 respectively around the shaft structures **2310b** of the shaft element **231b** as rotation axes, thereby enlarging the size of the light pass aperture **210b**.

On the other hand, when the size of the light pass aperture **210b** is to be enlarged, the first magnet **253b**, the second magnet **254b**, the first coil **255b** and the second coil **256b** of the driving part **25b** together generate a driving force to drive the rotatable element **251b** to rotate in a direction opposite to the rotation direction DF5, and the connection protrusions **2510b** of the rotatable element **251b** drive the movable blades ASB to rotate respectively around the shaft structures **2310b** of the shaft element **231b** as rotation axes in a direction opposite to the direction DF7, thereby reducing the size of the light pass aperture **210b**.

FIG. 32 to FIG. 34 respectively show three aperture states of the controllable aperture stop **2b** in this embodiment.

As shown in FIG. 32, when the controllable aperture stop **2b** is in a first aperture state, a focal length of the compact camera module **1b** is f , and an aperture area of the light pass aperture **210b** is $a1$, the following conditions are satisfied: $f=6.19$ mm; $a1=15.34$ mm²; and $f/\sqrt{a1}=1.58$. In the first aperture state, an f-number of the compact camera module **1b** is fno , and the following condition is satisfied: $fno=1.4$. Moreover, a difference between a farthest distance and a shortest distance between a periphery of the light pass aperture **210b** and the central axis CA is smaller than 9.8%. In this embodiment, the first aperture state is the maximum aperture state of the controllable aperture stop **2b**, and the light pass aperture **210b** in the maximum aperture state.

As shown in FIG. 33, when the controllable aperture stop **2b** is in a second aperture state, the focal length of the compact camera module **1b** is f , and the aperture area of the light pass aperture **210b** is $a1$, the following conditions are satisfied: $f=6.19$ mm; $a1=3.84$ mm²; and $f/\sqrt{a1}=3.16$. In the second aperture state, the f-number of the compact camera module **1b** is fno , and the following condition is satisfied: $fno=2.8$.

As shown in FIG. 34, when the controllable aperture stop **2b** is in a third aperture state, the focal length of the compact camera module **1b** is f , and the aperture area of the light pass aperture **210b** is $a1$, the following conditions are satisfied: $f=6.19$ mm; $a1=0.96$ mm²; and $f/\sqrt{a1}=6.32$. In the third aperture state, the f-number of the compact camera module **1b** is fno , the following condition is satisfied: $fno=5.6$.

3rd Embodiment

Please refer to FIG. 35 to FIG. 37. FIG. 35 is one perspective view of an electronic device according to the 3rd embodiment of the present disclosure, FIG. 36 is another perspective view of the electronic device in FIG. 35, and FIG. 37 is a block diagram of the electronic device in FIG. 35.

In this embodiment, an electronic device **7** is a mobile device such as a computer, a smartphone, a smart wearable device, a camera drone, a driving recorder and displayer, and the present disclosure is not limited thereto. The electronic device **7** includes a compact camera module **70a** having a controllable aperture stop, a wide-angle compact camera

24

module **70b**, a macro-photo compact camera module **70c**, a compact camera module **70d**, a ToF (time of flight) camera module **70e**, a flash module **72**, a focus assist module **73**, an image signal processor, a display module **75**, an image software processor and a biometric identification device **77**. In addition, the compact camera module **70a** having a controllable aperture stop is, for example, the compact camera module **1** as disclosed in the 1st embodiment, but the present disclosure is not limited thereto. Each of the camera modules **70b**, **70c**, **70d** and **70e** may be one of the compact camera modules as disclosed in the above embodiments of the present disclosure.

The compact camera module **70a**, the compact camera module **70b** and the compact camera module **70c** are disposed on the same side of the electronic device **7**. The compact camera module **70d**, the ToF camera module **70e** and the display module **75** are disposed on the opposite side of the electronic device **7**. The display module **75** can be a user interface, such that the camera module **70d** and the camera module **70e** can be front-facing cameras of the electronic device **7** for taking selfies, but the present disclosure is not limited thereto.

In this embodiment, the compact camera module **70a**, the compact camera module **70b** and the compact camera module **70c** have different fields of view, such that the electronic device **7** can have various magnification ratios so as to meet the requirement of optical zoom functionality. For example, the wide-angle compact camera module **70b** has a relatively large field of view, and the image captured by the wide-angle compact camera module **70b** can refer to FIG. 38, which shows an image captured by the electronic device **7** with a wide-angle compact camera module, and the captured image as shown in FIG. 38 includes the whole cathedral, surrounding buildings and people in front of the cathedral. The captured image as shown in FIG. 38 has a relatively large field of view and depth of view, but it often has a relatively large degree of distortion. The image captured by the compact camera module **70a** having a controllable aperture stop with a relatively small f-number can refer to FIG. 39, and the image captured by the compact camera module **70a** having a controllable aperture stop with a relatively large f-number can refer to FIG. 40. FIG. 39 shows an image captured by the electronic device **7** with a compact camera module having a controllable aperture stop with an f-number of 1.4, FIG. 40 shows an image captured by the electronic device **7** with a compact camera module having a controllable aperture stop with an f-number of 5.6, and the captured images as shown in FIG. 39 and FIG. 40 include birds flying in front of the cathedral. As shown in FIG. 39, when the controllable aperture stop of the compact camera module **70a** provides a relatively large light pass aperture, the image sensor receives more light, but the background in the image is relatively blurry. As shown in FIG. 40, when the controllable aperture stop of the compact camera module **70a** provides a relatively small light pass aperture, the image sensor receives less light, but the background in the image is relatively clear. The captured images as shown in FIG. 39 and FIG. 40 have a relatively small field of view and depth of view, and the compact camera module **70a** having a controllable aperture stop can be used for shooting moving targets. For example, the lens driving unit can drive the lens assembly to quickly and continuously autofocus on the target, such that the captured image of the target would not be blurred due to long focusing distance. When imaging, the compact camera module **70a** having a controllable aperture stop can further perform optical zoom for imaged objects so as to obtain clearer images. In addition, the camera module **70e** can

determine depth information of the imaged object. In this embodiment, the electronic device 7 includes multiple camera modules 70a, 70b, 70c, 70d, and 70e, but the present disclosure is not limited to the number and arrangement of camera modules.

When a user captures images of an object OBJ, light rays converge in the camera module 70a, the camera module 70b or the camera module 70c to generate images, and the flash module 72 is activated for light supplement. The focus assist module 73 detects the object distance of the imaged object OBJ to achieve fast auto focusing. The image signal processor is configured to optimize the captured image to improve image quality. The light beam emitted from the focus assist module 73 can be either conventional infrared or laser.

In addition, the light rays may converge in the camera module 70d or the camera module 70e to generate images. The electronic device 7 can include a reminder light 82 that can be illuminated to remind the user that the camera module 70d or the camera module 70e is working. The display module 75 can be a touch screen or physical buttons such as a zoom button 751 and a shutter release button 752. The user is able to interact with the display module 75 and the image software processor having multiple functions to capture images and complete image processing. The image processed by the image software processor can be displayed on the display module 75. The user can replay the previously captured image through an image playback button 753 of the display module 75, can choose a suitable camera module for shooting through a camera module switching button 754 of the display module 75, and can properly adjust shooting parameters according to current shooting situations through an integrated menu button 755 of the display module 75.

Further, the electronic device 7 further includes a circuit board 78 and a plurality of electronic components 79 disposed on the circuit board 78. The camera modules 70a, 70b, 70c, 70d, and 70e are electrically connected to the electronic component 79 via connectors 781 on the circuit board 78. The electronic components 79 can include a signal emitting module and can transmit image(s) to other electronic device or a cloud storage via the signal emitting module. The signal emitting module can be a wireless fidelity (WiFi) module, a Bluetooth module, an infrared module, a network service module or an integrated module for transmitting various signals mentioned above, and the present disclosure is not limited thereto.

The electronic components 79 can also include a storage unit, a random access memory for storing image information, a gyroscope, and a position locator for facilitating the navigation or positioning of the electronic device 7. In this embodiment, the image signal processor, the image software processor and the random access memory are integrated into a single chip system 74, but the present disclosure is not limited thereto. In some other embodiments, the electronic components can also be integrated in the camera module or can also be disposed on one of the circuit boards. In addition, the user can use the biometric identification device 77 to turn on and unlock the electronic device 7.

The smartphone in this embodiment is only exemplary for showing the compact camera module of the present disclosure installed in an electronic device, and the present disclosure is not limited thereto. The compact camera module can be optionally applied to optical systems with a movable focus. Furthermore, the compact camera module features good capability in aberration corrections and high image quality, and can be applied to 3D (three-dimensional) image capturing applications, in products such as digital cameras,

mobile devices, digital tablets, smart televisions, network surveillance devices, dashboard cameras, vehicle backup cameras, multi-camera devices, image recognition systems, motion sensing input devices, wearable devices and other electronic imaging devices.

The foregoing description, for the purpose of explanation, has been described with reference to specific embodiments. It is to be noted that the present disclosure shows different data of the different embodiments; however, the data of the different embodiments are obtained from experiments. The embodiments were chosen and described in order to best explain the principles of the disclosure and its practical applications, to thereby enable others skilled in the art to best utilize the disclosure and various embodiments with various modifications as are suited to the particular use contemplated. The embodiments depicted above and the appended drawings are exemplary and are not intended to be exhaustive or to limit the scope of the present disclosure to the precise forms disclosed. Many modifications and variations are possible in view of the above teachings.

What is claimed is:

1. A controllable aperture stop comprising:

a light pass portion comprising a plurality of movable blades, and the plurality of movable blades together surrounding a light pass aperture;

a fixed portion having a plurality of shaft structures respectively disposed corresponding to the plurality of movable blades;

a driving part comprising:

a rotatable element connected to the plurality of movable blades, and the rotatable element configured to drive the plurality of movable blades to rotate respectively relative to the plurality of shaft structures so as to adjust a size of the light pass aperture; a first magnet disposed on the rotatable element; and a first coil disposed corresponding to the first magnet, the first coil located farther away from the light pass aperture than the first magnet to the light pass aperture, and the first magnet and the first coil configured to drive the rotatable element to rotate around the light pass aperture; and

a plurality of rollable elements disposed between the fixed portion and the rotatable element and arranged around the light pass aperture, so that the rotatable element can be rotated relative to the fixed portion;

wherein the fixed portion comprises a frame element, the plurality of rollable elements are disposed between the frame element and the rotatable element, the frame element comprises a metal component and a clad component, and the metal component is insert-molded with the clad component to together form the frame element;

wherein the metal component comprises an attraction portion, the attraction portion is ferromagnetic and disposed corresponding to the first magnet so as to generate a magnetic attraction, the magnetic attraction forces the first magnet and the rotatable element to exert a pressure on the plurality of rollable elements, and the attraction portion and the first magnet overlap with each other in a direction parallel to a central axis of the light pass aperture;

wherein a farthest distance between the first magnet and the central axis of the light pass aperture is r_m , a shortest distance between the first coil and the central axis is r_c , a shortest distance between the plurality of rollable elements and the central axis is r_b , and the following conditions are satisfied:

$0.5 \leq r_m/r_c < 1$; and

$0.6 \leq r_b/r_m \leq 1.8$.

2. The controllable aperture stop of claim 1, wherein the fixed portion further comprises:

a shaft element having the plurality of shaft structures; wherein the frame element having a through hole, wherein the through hole and the light pass aperture correspond to each other, and the frame element and the shaft element are fixed to each other.

3. The controllable aperture stop of claim 2, wherein the frame element comprises a curved installation structure, and at least one of the plurality of rollable elements is disposed on the curved installation structure and movable along the curved installation structure in a direction around the light pass aperture.

4. The controllable aperture stop of claim 1, wherein the fixed portion further comprises a cover, the plurality of movable blades are disposed between the cover and the rotatable element, the cover comprises a positioning hole, and the positioning hole is disposed corresponding to one of the plurality of shaft structures.

5. The controllable aperture stop of claim 4, wherein the cover comprises an inner surface facing the plurality of movable blades;

wherein an arithmetic average roughness (Ra) of the inner surface is smaller than 0.25 μm .

6. The controllable aperture stop of claim 4, wherein the cover comprises an inner surface and an outer surface, the inner surface faces the plurality of movable blades, the outer surface is located farther away from the plurality of movable blades than the inner surface to the plurality of movable blades, and a reflectivity of the outer surface is smaller than a reflectivity of the inner surface.

7. The controllable aperture stop of claim 1, wherein the first magnet is in an arc shape, and a direction of the arc shape corresponds to a rotation direction of the first magnet.

8. The controllable aperture stop of claim 1, wherein the fixed portion further comprises a top contact surface, and the plurality of movable blades are disposed on the top contact surface;

wherein an arithmetic average roughness (Ra) of the top contact surface is smaller or equal to 0.25 μm .

9. The controllable aperture stop of claim 1, wherein the rotatable element comprises a bottom contact surface, and the plurality of movable blades are disposed on the bottom contact surface;

wherein an arithmetic average roughness (Ra) of the bottom contact surface is smaller than 0.25 μm .

10. The controllable aperture stop of claim 1, wherein the driving part further comprises a driver controller electrically connected to the first coil.

11. The controllable aperture stop of claim 10, wherein the driver controller has a position sensing circuit.

12. The controllable aperture stop of claim 1, wherein the plurality of movable blades consist of a first blade assembly and a second blade assembly, the first blade assembly comprises some of the plurality of movable blades, and the second blade assembly comprises others of the plurality of movable blades;

wherein in the direction parallel to the central axis, the plurality of movable blades of the first blade assembly do not overlap with one another, the plurality of movable blades of the second blade assembly do not overlap with one another, and the first blade assembly and the second blade assembly at least partially overlap with each other; and

wherein in a direction around the light pass aperture, the plurality of movable blades of the first blade assembly at least partially overlap with one another, the plurality of movable blades of the second blade assembly at least partially overlap with one another, and the first blade assembly and the second blade assembly do not overlap with each other.

13. The controllable aperture stop of claim 1, wherein the driving part further comprises a second magnet and a second coil, and the second magnet and the second coil are disposed symmetrical to the first magnet and the first coil.

14. The controllable aperture stop of claim 1, wherein when the controllable aperture stop is in a maximum aperture state, a difference between a farthest distance and a shortest distance between a periphery of the light pass aperture and the central axis is smaller than 9.8%.

15. A compact camera module comprising: the controllable aperture stop of claim 1, wherein the controllable aperture stop is disposed on an aperture position of the compact camera module; wherein a focal length of the compact camera module is f , an aperture area of the light pass aperture is a_1 , and the following condition is satisfied:

$$1.19 \leq f/V(a_1) \leq 11.99.$$

16. An electronic device comprising: the compact camera module of claim 15.

17. A controllable aperture stop comprising: a light pass portion comprising a plurality of movable blades, and the plurality of movable blades together surrounding a light pass aperture;

a fixed portion having a plurality of shaft structures respectively disposed corresponding to the plurality of movable blades;

a driving part comprising: a rotatable element connected to the plurality of movable blades, and the rotatable element configured to drive the plurality of movable blades to rotate respectively relative to the plurality of shaft structures so as to adjust a size of the light pass aperture; a first magnet disposed on the rotatable element; and a first coil disposed corresponding to the first magnet, the first coil located farther away from the light pass aperture than the first magnet to the light pass aperture, and the first magnet and the first coil configured to drive the rotatable element to rotate around the light pass aperture; and

a plurality of rollable elements disposed between the fixed portion and the rotatable element and arranged around the light pass aperture, so that the rotatable element can be rotated relative to the fixed portion;

wherein the fixed portion comprises a frame element, the frame element is in physical contact with the plurality of rollable elements so as to support the plurality of rollable elements and the rotatable element, the frame element comprises a metal component and a clad component, and the metal component is insert-molded with the clad component to together form the frame element;

wherein the metal component has a plurality of filled holes, the clad component is filled into the plurality of filled holes, and the plurality of filled holes and the first magnet do not overlap with each other in a direction parallel to a central axis of the light pass aperture.

18. The controllable aperture stop of claim 17, wherein the fixed portion further comprises a shaft element, the shaft

29

element has the plurality of shaft structures, and the shaft element and the frame element are fixed to each other.

19. The controllable aperture stop of claim 17, wherein the fixed portion further comprises a cover, the plurality of movable blades are disposed between the cover and the rotatable element, the cover comprises a positioning hole, and the positioning hole is disposed corresponding to one of the plurality of shaft structures.

20. The controllable aperture stop of claim 19, wherein the cover comprises an inner surface facing the plurality of movable blades;

wherein an arithmetic average roughness (Ra) of the inner surface is smaller than 0.25 μm .

21. The controllable aperture stop of claim 19, wherein the cover comprises an inner surface and an outer surface, the inner surface faces the plurality of movable blades, the outer surface is located farther away from the plurality of movable blades than the inner surface to the plurality of movable blades, and a reflectivity of the outer surface is smaller than a reflectivity of the inner surface.

22. The controllable aperture stop of claim 17, wherein the first magnet is in an arc shape, and a direction of the arc shape corresponds to a rotation direction of the first magnet.

23. The controllable aperture stop of claim 17, wherein the fixed portion further comprises a top contact surface, and the plurality of movable blades are disposed on the top contact surface;

wherein an arithmetic average roughness (Ra) of the top contact surface is smaller or equal to 0.25 μm .

24. The controllable aperture stop of claim 17, wherein the rotatable element comprises a bottom contact surface, and the plurality of movable blades are disposed on the bottom contact surface;

wherein an arithmetic average roughness (Ra) of the bottom contact surface is smaller than 0.25 μm .

25. The controllable aperture stop of claim 17, wherein the frame element further comprises a curved installation structure, and at least one of the plurality of rollable elements is disposed on the curved installation structure and movable along the curved installation structure in a direction around the light pass aperture.

26. The controllable aperture stop of claim 17, wherein the driving part further comprises a driver controller electrically connected to the first coil.

27. The controllable aperture stop of claim 26, wherein the driver controller has a position sensing circuit.

28. The controllable aperture stop of claim 17, wherein the plurality of movable blades consist of a first blade assembly and a second blade assembly, the first blade assembly comprises some of the plurality of movable blades, and the second blade assembly comprises others of the plurality of movable blades;

wherein in a direction parallel to the central axis, the plurality of movable blades of the first blade assembly do not overlap with one another, the plurality of movable blades of the second blade assembly do not overlap with one another, and the first blade assembly and the second blade assembly at least partially overlap with each other; and

wherein in a direction around the light pass aperture, the plurality of movable blades of the first blade assembly at least partially overlap with one another, the plurality of movable blades of the second blade assembly at least partially overlap with one another, and the first blade assembly and the second blade assembly do not overlap with each other.

30

29. The controllable aperture stop of claim 17, wherein the driving part further comprises a second magnet and a second coil, and the second magnet and the second coil are disposed symmetrical to the first magnet and the first coil.

30. The controllable aperture stop of claim 17, wherein when the controllable aperture stop is in a maximum aperture state, a difference between a farthest distance and a shortest distance between a periphery of the light pass aperture and the central axis is smaller than 9.8%.

31. The controllable aperture stop of claim 17, wherein one of the plurality of filled holes is a C-shaped hole.

32. The controllable aperture stop of claim 17, wherein the metal component is ferromagnetic, the metal component and the first magnet are disposed corresponding to each other so as to generate a magnetic attraction, and the magnetic attraction forces the first magnet and the rotatable element to exert a pressure on the plurality of rollable elements.

33. The controllable aperture stop of claim 17, wherein the frame element has a plurality of recesses, the plurality of recesses are respectively disposed corresponding to the plurality of filled holes, and the plurality of filled holes are respectively partially exposed by the plurality of recesses.

34. A compact camera module comprising:

the controllable aperture stop of claim 17, wherein the controllable aperture stop is disposed on an aperture position of the compact camera module;

wherein a focal length of the compact camera module is f , an aperture area of the light pass aperture is a_1 , and the following condition is satisfied:

$$1.19 \leq f/\sqrt{(a_1)} \leq 11.99.$$

35. An electronic device comprising:

the compact camera module of claim 34.

36. A controllable aperture stop comprising:

a light pass portion comprising a plurality of movable blades, and the plurality of movable blades together surrounding a light pass aperture;

a fixed portion having a plurality of shaft structures respectively disposed corresponding to the plurality of movable blades;

a driving part comprising:

a rotatable element connected to the plurality of movable blades, and the rotatable element configured to drive the plurality of movable blades to rotate respectively relative to the plurality of shaft structures so as to adjust a size of the light pass aperture; a first magnet disposed on the rotatable element; and a first coil disposed corresponding to the first magnet, the first coil located farther away from the light pass aperture than the first magnet to the light pass aperture, and the first magnet and the first coil configured to drive the rotatable element to rotate around the light pass aperture; and

a plurality of rollable elements disposed between the fixed portion and the rotatable element and arranged around the light pass aperture, so that the rotatable element can be rotated relative to the fixed portion;

wherein the fixed portion comprises a frame element, the frame element is in physical contact with the plurality of rollable elements so as to support the plurality of rollable elements and the rotatable element, the frame element comprises a metal component and a clad component, and the metal component is insert-molded with the clad component to together form the frame element;

31

wherein the metal component comprises an attraction portion, the attraction portion is ferromagnetic and disposed corresponding to the first magnet so as to generate a magnetic attraction, the magnetic attraction forces the first magnet and the rotatable element to exert a pressure on the plurality of rollable elements, and the attraction portion and the first magnet overlap with each other in a direction parallel to a central axis of the light pass aperture;

wherein the first magnet comprises a first surface, a second surface and a connection surface, the first surface faces the first coil, the second surface is located closer to the light pass aperture than the first surface to the light pass aperture, the connection surface is connected to the first surface and the second surface, and the attraction portion is disposed corresponding to the connection surface.

37. The controllable aperture stop of claim 36, wherein the fixed portion further comprises a shaft element having the plurality of shaft structures, and the shaft element and the frame element are fixed to each other.

38. The controllable aperture stop of claim 36, wherein the fixed portion further comprises a cover, the plurality of movable blades are disposed between the cover and the rotatable element, the cover comprises a positioning hole, and the positioning hole is disposed corresponding to one of the plurality of shaft structures.

39. The controllable aperture stop of claim 38, wherein the cover comprises an inner surface facing the plurality of movable blades;

wherein an arithmetic average roughness (Ra) of the inner surface is smaller than 0.25 μm .

40. The controllable aperture stop of claim 38, wherein the cover comprises an inner surface and an outer surface, the inner surface faces the plurality of movable blades, the outer surface is located farther away from the plurality of movable blades than the inner surface to the plurality of movable blades, and a reflectivity of the outer surface is smaller than a reflectivity of the inner surface.

41. The controllable aperture stop of claim 36, wherein the first magnet is in an arc shape, and a direction of the arc shape corresponds to a rotation direction of the first magnet.

42. The controllable aperture stop of claim 36, wherein the fixed portion further comprises a top contact surface, and the plurality of movable blades are disposed on the top contact surface;

wherein an arithmetic average roughness (Ra) of the top contact surface is smaller or equal to 0.25 μm .

43. The controllable aperture stop of claim 36, wherein the rotatable element comprises a bottom contact surface, and the plurality of movable blades are disposed on the bottom contact surface;

wherein an arithmetic average roughness (Ra) of the bottom contact surface is smaller than 0.25 μm .

44. The controllable aperture stop of claim 36, wherein the frame element further comprises a curved installation structure, and at least one of the plurality of rollable elements is disposed on the curved installation structure and movable along the curved installation structure in a direction around the light pass aperture.

45. The controllable aperture stop of claim 36, wherein the driving part further comprises a driver controller electrically connected to the first coil.

46. The controllable aperture stop of claim 45, wherein the driver controller has a position sensing circuit.

47. The controllable aperture stop of claim 36, wherein the plurality of movable blades consist of a first blade

32

assembly and a second blade assembly, the first blade assembly comprises some of the plurality of movable blades, and the second blade assembly comprises others of the plurality of movable blades;

wherein in the direction parallel to the central axis of the light pass aperture, the plurality of movable blades of the first blade assembly do not overlap with one another, the plurality of movable blades of the second blade assembly do not overlap with one another, and the first blade assembly and the second blade assembly at least partially overlap with each other; and

wherein in a direction around the light pass aperture, the plurality of movable blades of the first blade assembly at least partially overlap with one another, the plurality of movable blades of the second blade assembly at least partially overlap with one another, and the first blade assembly and the second blade assembly do not overlap with each other.

48. The controllable aperture stop of claim 36, wherein the driving part further comprises a second magnet and a second coil, and the second magnet and the second coil are disposed symmetrical to the first magnet and the first coil.

49. The controllable aperture stop of claim 36, wherein when the controllable aperture stop is in a maximum aperture state, a difference between a farthest distance and a shortest distance between a periphery of the light pass aperture and the central axis of the light pass aperture is smaller than 9.8%.

50. A compact camera module comprising:

the controllable aperture stop of claim 36, wherein the controllable aperture stop is disposed on an aperture position of the compact camera module;

wherein a focal length of the compact camera module is f , an aperture area of the light pass aperture is $a1$, and the following condition is satisfied:

$$1.19 \leq f/\sqrt{a1} \leq 11.99.$$

51. An electronic device comprising:

the compact camera module of claim 50.

52. A controllable aperture stop comprising:

a light pass portion comprising a plurality of movable blades, and the plurality of movable blades together surrounding a light pass aperture;

a fixed portion having a plurality of shaft structures respectively disposed corresponding to the plurality of movable blades; and

a driving part comprising:

a rotatable element connected to the plurality of movable blades, and the rotatable element configured to drive the plurality of movable blades to rotate respectively relative to the plurality of shaft structures so as to adjust a size of the light pass aperture; a first magnet disposed on the rotatable element;

a first coil disposed corresponding to the first magnet, the first coil located farther away from the light pass aperture than the first magnet to the light pass aperture, and the first magnet and the first coil configured to drive the rotatable element to rotate around the light pass aperture; and

an electronic component having a position sensing circuit, the electronic component disposed corresponding to the first magnet, and the electronic component located farther away from the light pass aperture than the first magnet to the light pass aperture;

wherein the fixed portion comprises a frame element, the frame element comprises a metal component and a clad

33

component, and the metal component is insert-molded with the clad component to together form the frame element;
 wherein the metal component is ferromagnetic, and the metal component and the first magnet are disposed corresponding to each other and overlap with each other in a direction parallel to a central axis of the light pass aperture;
 wherein a farthest distance between the first magnet and the central axis of the light pass aperture is r_m , a shortest distance between the first coil and the central axis is r_c , a shortest distance between the electronic component and the central axis is r_p , and the following conditions are satisfied:

$$0.5 \leq r_m/r_c < 1; \text{ and}$$

$$0.5 \leq r_m/r_p < 1.$$

53. The controllable aperture stop of claim 52, further comprising a plurality of rollable elements, wherein the plurality of rollable elements are disposed between the frame element of the fixed portion and the rotatable element and arranged around the light pass aperture, so that the rotatable element can be rotated relative to the fixed portion.

54. The controllable aperture stop of claim 52, wherein the fixed portion further comprises a cover, the plurality of movable blades are disposed between the cover and the rotatable element, the cover comprises a positioning hole, and the positioning hole is disposed corresponding to one of the plurality of shaft structures.

55. The controllable aperture stop of claim 52, wherein the electronic component is a driver controller, and the driver controller is electrically connected to the first coil.

56. The controllable aperture stop of claim 52, wherein the driving part further comprises a second magnet and a second coil, and the second magnet and the second coil are disposed symmetrical to the first magnet and the first coil.

57. A compact camera module comprising:
 the controllable aperture stop of claim 52, wherein the controllable aperture stop is disposed on an aperture position of the compact camera module;
 wherein a focal length of the compact camera module is f , an aperture area of the light pass aperture is a_1 , and the following condition is satisfied:

$$1.19 \leq f/\sqrt{a_1} \leq 11.99.$$

58. An electronic device comprising:
 the compact camera module of claim 57.

59. A controllable aperture stop comprising:
 a light pass portion comprising a plurality of movable blades, and the plurality of movable blades together surrounding a light pass aperture;
 a fixed portion having a plurality of shaft structures respectively disposed corresponding to the plurality of movable blades;
 a driving part comprising:
 a rotatable element rotatable around the light pass aperture, the rotatable element connected to the plurality of movable blades, and the rotatable element configured to drive the plurality of movable blades to rotate respectively relative to the plurality of shaft structures so as to adjust a size of the light pass aperture;
 a first magnet disposed on the rotatable element; and
 an electronic component having a position sensing circuit, the electronic component disposed corre-

34

sponding to the first magnet, and the electronic component located farther away from the light pass aperture than the first magnet to the light pass aperture; and
 a plurality of rollable elements disposed between the fixed portion and the rotatable element and arranged around the light pass aperture, so that the rotatable element can be rotated relative to the fixed portion;
 wherein the fixed portion comprises a frame element, the plurality of rollable elements are disposed between the frame element and the rotatable element, the frame element comprises a metal component and a clad component, and the metal component is insert-molded with the clad component to together form the frame element;

wherein the metal component comprises an attraction portion, the attraction portion is ferromagnetic and disposed corresponding to the first magnet so as to generate a magnetic attraction, the magnetic attraction forces the first magnet and the rotatable element to exert a pressure on the plurality of rollable elements, and the attraction portion and the first magnet overlap with each other in a direction parallel to a central axis of the light pass aperture;

wherein a farthest distance between the first magnet and the central axis of the light pass aperture is r_m , a shortest distance between the electronic component and the central axis is r_p , a shortest distance of the plurality of rollable elements and the central axis is r_b , and the following conditions are satisfied:

$$0.5 \leq r_m/r_p < 1; \text{ and}$$

$$0.6 \leq r_b/r_m \leq 1.8.$$

60. The controllable aperture stop of claim 59, wherein the fixed portion further comprises:
 a shaft element having the plurality of shaft structures; wherein the frame element having a through hole, wherein the through hole and the light pass aperture correspond to each other, and the frame element and the shaft element are fixed to each other.

61. The controllable aperture stop of claim 59, wherein the driving part further comprises a second magnet, and the second magnet and the first magnet are symmetrically arranged.

62. The controllable aperture stop of claim 60, wherein the frame element comprises a curved installation structure, and at least one of the plurality of rollable elements is disposed on the curved installation structure and movable along the curved installation structure in a direction around the light pass aperture.

63. The controllable aperture stop of claim 59, wherein the first magnet is in an arc shape, and a direction of the arc shape corresponds to a rotation direction of the first magnet.

64. A compact camera module comprising:
 the controllable aperture stop of claim 59, wherein the controllable aperture stop is disposed on an aperture position of the compact camera module;
 wherein a focal length of the compact camera module is f , an aperture area of the light pass aperture is a_1 , and the following condition is satisfied:

$$1.19 \leq f/\sqrt{a_1} \leq 11.99.$$

65. An electronic device comprising:
 the compact camera module of claim 64.

* * * * *