



US011556329B2

(12) **United States Patent**  
**Thomasma et al.**

(10) **Patent No.:** **US 11,556,329 B2**  
(45) **Date of Patent:** **Jan. 17, 2023**

(54) **SYSTEM FOR UPDATING VEHICLE SOFTWARE**

(56) **References Cited**

(71) Applicant: **FORD GLOBAL TECHNOLOGIES, LLC**, Dearborn, MI (US)

(72) Inventors: **Timothy Thomasma**, West Bloomfield, MI (US); **Parvathy Viswamohan**, Canton, MI (US)

(73) Assignee: **Ford Global Technologies, LLC**, Dearborn, MI (US)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **17/099,348**

(22) Filed: **Nov. 16, 2020**

(65) **Prior Publication Data**

US 2022/0156054 A1 May 19, 2022

(51) **Int. Cl.**  
**G06F 8/65** (2018.01)  
**H04L 67/12** (2022.01)  
**H04L 67/00** (2022.01)

(52) **U.S. Cl.**  
CPC ..... **G06F 8/65** (2013.01); **H04L 67/12** (2013.01); **H04L 67/34** (2013.01)

(58) **Field of Classification Search**  
CPC ... G06F 8/65; G06F 8/658; G06F 8/60; G06F 8/71

See application file for complete search history.

U.S. PATENT DOCUMENTS

7,366,589 B2	4/2008	Habermas	
7,665,081 B1 *	2/2010	Pavlyushchik .....	G06F 8/658 717/168
2015/0193220 A1 *	7/2015	Rork .....	G06Q 10/20 717/170
2016/0294614 A1 *	10/2016	Searle .....	H04L 67/34
2016/0371076 A1 *	12/2016	Moeller .....	G06F 8/654
2018/0095745 A1	4/2018	Mine et al.	
2018/0336024 A1	11/2018	Klische	
2019/0187971 A1	6/2019	Wang et al.	


\* cited by examiner


*Primary Examiner* — Duy Khuong T Nguyen  
(74) *Attorney, Agent, or Firm* — Gregory P. Brown; Brooks Kushman P.C.


(57) **ABSTRACT**

A server includes an interface configured to receive a new software content; a processor, configured to responsive to receiving the new software content, create a new rollout associated with the new software content, and identify a plurality of vehicles eligible to receive the new software content, responsive to detecting a first vehicle of the plurality of vehicles being yet to receive an existing software content associated with an existing rollout, generate a combined software content including both the new and existing software content, and associate the first vehicle with the combined software content.


**15 Claims, 5 Drawing Sheets**

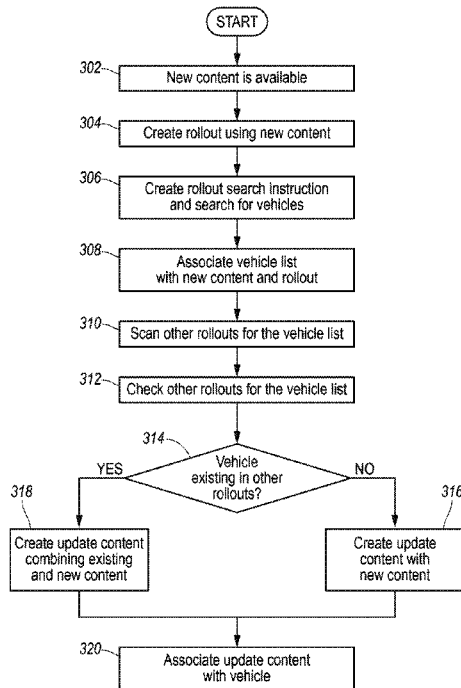

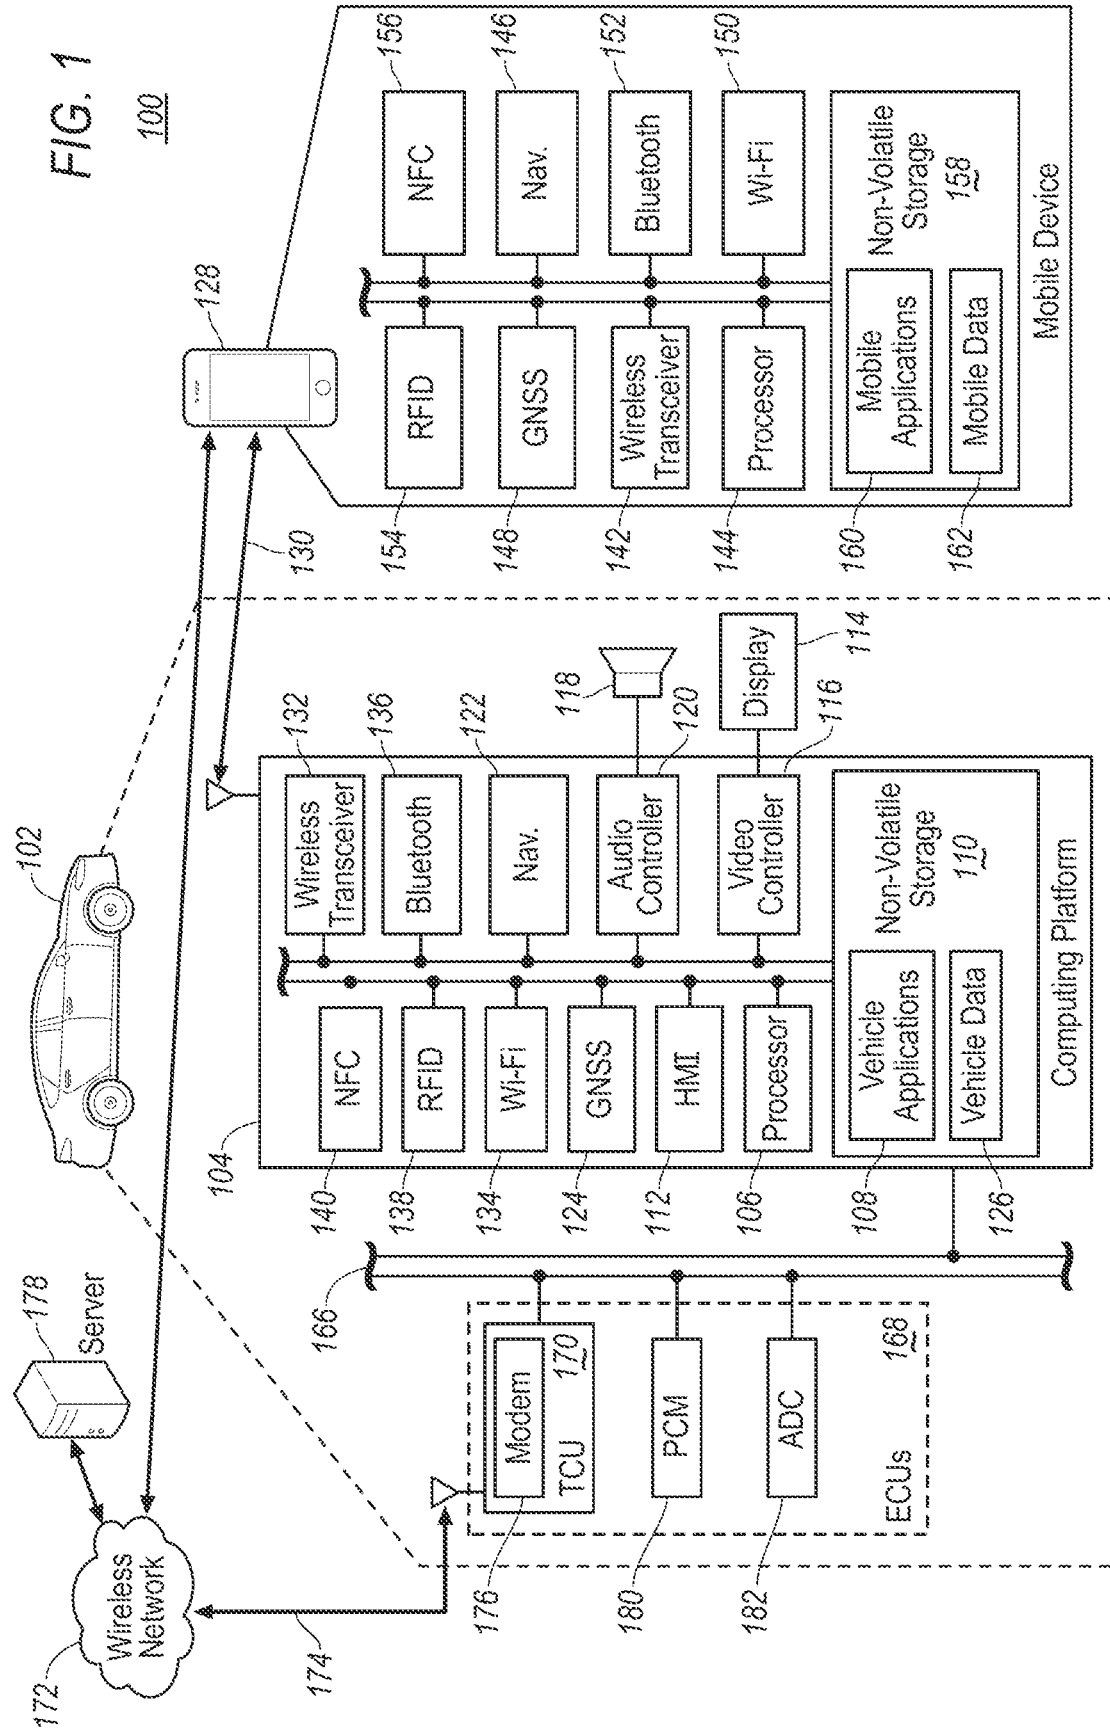

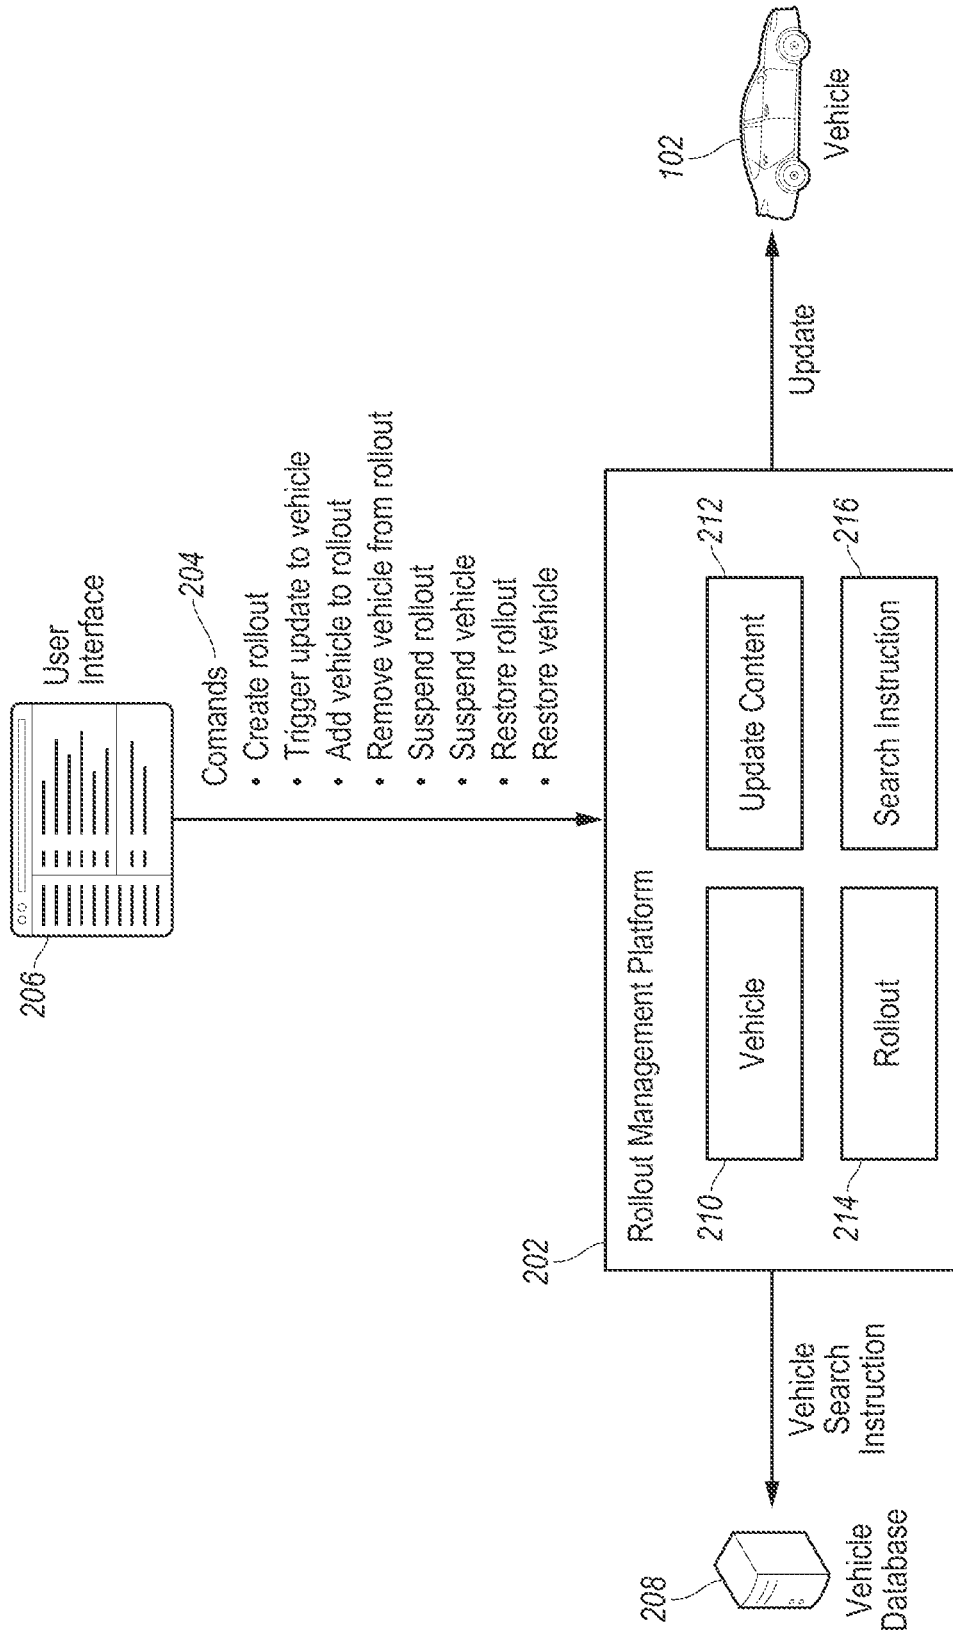


200  
FIG. 2

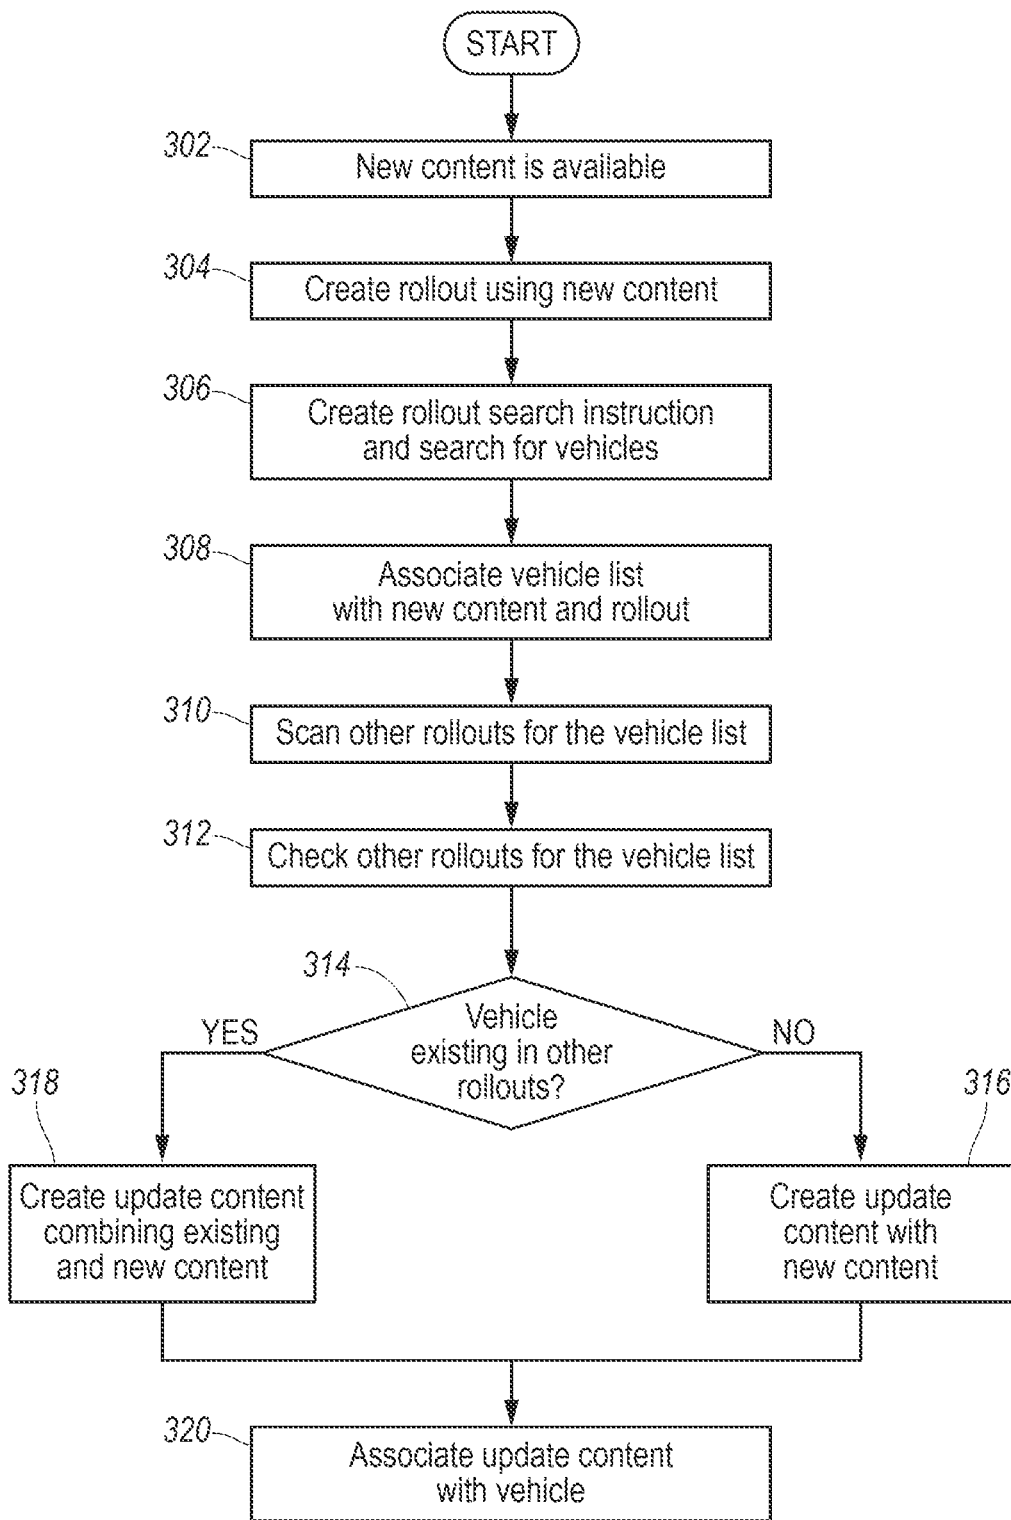

300

FIG. 3

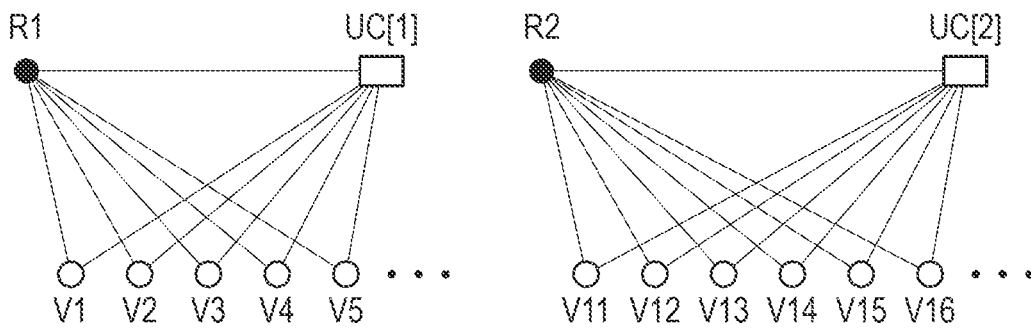

402

R1	V1	V2	V3	V4	V5 ...
	UC[1]	UC[1]	UC[1]	UC[1]	UC[1]

404

R2	V11	V12	V13	V14	V15	V16 ...
	UC[2]	UC[2]	UC[2]	UC[2]	UC[2]	UC[2]

FIG. 4A

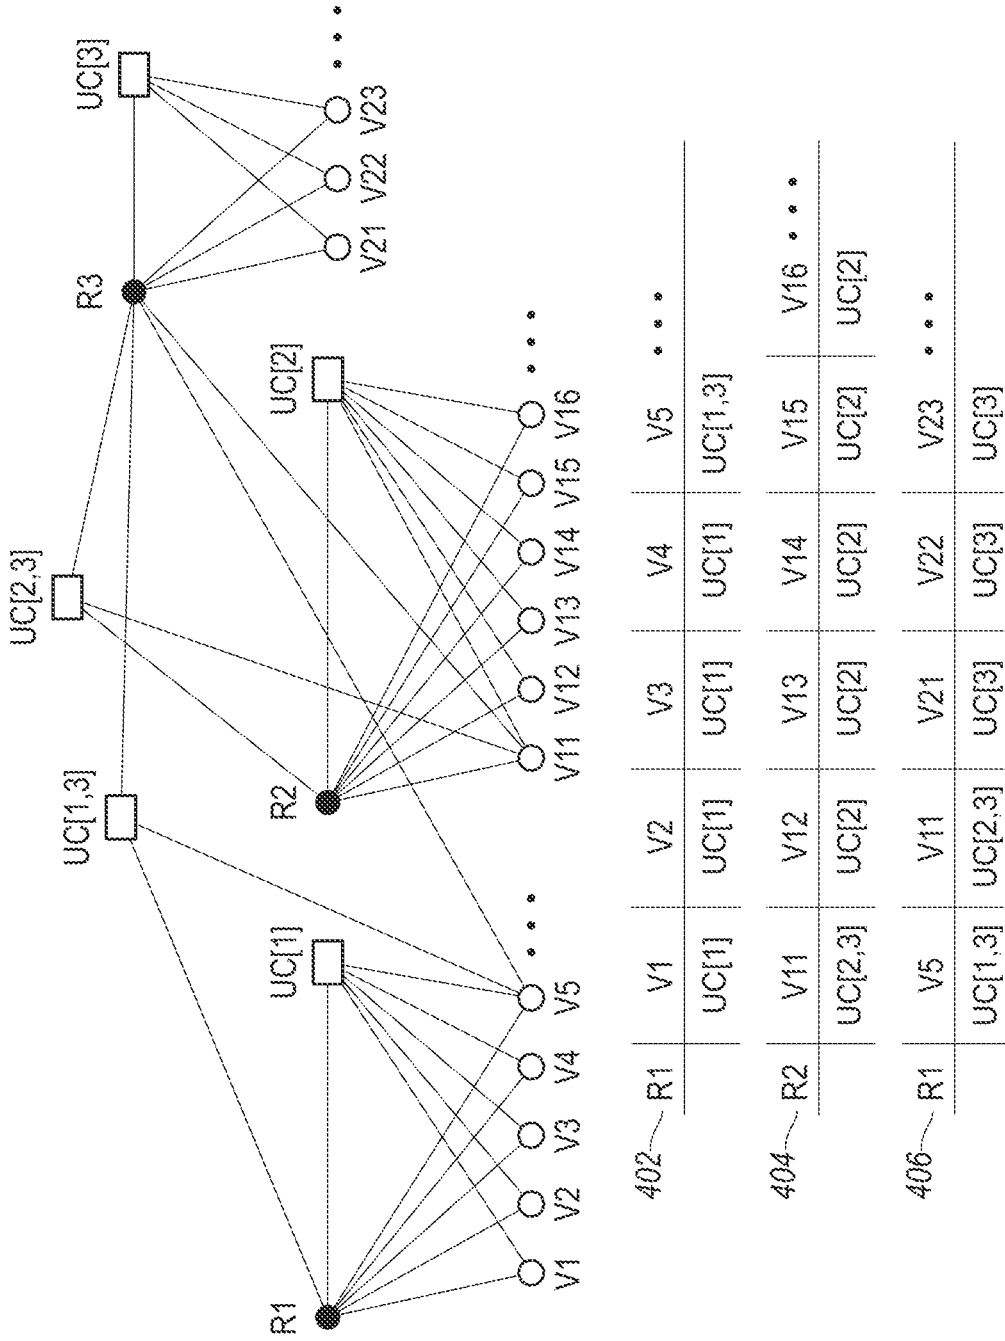


FIG. 4B

## SYSTEM FOR UPDATING VEHICLE SOFTWARE

### TECHNICAL FIELD

The present disclosure generally relates to a system for updating vehicle software. More specifically, the present disclosure relates to a system for updating software customized to criteria of vehicles.

### BACKGROUND

Modern vehicles are equipped with multiple controllers/computers to enable various configurable features such as infotainment, autonomous driving or the like. Software controlling those controllers may be updated periodically to provide the latest functionalities and security features. When new software update is available, a software rollout/deployment may be created to associate vehicles eligible to receive the update. The software may be sent to those eligible vehicles associated with the rollout.

### SUMMARY

In one or more illustrative embodiments of the present disclosure, a server includes an interface configured to receive a new software content; a processor, configured to responsive to receiving the new software content, create a new rollout associated with the new software content, and identify a plurality of vehicles eligible to receive the new software content, responsive to detecting a first vehicle of the plurality of vehicles being yet to receive an existing software content associated with an existing rollout, generate a combined software content including both the new and existing software content, and associate the first vehicle with the combined software content.

In one or more illustrative embodiments of the present disclosure, a method for a server includes responsive to receiving the new software content via an interface, creating a new rollout associated with the new software content, and identifying a plurality of vehicles eligible to receive the new software content; creating a new rollout list in which each of the vehicles eligible to receive the new software content is associated with the new software content; and responsive to detecting a first vehicle of the plurality of vehicles having an outstanding existing software content associated with an existing rollout, generating a combined software content including both the new and existing software content, and updating the new rollout list such that the first vehicle is associated with the combined software content.

In one or more illustrative embodiments of the present disclosure, a computer device includes an interface configured to receive a first software content; a processor, configured to responsive to receiving the first software content via the interface, create a first rollout associated with the first software content, and identify a plurality of vehicles eligible to receive the first software content, create a first rollout list in which each of the vehicles eligible to receive the first software content is associated with the first software content, responsive to detecting a first vehicle of the plurality of vehicles being eligible but yet to receive a second software content associated with an second rollout, generate a combined software content including both the first and second software content, and update the first rollout list such that the first vehicle is associated with the combined software content in the first rollout list.

## BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the invention and to show how it may be performed, embodiments thereof will now be described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

FIG. 1 illustrates an example block topology of a vehicle system of one embodiment of the present disclosure;

FIG. 2 illustrates an example block diagram of a vehicle software rollout system of one embodiment of the present disclosure;

FIG. 3 illustrates an example flow diagram of a process for creating an update content of one embodiment of the present disclosure; and

FIGS. 4A and 4B illustrate schematic diagrams of a vehicle software rollout example of one embodiment of the present disclosure.

### DETAILED DESCRIPTION

As required, detailed embodiments of the present invention are disclosed herein; however, it is to be understood that the disclosed embodiments are merely exemplary of the invention that may be embodied in various and alternative forms. The figures are not necessarily to scale; some features may be exaggerated or minimized to show details of particular components. Therefore, specific structural and functional details disclosed herein are not to be interpreted as limiting, but merely as a representative basis for teaching one skilled in the art to variously employ the present invention.

The present disclosure generally provides for a plurality of circuits or other electrical devices. All references to the circuits and other electrical devices, and the functionality provided by each, are not intended to be limited to encompassing only what is illustrated and described herein. While particular labels may be assigned to the various circuits or other electrical devices, such circuits and other electrical devices may be combined with each other and/or separated in any manner based on the particular type of electrical implementation that is desired. It is recognized that any circuit or other electrical device disclosed herein may include any number of microprocessors, integrated circuits, memory devices (e.g., FLASH, random access memory (RAM), read only memory (ROM), electrically programmable read only memory (EPROM), electrically erasable programmable read only memory (EEPROM), or other suitable variants thereof) and software which co-act with one another to perform operation(s) disclosed herein. In addition, any one or more of the electric devices may be configured to execute a computer-program that is embodied in a non-transitory computer readable medium that is programmed to perform any number of the functions as disclosed.

The present disclosure proposes a vehicle software update rollout mechanism. More specifically, the present disclosure proposes a system and method for deploying software update data when multiple rollouts are available.

Referring to FIG. 1, an example block topology of a vehicle system **100** of one embodiment of the present disclosure is illustrated. A vehicle **102** may include various types of automobile, crossover utility vehicle (CUV), sport utility vehicle (SUV), truck, recreational vehicle (RV), boat, plane, or other mobile machine for transporting people or goods. In many cases, the vehicle **102** may be powered by an internal combustion engine. As another possibility, the vehicle **102** may be a battery electric vehicle (BEV), a hybrid electric vehicle (HEV) powered by both an internal

combustion engine and one or more electric motors, such as a series hybrid electric vehicle (SHEV), a plug-in hybrid electric vehicle (PHEV), or a parallel/series hybrid vehicle (PSHEV), a boat, a plane or other mobile machine for transporting people or goods. As an example, the system **100** may include the SYNC system manufactured by The Ford Motor Company of Dearborn, Mich. It should be noted that the illustrated system **100** is merely an example, and more, fewer, and/or differently located elements may be used.

As illustrated in FIG. 1, a computing platform **104** may include one or more processors **106** configured to perform instructions, commands, and other routines in support of the processes described herein. For instance, the computing platform **104** may be configured to execute instructions of vehicle applications **108** to provide features such as navigation, remote controls, and wireless communications. Such instructions and other data may be maintained in a non-volatile manner using a variety of types of computer-readable storage medium **110**. The computer-readable medium **110** (also referred to as a processor-readable medium or storage) includes any non-transitory medium (e.g., tangible medium) that participates in providing instructions or other data that may be read by the processor **106** of the computing platform **104**. Computer-executable instructions may be compiled or interpreted from computer programs created using a variety of programming languages and/or technologies, including, without limitation, and either alone or in combination, Java, C, C++, C#, Objective C, Fortran, Pascal, Java Script, Python, Perl, and PL/SQL.

The computing platform **104** may be provided with various features allowing the vehicle occupants/users to interface with the computing platform **104**. For example, the computing platform **104** may receive input from HMI controls **112** configured to provide for occupant interaction with the vehicle **102**. As an example, the computing platform **104** may interface with one or more buttons, switches, knobs, or other HMI controls configured to invoke functions on the computing platform **104** (e.g., steering wheel audio buttons, a push-to-talk button, instrument panel controls, etc.).

The computing platform **104** may also drive or otherwise communicate with one or more displays **114** configured to provide visual output to vehicle occupants by way of a video controller **116**. In some cases, the display **114** may be a touch screen further configured to receive user touch input via the video controller **116**, while in other cases the display **114** may be a display only, without touch input capabilities. The computing platform **104** may also drive or otherwise communicate with one or more speakers **118** configured to provide audio output and input to vehicle occupants by way of an audio controller **120**.

The computing platform **104** may also be provided with navigation and route planning features through a navigation controller **122** configured to calculate navigation routes responsive to user input via e.g., the HMI controls **112**, and output planned routes and instructions via the speaker **118** and the display **114**. Location data that is needed for navigation may be collected from a global navigation satellite system (GNSS) controller **124** configured to communicate with multiple satellites and calculate the location of the vehicle **102**. The GNSS controller **124** may be configured to support various current and/or future global or regional location systems such as global positioning system (GPS), Galileo, Beidou, Global Navigation Satellite System (GLONASS) and the like. Map data used for route planning may be stored in the storage **110** as a part of the vehicle data **126**. Navigation software may be stored in the storage **110** as one the vehicle applications **108**.

The computing platform **104** may be configured to wirelessly communicate with a mobile device **128** of the vehicle users/occupants via a wireless connection **130**. The mobile device **128** may be any of various types of portable computing devices, such as cellular phones, tablet computers, wearable devices, smart watches, smart fobs, laptop computers, portable music players, or other device capable of communication with the computing platform **104**. A wireless transceiver **132** may be in communication with a Wi-Fi controller **134**, a Bluetooth controller **136**, a radio-frequency identification (RFID) controller **138**, a near-field communication (NFC) controller **140**, and other controllers such as a Zigbee transceiver, an IrDA transceiver, a ultra-wide band (UWB) controller (not shown), and configured to communicate with a compatible wireless transceiver **142** of the mobile device **128**.

The mobile device **128** may be provided with a processor **144** configured to perform instructions, commands, and other routines in support of the processes such as navigation, telephone, wireless communication, and multi-media processing. For instance, the mobile device **128** may be provided with location and navigation functions via a navigation controller **146** and a GNSS controller **148**. The mobile device **128** may be provided with a wireless transceiver **142** in communication with a Wi-Fi controller **150**, a Bluetooth controller **152**, a RFID controller **154**, an NFC controller **156**, and other controllers (not shown), configured to communicate with the wireless transceiver **132** of the computing platform **104**. The mobile device **128** may be further provided with a non-volatile storage **158** to store various mobile application **160** and mobile data **162**.

The computing platform **104** may be further configured to communicate with various components of the vehicle **102** via one or more in-vehicle network **166**. The in-vehicle network **166** may include, but is not limited to, one or more of a controller area network (CAN), an Ethernet network, and a media-oriented system transport (MOST), as some examples. Furthermore, the in-vehicle network **166**, or portions of the in-vehicle network **166**, may be a wireless network accomplished via Bluetooth low-energy (BLE), Wi-Fi, UWB, or the like.

The computing platform **104** may be configured to communicate with various ECUs **168** of the vehicle **102** configured to perform various operations. For instance, the computing platform **104** may be configured to communicate with a TCU **170** configured to control telecommunication between vehicle **102** and a wireless network **172** through a wireless connection **174** using a modem **176**. The wireless connection **174** may be in the form of various communication network e.g., a cellular network. Through the wireless network **172**, the vehicle may access one or more servers **178** to access various content for various purposes. It is noted that the terms wireless network and server are used as general terms in the present disclosure and may include any computing network involving carriers, router, computers, controllers or the like configured to store data and perform data processing functions and facilitate communication between various entities. The ECUs **168** may further include a powertrain control module (PCM) **180** configured to provide operate powertrain of the vehicle **102**. The ECU **168** may further include an autonomous driving controller (ADC) **190** configured to provide autonomous driving features to the vehicle **102**. The ADC **190** may be provided with a local storage to store software to enable the autonomous driving features. Additionally or alternatively, the ADC **190** may fully or partially rely on software (e.g. vehicle applications **108**) from the vehicle storage **110** to enable to



autonomous driving. The ADC **190** and/or computing platform **104** may be configured to update the software by downloading an update content data from the server **178** via the TCU **170** through the wireless network **172**. Alternatively, the update content data may be download via a localized wireless network (e.g. a Wi-Fi access point) via the wireless transceiver **132**. Alternatively, the update content data may be download via the mobile device **128**.

Referring to FIG. 2, a diagram for vehicle software rollout system **200** of one embodiment of the present disclosure is illustrated. With continuing reference to FIG. 1, the rollout system **200** may include a rollout management platform **202** configured to manage and coordinate the vehicle software rollout/deployment to each vehicle **102**. The rollout management platform **202** may be implemented via one or more servers **178** connected to the vehicles **102** via the wireless network **172** or a wired network (not shown). The rollout management platform **202** may be configured to receive commands **204** from a user interface **206** which may be operated by various parties. For instance, the user interface **206** may be operated by a vehicle manufacturer that provides vehicle update data periodically. Responsive to a new update, the manufacturer may send commands to the rollout management platform **202** via the user interface **206** to prepare for software deployment to each eligible vehicle. The commands **204** may include instructions to trigger various operations. For instance, the commands **204** may include instructions to create rollout, trigger update to vehicle, add/remove one or more vehicles to rollout, suspend/restore one or more rollouts, and/or suspend/restore one or more vehicles. The rollout management platform **202** may be further in communication with a vehicle database **208** configured to record vehicle information such as vehicle software information. The vehicle database **208** may be remotely located from the rollout management platform **202**. Alternatively, the vehicle database **208** may be local to or integrated with the rollout management platform **202**. The rollout management platform **202** individually or in combination with the vehicle database **208** may record various entries of data. For instance, the rollout management platform **202** may record a vehicle entry **210** reflecting vehicle identification and software information, an update content entry **212** recording software update content received from the user interface **206**, a software rollout/deployment entry **214** reflecting rollout status corresponding to update contents, and a search entry including various search instruction **216** to facilitating identification of corresponding rollouts for each vehicle. The rollout management platform **202** may be further configured to send the vehicle update content to each corresponding vehicle **102** (to be discussed in detail below).

Referring to FIG. 3, a flow diagram of a process **300** for creating an update content of one embodiment of the present disclosure is illustrated. With continuing reference to FIGS. 1 and 2, the process **300** may be implemented via the rollout management platform **202** illustrated in FIG. 2. At operation **302**, the rollout management platform **202** receives a new vehicle software content made available via the user interface **206**. In response, the rollout management platform **202** creates a software rollout using the new content at operation **304**. At operation **306**, the rollout management platform **202** generates rollout search instruction **216** to identify vehicles that are eligible for the newly created rollout. The rollout management platform **202** may generate the search instruction **216** using identifiers which identifies compatible hardware (e.g. ECUs) included in the new content and searches for vehicles provided with the compatible hardware using

the vehicle database **208**. With the eligible vehicles identified, at operation **308**, the rollout management platform **202** associates the new content and rollout with the vehicle list.

At operation **310**, the rollout management platform **202** scans for other active software rollouts and at operation **312**, checks if any vehicles identified in the vehicle list is associated with any of the identified active rollout that is yet to be performed. If the answer is a no, the process proceeds to operation **316** and the rollout management platform **202** creates an update content using the new content only. Otherwise, if the rollout management platform **202** detects one or more vehicles on the vehicle list are associated with one or more existing rollouts that are outstanding, the process proceeds to operation **318** and the rollout management platform **202** creates the update content by combining the content associated with the outstanding rollout with the new content. At operation **320**, the rollout management platform **202** associate the update content with each vehicle to prepared for the update.

The operations of process **300** may be applied to various situations. Referring to FIGS. 4A and 4B, schematic diagrams of a vehicle software update rollout process are illustrated. As illustrated in FIG. 4A, a first vehicle software rollout **R1** may be associated with a first vehicle software update content **UC[1]**. There may be multiple vehicles (i.e. **V1** to **V5**, and etc.) associated with the first rollout **R1** and first update content **UC[1]**. A second vehicle software rollout **R2** may be associated with a second vehicle software update content **UC[2]**. There may multiple vehicles (i.e. **V11** to **V16**, and etc.) associated with the second rollout **R2** and second update content **UC[2]**. The association of each vehicle and the update content is illustrated in rollout association tables (a.k.a. rollout list) **402** and **404** for the first and second rollout **R1** and **R2** respectively. The association tables **402** and **404** may be created and stored in the rollout management platform **202** and/or the vehicle database **208** as an example. In the present example illustrated with reference to FIG. 4A, there is no cross-relationship between the first rollout **R1** and the second rollout **R2**. In other words, no vehicle listed in either table is eligible for both of the first and second update contents **UC[1]** and **UC[2]**. In other words, vehicles **V1-V5** listed in the association table **402** are all associated with the first rollout **R1**, but none of the vehicles **V1-V5** are associate with the second rollout **R2**. The reverse is true for vehicles listed in the association table **404**.

Referring to FIG. 4B, a third rollout **R3** associated with the third update content **UC[3]** may become available in addition to the first rollout **R1** and the second rollout **R2**. The rollout management platform **202** may determine that one or more vehicles associated with the first rollout **R1** and the second rollout **R2** are eligible for the third update content **UC[3]**. In the present example, the rollout management platform **202** may determine that the vehicle **V5** associated with the first rollout **R1** and the vehicle **V11** associated with the second rollout **R2** are eligible to receive the third update content **UC[3]** whereas the vehicles **V5** and **V11** are yet to receive their respective first and second update content **UC[1]** and **UC[2]**. In response, the rollout management platform **202** may create a first combined update content **UC[1,3]** including the first and third update content **UC[1]** and **UC[3]** and associate the vehicle **V5** with the first combined update content **UC[1,3]**. The rollout management platform **202** may further create a second combined update content **UC[2,3]** including the second and third update content **UC[2]** and **UC[3]** and associate the vehicle **V11** with the first combined update content **UC[2,3]**. The rollout

management platform **202** may further update the association tables **402** and **404** for the first and second rollouts **R1** and **R2** using the first combined update content UC[**1,3**] for the vehicle **V5** and the second combined update content UC[**2,3**] for the vehicle **V11**. Additionally, the vehicles **V5** and **V11** may be put into the association table **406** for the third rollout **R3**.

The association tables may be updated periodically. As an example, the rollout management platform **202** may remove/disassociate a vehicle from the association tables responsive to verifying such a vehicle has received the update content and/or successfully performed the software update. Taking the vehicle **V5** illustrated in FIG. 4B for example, responsive to verifying the vehicle **V5** has received the first update content UC[**1**] but yet to receive the third update content UC[**3**], the rollout management platform **202** may remove the vehicle **V5** from the association table **402** for the first rollout **R1**, and update the association table **406** for the third rollout **R3** such that the vehicle **V5** is now only associated with the third update content UC[**3**]. This situation may occur when the vehicle user is provided with options to select which update content he/she may wish to receive. The user may choose to receive the combined update content, or alternatively, an individual update content. Otherwise, if the vehicle **V5** has received the combined update content UC[**1, 3**], the rollout management platform **202** may remove the vehicle **V5** from both the association tables **402** and **406** for the both the first and third rollouts **R1** and **R3**. Additionally, the rollout management platform **202** may manually add or remove vehicles from the association tables based on the commands **204** received from the interface **206**.

While exemplary embodiments are described above, it is not intended that these embodiments describe all possible forms of the invention. Rather, the words used in the specification are words of description rather than limitation, and it is understood that various changes may be made without departing from the spirit and scope of the invention. Additionally, the features of various implementing embodiments may be combined to form further embodiments of the invention.

What is claimed is:

**1.** A server, comprising:

an interface configured to receive a new software content; a processor, configured to

responsive to receiving the new software content, create a new rollout associated with the new software content, and identify a plurality of vehicles eligible to receive the new software content,

responsive to detecting a first vehicle of the plurality of vehicles being yet to receive an existing software content associated with an existing rollout, generate a combined software separated from the existing and new software content by combining the new software content with the existing software content,

associate the first vehicle with the combined software content to allow the first vehicle to update to a new status corresponding to the new software content without going through a prior status corresponding to the existing software content,

create a new rollout list in which each of the vehicles eligible to receive the new software content is associated with the new software content, and

responsive to receiving a manual add vehicle command via the interface, add a second vehicle to the new rollout list, wherein the second vehicle is not within the vehicles eligible to receive the new software content identified by the server.

**2.** The server of claim **1**, wherein the processor is further configured to: responsive to detecting the first vehicle being yet to receive the existing software content, update the new rollout list such that the first vehicle is associated with the combined software content in the new rollout list.

**3.** The server of claim **2**, wherein the processor is further configured to:

responsive to detecting the first vehicle being yet to receive the existing software content, update an existing rollout list such that the first vehicle is associated with the combined software content in the existing rollout list.

**4.** The server of claim **3**, wherein the processor is further configured to:

responsive to verifying the first vehicle has received the combined software content, remove the first vehicle from both the existing rollout list and the new rollout list.

**5.** The server of claim **3**, wherein the processor is further configured to:

responsive to verifying the first vehicle has received the existing software content and failed to receive the new software content, remove the first vehicle from the existing rollout list and update the new rollout list such that the first vehicle is no longer associated with the existing software content.

**6.** The server of claim **1**, wherein the new software content includes a software identifier, the processor is further configured to:

generate a search instruction to identify the vehicles eligible to receive the new software content using the identifier via a vehicle database located remotely from the server.

**7.** The server of claim **1**, wherein the processor is further configured to:

disassociate the first vehicle from the existing software content and new software content individually.

**8.** A method for a server, comprising:

responsive to receiving the new software content via an interface, creating a new rollout associated with the new software content, wherein the new software content includes a software identifier;

generating a search instruction to search for the vehicles eligible to receive the new software content using the identifier via a vehicle database located remotely from the server;

associates a plurality of vehicles eligible to receive the new software content;

creating a new rollout list in which each of the vehicles eligible to receive the new software content is associated with the new software content;

responsive to detecting a first vehicle of the plurality of vehicles having an outstanding existing software content associated with an existing rollout, combining the new and existing software content to generate a combined software content, and updating the new rollout list such that the first vehicle is associated with the combined software content;

send the combined software content to the first vehicle such that first vehicle directly updates to a new version corresponding to the new software content without requiring the first vehicle to update to an existing version corresponding to the existing software content and

responsive to receiving a manual add vehicle command via the interface, adding a second vehicle to the new rollout list.

9

9. The method of claim 8, further comprising:  
updating an existing rollout list such that the first vehicle  
is associated with the combined software content in the  
existing rollout list.

10. The method of claim 9, further comprising: 5  
responsive to verifying the first vehicle has received the  
combined software content, disassociating the first  
vehicle from both the existing rollout list and the new  
rollout list.

11. The method of claim 9, further comprising: 10  
responsive to verifying the first vehicle has received the  
new software content and failed to receive the existing  
software content, disassociating the first vehicle from  
the new rollout list and updating the existing rollout list  
such that the first vehicle is no longer associated with 15  
the new software content.

12. A computer device, comprising:  
an interface configured to receive a first software content;  
a processor, configured to  
responsive to receiving the first software content via the 20  
interface, create a first rollout associated with the  
first software content, and identify a plurality of  
vehicles eligible to receive the first software content,  
create a first rollout list in which each of the vehicles  
eligible to receive the first software content is asso- 25  
ciated with the first software content,  
responsive to detecting a first vehicle of the plurality of  
vehicles being eligible but yet to receive a second  
software content associated with a second rollout,  
generate a combined software content including both

10

the first and second software content, and update the  
first rollout list such that the first vehicle is associ-  
ated with the combined software content in the first  
rollout list and disassociated with the first software  
content and the second software content individually,  
update a second rollout list such that the first vehicle is  
associated with the combined software content in the  
second rollout list, and  
responsive to receiving a manual add vehicle command  
via the interface, adding a second vehicle to the  
second rollout list.

13. The computer device of claim 12, wherein the pro-  
cessor is further configured to: responsive to verifying the  
first vehicle has received the combined software content,  
remove the first vehicle from both the first and second  
rollout lists.

14. The computer device of claim 12, wherein the pro-  
cessor is further configured to: responsive to verifying the  
first vehicle has received the first software content and failed  
to receive the second software content, remove the first  
vehicle from the first rollout list and update the second  
rollout list such that the first vehicle is no longer associated  
with the first software content.

15. The computer device of claim 12, wherein the pro-  
cessor is further configured to: generate a search instruction  
to search for the vehicles eligible to receive the first software  
content via a vehicle database located remotely from the  
computer device.

\* \* \* \* \*