



(11) **EP 4 254 980 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
04.10.2023 Bulletin 2023/40

(51) International Patent Classification (IPC):
H04R 1/10 (2006.01)

(21) Application number: **22165768.7**

(52) Cooperative Patent Classification (CPC):
H04R 1/1016; H04R 1/1075; H04R 2460/11

(22) Date of filing: **31.03.2022**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

- **NIELSEN, Henrik**
2750 Ballerup (DK)
- **CHAPPELL, Thomas John**
2750 Ballerup (DK)
- **MERCA, Timea Denisa**
2750 Ballerup (DK)
- **OLSGAARD, Thomas**
2750 Ballerup (DK)

(71) Applicant: **GN Hearing A/S**
2750 Ballerup (DK)

(74) Representative: **GN Store Nord A/S**
Lautrupbjerg 7
2750 Ballerup (DK)

(72) Inventors:
• **JOHANSEN, Jan**
2750 Ballerup (DK)

(54) **HEARING DEVICE**

(57) Provided is a hearing device comprising an earmould (3). The earmould comprises a front end (5), a rear end (7) opposite the front end, and a middle part (8) arranged in-between the front and a rear end. The front end comprises a front opening (9), and the rear end comprises a rear opening. The earmould is configured for the front end to be positioned facing a tympanic membrane of the user during use. The hearing device further comprises a receiver housing (25) arranged at least partly within the earmould, where the receiver housing comprises a receiver (11). The receiver housing (25) being positioned with a first end towards the front end (5) of the earmould and a second, opposite, end towards the rear end (7) of the earmould (3). Further, the hearing device comprises a sound passage extending between the front opening (9) and the rear end (7), and configured to allow for fluid connection between the front opening (9) and an outside of the ear canal of the user during use. An active vent (13) comprised in the hearing device comprises a valve positioned in a space within the earmould limited by the second end of the receiver housing and by the front opening (9), and the valve forms at least a part of the sound passage. The active vent is configured to have an open state and a closed state, wherein the valve, in the open state, provides a fluid connection through the sound passage, wherein the valve, in the closed state, hinders fluid connection through the sound passage. The hearing device further comprises a supporting structure (29) configured to hold the receiver housing (25) in place within the earmould.

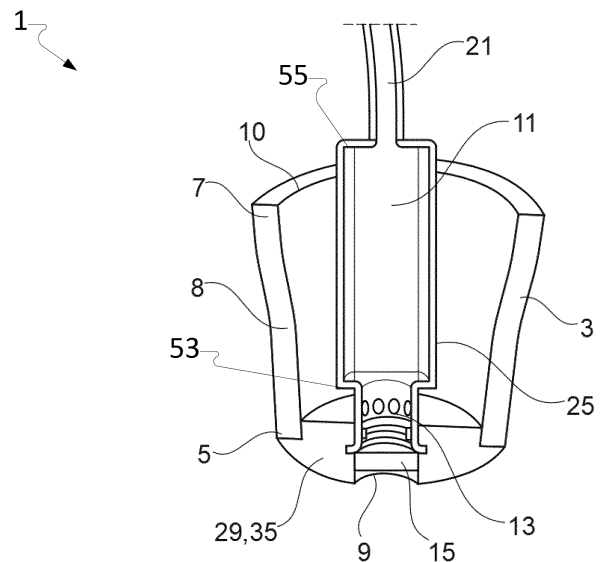


FIG. 1A

EP 4 254 980 A1

Description

[0001] The present disclosure relates to a hearing device comprising an earmould. The hearing device comprises a receiver housing arranged at least partly within the earmould, a sound passage extending between the front opening and the rear end of the earmould, where the sound passage is configured to allow for fluid to flow between the front opening and an outside of the ear canal during use of the hearing device. The hearing device further comprises an active vent, which has a valve positioned in a space within the earmould limited by an end of the receiver housing and by the front opening, the valve forming at least a part of the sound passage. The active vent is configured to have an open state and a closed state. In the open state the valve provides a fluid connection through the sound passage, whereas in the closed state the valve hinders fluid connection through the sound passage. A supporting structure comprised in the hearing device is configured to hold the receiver housing in place within the earmould.

BACKGROUND OF THE INVENTION

[0002] Some hearing devices have an earmould that is placed at least partly within an ear canal of the user of the hearing device. This allows the receiver, i.e. speaker unit, within the earmould to be brought to sit relatively close to the tympanic membrane of the ear canal during use.

[0003] A nuisance often occurring when part of a hearing device sits in the ear canal is occlusion, whereby the blocking of the ear canal causes the user to experience unwelcome sounds when they speak or chew.

[0004] One way to mitigate occlusion is to use an open-fit hearing device, where the earmould, which sits in the ear canal during use, has one or more vents configured to allow for a fluid connection between the ear canal and the outside of the in-the-ear device.

[0005] However, the open fit also allows sound to enter the ear canal of the hearing device user, which can cause a number of problematic issues such as making it more difficult to control the sound delivered by the hearing device to the user; For example, the sound delivered by the hearing device may not be heard above the ambient sound or it may be distorted due to mixing with the ambient sound.

[0006] A solution to this is having an active vent within the hearing device, where the active vent can open or close one or more valves, either manually or automatically, in response to a given situation that the hearing device user is in. Thus, in a situation, where it is favourable for the user, the vent may be in an open state to permit fluid connection (such as air) to pass through the hearing device, e.g. to diminish occlusion and/or allow for the user to maintain environmental awareness. In other situations, the vent may be in a closed state to prevent or hinder ambient sound from entering the user's ear ca-

nal, e.g. to provide a more optimal transmission of the sound produced by the receiver, and to provide feedback cancellation. Thus, the closed state of the active vent is configured to block the acoustic path in both directions.

5 A hearing device having an active vent, however, is a complex system with a number of challenges many of which depend on the design of the in-the-ear part such as how to arrange a receiver and an active vent within the earmould. Further, wearing an earmould can be dis-
10 comfortable for the user, in particular if there is a poor fit of the earmould within the user's ear canal.

[0007] There is thus a need for an improved hearing device comprising an active vent.

15 **[0008]** Further, there is a desire for making production of goods more sustainable.

[0009] It is an object to provide an improved hearing device comprising an active vent.

SUMMARY OF THE INVENTION

20 **[0010]** Provided is a hearing device comprising an earmould. The earmould comprises a front end, a rear end opposite the front end, and a middle part arranged in-
25 between the front and a rear end. The front end comprises a front opening, and the rear end comprises a rear opening. The earmould is configured for the front end to be positioned facing a tympanic membrane of the user during use. The hearing device further comprises a re-
30 ceiver housing arranged at least partly within the earmould, the receiver housing being positioned with a first end towards the front end of the earmould and a second, opposite, end towards the rear end of the earmould, and a sound passage extending between the front opening
35 and the rear end of the earmould, where the sound passage is configured to allow for fluid connection between the front opening and an outside of the ear canal of the user during use. The hearing device further comprises an active vent, which comprises a valve positioned in a
40 space within the earmould limited by the second end of the receiver housing and by the front opening, the valve forming at least a part of the sound passage,. The active vent is configured to have an open state and a closed state. In the open state the valve provides a fluid con-
45 nection through the sound passage, and in the closed state the valve hinders fluid connection through the sound passage. A supporting structure comprised in the hearing device is configured to hold the receiver housing in place within the earmould.

50 **[0011]** The receiver housing comprises a receiver, which is configured such that sound produced by the re-
ceiver travels through the front opening. In this way, the receiver is able to deliver sound to the ear canal of the user. The front opening may comprise a front filter, and the receiver may then be configured such that sound
55 produced by the receiver travels through the front opening and the front filter. The front filter may be configured to hinder contaminants from entering the earmould through the front opening. Contaminants may be e.g. humidity,

dirt, hair, oily substances, where oily substances can be e.g. ear wax, i.e. the front filter may be a cerumen grid. The front filter may be removable such that it can be replaced if needed.

[0012] The hearing device comprises electronic components, which may be comprised e.g. in the receiver housing and/or within the earmould. The hearing device may comprise electronic components and circuits that create, process, and/or cancel audible sound, such as electronic components that act to provide hearing compensation.

[0013] A sound passage extends between the front opening and the rear end, and is configured to allow for fluid connection between the front opening and an outside of the ear canal. Thus, the sound passage allows fluid, such as air or liquids, to pass between the ambient surroundings of the user and the ear canal of the user via the earmould. Thus, when in the open state fluid, such as air, is allowed to pass between the ambient environment and the ear canal of the user through the hearing device. In contrast, in the closed state the passage of fluid via the sound passage is blocked.

[0014] The active vent may be positioned in-between the receiver housing and the front opening. The active vent may be comprised within the receiver housing or be coupled to the receiver housing. By coupled is meant that the active vent and the receiver housing are physically coupled, for example as an active vent receiver. In some embodiments, the active vent is held in place within the earmould by at least part of the supporting structure. If the active vent is coupled to the receiver housing in such embodiments, holding the active vent in place within the earmould will hold the receiver housing in place within the earmould. The active vent may be configured to being controlled by a vent control arrangement comprised in the hearing device.

[0015] Thus, the open state of the active vent provides the possibility for occlusion cancellation, and the close state provides the possibility for feedback cancellation.

[0016] In some embodiments, a hearing device is configured to be worn by a user. The hearing device may be arranged at the user's ear, on the user's ear, over the user's ear, in the user's ear, in the user's ear canal, behind the user's ear and/or in the user's concha, i.e., the hearing device is configured to be worn in, on, over and/or at the user's ear. The user may wear two hearing devices, one hearing device at each ear. The two hearing devices may be connected, such as wirelessly connected and/or connected by wires, such as a binaural hearing aid system.

[0017] The hearing device may be a hearable such as a headset, headphone, earphone, earbud, hearing aid, a personal sound amplification product (PSAP), an over-the-counter (OTC) hearing device, a hearing protection device, a one-size-fits-all hearing device, a custom hearing device or another head-wearable hearing device. Hearing devices can include both prescription devices and non-prescription devices.

[0018] The hearing device may be an ITE hearing de-

vice. The hearing device may be embodied in various housing styles or form factors. Some of these form factors are Behind-the-Ear (BTE) hearing device, Receiver-in-Canal (RIC) hearing device, Receiver-in-Ear (RIE) hearing device or Microphone-and-Receiver-in-Ear (MaRIE) hearing device, or a vented receiver in the ear (VRIE) hearing device. These devices may comprise a BTE unit configured to be worn behind the ear of the user and an in the ear (ITE) unit configured to be inserted partly or fully into the user's ear canal. Generally, the BTE unit may comprise at least one input transducer, a power source and a processing unit. The term BTE hearing device refers to a hearing device where the receiver, i.e. the output transducer, is comprised in the BTE unit and sound is guided to the ITE unit via a sound tube connecting the BTE and ITE units, whereas the terms RIE, RIC and MaRIE hearing devices refer to hearing devices where the receiver may be comprised in the ITE unit, which is coupled to the BTE unit via a connector cable or wire configured for transferring electric signals between the BTE and ITE units.

[0019] Some of these form factors are In-the-Ear (ITE) hearing device, Completely-in-Canal (CIC) hearing device or Invisible-in-Canal (IIC) hearing device. These hearing devices may comprise an ITE unit, wherein the ITE unit may comprise at least one input transducer, a power source, a processing unit and an output transducer. These form factors may be custom devices, meaning that the ITE unit may comprise a housing having a shell made from a hard material, such as a hard polymer or metal, or a soft material such as a rubber-like polymer, molded to have an outer shape conforming to the shape of the specific user's ear canal.

[0020] Some of these form factors are earbuds, on the ear headphones or over the ear headphones. The person skilled in the art is well aware of different kinds of hearing devices and of different options for arranging the hearing device in, on, over and/or at the ear of the hearing device wearer. The hearing device (or pair of hearing devices) may be custom fitted, standard fitted, open fitted and/or occlusive fitted.

[0021] In some embodiments, the hearing device may comprise one or more input transducers. The one or more input transducers may comprise one or more microphones. The one or more input transducers may comprise one or more vibration sensors configured for detecting bone vibration. The one or more input transducer(s) may be configured for converting an acoustic signal into a first electric input signal. The first electric input signal may be an analogue signal. The first electric input signal may be a digital signal. The one or more input transducer(s) may be coupled to one or more analogue-to-digital converter(s) configured for converting the analogue first input signal into a digital first input signal.

[0022] In some embodiments, the hearing device may comprise one or more antenna(s) configured for wireless communication. The one or more antenna(s) may comprise an electric antenna. The electric antenna may be

configured for wireless communication at a first frequency. The first frequency may be above 800 MHz, preferably a wavelength between 900 MHz and 6 GHz. The first frequency may be 902 MHz to 928 MHz. The first frequency may be 2.4 to 2.5 GHz. The first frequency may be 5.725 GHz to 5.875 GHz. The one or more antenna(s) may comprise a magnetic antenna. The magnetic antenna may comprise a magnetic core. The magnetic antenna may comprise a coil. The coil may be coiled around the magnetic core. The magnetic antenna may be configured for wireless communication at a second frequency. The second frequency may be below 100 MHz. The second frequency may be between 9 MHz and 15 MHz.

[0023] In some embodiments, the hearing device may comprise one or more wireless communication unit(s). The one or more wireless communication unit(s) may comprise one or more wireless receiver(s), one or more wireless transmitter(s), one or more transmitter-receiver pair(s) and/or one or more transceiver(s). At least one of the one or more wireless communication unit(s) may be coupled to the one or more antenna(s). The wireless communication unit may be configured for converting a wireless signal received by at least one of the one or more antenna(s) into a second electric input signal. The hearing device may be configured for wired/wireless audio communication, e.g. enabling the user to listen to media, such as music or radio and/or enabling the user to perform phone calls.

[0024] In an embodiment, the wireless signal may originate from one or more external source(s) and/or external devices, such as spouse microphone device(s), wireless audio transmitter(s), smart computer(s) and/or distributed microphone array(s) associated with a wireless transmitter. The wireless input signal(s) may originate from another hearing device, e.g., as part of a binaural hearing system and/or from one or more accessory device(s), such as a smartphone and/or a smart watch.

[0025] In some embodiments, the hearing device may include a processing unit. The processing unit may be configured for processing the first and/or second electric input signal(s). The processing may comprise compensating for a hearing loss of the user, i.e., apply frequency dependent gain to input signals in accordance with the user's frequency dependent hearing impairment. The processing may comprise performing feedback cancellation, beamforming, tinnitus reduction/masking, noise reduction, noise cancellation, speech recognition, bass adjustment, treble adjustment and/or processing of user input. The processing unit may be a processor, an integrated circuit, an application, functional module, etc. The processing unit may be implemented in a signal-processing chip or a printed circuit board (PCB). The processing unit may be configured to provide a first electric output signal based on the processing of the first and/or second electric input signal(s). The processing unit may be configured to provide a second electric output signal. The second electric output signal may be based on the processing of the first and/or second electric input sig-

nal(s).

[0026] In some embodiments, the hearing device may comprise an output transducer. The output transducer may be coupled to the processing unit. The output transducer may be a receiver. It is noted that in this context, a receiver may be a loudspeaker, whereas a wireless receiver may be a device configured for processing a wireless signal. The receiver may be configured for converting the first electric output signal into an acoustic output signal. The output transducer may be coupled to the processing unit via the magnetic antenna. The output transducer may be comprised in an ITE unit or in an earpiece, e.g. Receiver-in-Ear (RIE) unit or Microphone-and-Receiver-in-Ear (MaRIE) unit, of the hearing device. One or more of the input transducer(s) may be comprised in an ITE unit or in an earpiece.

[0027] In some embodiments, the wireless communication unit may be configured for converting the second electric output signal into a wireless output signal. The wireless output signal may comprise synchronization data. The wireless communication unit may be configured for transmitting the wireless output signal via at least one of the one or more antennas.

[0028] In some embodiments, the hearing device may comprise a digital-to-analogue converter configured to convert the first electric output signal, the second electric output signal and/or the wireless output signal into an analogue signal.

[0029] The hearing device comprises an active vent. A vent is a physical passageway such as a canal or tube primarily placed to offer pressure equalization across a housing placed in the ear such as an ITE hearing device, an ITE unit of a BTE hearing device, a CIC hearing device, a RIE hearing device, a RIC hearing device, a MaRIE hearing device or a dome tip, or earmould. The vent may be a pressure vent with a small cross section area, which is preferably acoustically sealed. The vent may be an acoustic vent configured for occlusion cancellation. An active vent enables opening or closing of the vent during use of the hearing device and comprises a valve. In some embodiments, the hearing device may comprise a power source. The power source may comprise a battery providing a first voltage. The battery may be a rechargeable battery. The battery may be a replaceable battery. The power source may comprise a power management unit. The power management unit may be configured to convert the first voltage into a second voltage. The power source may comprise a charging coil. The charging coil may be provided by the magnetic antenna.

[0030] In some embodiments, the hearing device may comprise a memory, including volatile and nonvolatile forms of memory.

[0031] Throughout this text, the term removable is used in connection with various components. It is noted that by the term removable is meant that the component mentioned in connection with the term is intended to be removable and that a user or hearing care professional may remove/detach a component without the use of ex-

cessive force.

[0032] The supporting structure may be arranged in a variety of ways to achieve the purpose of holding the receiver housing in place within the earmould. In some embodiments, the supporting structure comprises a plurality of supporting structures. The supporting structure may be configured to allow the receiver housing to move, such as when the user talks or chews, which provides increased comfort for the user of the hearing device. In some embodiments, the supporting structure is an integral part of the earmould. Thus, in some embodiments, the supporting structure is made from the same material as the earmould.

[0033] In some embodiments, at least part of the supporting structure extends from an inside wall of the earmould.

[0034] In some embodiments, at least part of the supporting structure is arranged at the front end and/or at least part of the supporting structure is arranged at the rear end of the earmould.

[0035] In some embodiments, the supporting structure is configured to at least partially surround the receiver housing. In some embodiments, the receiver housing comprises a structure that is configured to connect with a part of the supporting structure. In some embodiments, the receiver housing comprises a structure that is configured to connect with a part of the supporting structure that at least partially surrounds the receiver housing. Thus, in some embodiments, the receiver housing comprises an interlocking element configured to interconnect with at least part of the supporting structure. In some embodiments, the active vent is coupled to the receiver housing and the active vent may comprise an interlocking element configured to interconnect with at least part of the supporting structure.

[0036] In some embodiments, the supporting structure is configured to suspend the receiver housing within the earmould. The supporting structure may be configured to allow for the receiver housing to have some freedom of movement within the earmould. This will allow the receiver housing to move in response to forces acting on the earmould such as during movement of the user's jaws and may also dampen any vibrations from the receiver. For example, the receiver housing may be arranged within the earmould in such a way that at least part of or most of the outer surface of the receiver housing is not in contact with a supporting structure. For example, the receiver housing may be coupled to the earmould only at the front opening, possibly via an active vent. In some embodiments, the receiver housing is coupled to the earmould only at the front opening, possibly via an active vent, and at a part of the receiver housing arranged furthest from the front opening.

[0037] In some embodiments, at least part of the supporting structure is comprised in the front opening. In some embodiments, the supporting structure comprises a fixation tip attached to the front end of the earmould. The fixation tip may be part of the front opening. The

fixation tip may be configured to hold the receiver housing in place within the earmould. In some embodiments, the fixation tip comprises the front opening. A fixation tip may be made custom for a user or may be provided as a standard part in a variety of sizes. The receiver housing and/or an active vent coupled to the receiver housing may be held in place at the front opening. In some embodiments, the earmould further comprises a flexible and resilient element that is configured to cushion the receiver housing against an inside wall of the earmould. The flexible and resilient element may comprise a foam material. The cushioning by the flexible and resilient element allows the receiver housing to move, such as when the user talks or chews, which provides increased comfort for the user of the hearing device.

[0038] The at least part of the supporting structure, which is comprised in the front opening, may comprise a material that is softer than that of the middle part, and the receiver housing and/or an active vent coupled to the receiver housing may be removably attached to the supporting structure at the front opening.

[0039] At least part of the supporting structure may comprise a material that is softer than the material used to make the middle part of the earmould. In some embodiments, the entire supporting structure is made from a material that is softer than the material used to make the middle part of the earmould.

[0040] To characterize the hardness of the materials a standard method such as measurements using a Shore durometer may be used. The earmould, or at least the middle part of the earmould, may be a hard earmould comprising, or being made entirely of, a material having a measured hardness of 60-100 shore D, such as of 70-90 shore D, such as of 75-85 shore D. The earmould, or at least the middle part of the earmould, may be made using 3D printing technology. Thus, the earmould, or at least the middle part of the earmould, may be made of a photopolymer resin such as a DLP (Digital light processing) resin.

[0041] By a material being softer than another material is meant that its measured indentation hardness is a lower value. For example, the hardness of the middle part of the earmould and of the materials in the supporting structure may be determined according to a Shore hardness scale. In some preferred embodiments, the earmould is a hard shell earmould. Hard shell earmoulds are commonly used for making custom earmoulds, i.e. earmoulds where at least part of it has been shaped to conform to a particular user's ear canal. Making an earmould as a hard shell makes the earmould more comfortable for the user and the earmould is, in general, more likely to stay in place in a user's ear canal compared to a soft earmould.

[0042] In some embodiments, all or part of the earmould, such as the middle part, is configured to at least partially conform to at least part of the ear canal of the user. In some embodiments, the middle part of the earmould is made from an acrylic. In some embodiments,

the supporting structure comprises silicone rubber, TPE, TPA, EPDM and/or LSR. In some embodiments, the supporting structure comprises a flexible material configured to stretch so as to accommodate the receiver housing during insertion of the receiver housing within the earmould and to hold the receiver housing in place after insertion. Having a supporting structure made from a softer material than that of the earmould allows for compensation of deviations during manufacture, such as low fidelity print resolution, i.e. for the receiver housing to be inserted in an earmould, which is not itself flexible enough to provide give during insertion and where even a small deviation during manufacture can make it difficult or impossible to insert the receiver housing, especially if the receiver housing is to be removable.

[0043] In some embodiments, at least part of the supporting structure is arranged at the rear end of the earmould. The receiver housing takes up a significant part of the available space within the earmould. In particular, some receiver housings have a comparatively large spout diameter, i.e. a comparatively large diameter of the structure, where sound exits the receiver housing. For example, active vent receivers, which have an active vent comprised in the receiver housing, may have a larger spout diameter. Design of an earmould is challenged by the available space within the ear canal of the user, and if the overall dimensions of the earmould grow this may become a problem. For example, an increase in overall dimension of an earmould may reduce the insertion depth of the earmould and also how well it can fit inside the ear canal. Having the supporting structure at the rear end or primarily at the rear end of the earmould may save space at the front of the earmould compared to fixation of the receiver housing at the front end. It may be advantageous to combine a soft material at the front opening providing an acoustic seal between the receiver housing and the earmould with a supporting structure at the middle part or the rear end providing the necessary force to hold the receiver housing in place.

[0044] In some embodiments, the receiver or receiver housing comprises a wired connection, which is configured to connect the receiver electronics with other parts of the hearing device, such as with a Behind-the-ear (BTE) part. In some embodiments, the supporting structure is configured to at least partially surround the wired connection. The part of the receiver housing from where the wired connection extends, may comprise a structure, which is configured to connect with a supporting structure.

[0045] In some embodiments, the earmould further comprises a faceplate that is attached to the rear end of the earmould. The faceplate may be configured to allow ambient sound from outside the ear canal of the user to pass through it. The faceplate may be removably attached to the earmould. In some embodiments, the supporting structure is comprised in or coupled to the faceplate. In some embodiments, the supporting structure is an integral part of the faceplate.

[0046] The receiver housing may be removably arranged within the earmould. Thus, in some embodiments, the supporting structure is configured such that the receiver housing is removably arranged within the earmould. An exchangeable receiver allows the receiver to be exchanged if needed or desired. For example, the receiver may be replaced if it is defective, or as part of an exchange or upgrade of part of the hearing device. Having a removable receiver in the hearing device may extend the usable lifetime of the hearing device and save cost. Further, materials may be saved as the manufacturer may avoid a replacement of the entire earmould and instead replace only parts of the hearing device such as the receiver and/or one or more filters thus making the production and maintenance of the hearing device more sustainable. The user may be able to keep an earmould that fit well even though part of the hearing device such as the receiver housing needed to be replaced. Additionally, as earmoulds can be difficult to fit for a user, the earmould may be part exchanged.

[0047] In an embodiment, the receiver housing optionally comprises one or more biometric sensors for retrieving, such as, but not limited to, a pressure signal, a heart-beat rate signal, a snore detection signal. Optionally, the receiver housing further comprises one or more movement sensors e.g. a gyro sensor, an acceleration sensors.

BRIEF DESCRIPTION OF THE DRAWINGS

[0048] In the following, exemplary embodiments of the invention are described in more detail with reference to the appended drawings, wherein:

FIGS. 1A and 1B schematically illustrate a hearing device according to some embodiments,

FIGS. 2A and 2B schematically illustrate a hearing device according to some embodiments,

FIGS. 3A and 3B schematically illustrate a hearing device according to some embodiments,

FIGS. 4A and 4B schematically illustrate a hearing device according to some embodiments,

FIGS. 5A and 5B schematically illustrate a hearing device according to some embodiments,

FIG. 6 schematically illustrates a hearing device according to some embodiments,

FIGS. 7A and 7B schematically illustrate a receiver housing comprising an interlocking element and part of a supporting structure according to some embodiments,

FIG. 8 schematically illustrates a hearing device ac-

ording to some embodiments, and

FIG. 9 schematically illustrates a hearing device according to some embodiments.

DETAILED DESCRIPTION

[0049] In the following various exemplary embodiments of the disclosed hearing device are described with reference to the appended drawings. The skilled person will understand that the accompanying drawings are schematic and simplified for clarity and therefore merely show details which are essential to the understanding of the invention, while other details have been left out. The elements shown in the drawings are not necessarily drawn to scale, but may primarily be illustrative of relative position, orientation, and function. Like reference numerals refer to like elements throughout. Like elements will therefore not necessarily be described in detail with respect to each figure.

[0050] **FIGS. 1A** and **1B** schematically illustrate in a cutaway drawing a hearing device part according to some embodiments.

[0051] In fig. 1A is shown an earmould 3, which may be part of an in-the-ear (ITE) part 1 of a hearing device. A connector 21 connects a receiver 11 within a receiver housing 25 arranged in the earmould 3 to another part of the hearing device, such as a BTE part. The earmould 3 has an elongated shape and is configured for placement at least partially within an ear canal of the intended user. The earmould may be made from a hard material, such as a hard polymer or a metal, or from a soft material, such as a rubber-like polymer, such as an acrylic, and may be moulded to have an outer shape that at least in part conforms to the shape of a specific user's ear canal.

[0052] The earmould 3 has a front end 5, having a front opening 9, a rear end 7, having a rear opening 10, opposite the front end, and a middle part 8. The rear end of the earmould 3 in fig. 1A is not closed off to the outside of the earmould such that the earmould has an open shell structure.

[0053] The earmould is configured such that the front end can be positioned to face the tympanic membrane of the user's ear canal during use of the hearing device. A receiver housing 25 is arranged within the earmould such that sound produced by the receiver will exit the earmould via the front opening 9 at the front end. A front filter 15 at the front opening diminishes the amount of contaminants that may otherwise enter through the front opening 9.

[0054] The receiver housing 25 is held within the earmould by a supporting structure 29 and the receiver housing is positioned to have a first end 53 facing towards the front end 5 of the earmould and a second, opposite, end 55 facing towards the rear end 7 of the earmould. The supporting structure 29 comprises a fixation tip 35 attached to the front end of the earmould and the fixation tip is configured to hold the receiver housing 25 in place

within the earmould by interlocking with part of the receiver housing 25 to secure it in place. This supporting structure 29 may be configured such that the receiver can be removed, and possibly exchanged, later, if needed.

[0055] Optionally, the supporting structure 29 comprises a soft material at the front opening, which has a number of advantages, as it allows the supporting structure to be configured to: provide an acoustic seal between the ear canal of the user and the inner space of the earmould, provide for the receiver housing to be removably attached in the supporting structure, and provide for the receiver housing to have some mobility within the earmould, which increases the comfort for the user.

[0056] The earmould is made to have a sound passage, which extends between the front opening 9 and the rear end 7, to allow for fluid connection between the front opening and an outside of the ear canal. The earmould 3 has an active vent 13, which has a valve that is positioned in-between the receiver 11 and the front opening 9. Thus, when the valve in the vent is closed, fluid is hindered in its movement between the front opening 9 and the rear end 7. Conversely, opening the valve allows fluid to move through the sound passage. The receiver and active vent may be integrated in an active vent receiver.

[0057] A rear filter (not shown) may be arranged so as to be positioned at the rear opening, or to be positioned in-between the rear opening 9 and the valve of the active vent 13. Such a rear filter may be configured to allow sound to pass therethrough and further configured to hinder contaminants from entering the space between the rear filter and the vent. To hinder contaminants from bypassing the rear filter, the rear filter may be made from a flexible material. For example, the rear filter may be made from a woven material or a foam material. When the receiver housing 25 is secured within the earmould, the rear filter creates a partition between the inside of the earmould and the outside of the earmould from where contamination may arrive.

[0058] In fig. 1B is illustrated how an earmould 3 and a supporting structure 29 in the form of a fixation tip 35 may be assembled to produce an assembly prepared for the insertion of a receiver housing to obtain the hearing device part 1 shown in fig. 1A. A custom-made earmould 3 shaped to fit part of a user's ear canal is attached, for example using an adhesive such as glue, to the softer fixation tip 35. The fixation tip comprises the front opening, which is configured such that the receiver housing 25 can be inserted into it.

[0059] **FIGS. 2A** and **2B** schematically illustrate a hearing device part according to some embodiments.

[0060] In fig. 2A is shown in a cutaway drawing an earmould 3, which may be part of an in-the-ear (ITE) part 1 of a hearing device. A connector 21 connects a receiver 11 within a receiver housing 25 arranged in the earmould 3 to another part of the hearing device, such as a BTE part. The earmould 3 has an elongated shape and is con-

figured for placement at least partially within an ear canal of the intended user. The earmould may be made from a hard material, such as a hard polymer or a metal, or from a soft material, such as a rubber-like polymer, such as an acrylic, and may be moulded to have an outer shape that at least in part conforms to the shape of a specific user's ear canal.

[0061] The earmould 3 has a front end 5, having a front opening 9, a rear end 7, having a rear opening 10, opposite the front end, and a middle part 8. The rear end of the earmould 3 in fig. 2A is not closed off to the outside of the earmould such that the earmould has an open shell structure.

[0062] The earmould is configured such that the front end can be positioned to face the tympanic membrane of the user's ear canal during use of the hearing device. A receiver housing 25 is arranged within the earmould such that sound produced by the receiver will exit the earmould via the front opening 9 at the front end. A front filter may be positioned at the front opening to diminish the amount of contaminants that may otherwise enter through the front opening.

[0063] The receiver housing 25 is held within the earmould by a supporting structure, which comprises a plurality of supporting structures 41, 43. The receiver housing is positioned to have a first end 53 facing towards the front end 5 of the earmould and a second, opposite, end 55 facing towards the rear end 7 of the earmould. A first supporting structure 41 extends from the inside wall 27 closer to the rear end than the front end. Having the supporting structure primarily towards the rear end of the earmould saves space at the front of the earmould, which is advantageous as the available space at the front is usually more limited than at the back. If the front of the earmould has to be made larger, this may reduce the insertion depth of the earmould within the user's ear canal and/or make it more difficult to obtain a good fit for the earmould within the ear canal.

[0064] The first supporting structure 41 may be manufactured together with the earmould 3 as a 3D print and may be made from the same material as that used for the earmould 3. A part of the first supporting structure 41 has a shape that allows the receiver housing 25 to fit within it, but is made to be slightly larger than needed such that the receiver housing 25 will fit even if there are small deviations in the print due to e.g. a low fidelity print resolution. The first supporting structure is made to surround the receiver housing, and provides a visual indication of the correct attachment into the earmould.

[0065] Optionally, a second supporting structure 41 is made from a material that is softer than the material used to make the earmould. Either or both of the first supporting structure 41 and second structure 43 can be made from a material that is softer than the material used to make the earmould, or at least softer than the material used to make the middle part of the earmould. The first and second supporting structures may have different hardness, i.e. the first supporting structure may have a

different hardness than the second supporting structure - even while both the first and second supporting structure is softer than the material used for the earmould, or at least softer than the material used for the middle part of the earmould.

[0066] The second supporting structure 43 is shaped as a ring that fits within a groove in the first supporting structure 35. Optionally, the second supporting structure is configured to be able to provide some give, when the receiver housing 25 is inserted into the supporting structure and to provide the retention force necessary to hold the receiver housing within the earmould. The second supporting structure 43 may also be configured to allow the receiver housing to be removed from the supporting structure.

[0067] Optionally, the hearing device comprises a soft material at the front opening 9 into which the receiver housing 25, or an active vent 13 coupled to the receiver housing, is inserted, the soft material being configured to provide give during the insertion. The soft material at the front opening can be configured to allow the receiver housing to be removed from the earmould, if needed. The soft material at the front opening 9 may be a fixation tip and so a part of the supporting structure. The fixation tip 35 shown in fig. 2A is smaller than that shown in figs. 1A and 1B.

[0068] The receiver housing 25 has an active vent 13 coupled to it, for example it may be an active vent receiver, wherein an active vent is built-in into the receiver. For the active vent to function satisfactorily the soft material at the front opening is configured to provide an acoustic seal between the ear canal of the user and the inner space of the earmould which is open to the outside of the user's ear canal. This allow for sound passage, i.e. fluid connection, between the front opening and outside of the ear canal, when the valve within the active vent is in an open state, and for ambient sound to be hindered from entering the ear canal of the user, when the valve is in a closed state.

[0069] Further, the soft material at the front opening 9 may be configured to allow the receiver housing and active vent to have some mobility within the earmould, which increases the comfort for the user, while the hearing device is worn.

[0070] A rear filter (not shown) may be arranged so as to be positioned at the rear opening, or to be positioned in-between the rear opening 9 and the valve of the active vent 13. Such a rear filter may be configured to allow for sound passage, i.e. to allow for a fluid connection, between the front opening and outside of the ear canal and further configured to hinder contaminants from entering the space between the rear filter and the vent. To hinder contaminants from bypassing the rear filter, the rear filter may be made from a flexible material. For example, the rear filter may be made from a woven material or a foam material. When the receiver housing 25 is secured within the earmould, the rear filter creates a partition between the inside of the earmould and the outside of the ear-

mould from where contamination may arrive.

[0071] In fig. 2B is shown a view towards the rear end 7 of the earmould 3 that is shown in fig. 2A. The first and second supporting structures 41, 43 are shown without the receiver housing inserted, whereby the 3D structures are better visualised together with fig. 2A.

[0072] FIGS. 3A and 3B schematically illustrate a hearing device part according to some embodiments.

[0073] In fig. 3A is shown in a cutaway drawing an earmould 3, which may be part of an in-the-ear (ITE) part 1 of a hearing device. A connector 21 connects a receiver 11 within a receiver housing 25 arranged in the earmould 3 to another part of the hearing device, such as a BTE part. The earmould 3 has an elongated shape and is configured for placement at least partially within an ear canal of the intended user. The earmould 3 and receiver housing 25 may be largely as described above in connection with fig. 2A and the receiver may be an active vent receiver.

[0074] The receiver housing 25 is held within the earmould by a supporting structure and the receiver housing is positioned to have a first end 53 facing towards the front end 5 of the earmould and a second, opposite, end 55 facing towards the rear end 7 of the earmould. A supporting structure 29 extends from the inside wall 27 closer to the rear end than the front end and comprises a material that is softer than the material used to make the middle part of the earmould. The supporting structure may be attached to the earmould using an adhesive such as e.g. glue. Having the supporting structure primarily towards the rear end of the earmould saves space at the front of the earmould, which is advantageous as the available space at the front is usually more limited than at the back. If the front of the earmould has to be made larger, this may reduce the insertion depth of the earmould within the user's ear canal and/or make it more difficult to obtain a good fit for the earmould within the ear canal.

[0075] The supporting structure 29 has a shape that allows part of the wired connection 21 to fit within it. The supporting structure 29 is configured such that it will provide give to allow the wired connection 21 to be inserted into it, but also configured such that once inserted the supporting structure will provide the retention force to hold the wired connection 21 such that the receiver housing is held in place within the earmould.

[0076] A structure arranged at the front 5 of the earmould holds the receiver housing, or active vent coupled to the receiver housing, in place at or near the front opening 9, for example, but not limited to, a soft material at the front opening 9 as described above.

[0077] Alternatively, the embodiment in fig. 3A shows an embodiment in which the supporting structure comprises a plurality of supporting structures. A first supporting structure 41 extends from the inside wall 27 closer to the rear end than the front end and may be manufactured together with the earmould 3 as a 3D print and may be made from the same material as that used for the earmould 3, which must then provide enough give for the

wired connection to be inserted into the first supporting structure 41. A second supporting structure 43 is arranged at the front end 5 of the earmould and comprises a material that is optionally softer than the material used to make the earmould. The second supporting structure 43 may be a fixation tip and the second supporting structure may be configured to provide an acoustic seal between the ear canal of the user and the inner space of the earmould.

[0078] Fig. 3B shows a view towards the rear end 7 of the earmould 3 shown in fig. 3A to show another view of the (first) supporting structure(s) 29, 41 with the wired connection 21 retained within the supporting structure such that the receiver housing 25 is held in place within the earmould 3.

[0079] FIGS. 4A and 4B schematically illustrate a hearing device part according to some embodiments.

[0080] In fig. 4A is shown in a cutaway drawing an earmould 3, which may be part of an in-the-ear (ITE) part 1 of a hearing device. A connector 21 connects a receiver 11 within a receiver housing 25 arranged in the earmould 3 to another part of the hearing device, such as a BTE part. The earmould 3 has an elongated shape and is configured for placement at least partially within an ear canal of the intended user. The earmould may be made from a hard material, such as a hard polymer or a metal, or from a softer material, such as a rubber-like polymer, such as an acrylic, and may be moulded to have an outer shape that at least in part conforms to the shape of a specific user's ear canal.

[0081] The earmould 3 has a front end 5, having a front opening 9, a rear end 7, having a rear opening 10, opposite the front end, and a middle part 8. The rear end of the earmould 3 in fig. 4A is not closed off to the outside of the earmould such that the earmould has an open shell structure.

[0082] The earmould 3 is configured such that the front end 5 can be positioned to face the tympanic membrane of the user's ear canal during use of the hearing device. A receiver housing 25 is arranged within the earmould such that sound produced by the receiver will exit the earmould via the front opening 9 at the front end. A front filter may be positioned at the front opening to diminish the amount of contaminants that may otherwise enter through the front opening.

[0083] The receiver housing 25 is held within the earmould by a supporting structure 29 and the receiver housing is positioned to have a first end 53 facing towards the front end 5 of the earmould and a second, opposite, end 55 facing towards the rear end 7 of the earmould. The supporting structure 29 may extend from the inside wall 27 and is arranged closer to the rear end 7 than the front end 5 of the earmould. Optionally, the supporting structure may be attached to the earmould using known methods, such as using an adhesive, e.g. glue. Having the supporting structure primarily towards the rear end of the earmould saves space at the front of the earmould, which is advantageous as the available space at the front is

usually more limited than at the back. If the front of the earmould has to be made larger, this may reduce the insertion depth of the earmould within the user's ear canal and/or make it more difficult to obtain a good fit for the earmould within the ear canal.

[0084] The supporting structure 29 shown in figs. 4A and 4B is made from a flexible material, which can stretch to accommodate the receiver housing 25 both during and after insertion of the receiver housing within the earmould 3. The supporting structure 29 may be made from, or at least comprise, a material that is softer than the material used to make the earmould, or at least softer than the material used to make the middle part of the earmould.

[0085] The supporting structure is shaped to cover the part of the receiver housing, where the wired connection 21 extends from and has a hole through which the wired connection extends through. The wired connection 21 extends from the end of the elongated receiver housing 25, which faces away from the front end 5 of the earmould, and the supporting structure 29 is shaped to fit over the end, and further to extend some way along the receiver housing so as to form a cavity shaped to fit the end of the receiver housing. The flexible supporting structure 29 is configured to be able to provide some give, when the receiver housing 25 is inserted into the earmould and to provide the retention force necessary to hold the receiver housing within the earmould.

[0086] The wired connection 21 may either be permanently fixed to the receiver housing 25 or removably attached to the receiver housing, for example using a known wire interface. If the wired connection is fixed to the receiver housing 25, the other end of the wired connection must removably attached in order for the receiver housing to be removably arranged in the earmould. If the wired connection 21 is removably attached to the receiver housing 25, the housing may be inserted in the earmould and fixated in the supporting structure before the wired connection 21 is attached to the housing 25.

[0087] The supporting structure 29 may be configured to fixate the receiver housing 25 in place within the earmould on its own, i.e. even when the wired connection is not there, or the wired connection extending through the hole in the supporting structure may assist in holding the receiver housing 25 in place by limiting the movement of the receiver housing 25.

[0088] Optionally, the hearing device comprises a soft material at the front opening 9 into which the receiver housing 25, or an active vent 13 coupled to the receiver housing, is inserted, the soft material being configured to provide give during the insertion. The soft material at the front opening can be configured to allow the receiver housing to be removed from the earmould, if needed. The soft material at the front opening 9 may be a fixation tip, as discussed elsewhere, and so be a part of the supporting structure.

[0089] The receiver housing 25 shown in fig. 4A has an active vent 13 coupled to it, for example it may be an active vent receiver, wherein an active vent is built-in into

the receiver. In an optional embodiment where the front opening is made from a soft material, for the active vent to function satisfactorily the soft material at the front opening is configured to provide an acoustic seal between the ear canal of the user and the inner space of the earmould which is open to the outside of the user's ear canal.

[0090] Further, in an optional embodiment, where the front opening 9 is made from a softer material than the earmould, the soft material at the front opening 9 may be configured to allow the receiver housing and active vent to have some mobility within the earmould, which increases the comfort for the user, while the hearing device is worn.

[0091] A rear filter (not shown) may be arranged so as to be positioned at the rear opening, or to be positioned in-between the rear opening 9 and the valve of the active vent 13. Such a rear filter may be configured to allow sound to pass therethrough and further configured to hinder contaminants from entering the space between the rear filter and the vent. To hinder contaminants from bypassing the filter, the rear filter may be made from a flexible material. For example, the rear filter may be made from a woven material or a foam material. When the receiver housing 25 is secured within the earmould, the rear filter creates a partition between the inside of the earmould and the outside from where contamination may arrive.

[0092] Fig. 4B shows a view towards the rear end 7 of the earmould 3 shown in fig. 4A to show another view of the supporting structure 29 with the receiver housing 25 held by the supporting structure 29 such that the housing is held in place within the earmould 3. The wired connection 21 extends through a hole in the supporting structure 29.

[0093] FIGS. 5A and 5B schematically illustrate in a hearing device part according to some embodiments.

[0094] In fig. 5A is shown in a cutaway drawing an earmould 3, which may be part of an in-the-ear (ITE) part 1 of a hearing device. A connector 21 connects a receiver 11 within a receiver housing 25 arranged in the earmould 3 to another part of the hearing device, such as a BTE part. The earmould 3 has an elongated shape and is configured for placement at least partially within an ear canal of the intended user. The earmould may be made from a hard material, such as a hard polymer or a metal, or from a softer material, such as a rubber-like polymer, such as an acrylic, and may be moulded to have an outer shape that at least in part conforms to the shape of a specific user's ear canal.

[0095] The earmould 3 has a front end 5, having a front opening 9, a rear end 7, having a rear opening 10, opposite the front end, and a middle part 8. The rear end of the earmould 3 in fig. 5A is not closed off to the outside of the earmould such that the earmould has an open shell structure.

[0096] The earmould 3 is configured such that the front end 5 can be positioned to face the tympanic membrane of the user's ear canal during use of the hearing device.

A receiver housing 25 is arranged within the earmould such that sound produced by the receiver will exit the earmould via the front opening 9 at the front end. A front filter may be positioned at the front opening to diminish the amount of contaminants that may otherwise enter through the front opening.

[0097] The receiver housing 25 is held within the earmould by a supporting structure 29 and the receiver housing is positioned to have a first end 53 facing towards the front end 5 of the earmould and a second, opposite, end 55 facing towards the rear end 7 of the earmould. Optionally, the supporting structure 29 comprises a flexible material that is softer than the material used to make the earmould 3. The supporting structure 29 is made from a flexible material, which can stretch to accommodate the receiver housing 25 both during and after insertion of the receiver housing within the earmould 3. The flexible supporting structure 29 is configured to be able to provide some give, when the receiver housing 25 is inserted into the earmould and to provide the retention force necessary to hold the receiver housing 25 within the earmould 3.

[0098] The supporting structure 29 extends from the inside wall 27 of the earmould and part of it forms a tube in which the receiver housing 25 fits. The tubular shape is sized to fit snugly around the elongated body of the receiver housing 25 and thus create a retention force. The supporting structure 29 may be attached to the earmould 3 using known methods, such as using an adhesive, e.g. glue. The tubular supporting structure 29 can be arranged to be primarily towards the rear end of the earmould to save space at the front of the earmould. The supporting structure 29 may be configured to allow the receiver housing 25 to be removed from the earmould 3, if needed.

[0099] The receiver housing 25 shown in fig. 5A has an active vent 13 coupled to it, for example it may be an active vent receiver, wherein an active vent is built-in into the receiver. For the active vent to function satisfactorily a part of the supporting structure at or near the front opening 9 is configured to provide an acoustic seal between the ear canal of the user and the inner space of the earmould which is open to the outside of the user's ear canal. This allow for a sound passage, i.e. a fluid connection, between the front opening and outside of the ear canal, when the valve within the active vent is in an open state, and for ambient sound to be hindered from entering the ear canal of the user, when the valve is in a closed state. Further, the supporting structure 29 has one or more fluid openings 45 that are positioned and configured to allow for fluid such as air to pass such that the supporting structure 29 does not interfere with the functionality of the active vent 13.

[0100] Further, in an optional embodiment where the supporting structure 29 is made from softer material than the earmould, the flexible and soft supporting structure 29 may allow the receiver housing 25 and active vent 13 to have some mobility within the earmould, which in-

creases the comfort for the user while the hearing device is worn.

[0101] A rear filter (not shown) may be arranged so as to be positioned at the rear opening, or to be positioned in-between the rear opening 9 and the valve of the active vent 13. Such a rear filter may be configured to allow sound to pass therethrough and further configured to hinder contaminants from entering the space between the rear filter and the vent. To hinder contaminants from bypassing the filter, the rear filter may be made from a flexible material. For example, the rear filter may be made from a woven material or a foam material. When the receiver housing 25 is secured within the earmould, the rear filter creates a partition between the inside of the earmould and the outside of the earmould from where contamination may arrive.

[0102] Fig. 5B shows a view towards the rear end 7 of the earmould 3 to show another view of the supporting structure 29 without the receiver housing 25 inserted, whereby the 3D structure of the supporting structure is better visualised together with fig. 5A.

[0103] FIG. 6 schematically illustrates in a cutaway drawing a hearing device part according to some embodiments. Shown is an earmould 3, which may be part of an in-the-ear (ITE) part 1 of a hearing device. The earmould 3 has an elongated shape and is configured for placement at least partially within an ear canal of the intended user. The earmould may be made from a hard material, such as a hard polymer or a metal, or from a softer material, such as a rubber-like polymer, such as an acrylic, and may be moulded to have an outer shape that at least in part conforms to the shape of a specific user's ear canal.

[0104] The earmould 3 has a front end 5, having a front opening 9, a rear end 7, having a rear opening 10, opposite the front end, and a middle part 8. The rear end of the earmould 3 is not closed off to the outside of the earmould such that the earmould has an open shell structure.

[0105] The earmould 3 is configured such that the front end 5 can be positioned to face the tympanic membrane of the user's ear canal during use of the hearing device. A receiver housing 25 is arranged within the earmould such that sound produced by the receiver will exit the earmould via the front opening 9 at the front end. A front filter 15 is positioned at the front opening 9 to diminish the amount of contaminants that may otherwise enter through the front opening.

[0106] The receiver housing 25 is held within the earmould by a supporting structure 29 and the receiver housing is positioned to have a first end 53 facing towards the front end 5 of the earmould and a second, opposite, end 55 facing towards the rear end 7 of the earmould. The supporting structure 29 is optionally made from a material that is softer than the material used to make the earmould 3. The supporting structure 29 is made from a material, which can stretch to accommodate the receiver housing 25 both during and after insertion of the receiver housing

within the earmould 3. The supporting structure 29 is positioned inside the earmould at the front end 5 and near the front opening 9. The supporting structure 29 is shaped to accommodate part of an active vent 13, which is coupled to a receiver housing 25, and configured to hold the active vent, and thereby the receiver housing 25, in place within the earmould 3.

[0107] The supporting structure 29 may be attached to the earmould 3 using known methods, such as using an adhesive, e.g. glue, and the supporting structure 29 may be configured to allow the receiver housing 25 to be removed from the earmould 3, if needed.

[0108] The earmould 3 further comprises a flexible and resilient element 37 that is configured to cushion the receiver housing 25 against an inside wall of the earmould 3. The flexible and resilient element may for example be a foam material. The cushioning by the flexible and resilient element is configured to allow the receiver housing 25 to move within the earmould, such as when the user talks or chews, which provides increased comfort for the user of the hearing device. The flexible and resilient element 37 may be attached to the receiver housing using a bellyband that secures around the receiver housing 25. The flexible and resilient element 37 can be made to be removable, for example by making it possible to remove the bellyband on which the element is attached. In this way, the flexible and resilient element 37 can be extracted from within the earmould 3 and cleaned or replaced, if needed.

[0109] The flexible and resilient element 37 may be additionally configured to act as a rear filter 17 and may be arranged so as to be positioned at the rear opening or to be positioned in-between the rear opening 9 and the valve of the active vent 13. To hinder contaminants from bypassing the rear filter 17, the rear filter may be made from a flexible material such as a woven material or a foam material. When the receiver housing 25 is secured within the earmould 3, the rear filter 17 creates a partition between the inner space of the earmould 3 and the outside of the earmould from where contamination may arrive. The rear filter 17 is configured so as to be acoustically open such that the functionality of the active vent is not compromised and the system will behave acoustically as a fully open vented earmould when the valve is in an open state.

[0110] FIGS. 7A and 7B schematically illustrate a receiver housing 25 comprising an interlocking element 39 and part of a supporting structure 29 according to some embodiments.

[0111] Fig. 7A shows a receiver housing 25 comprising an interlocking element 39, which has a cylindrical shape. One end of the cylindrical shape is attached to the receiver housing 25 and the other end of the cylindrical shape has a stopper. A wired connection 21 extends from the interlocking element 39 and connects to the receiver through the centre of the cylindrical shape.

[0112] Shown is also part of a supporting structure 29 comprising a cut-out that is shaped to fit around the cy-

lindrical shape of the interlocking element 39. The supporting structure 29 is coupled to an earmould, such as to an inside wall of an earmould.

[0113] The interlocking element 39 and the supporting structure 29 are configured to interlock with each other. When the cylindrical shape of the interlocking element 39 is introduced into the cut-out of the supporting structure, the interlocking element and the supporting structure interlock with each other and the stopper on the interlocking element helps to keep the receiver housing in place in relation to the supporting structure 29.

[0114] Fig. 7B shows a receiver housing 25 comprising an interlocking element 39. The interlocking element 39 is part of, or attached to, one end of the receiver housing 25. The interlocking element 39 comprises a hole extending through the interlocking element in a direction substantially parallel to the end surface of the receiver housing 25. A wired connection 21 extends from the receiver housing 25 and may extend through a part of the interlocking element 39.

[0115] Shown is also part of a supporting structure 29 that is shaped to fit within the hole in the interlocking element 39. The supporting structure 29 is coupled to an earmould, such as to an inside wall of an earmould.

[0116] The interlocking element 39 and the supporting structure 29 are thus configured to interlock with each other. The receiver housing 25 may be attached to the supporting structure 29 by applying force to push the interlocking element 39 onto the supporting structure 29 such that the part of the supporting structure 29 fitted for the hole sits within the hole of the interlocking element 39. In this way, the receiver housing 25 is held in place in relation to the supporting structure 29.

[0117] FIG. 8 schematically illustrates in a cutaway drawing a hearing device according to some embodiments.

[0118] In fig. 8 is shown in a cutaway drawing of an ITE hearing device 1 comprising an earmould 3. The earmould 3 has an elongated shape and is configured for placement at least partially within an ear canal of the intended user and may be made custom for a particular user by being shaped to conform to an ear canal of that user. The earmould is made from a hard material, such as a hard polymer, which for many users increases the comfort during use of the hearing device.

[0119] The earmould 3 has a front end 5, having a front opening 9, a rear end 7, having a rear opening 10, opposite the front end, and a middle part 8. The rear end of the earmould 3 is closed off to the outside of the earmould by a faceplate 19, which has a door to a battery compartment, wherein a battery 47 is housed.

[0120] The earmould 3 is configured such that the front end can be positioned to face the tympanic membrane of the user's ear canal during use of the hearing device. A receiver housing 25 comprises a receiver 11 and is arranged within the earmould such that sound produced by the receiver will exit the earmould through an active vent 13 and through the front opening 9 at the front end.

A front filter may be positioned at the front opening to diminish the amount of contaminants that may otherwise enter through the front opening. The receiver housing 25 may comprise various electronic components and further electronic components 49 may be arranged inside the earmould 3 outside of the receiver housing 25.

[0121] The earmould 3 is configured to have a sound passage, which extends between the front opening 9 and the rear end 7, to allow for fluid connection between the front opening and an outside of the earmould.

[0122] The active vent 13 is positioned in-between the receiver and the front opening and comprises a valve. The valve allows for the active vent to have an open state and a closed state, wherein, in the open state, the valve provides a fluid connection through the sound passage, and wherein, in the closed state, the valve hinders fluid connection through the sound passage. Thus, when the valve in the vent is closed, fluid is hindered in its movement between the front opening 9 and the outside of the earmould during use of the earmould. Conversely, opening the valve allows fluid connection through the sound passage. The receiver and active vent may be integrated in an active vent receiver.

[0123] The receiver housing 25 is held within the earmould by a supporting structure 29 extending from the inside wall 27 and the receiver housing is positioned to have a first end 53 facing towards the front end 5 of the earmould and a second, opposite, end 55 facing towards the rear end 7 of the earmould. Having the supporting structure more towards the rear end of the earmould than at the front saves space at the front of the earmould, which is advantageous as the available space at the front is usually more limited than at the back. If the front of the earmould has to be made larger, this may reduce the insertion depth of the earmould within the user's ear canal and/or make it more difficult to obtain a good fit for the earmould within the ear canal.

[0124] The supporting structure 29 is shaped as a disc, i.e. it has a flat shape, and is, in the embodiment shown in fig. 8, coupled to the inside wall 27 all around its outer circumference. Within the disc-shaped supporting structure 29 is an aperture inside which the receiver housing 25 is held. The disc-shaped supporting structure 29 is positioned between the active vent 13 and the faceplate 19.

[0125] The faceplate 19 and the disc-shaped supporting structure 29 each have one or more fluid openings 45 that form part of the sound passage that allows fluid connection between the outside the ear canal during use of the hearing device and the part of the interior of the earmould, which comprises the active vent.

[0126] Optionally, the supporting structure 29 is at least partially made from a material that is softer than the material used to make the earmould 3 and can be configured to allow some movement of the receiver housing 25. This freedom of the receiver housing 25 within the earmould 3 can lead to greater comfort for the user during use.

[0127] In the optional embodiment where the support-

ing structure 29 is made from a softer material than the earmould, the hearing device may comprise a soft material at the front opening 9 into which the receiver housing 25, or an active vent 13 coupled to the receiver housing, is inserted, the soft material being configured to provide give during the insertion. The soft material at the front opening may be part of the supporting structure holding the receiver housing 25 in place within the earmould 3. Further, the soft material at the front opening may be configured to provide an acoustic seal between the ear canal of the user and the inner space of the earmould.

[0128] In the optional embodiment where the supporting structure 29 is made from a softer material than the earmould, the supporting structure 29, the soft material at the front opening, the receiver housing 25 and the faceplate may each be configured to allow the receiver housing to be removed from the earmould, if needed. It may also be possible to disconnect the receiver housing 25 from further electronic components 49 of the hearing device 1. In some embodiments, the supporting structure 29, the soft material at the front opening, and the faceplate 19 may all be removably attached to the earmould 3 to allow a person, such as the user, a hearing aid dispenser or a technician, to exchange part of the hearing device.

[0129] FIG. 9 schematically illustrates in a cutaway drawing a hearing device according to some embodiments.

[0130] In fig. 9 is shown in a cutaway drawing of an ITE hearing device comprising an earmould 3 similar to that shown in fig. 8. In the embodiment shown in fig. 9 the fluid openings 45 in the faceplate 19 and the fluid openings 45 in the disc-shaped supporting structure 29 are connected by a fluid tube 51. Each fluid tube 51 extends between a fluid opening in the faceplate 19 and a fluid opening in the disc-shaped supporting structure 29. By having the fluid tubes 51 fluid can move between the outside of the earmould 1 during use of the hearing device and the part of the interior of the earmould, which comprises the active vent 13. Further, by having the fluid tubes 51 any sound originating in the interior of the earmould 3 in the space between the faceplate 19 and the disc-shaped supporting structure 29 can be dampened such that it is diminished or removed.

LIST OF REFERENCES

[0131]

| | |
|----|------------------------------|
| 1 | hearing device part/ITE part |
| 3 | earmould |
| 5 | front end |
| 7 | rear end |
| 8 | middle part |
| 9 | front opening |
| 10 | rear opening |
| 11 | receiver |

13 active vent
 15 front filter
 17 rear filter
 19 faceplate
 21 wired connection
 25 receiver body/receiver housing
 27 inside wall of earmould
 29 supporting structure
 31 filter holding element
 35 fixation tip
 37 foam/flexible and resilient element
 39 interlocking element
 41 first supporting structure
 43 second supporting structure
 45 fluid opening
 47 battery
 49 electronic components
 51 fluid tube
 53 first end of receiver housing
 55 second end of receiver housing

5

10

15

20

25

30

35

40

45

50

55

at least a part of the sound passage, the active vent being configured to have an open state and a closed state, wherein the valve, in the open state, provides a fluid connection through the sound passage, wherein the valve, in the closed state, hinders fluid connection through the sound passage, and a supporting structure (29) configured to hold the receiver housing (25) in place within the earmould.

2. A hearing device according to claim 1, wherein the middle part (8) is configured to at least partially conform to at least part of the ear canal of the user.

3. A hearing device according to any of the previous claims, wherein the receiver housing (25) is removably arranged within the earmould (3).

4. A hearing device according to any of the previous claims, wherein the receiver housing (25) comprises the active vent (13).

5. A hearing device according to any of the previous claims, wherein the active vent is (13) coupled to the receiver housing.

6. A hearing device according to any of the previous claims, wherein the active vent (13) is held in place within the earmould by at least part of the supporting structure (29).

7. A hearing device according to any of the previous claims, wherein at least part of the supporting structure comprises a material that is softer than the material used to make the middle part of the earmould.

8. A hearing device according to any of the previous claims, wherein the middle part (8) of the earmould is made from an acrylic.

9. A hearing device according to any of the previous claims, wherein the supporting structure (29) comprises silicone rubber, TPE, TPA, EPDM and/or LSR.

10. A hearing device according to any of the previous claims, wherein at least part of the supporting structure (29) is comprised in the front opening and comprises a material that is softer than that of the middle part (8), and wherein the receiver housing (25) and/or an active vent (13) coupled to the receiver housing, is removably attached to the supporting structure at the front opening.

11. A hearing device according to any of the previous claims, wherein at least part of the supporting structure extends from an inside wall (27) of the earmould.

Claims

1. A hearing device comprising:

an earmould (3) comprising:

a front end (5), a rear end (7), and a middle part (8) arranged in-between the front and a rear end,
 the front end (5) comprising a front opening (9), and
 the rear end (7) comprising a rear opening (10),

wherein the earmould is configured for the front end (5) to be positioned facing a tympanic membrane of the user during use,

the hearing device further comprising:

a receiver housing (25) arranged at least partly within the earmould, the receiver housing comprising a receiver (11), the receiver housing being positioned with a first end (53) towards the front end (5) of the earmould and a second, opposite, end (54) towards the rear end (7) of the earmould,

a sound passage extending between the front opening (9) and the rear end (7), and configured to allow for fluid connection between the front opening (9) and an outside of the ear canal of the user during use,

an active vent (13) comprising a valve, the valve being positioned in a space within the earmould limited by the second end of the receiver housing and by the front opening (9), the valve forming

- 12. A hearing device according to any of the previous claims, wherein the supporting structure is configured to at least partially surround the receiver housing (25).
5
- 13. A hearing device according to any of the previous claims, wherein the supporting structure (29) comprises a flexible material configured to stretch so as to accommodate the receiver housing (25) during insertion of the receiver housing within the earmould (3) and to hold the receiver housing after insertion.
10
- 14. A hearing device according to any of the previous claims, wherein the supporting structure (29) is configured to suspend the receiver housing within the earmould (3).
15
- 15. A hearing device according to any of the previous claims, wherein the receiver housing (25) comprises a biometric sensor.
20

25

30

35

40

45

50

55

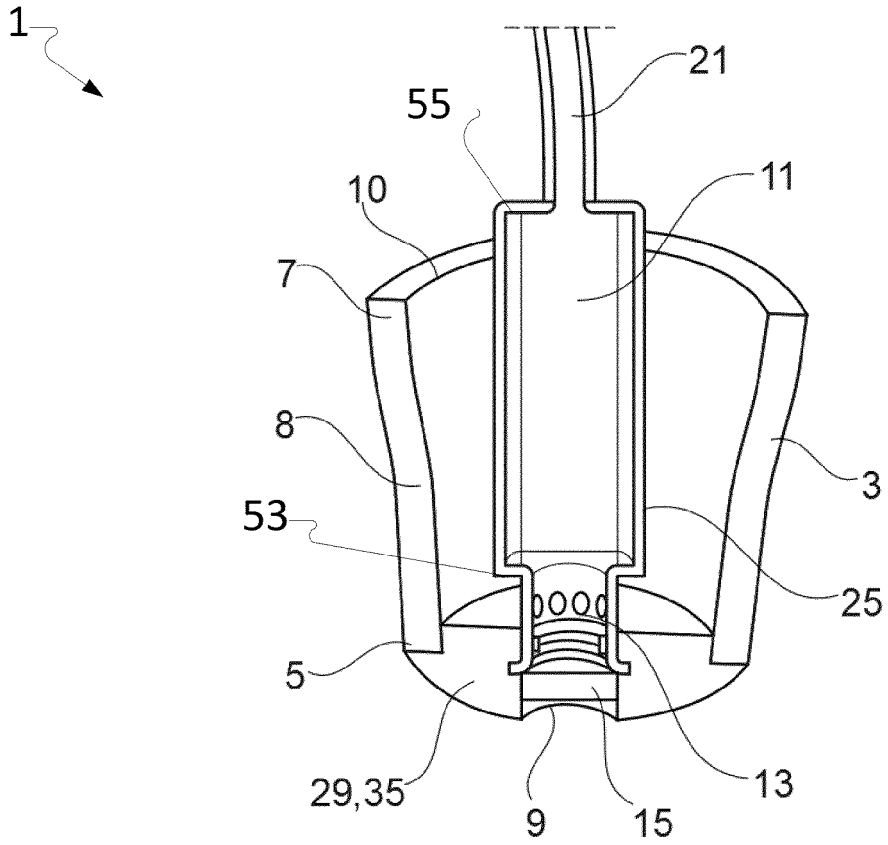


FIG. 1A

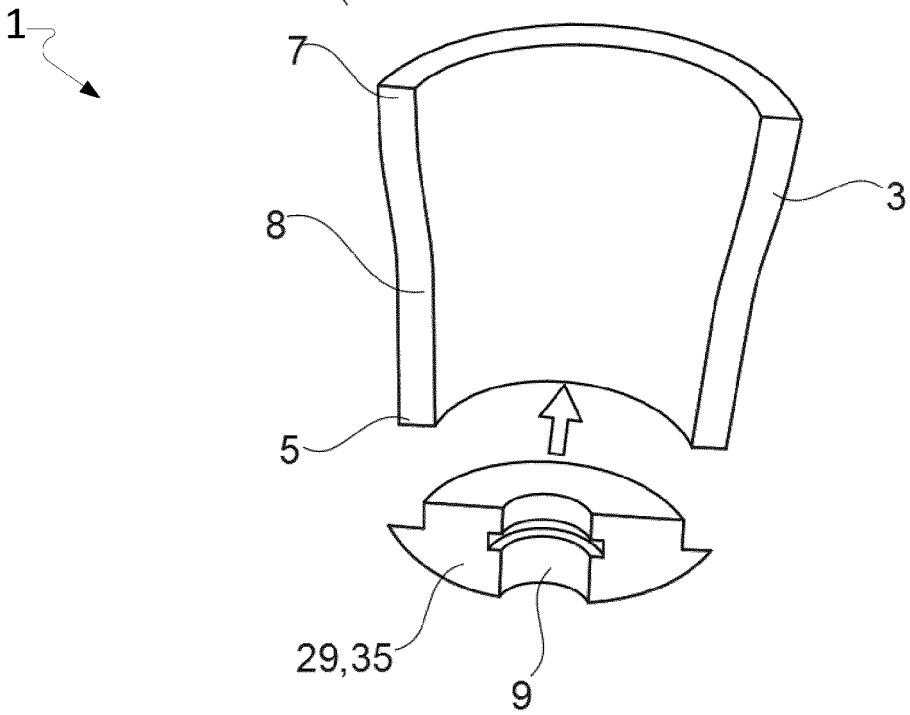


FIG. 1B

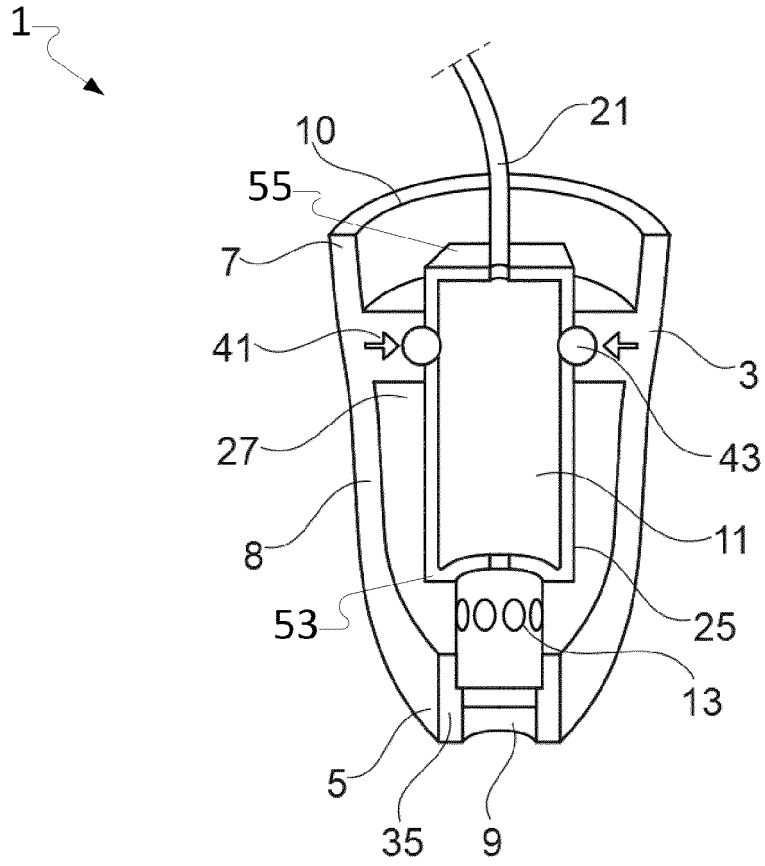


FIG. 2A



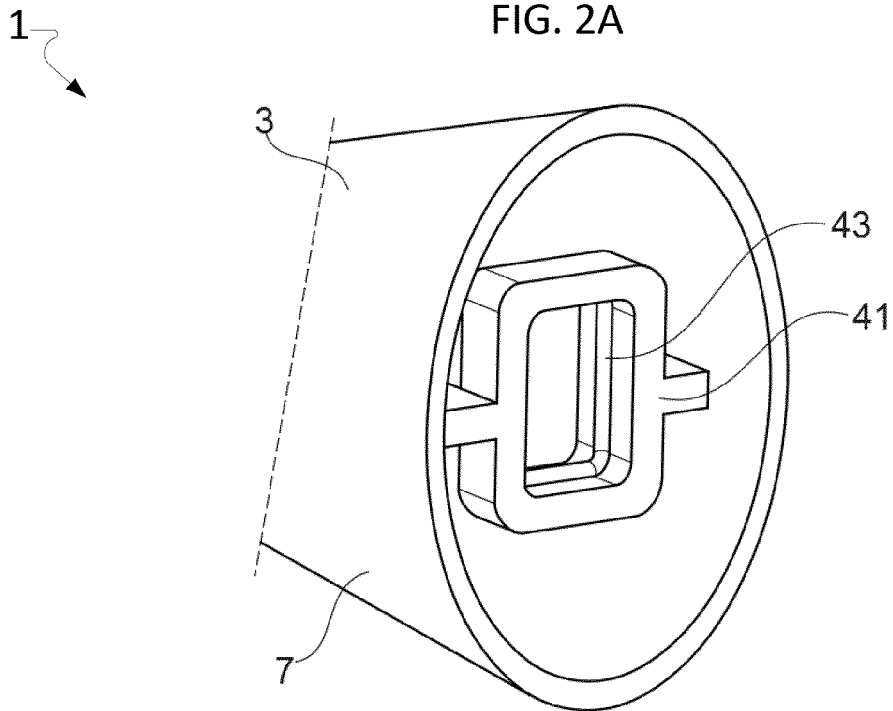


FIG. 2B

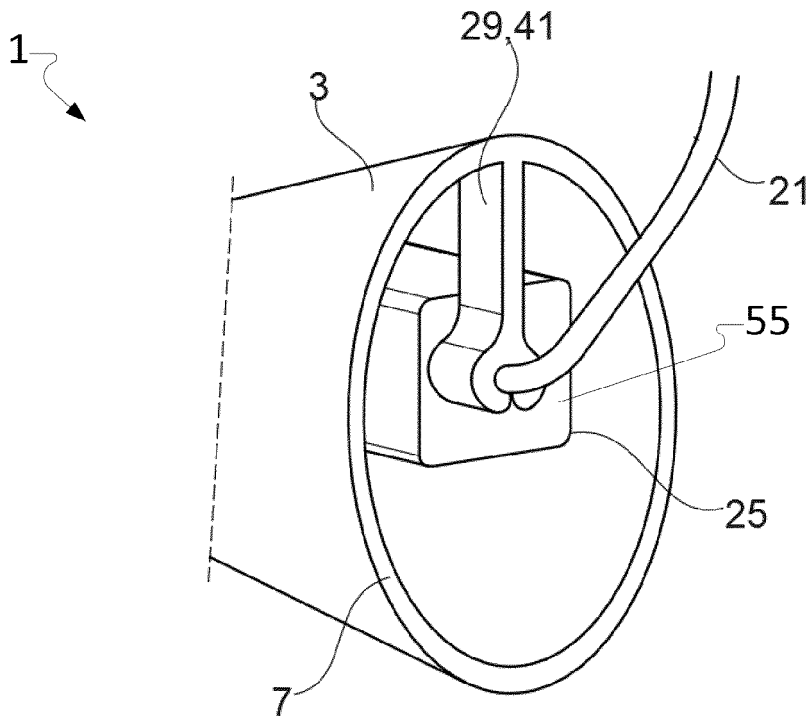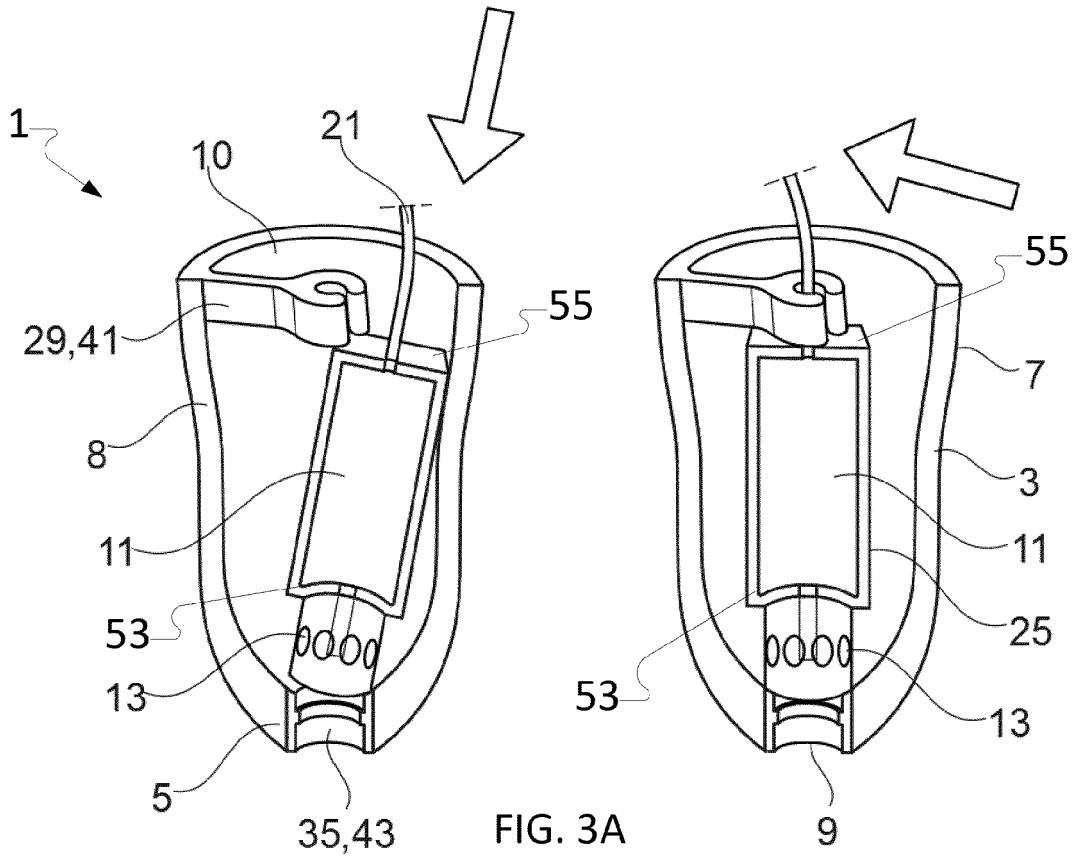

1 ↘

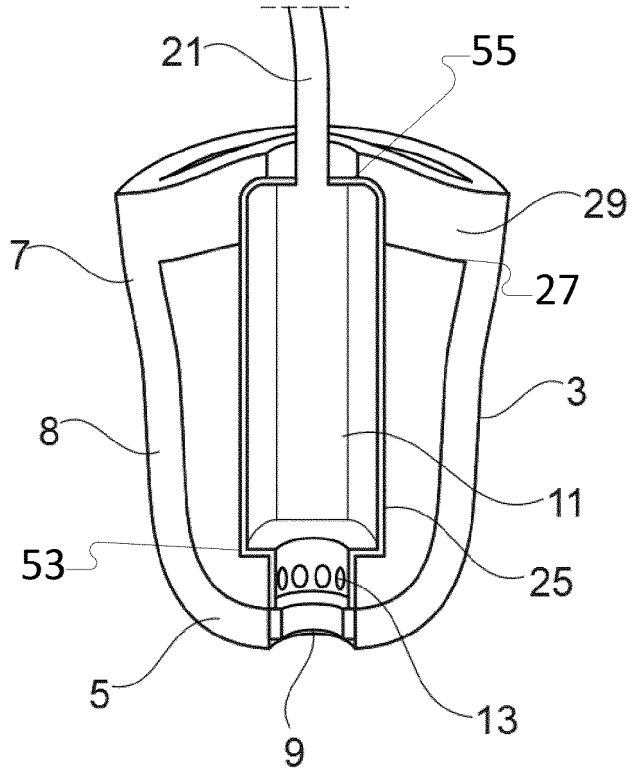


FIG. 4A

1 ↘

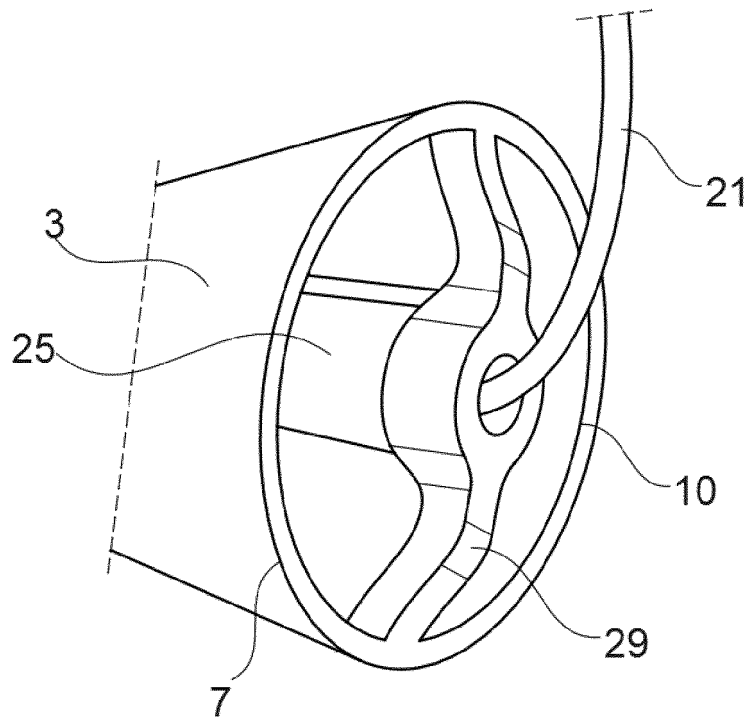


FIG. 4B

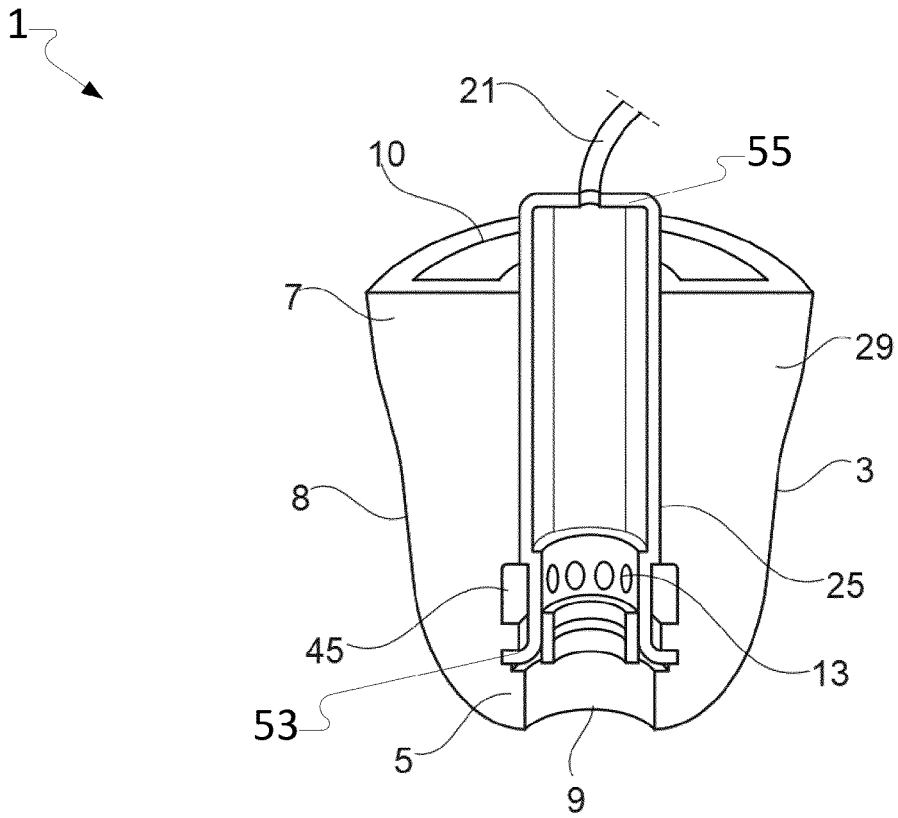


FIG. 5A

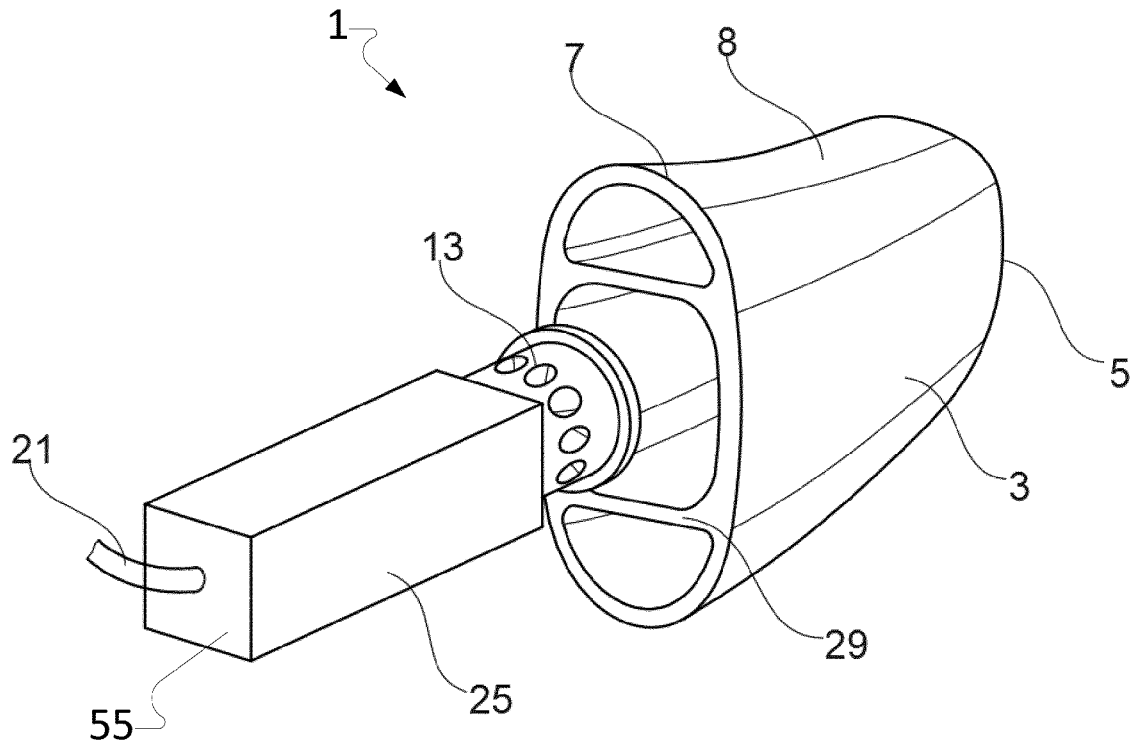


FIG. 5B

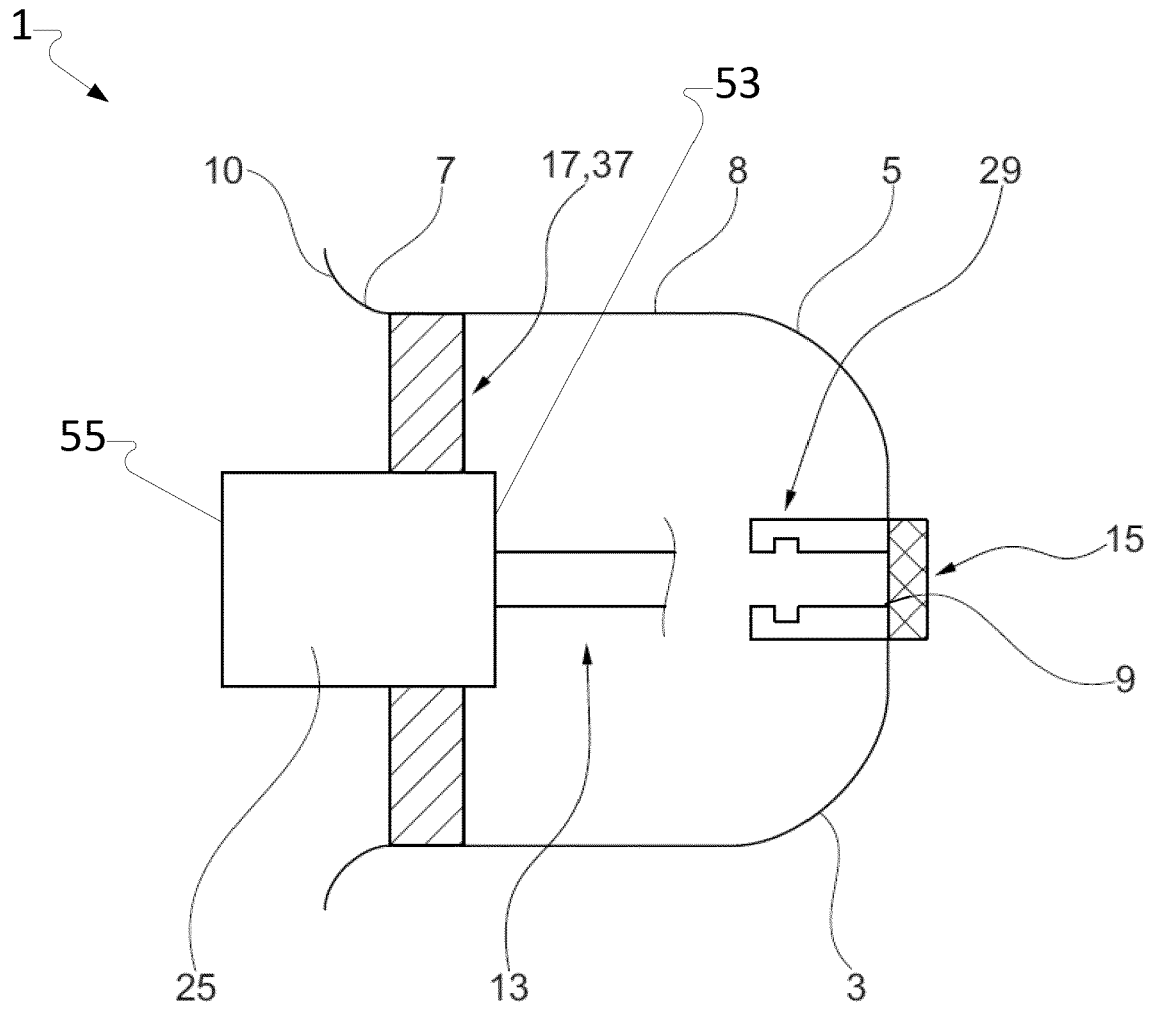


FIG. 6

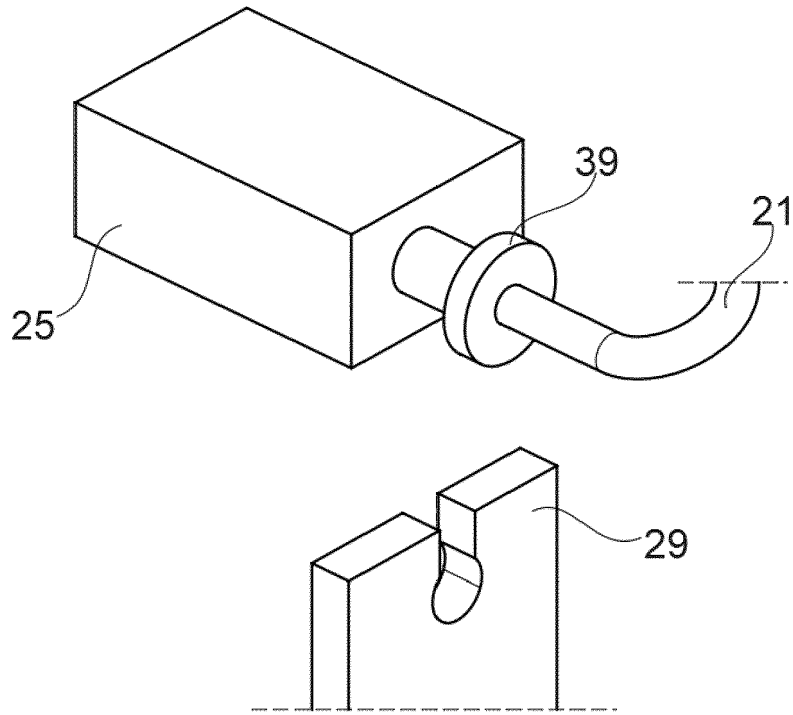


FIG. 7A

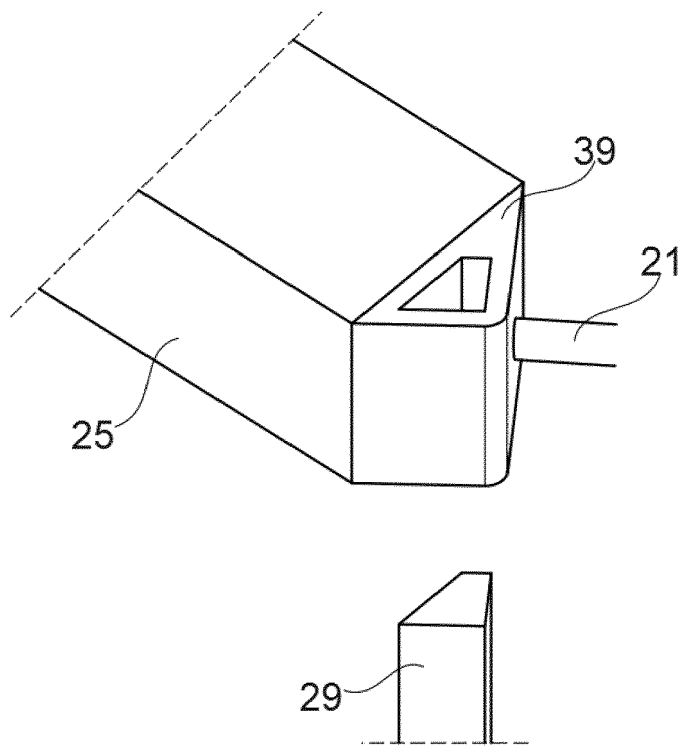


FIG. 7B

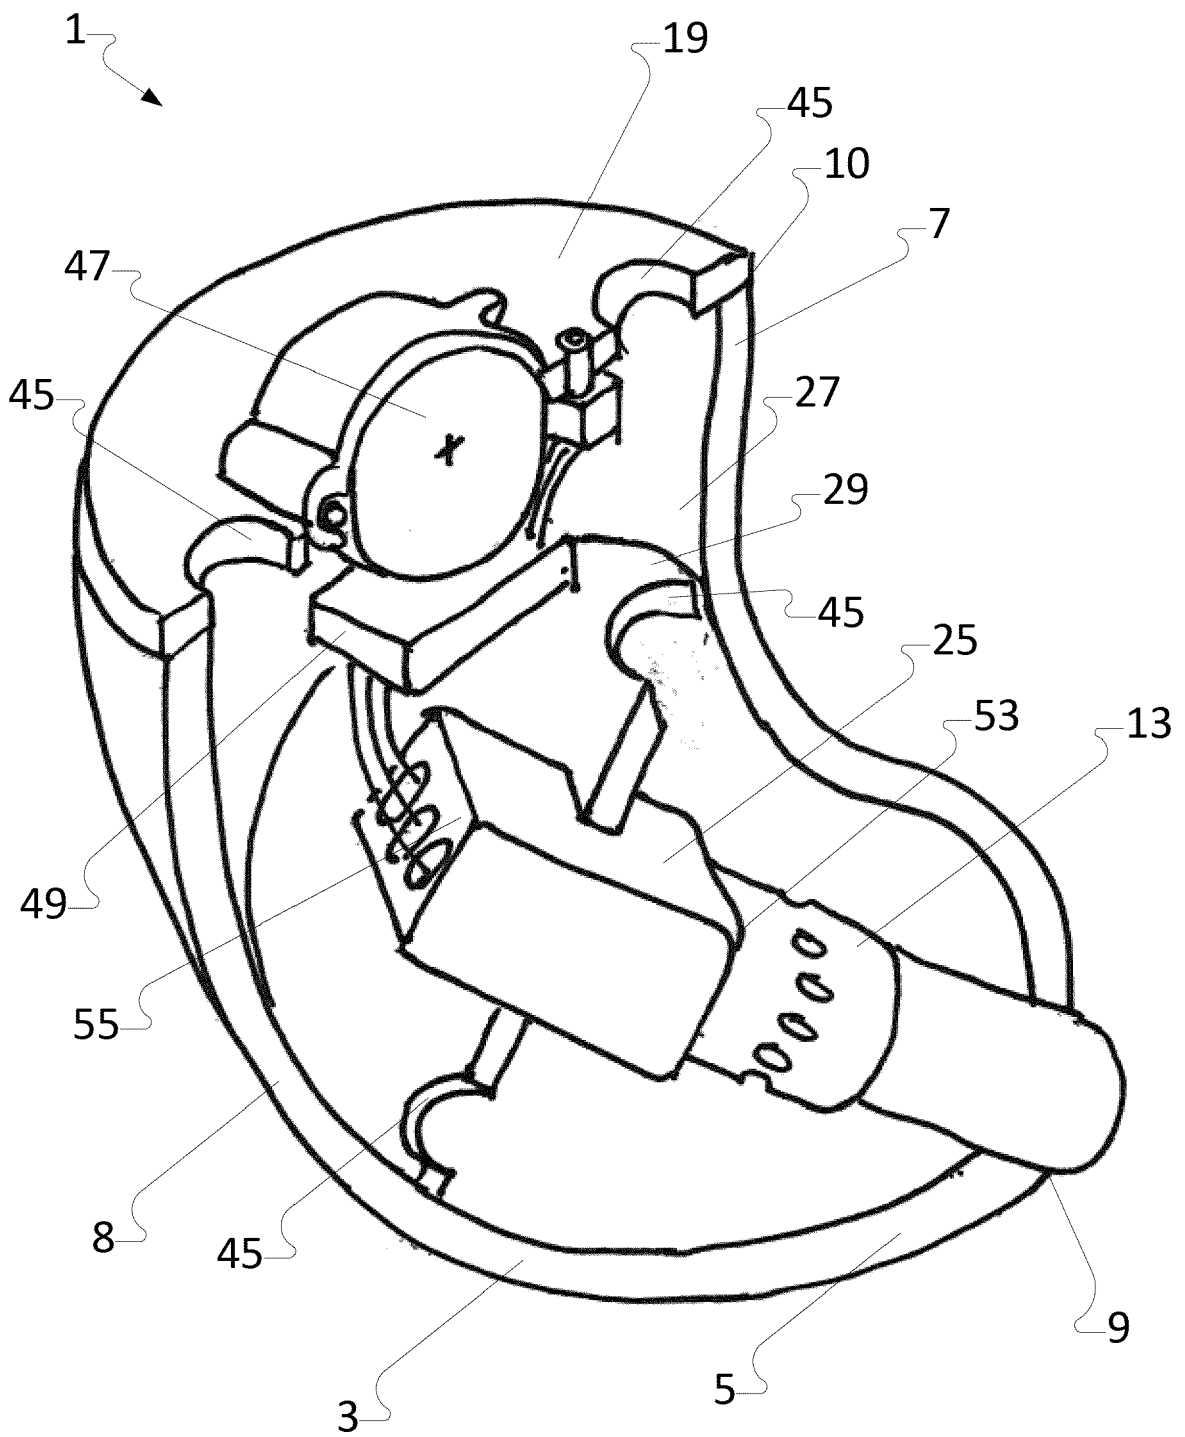


FIG. 8

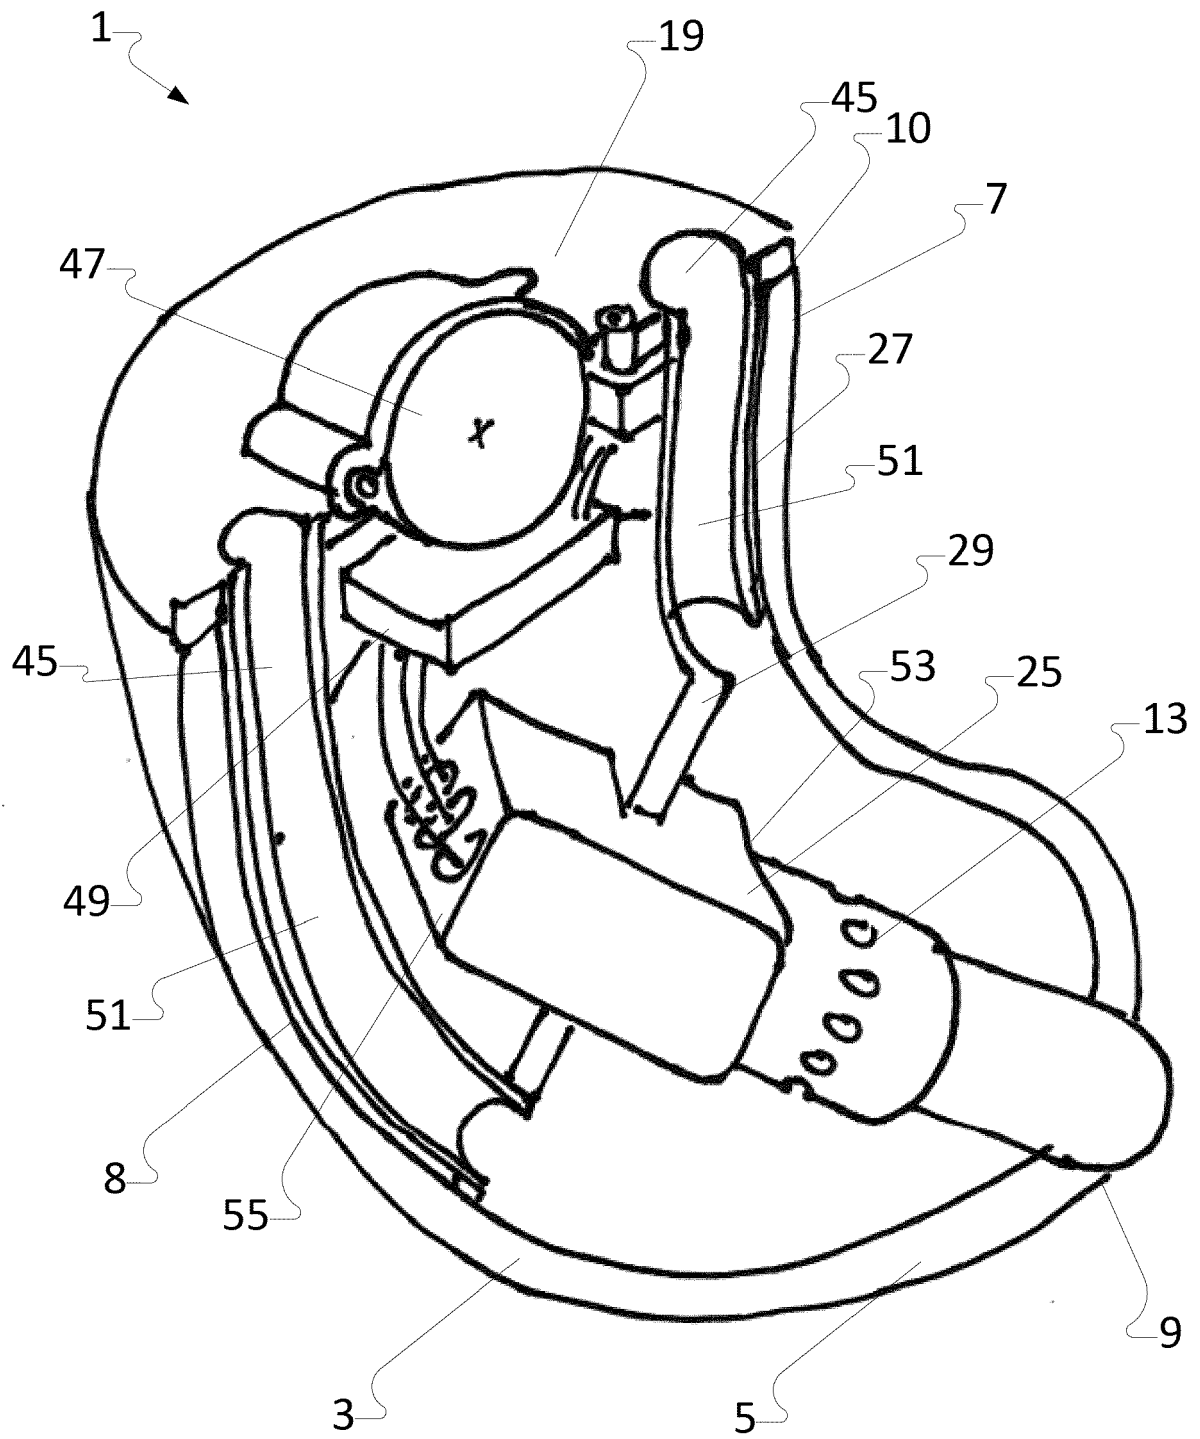


FIG. 9



EUROPEAN SEARCH REPORT

Application Number
EP 22 16 5768

5

10

15

20

25

30

35

40

45

DOCUMENTS CONSIDERED TO BE RELEVANT

| Category | Citation of document with indication, where appropriate, of relevant passages | Relevant to claim | CLASSIFICATION OF THE APPLICATION (IPC) |
|----------|---|-------------------|--|
| X | <p>KR 101 363 989 B1 (YUN YOUNG EUN [KR]; YUN TAE LIM [KR]; YUN EUN JOUNG [KR]) 18 February 2014 (2014-02-18) * paragraphs [0025] - [28;34]; figures 1a-5b *</p> <p style="text-align: center;">-----</p> | 1-15 | <p>INV. H04R1/10</p> <p style="text-align: center;">-----</p> <p>TECHNICAL FIELDS SEARCHED (IPC)</p> <p>H04R</p> |
| X | <p>US 2020/329321 A1 (DE RUIJTER LAURENS [NL] ET AL) 15 October 2020 (2020-10-15) * paragraphs [0021] - [0027], [0088] - [0095]; figures 1,2 *</p> <p style="text-align: center;">-----</p> | 1 | |
| X | <p>US 2019/208301 A1 (MONTI CHRISTOPHER [US] ET AL) 4 July 2019 (2019-07-04) * paragraphs [0025], [0048] - [0050]; figure 10 *</p> <p style="text-align: center;">-----</p> | 1 | |
| A | <p>US 2019/208343 A1 (MONTI CHRISTOPHER [US] ET AL) 4 July 2019 (2019-07-04) * paragraphs [0042] - [0044]; figure 3 *</p> <p style="text-align: center;">-----</p> | 1 | |

The present search report has been drawn up for all claims

2

50

| | | |
|----------------------------------|--|------------------------------------|
| Place of search Munich | Date of completion of the search 13 September 2022 | Examiner Righetti, Marco |
|----------------------------------|--|------------------------------------|

55

EPO FORM 1503 03:82 (P04C01)

CATEGORY OF CITED DOCUMENTS
 X : particularly relevant if taken alone
 Y : particularly relevant if combined with another document of the same category
 A : technological background
 O : non-written disclosure
 P : intermediate document

T : theory or principle underlying the invention
 E : earlier patent document, but published on, or after the filing date
 D : document cited in the application
 L : document cited for other reasons

 & : member of the same patent family, corresponding document

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 22 16 5768

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-09-2022

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|--|------------------|-------------------------|--------------------------------------|
| KR 101363989 | B1 | 18-02-2014 | NONE |
| ----- | | | |
| US 2020329321 | A1 | 15-10-2020 | DK 3726855 T3 15-11-2021 |
| | | | EP 3726855 A1 21-10-2020 |
| | | | US 2020329321 A1 15-10-2020 |
| ----- | | | |
| US 2019208301 | A1 | 04-07-2019 | CN 109996138 A 09-07-2019 |
| | | | CN 209402687 U 17-09-2019 |
| | | | DE 102018221390 A1 04-07-2019 |
| | | | DE 202018107057 U1 21-12-2018 |
| | | | US 2019208301 A1 04-07-2019 |
| ----- | | | |
| US 2019208343 | A1 | 04-07-2019 | CN 110049393 A 23-07-2019 |
| | | | CN 209390261 U 13-09-2019 |
| | | | DE 102018221726 A1 04-07-2019 |
| | | | DE 202018107148 U1 15-01-2019 |
| | | | US 2019208343 A1 04-07-2019 |
| ----- | | | |