



US008137380B2

(12) **United States Patent**
Green et al.

(10) **Patent No.:** **US 8,137,380 B2**
(45) **Date of Patent:** **Mar. 20, 2012**

(54) **CLOSURE DEVICE, DEPLOYMENT APPARATUS, AND METHOD OF DEPLOYING A CLOSURE DEVICE**

(75) Inventors: **Stephen M. Green**, Syracuse, NY (US);
Brian Fairman, Auburn, NY (US);
Herbert F. Brodt, Lafayette, NY (US);
David K. Boger, Vestavia Hills, AL (US)

(73) Assignee: **Transluminal Technologies, LLC**,
Syracuse, NY (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 610 days.

5,222,974 A	6/1993	Kensey et al.
5,282,827 A	2/1994	Kensey et al.
5,312,435 A	5/1994	Nash et al.
5,342,393 A	8/1994	Stack
5,350,399 A	9/1994	Erlebacher et al.
RE34,866 E	2/1995	Kensey et al.
5,391,182 A	2/1995	Chin
5,411,520 A	5/1995	Nash et al.
5,441,517 A	8/1995	Kensey et al.
5,531,759 A	7/1996	Kensey et al.
5,545,178 A	8/1996	Kensey et al.
5,593,422 A	1/1997	Muijs Van de Moer et al.
5,641,501 A	6/1997	Cooper et al.
5,645,566 A	7/1997	Brenneman et al.
5,662,681 A	9/1997	Nash et al.
5,676,689 A	10/1997	Kensey et al.

(Continued)

(21) Appl. No.: **12/204,977**

(22) Filed: **Sep. 5, 2008**

(65) **Prior Publication Data**

US 2009/0069844 A1 Mar. 12, 2009

Related U.S. Application Data

(60) Provisional application No. 60/971,618, filed on Sep. 12, 2007.

(51) **Int. Cl.**
A61B 17/00 (2006.01)

(52) **U.S. Cl.** **606/213**; 606/215; 606/151; 606/157;
606/158

(58) **Field of Classification Search** 606/151-158,
606/213, 215-221, 232; 623/1.11, 1.3-1.33;
411/340-346; 24/97-100

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,744,364 A	5/1988	Kensey
4,890,612 A	1/1990	Kensey et al.

FOREIGN PATENT DOCUMENTS

WO WO2006110614 A2 10/2006

(Continued)

Primary Examiner — Corrine M McDermott


Assistant Examiner — Todd J Scherbel

(74) *Attorney, Agent, or Firm* — George R. McGuire;
Frederick J M Price; Bond Schoeneck & King

(57) **ABSTRACT**

The present invention relates generally to medical devices and methods for sealing and closing passages formed through tissue. More specifically, the present invention relates to devices for sealing or closing an opening formed through biological tissue comprising a distal or outside margin or surface, and a proximal or inside margin or surface (i.e., a wall thickness), and to apparatuses and methods for delivering such devices, to control (or prevent or stop) bleeding (or the flow of other biological fluid or tissue). The openings comprise percutaneously formed punctures, incisions, or other openings formed through biological tissue, such as in blood vessels, organs, and the like.

18 Claims, 68 Drawing Sheets

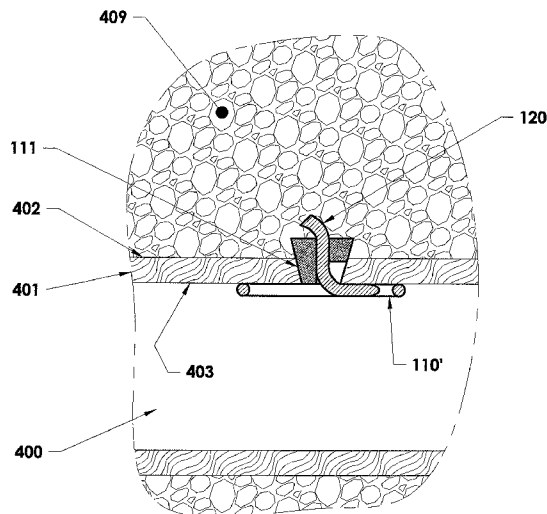

U.S. PATENT DOCUMENTS			2003/0144695 A1*			7/2003 McGuckin et al. 606/213		
5,690,674 A	11/1997	Diaz	2004/0019330 A1	1/2004	Ashby	2004/0153122 A1	8/2004	Palermo
5,700,277 A	12/1997	Nash et al.	2004/0153123 A1	8/2004	Palermo et al.	2004/0215231 A1	10/2004	Fortune et al.
5,707,393 A	1/1998	Kensey et al.	2004/0215232 A1	10/2004	Belhe et al.	2005/0085773 A1	4/2005	Forsberg
5,725,553 A	3/1998	Moening	2005/0085853 A1	4/2005	Forsberg et al.	2005/0085855 A1	4/2005	Forsberg
5,782,861 A	7/1998	Cragg et al.	2005/0090859 A1*	4/2005	Ravilkumar 606/213	2005/0096696 A1*	5/2005	Forsberg 606/213
5,861,004 A	1/1999	Kensey et al.	2005/0096697 A1	5/2005	Forsberg et al.	2005/0107820 A1	5/2005	Forsberg et al.
5,916,236 A	6/1999	Muijs Van de Moer et al.	2005/0107827 A1	5/2005	Paprocki	2005/0125030 A1*	6/2005	Forsberg et al. 606/213
5,935,147 A	8/1999	Kensey et al.	2005/0177189 A1	8/2005	Ginn et al.	2005/0192627 A1	9/2005	Whisenant et al.
5,941,898 A	8/1999	Moening et al.	2005/0192661 A1	9/2005	Griffen et al.	2005/0222614 A1*	10/2005	Ginn et al. 606/213
5,984,950 A	11/1999	Cragg et al.	2005/0234396 A1	10/2005	Forsberg et al.	2005/0267528 A1	12/2005	Ginn et al.
6,007,563 A	12/1999	Nash et al.	2005/0273135 A1	12/2005	Chanduszko et al.	2005/0273136 A1	12/2005	Belef et al.
6,017,359 A	1/2000	Gershony et al.	2006/0018954 A1	1/2006	Kuttler	2006/0020315 A1	1/2006	Geistert et al.
6,045,569 A	4/2000	Kensey et al.	2006/0052824 A1	3/2006	Ransick et al.	2006/0052863 A1	3/2006	Harder et al.
6,059,816 A	5/2000	Moening	2006/0052864 A1	3/2006	Harder et al.	2006/0058844 A1	3/2006	White et al.
6,071,300 A	6/2000	Brenneman et al.	2006/0064160 A1	3/2006	Gerold et al.	2006/0106418 A1	5/2006	Seibold et al.
6,080,183 A	6/2000	Tsugita et al.	2006/0135991 A1	6/2006	Kawaura et al.	2006/0142797 A1	6/2006	Egnelov
6,090,130 A	7/2000	Nash et al.	2006/0155327 A1	7/2006	Briganti et al.	2006/0195123 A1	8/2006	Ginn et al.
6,113,624 A	9/2000	Bezswana et al.	2006/0206146 A1	9/2006	Tenez	2006/0229672 A1	10/2006	Forsberg
6,162,192 A	12/2000	Cragg et al.	2006/0229673 A1	10/2006	Forsberg	2006/0229674 A1	10/2006	Forsberg
6,179,863 B1	1/2001	Kensey et al.	2006/0253037 A1	11/2006	Ginn et al.	2006/0265007 A1	11/2006	White et al.
6,190,400 B1	2/2001	Van De Moer et al.	2006/0287710 A1	12/2006	Lendlein et al.	2007/0010853 A1	1/2007	Ginn et al.
6,197,042 B1	3/2001	Ginn et al.	2007/0032823 A1	2/2007	Tegg	2007/0032824 A1	2/2007	Terwey
6,277,140 B2	8/2001	Ginn et al.	2007/0050009 A1	3/2007	Flanagan	2007/0055305 A1	3/2007	Schnyder et al.
6,287,332 B1	9/2001	Bolz et al.	2007/0073345 A1	3/2007	Pipenhagen et al.	2007/0083232 A1*	4/2007	Lee 606/213
6,315,753 B1	11/2001	Cragg et al.	2007/0135842 A1	6/2007	Van de Moer et al.	2007/0156084 A1	7/2007	Belhe et al.
6,368,341 B1	4/2002	Abrahamson	2007/0250080 A1	10/2007	Jones et al.	2007/0255314 A1	11/2007	Forsberg
6,371,974 B1	4/2002	Brenneman et al.	2007/0270904 A1	11/2007	Ginn	2007/0270940 A1	11/2007	Doty
6,391,048 B1	5/2002	Ginn et al.	2007/0276433 A1	11/2007	Huss	2007/0282352 A1	12/2007	Carley et al.
6,425,911 B1	7/2002	Akerfeldt et al.	2007/0282432 A1	12/2007	Stinson et al.	2008/0033535 A1	2/2008	Mueller et al.
6,461,364 B1	10/2002	Ginn et al.	2008/0033538 A1	2/2008	Borck et al.	2008/0058923 A1	3/2008	Bertsch et al.
6,508,828 B1	1/2003	Akerfeldt et al.	2008/0065151 A1	3/2008	Ginn	2008/0071311 A1	3/2008	White et al.
6,527,734 B2	3/2003	Cragg et al.	2008/0312683 A1*	12/2008	Drasler et al. 606/213	2009/0228040 A1*	9/2009	Mas et al. 606/216
6,540,735 B1	4/2003	Ashby et al.						
6,544,236 B1	4/2003	Cragg et al.						
6,610,026 B2	8/2003	Cragg et al.						
6,623,509 B2	9/2003	Ginn						
6,632,238 B2	10/2003	Ginn et al.						
6,656,207 B2	12/2003	Taylor et al.						
6,663,655 B2	12/2003	Ginn et al.						
6,712,836 B1*	3/2004	Berg et al. 606/213						
6,712,837 B2	3/2004	Akerfeldt et al.						
6,749,621 B2	6/2004	Pantages et al.						
6,764,500 B1	7/2004	Muijs Van De Moer et al.						
6,770,076 B2*	8/2004	Foerster 606/326						
6,780,197 B2	8/2004	Roe et al.						
6,786,915 B2	9/2004	Akerfeldt et al.						
6,846,319 B2	1/2005	Ginn et al.						
6,860,895 B1	3/2005	Akerfeldt et al.						
6,863,680 B2	3/2005	Ashby						
6,890,343 B2	5/2005	Ginn et al.						
6,896,692 B2	5/2005	Ginn et al.						
6,942,674 B2	9/2005	Belef et al.						
6,964,658 B2	11/2005	Ashby et al.						
6,969,397 B2	11/2005	Ginn						
7,001,398 B2	2/2006	Carley et al.						
7,001,411 B1	2/2006	Dean						
7,008,440 B2	3/2006	Sing et al.						
7,029,489 B1	4/2006	Ashby et al.						
7,037,322 B1	5/2006	Sing et al.						
7,048,710 B1	5/2006	Cragg et al.						
7,083,635 B2	8/2006	Ginn						
7,201,725 B1	4/2007	Cragg et al.						
7,250,057 B2	7/2007	Forsberg						
7,267,679 B2	9/2007	McGuckin, Jr. et al.						
7,326,230 B2	2/2008	Ravikumar						
7,341,595 B2*	3/2008	Hinchliffe et al. 606/151						
D566,272 S	4/2008	Walburg et al.						
7,361,183 B2	4/2008	Ginn						
2001/0003158 A1	6/2001	Kensey et al.						
2002/0004060 A1	1/2002	Heublein et al.						
2002/0198562 A1	12/2002	Akerfeldt et al.						
2003/0023267 A1	1/2003	Ginn						

FOREIGN PATENT DOCUMENTS

WO	WO2006124245	A2	11/2006
WO	WO2006124251	A2	11/2006
WO	WO2007081448	A2	7/2007
WO	WO2007139755	A2	12/2007

* cited by examiner

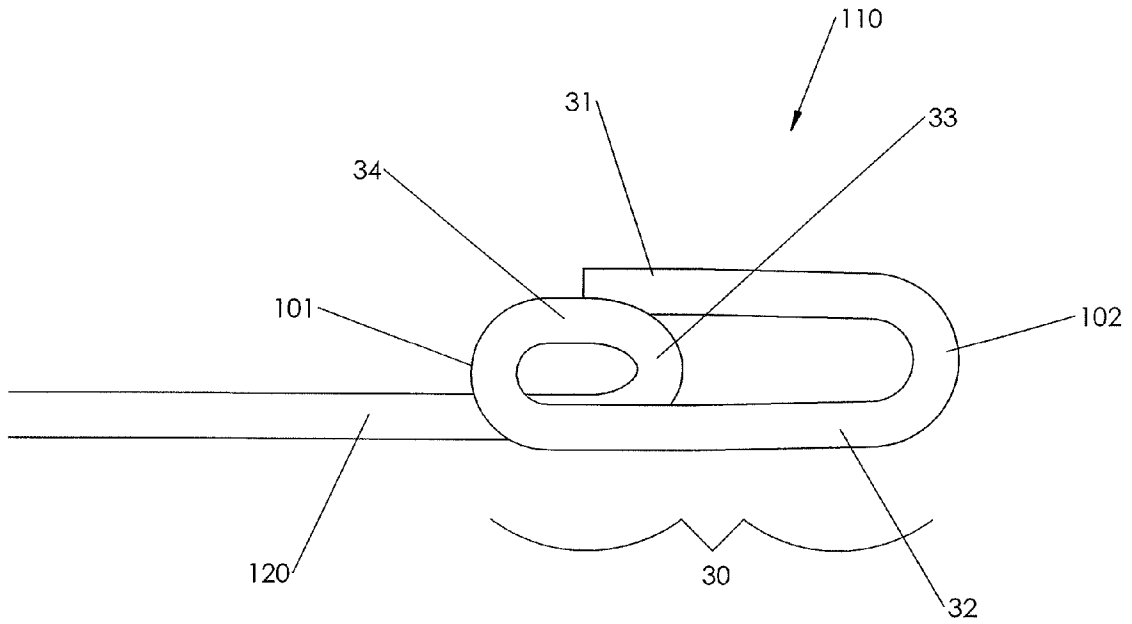


Fig. 1a

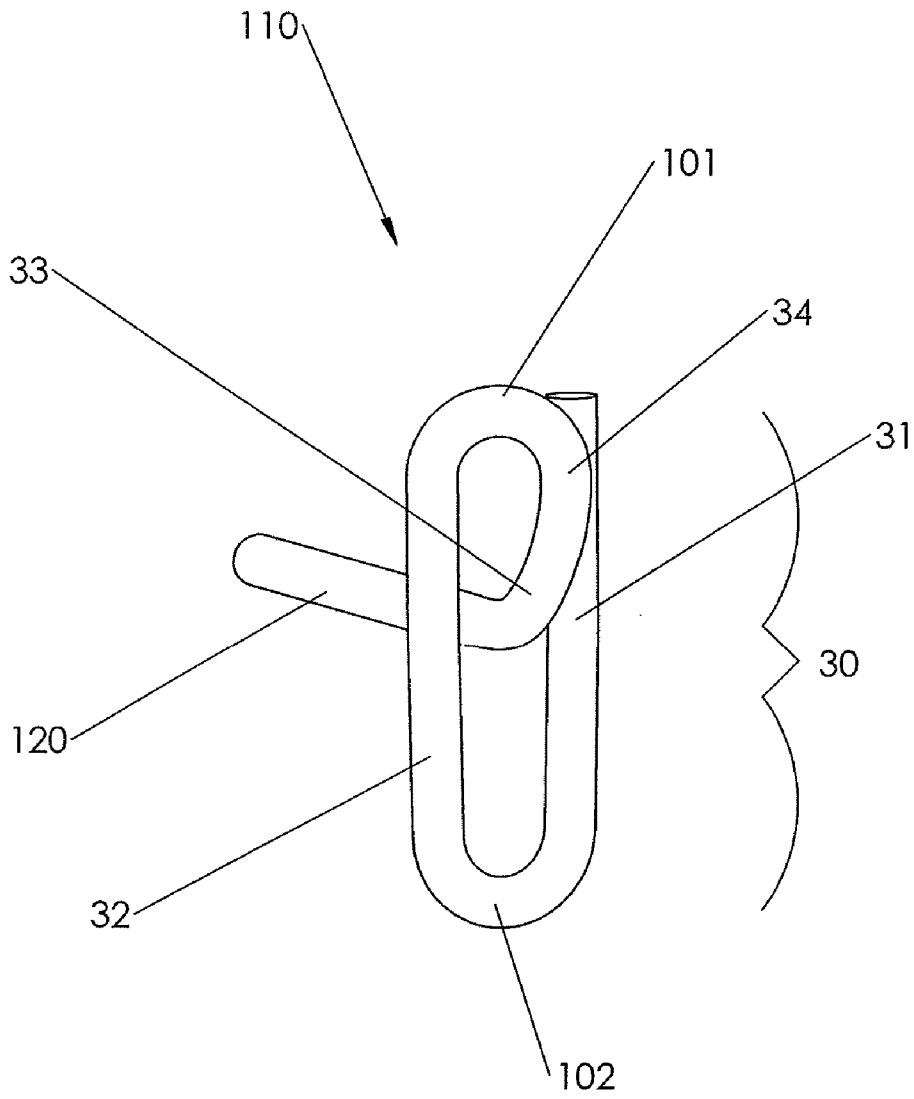


Fig. 1b

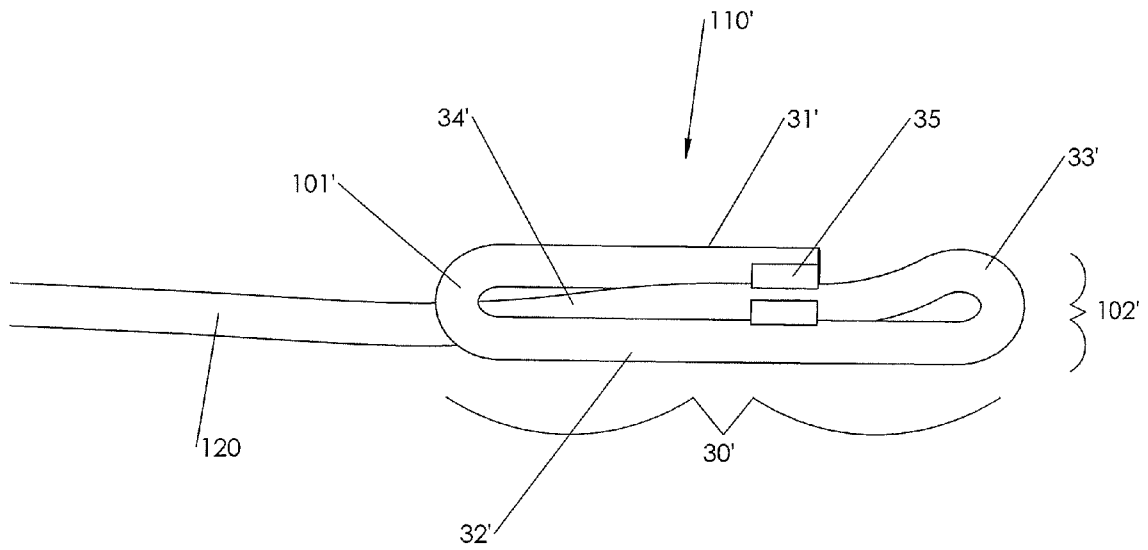


Fig. 1c

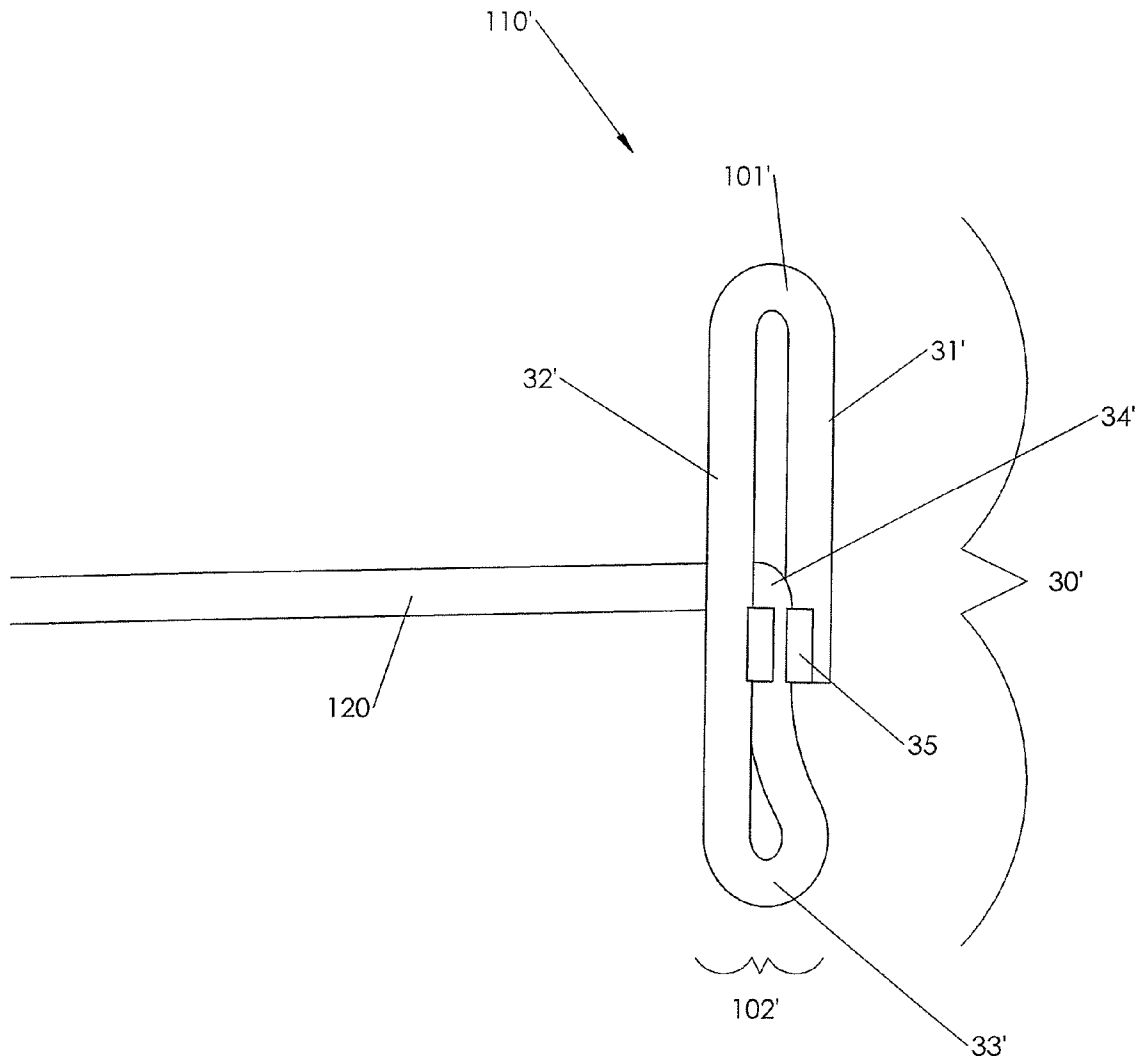


Fig. 1d

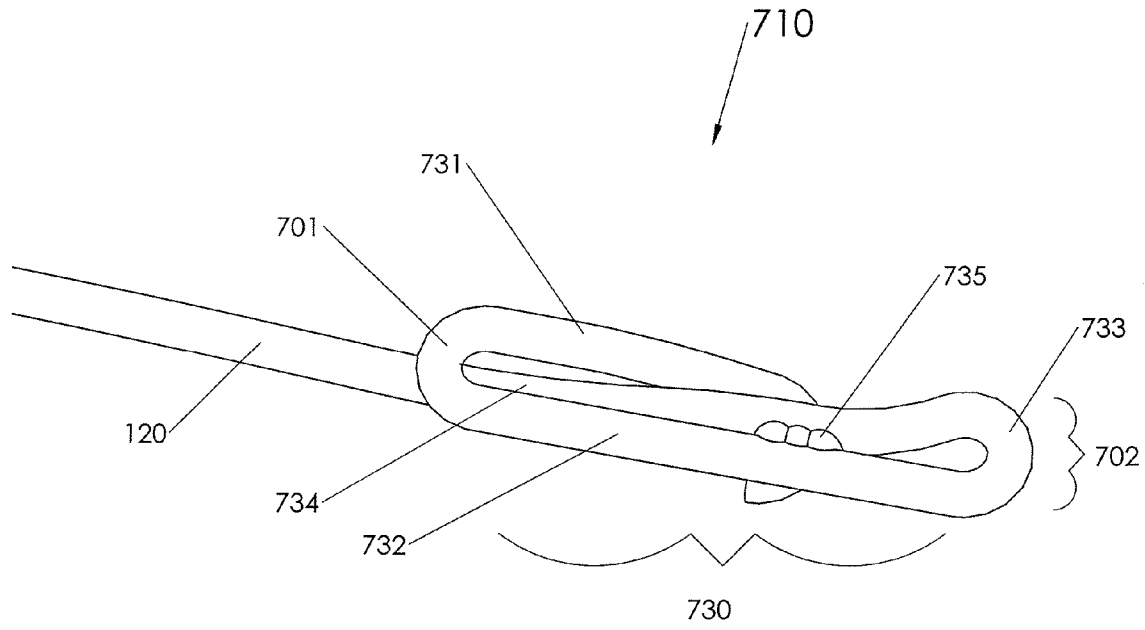


Fig. 1e

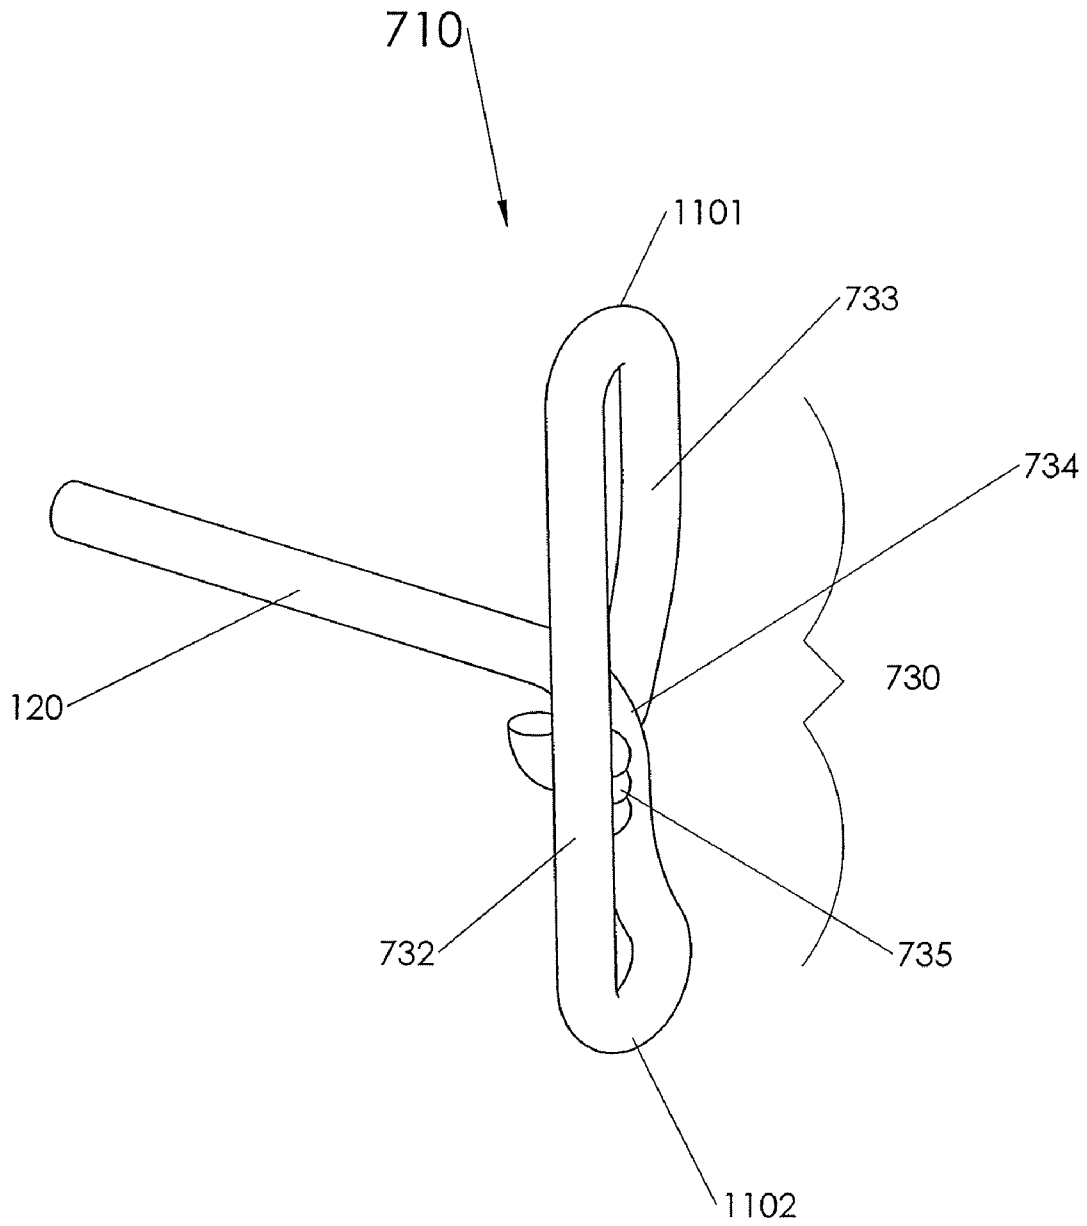


Fig. 1f

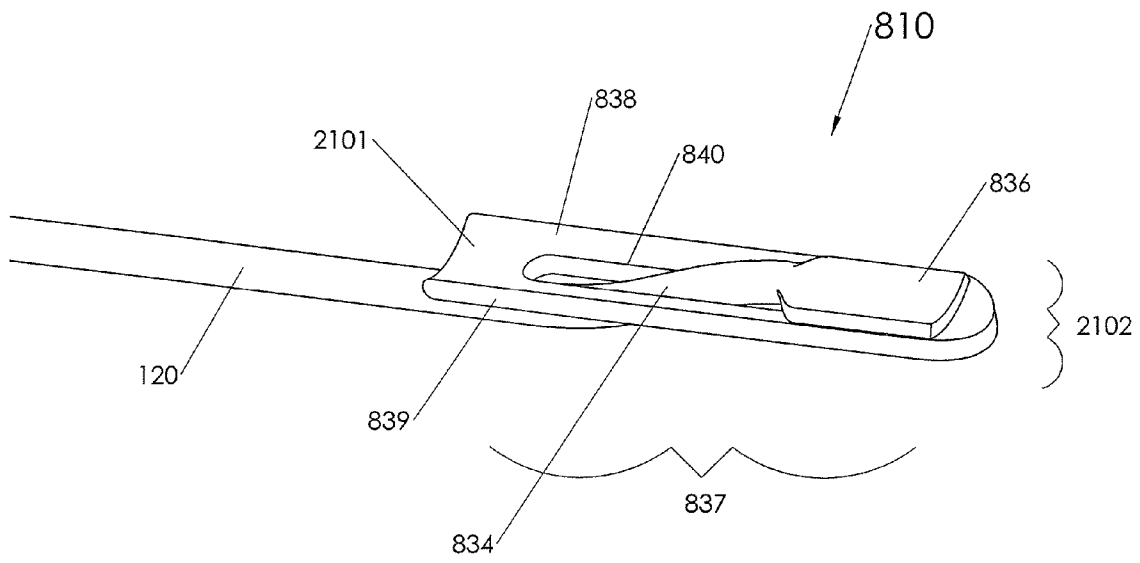


Fig. 1g

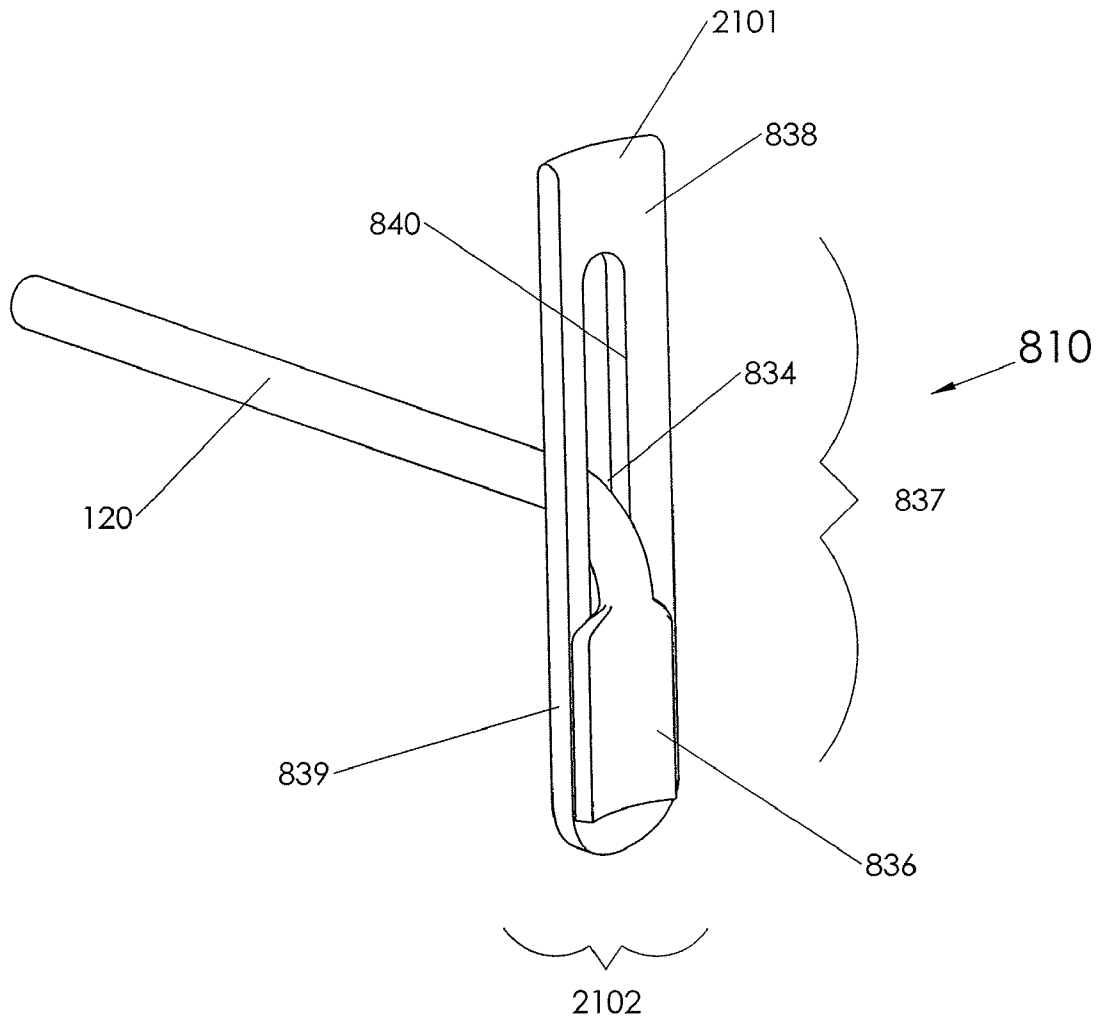


Fig. 1h

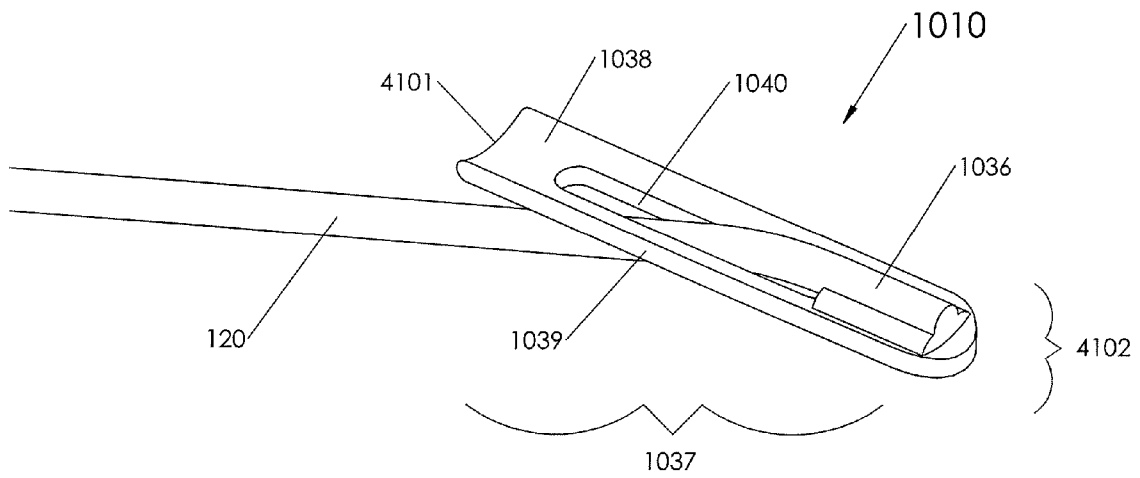


Fig. 1i

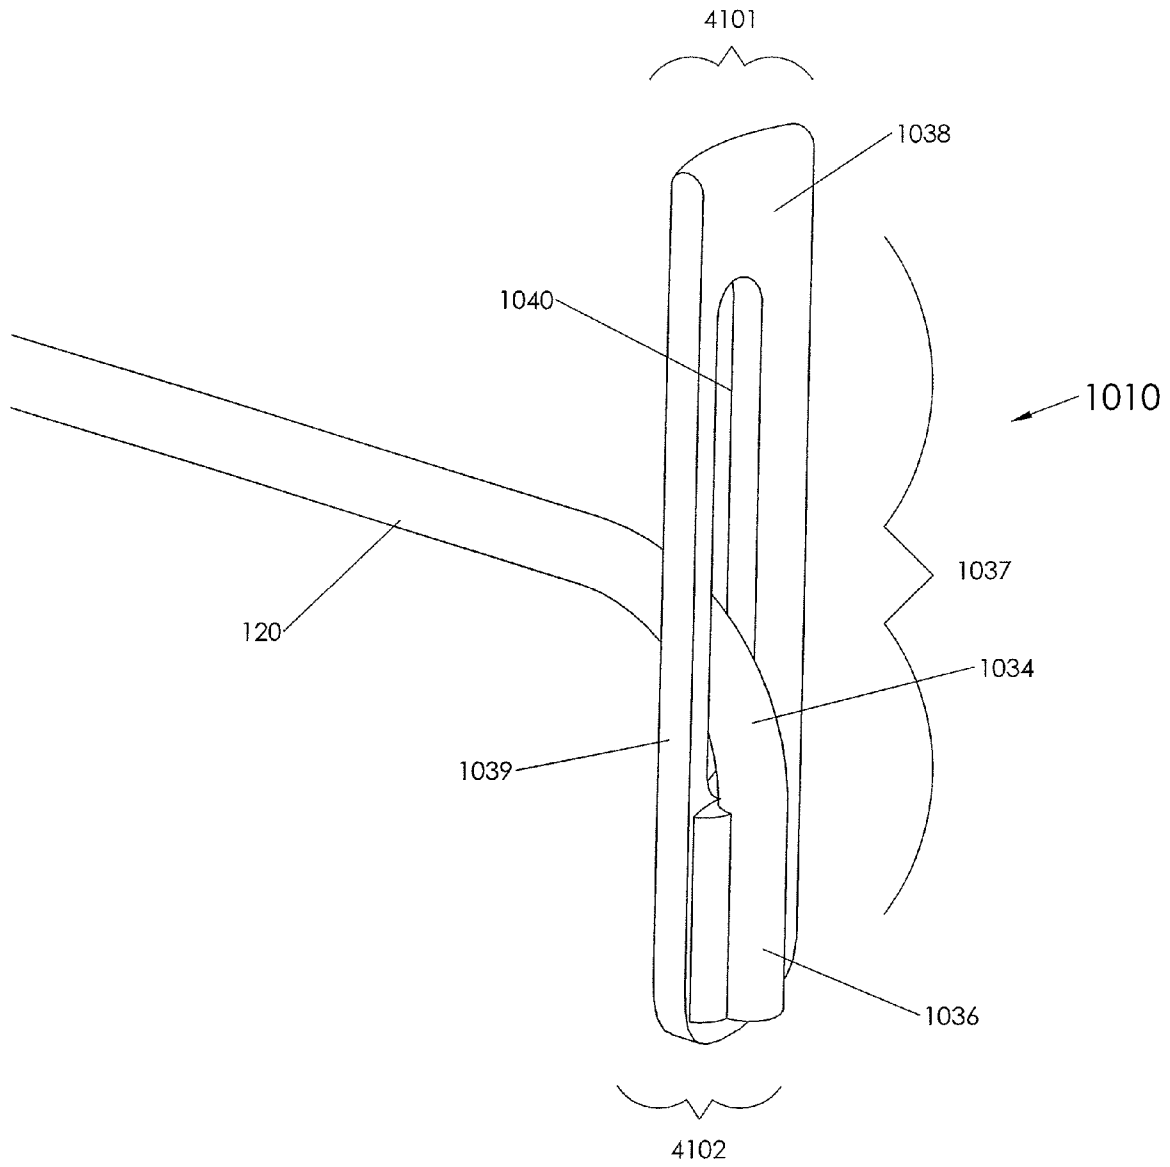


Fig. 1j

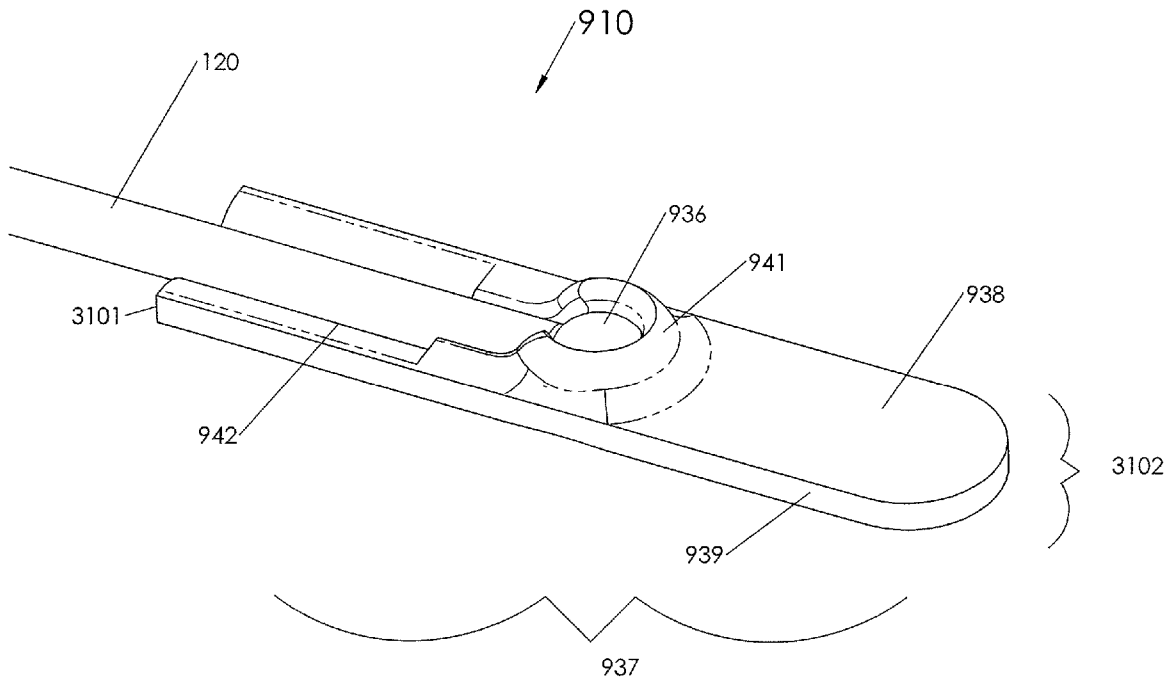


Fig. 1k

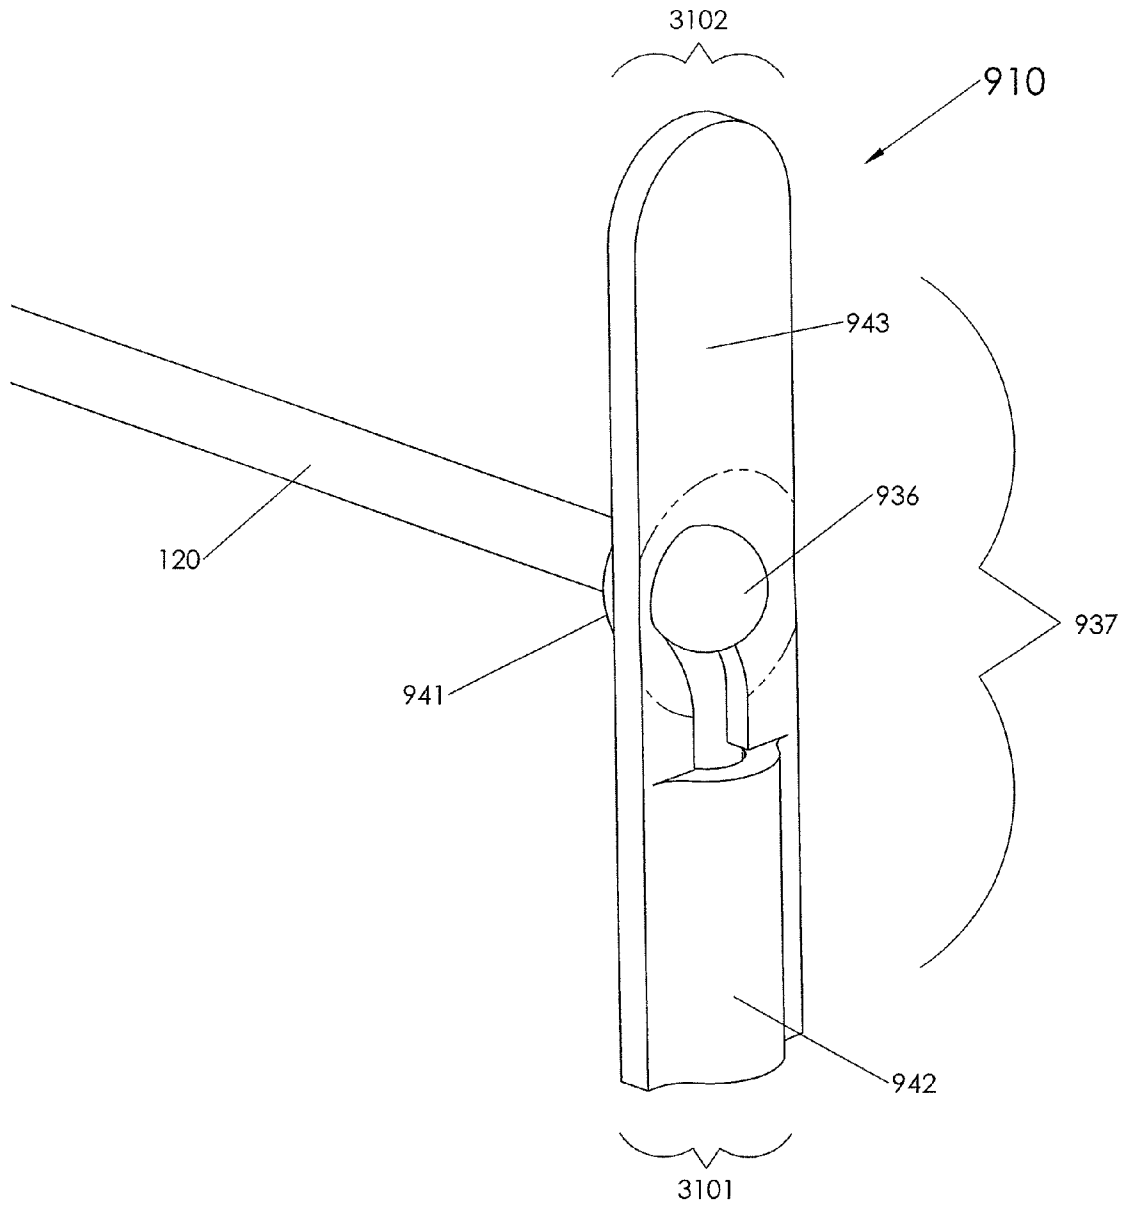


Fig. 1L

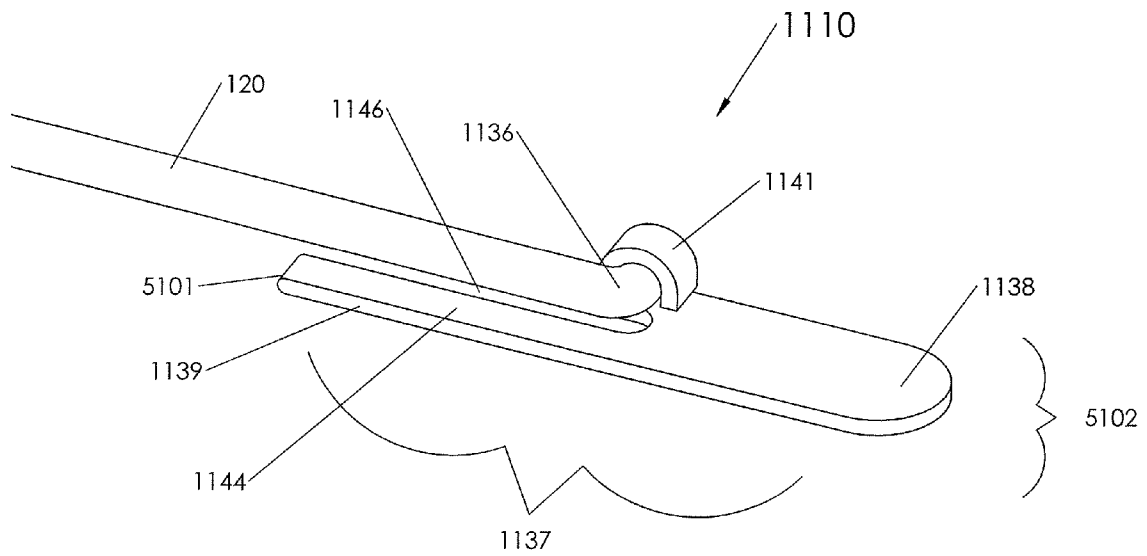


Fig. 1m

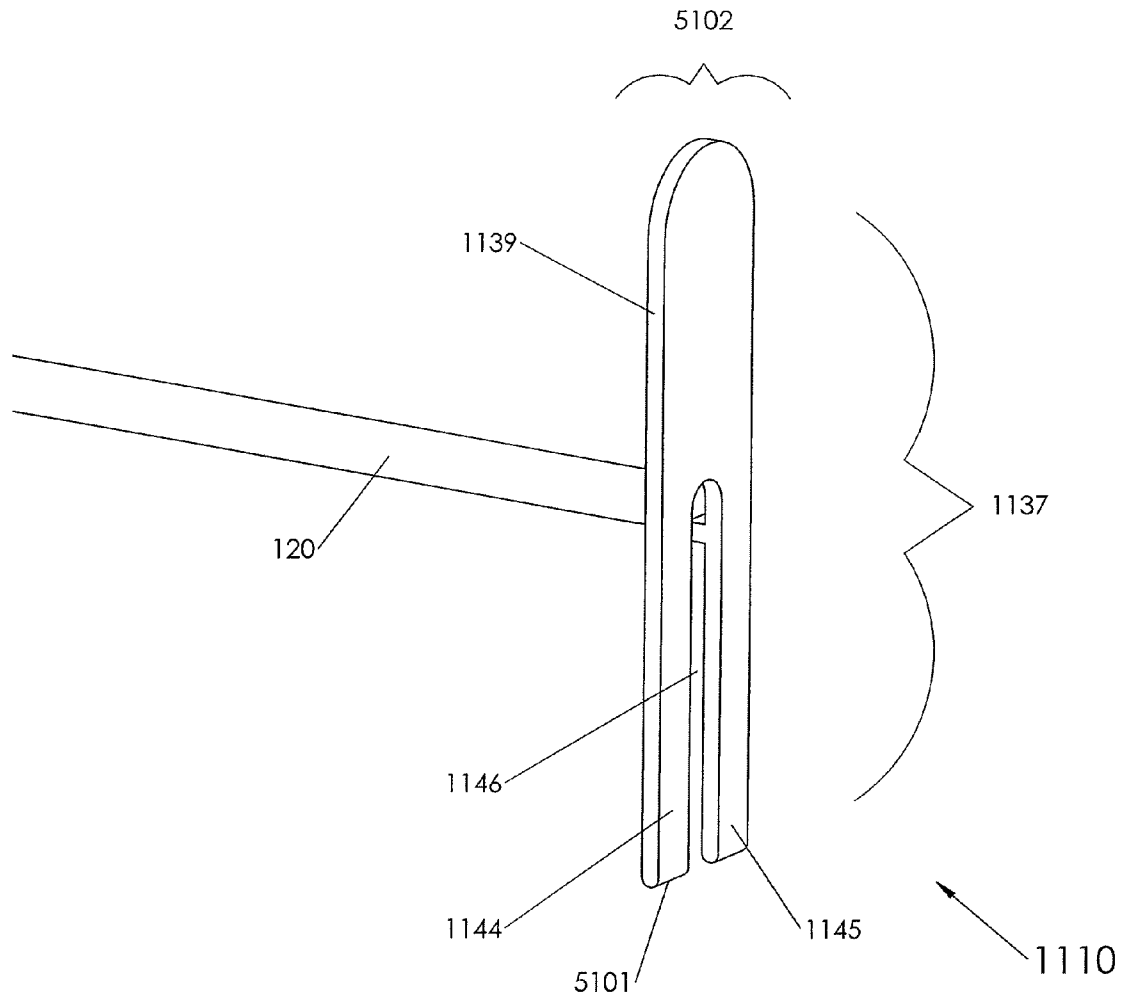


Fig. 1n

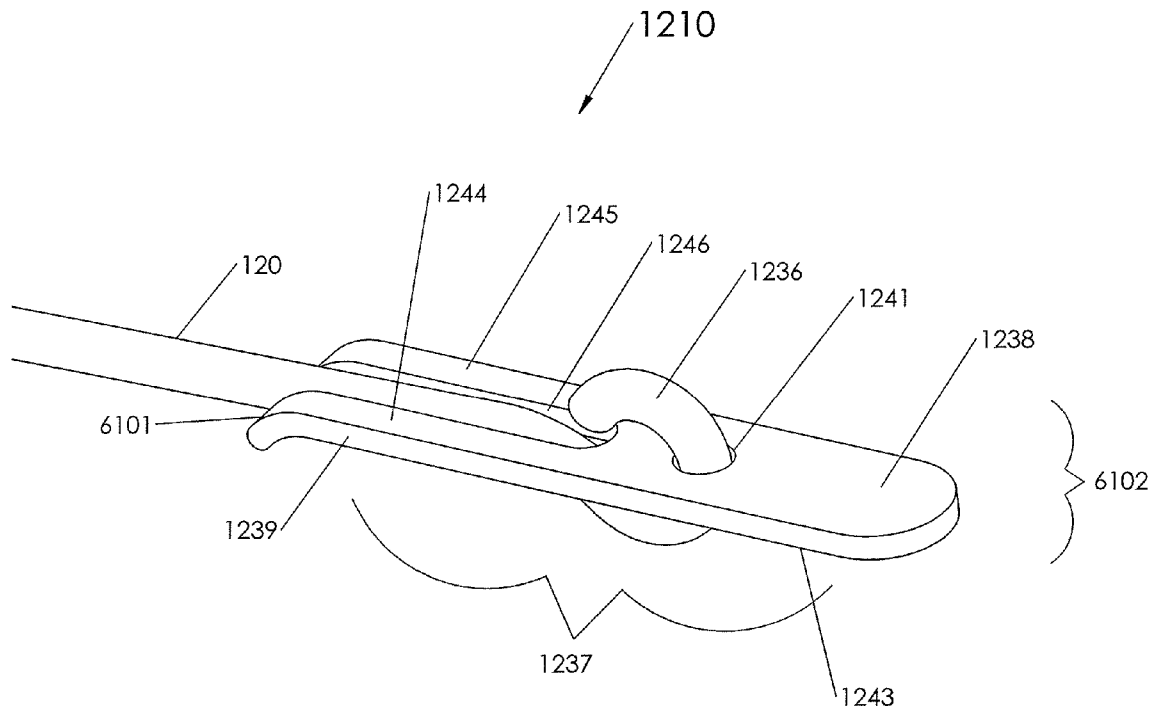


Fig. 1o

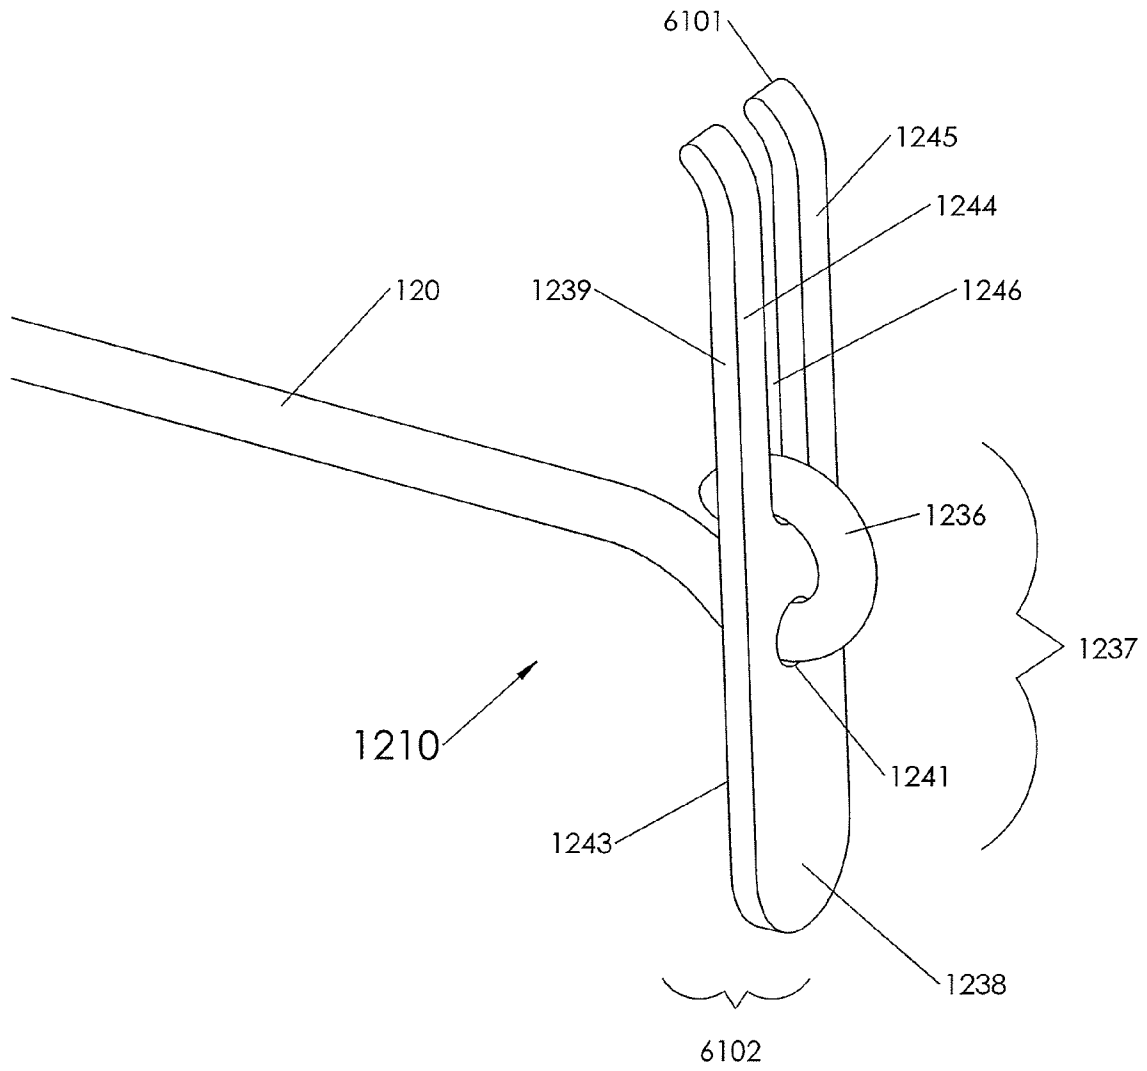


Fig. 1p

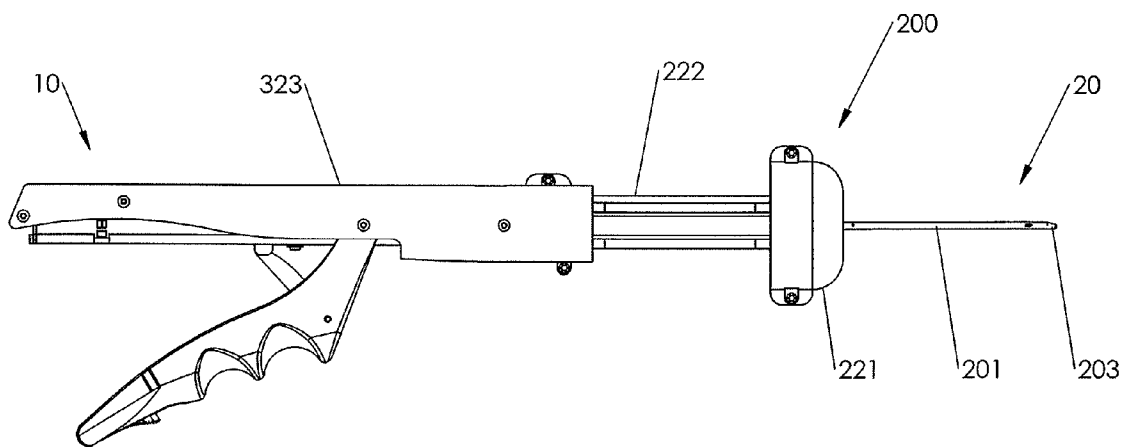


Fig. 2a

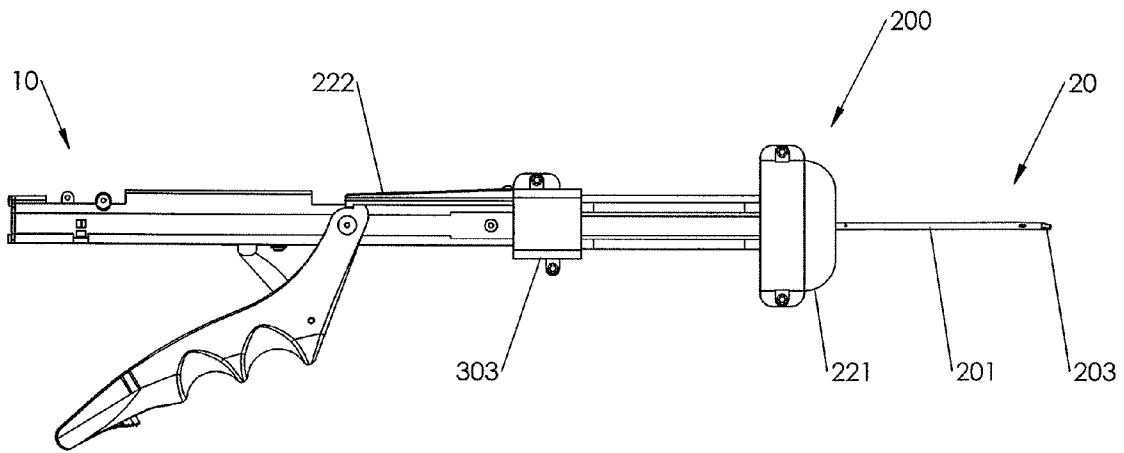


Fig. 2b

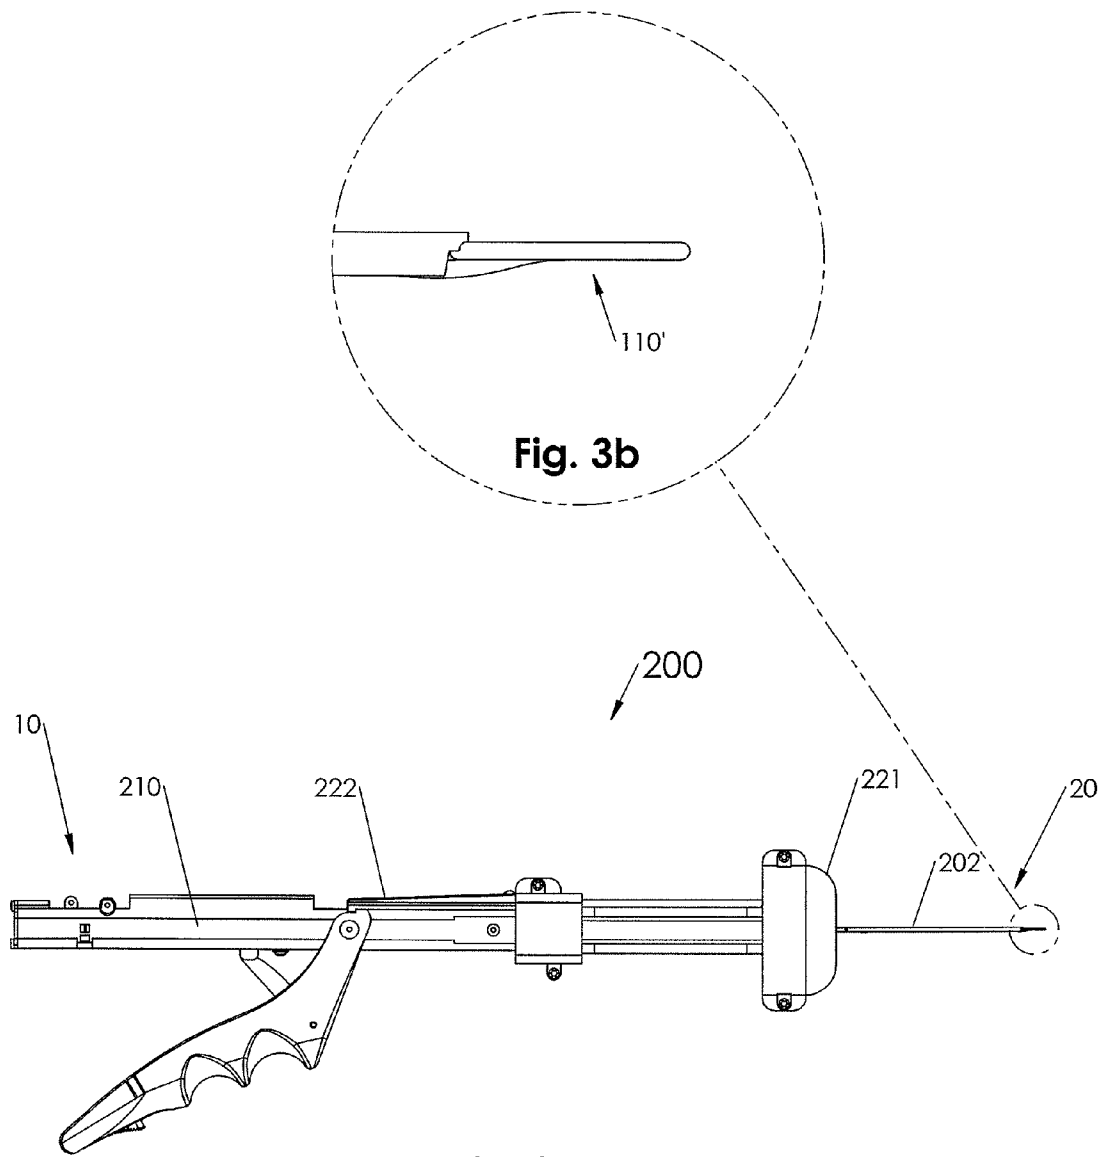
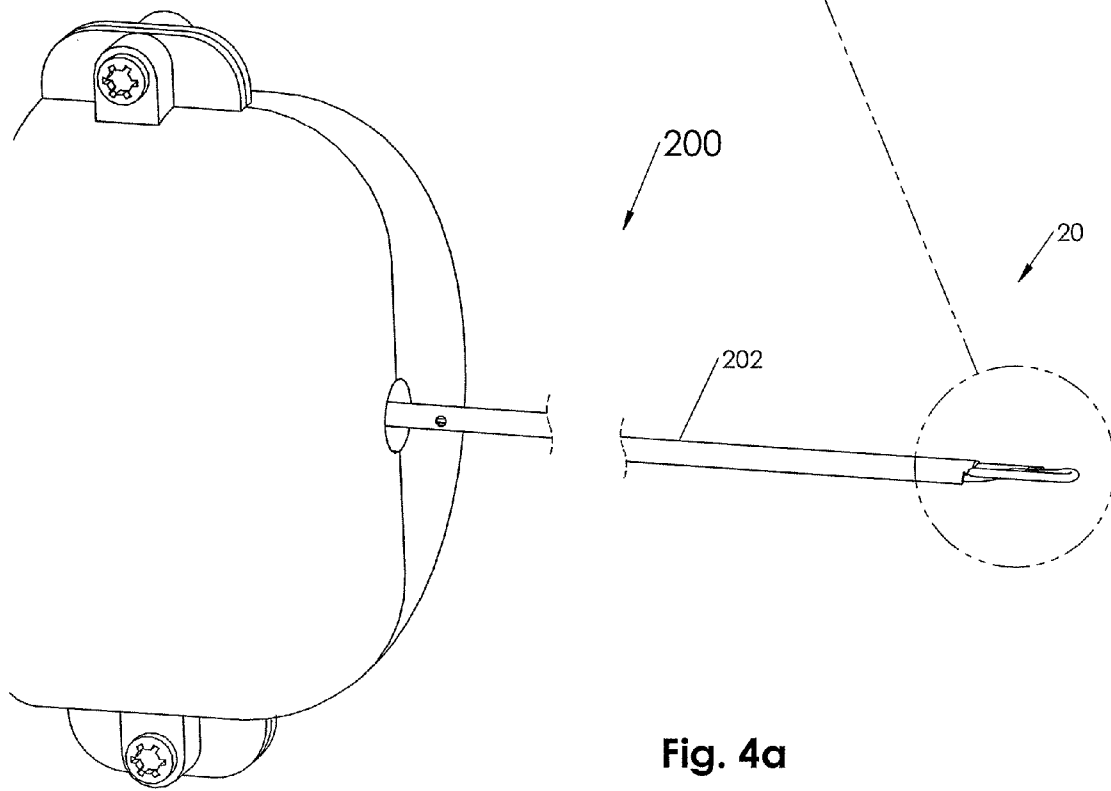
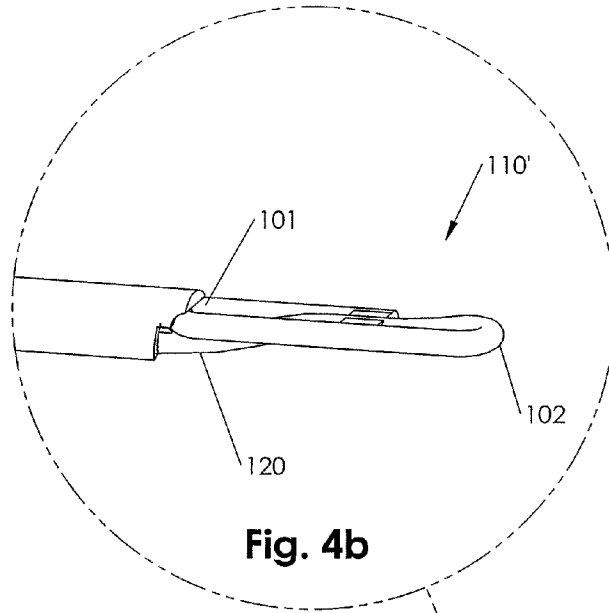


Fig. 3a

Fig. 3b



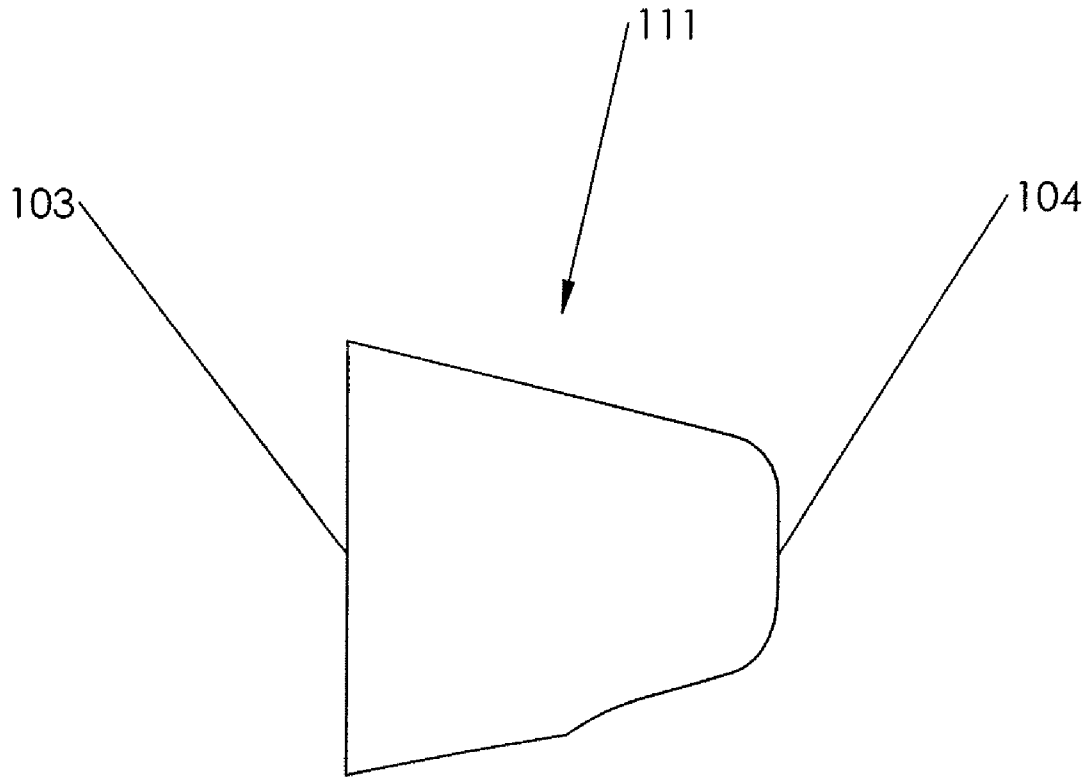


Fig. 5a

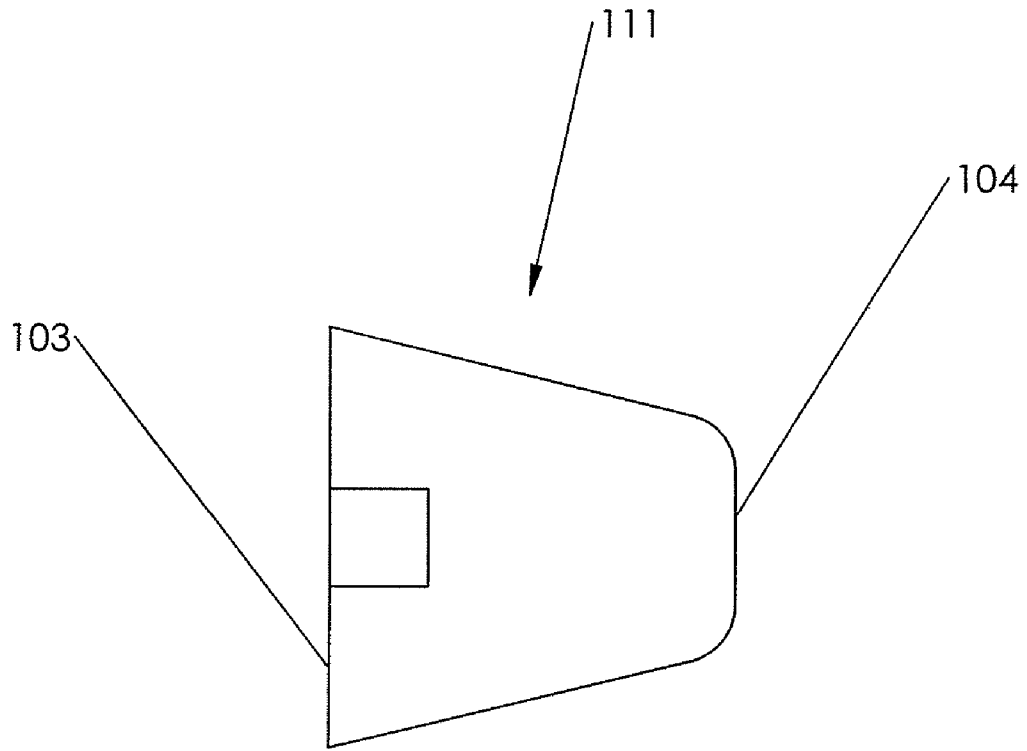


Fig. 5b

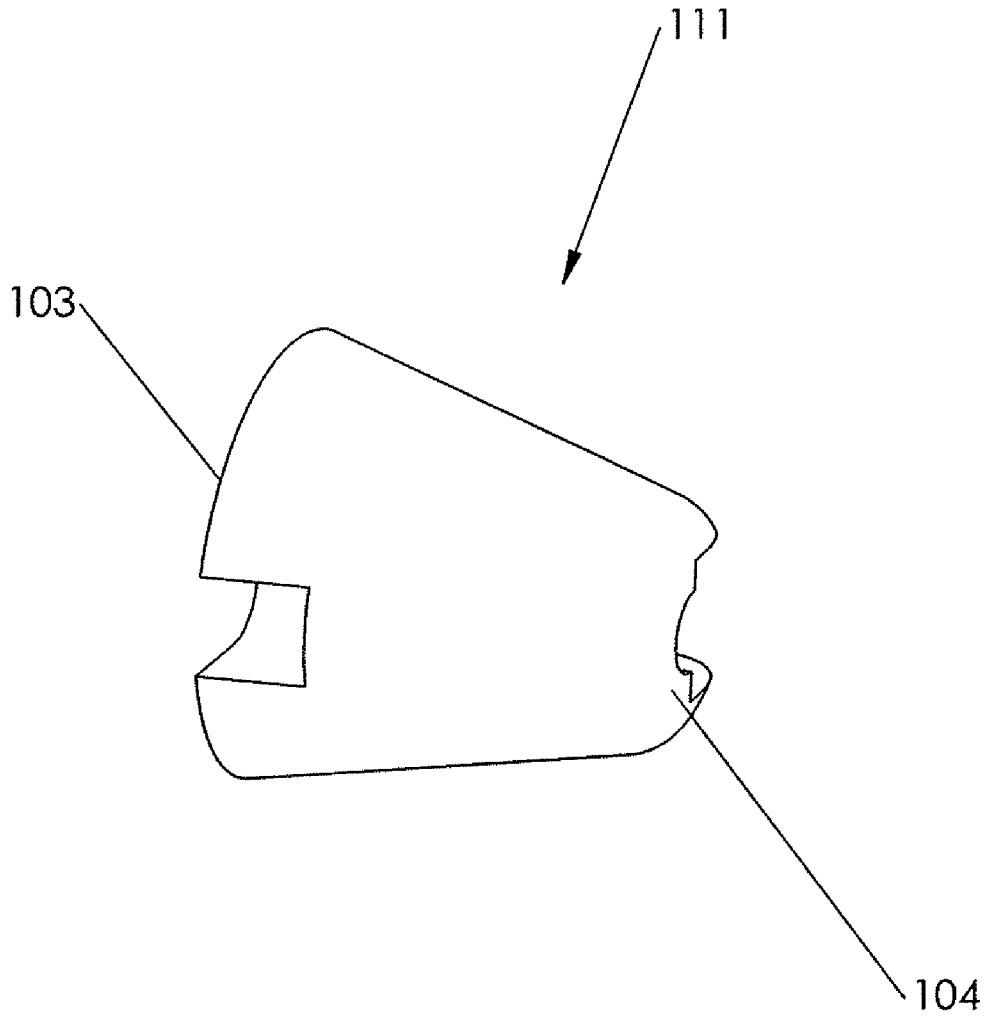


Fig. 5c

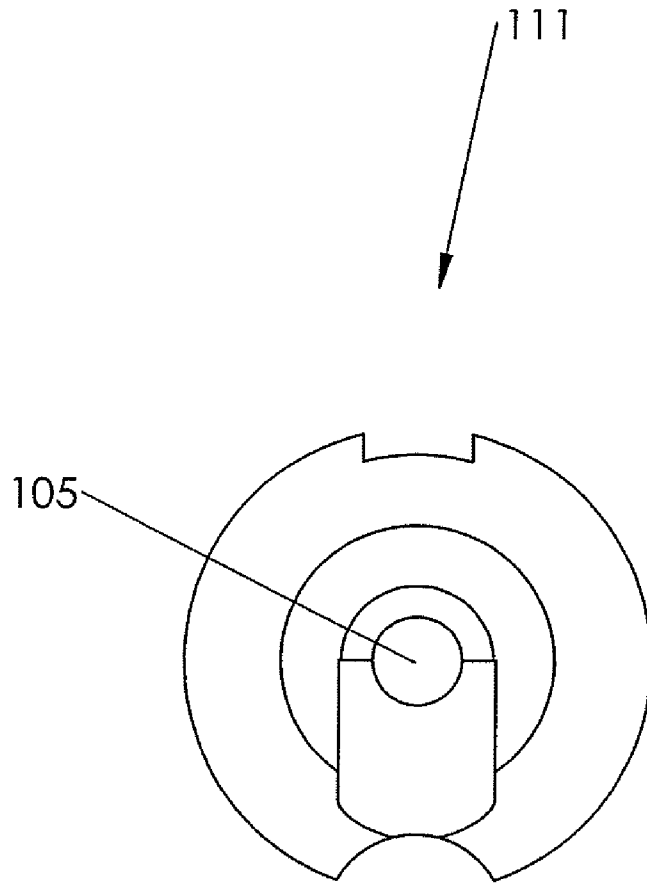


Fig. 5d

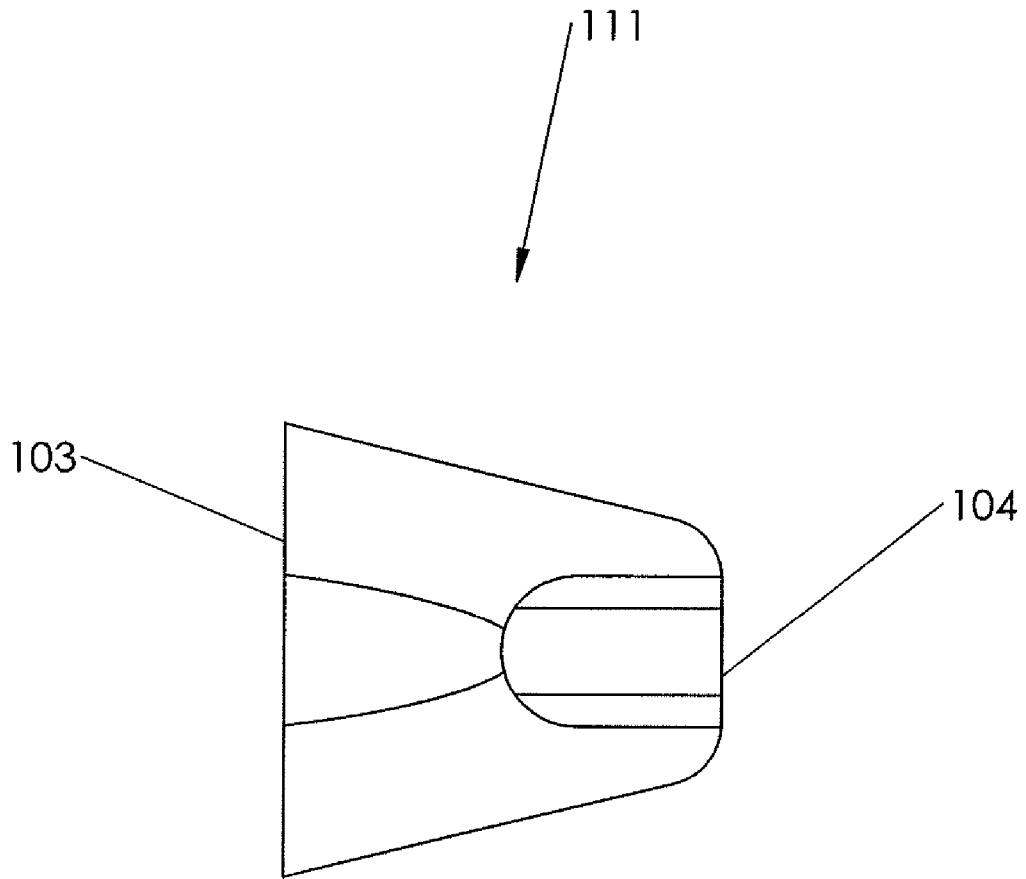


Fig. 5e

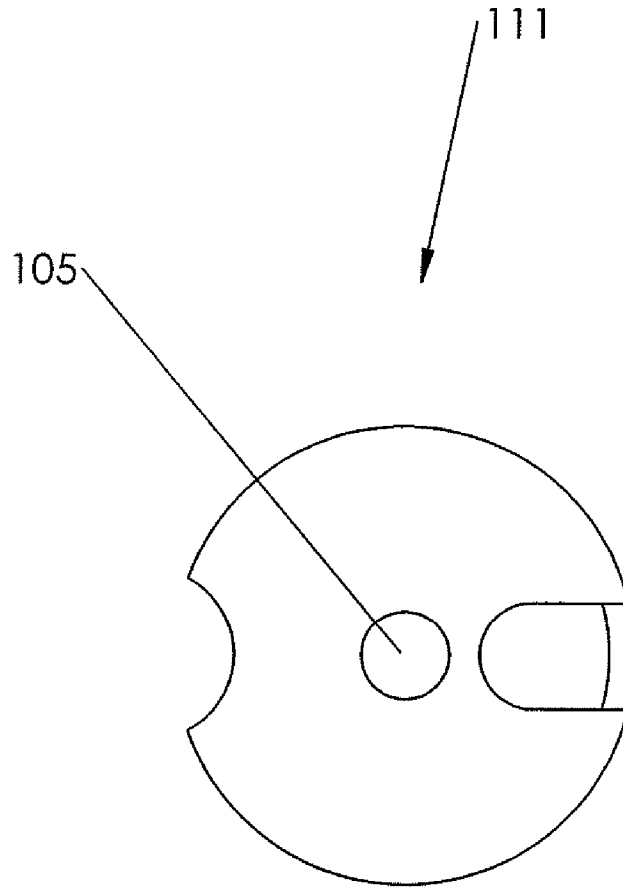


Fig. 5f

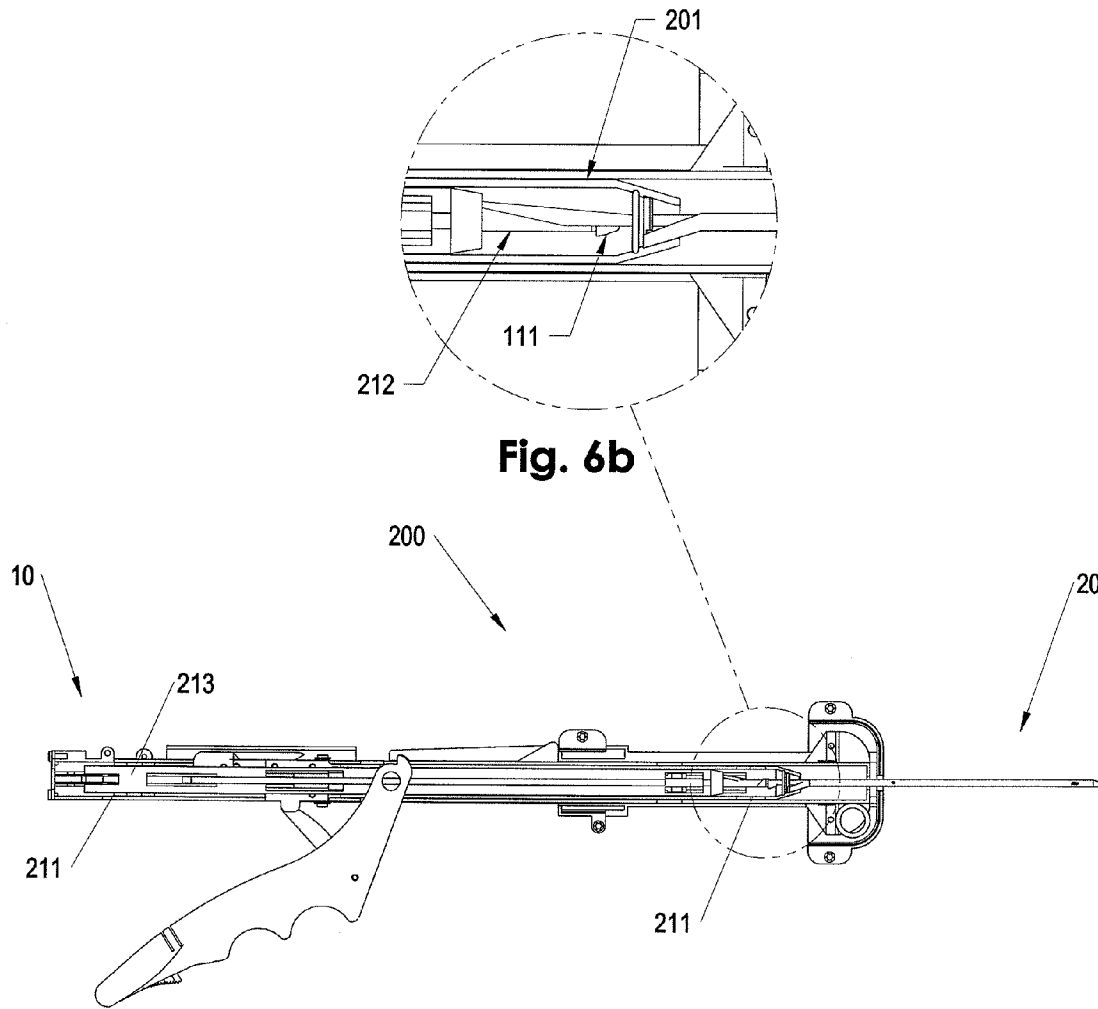


Fig. 6a

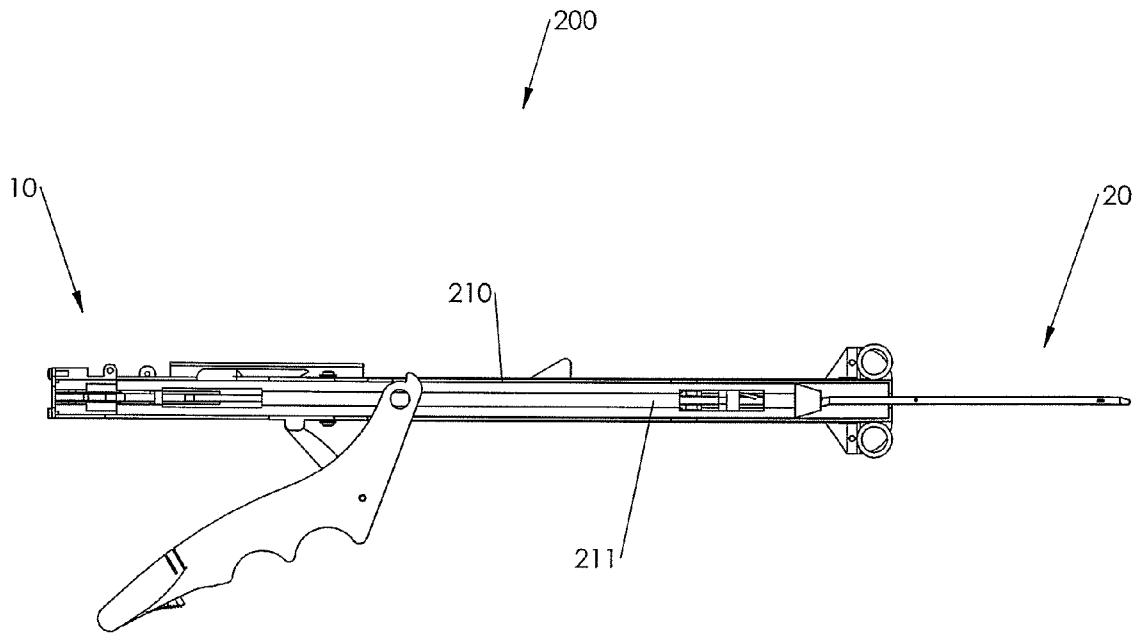


Fig. 6c

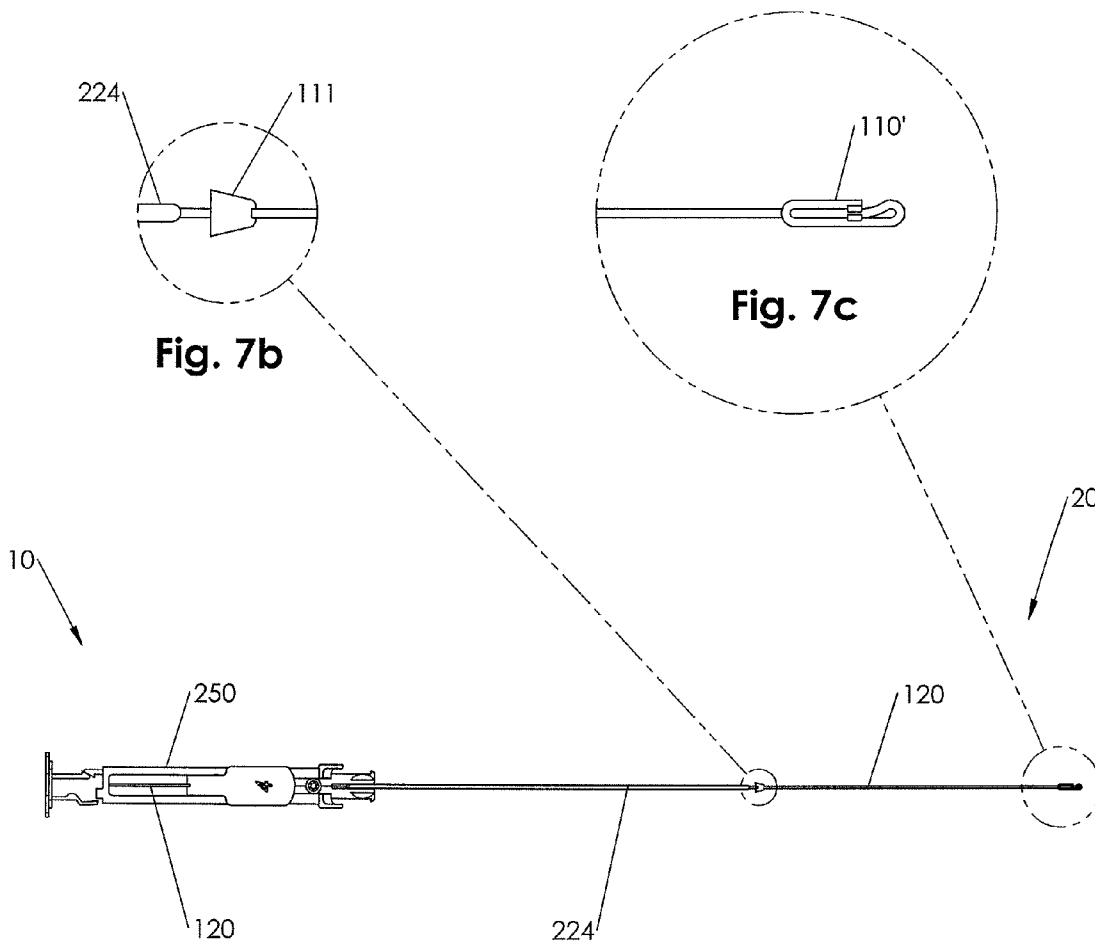


Fig. 7b

Fig. 7c

Fig. 7a

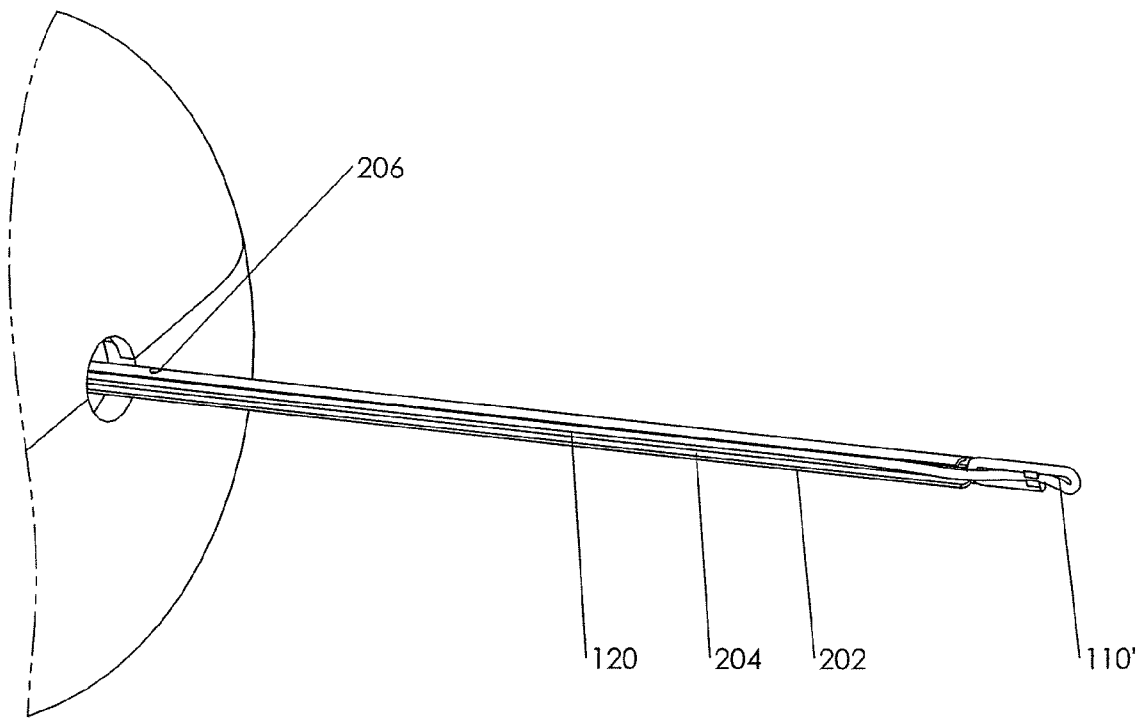


Fig. 8

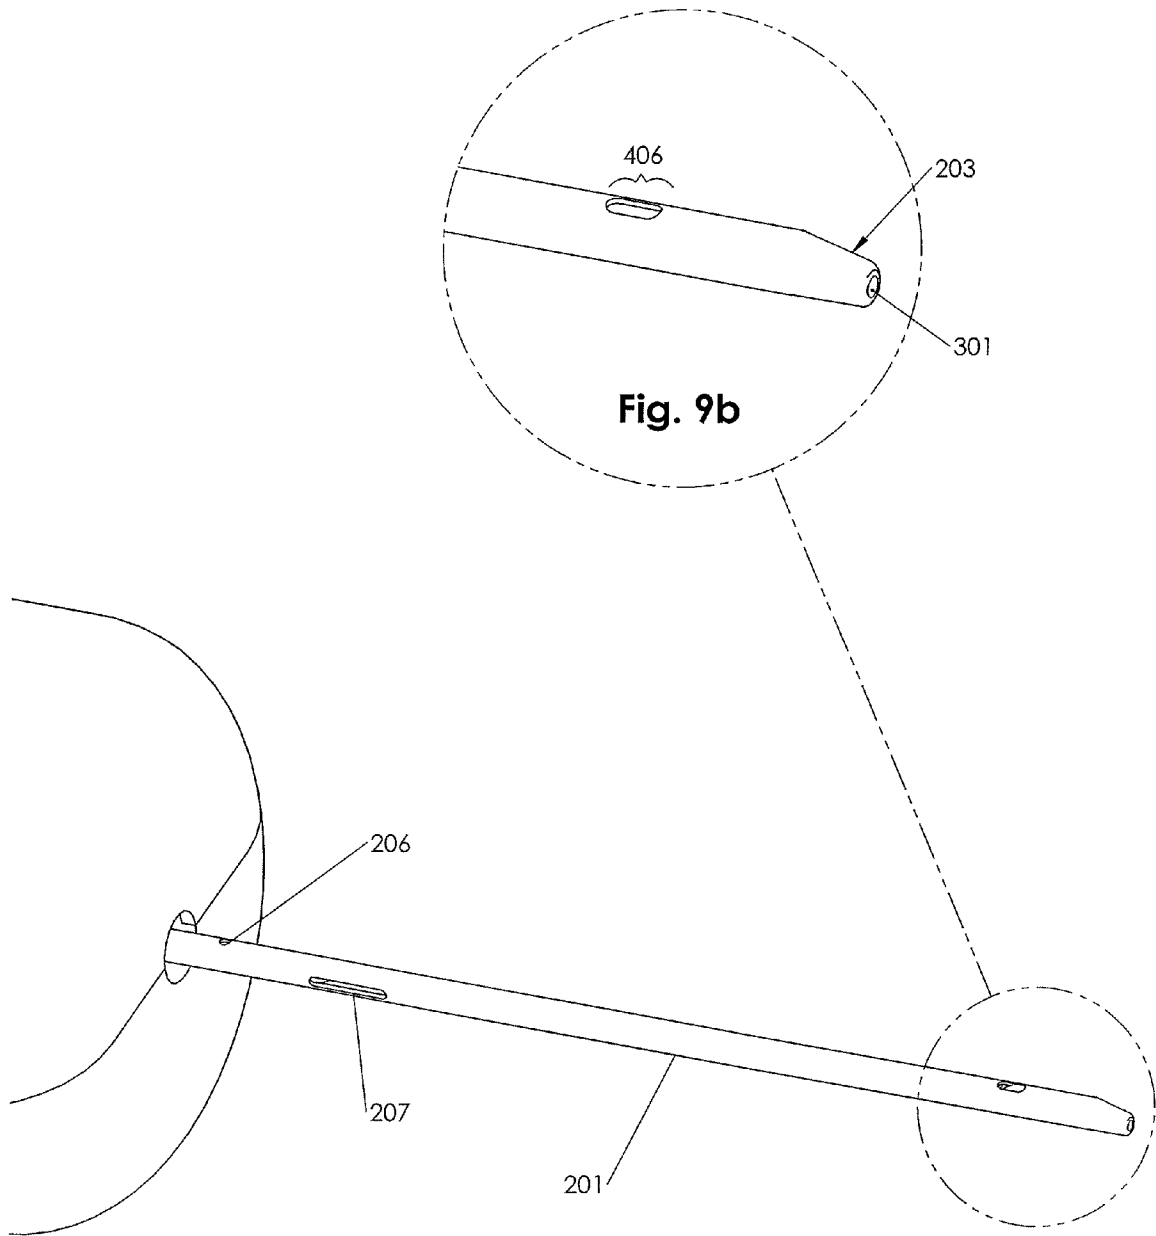


Fig. 9a

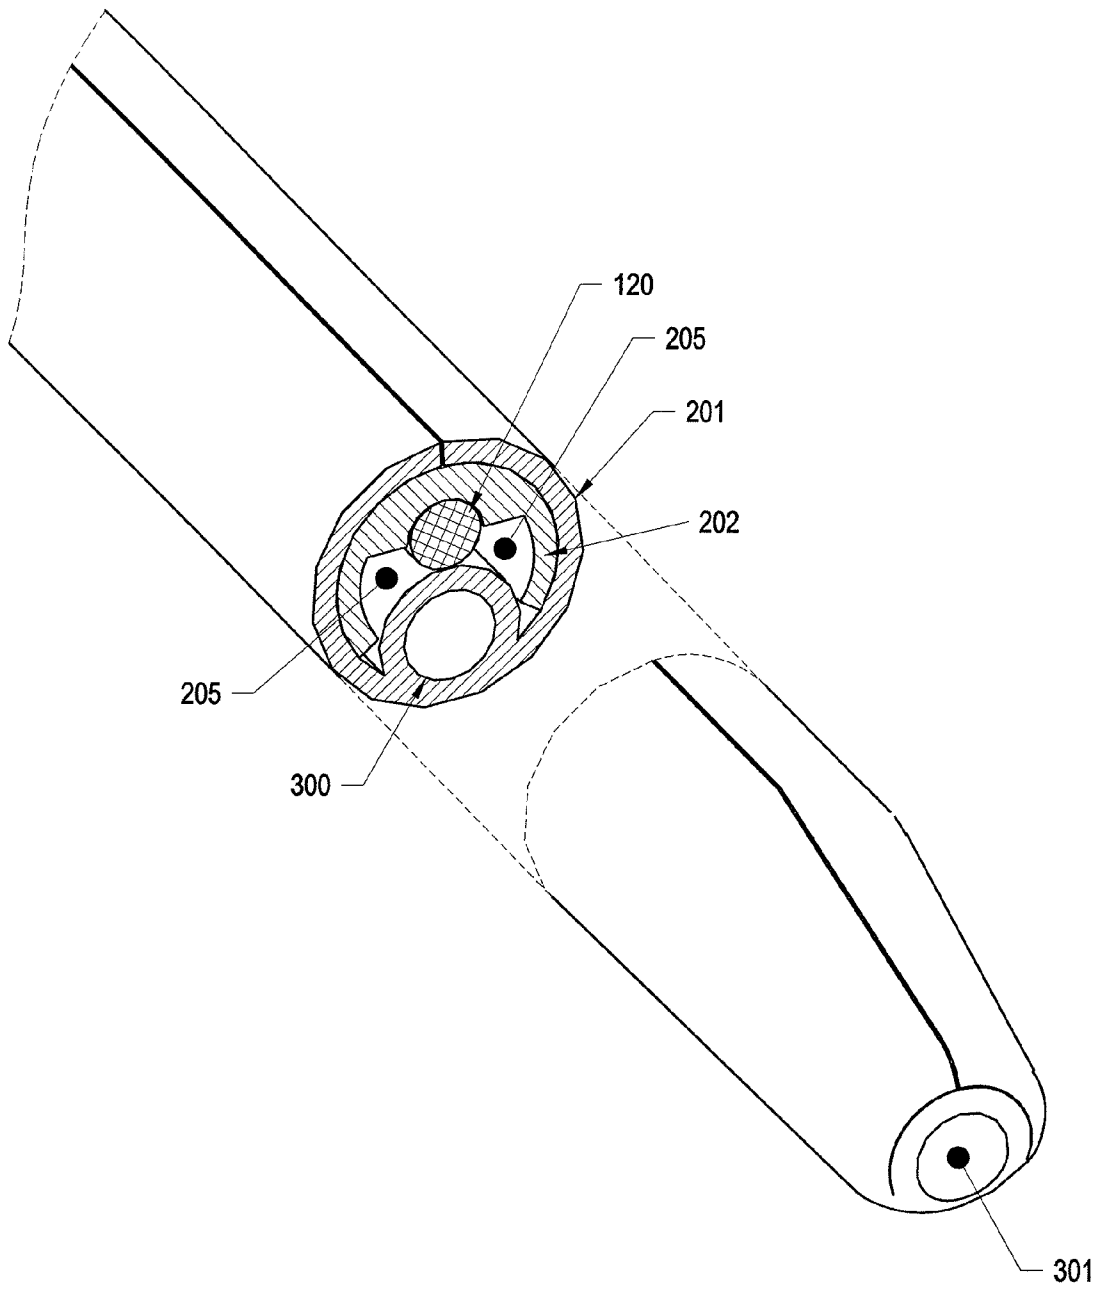


Fig. 9c

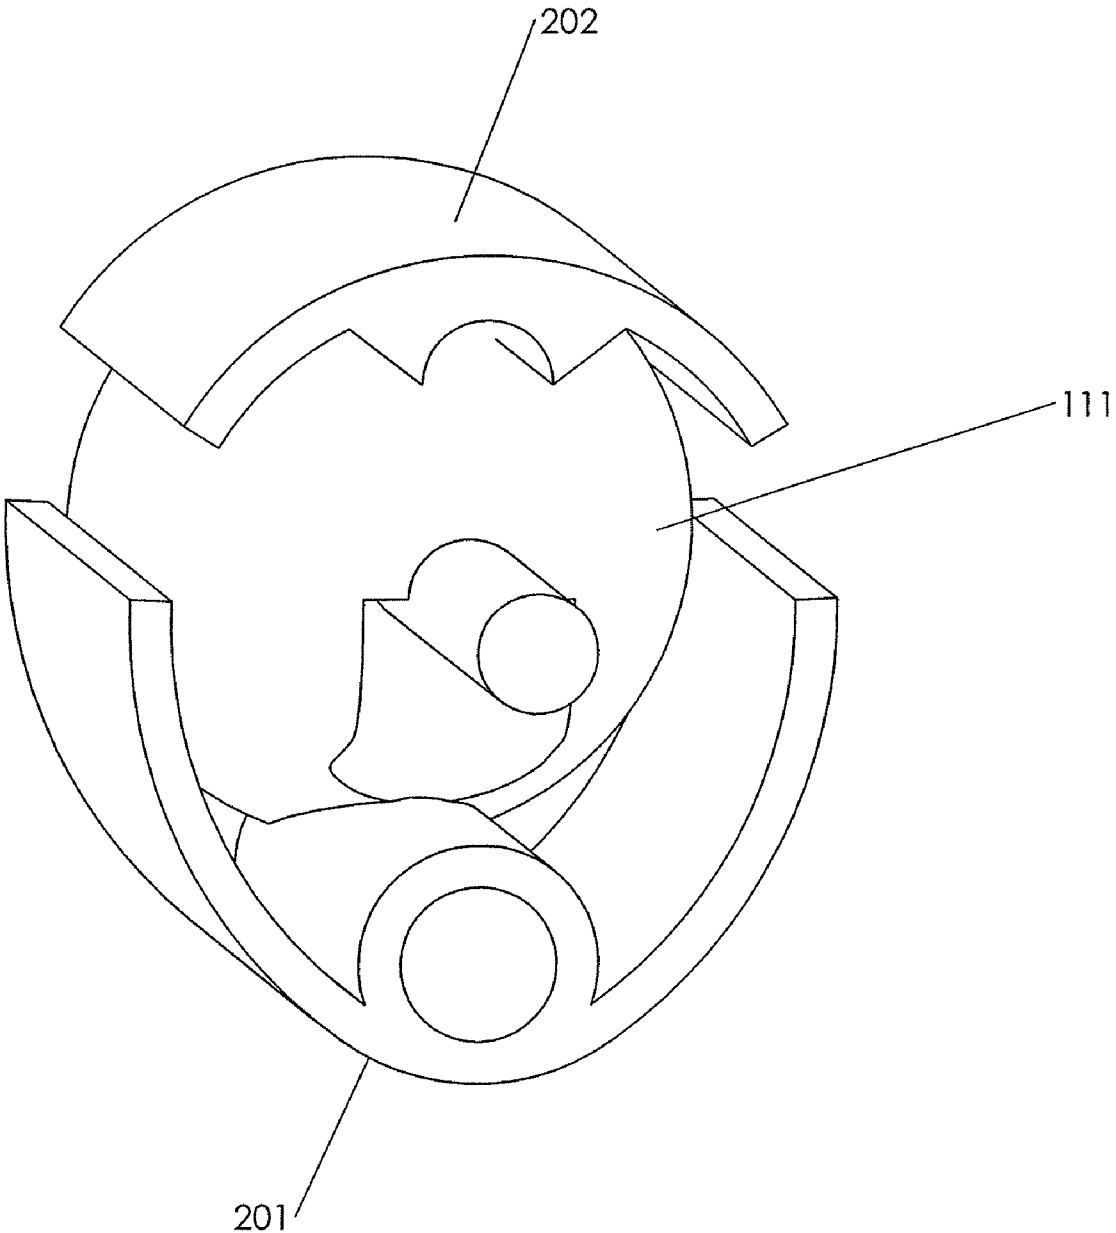


Fig. 9d

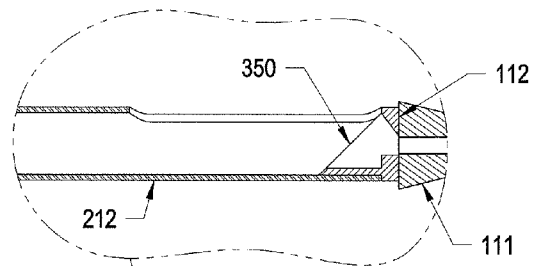


Fig. 10b

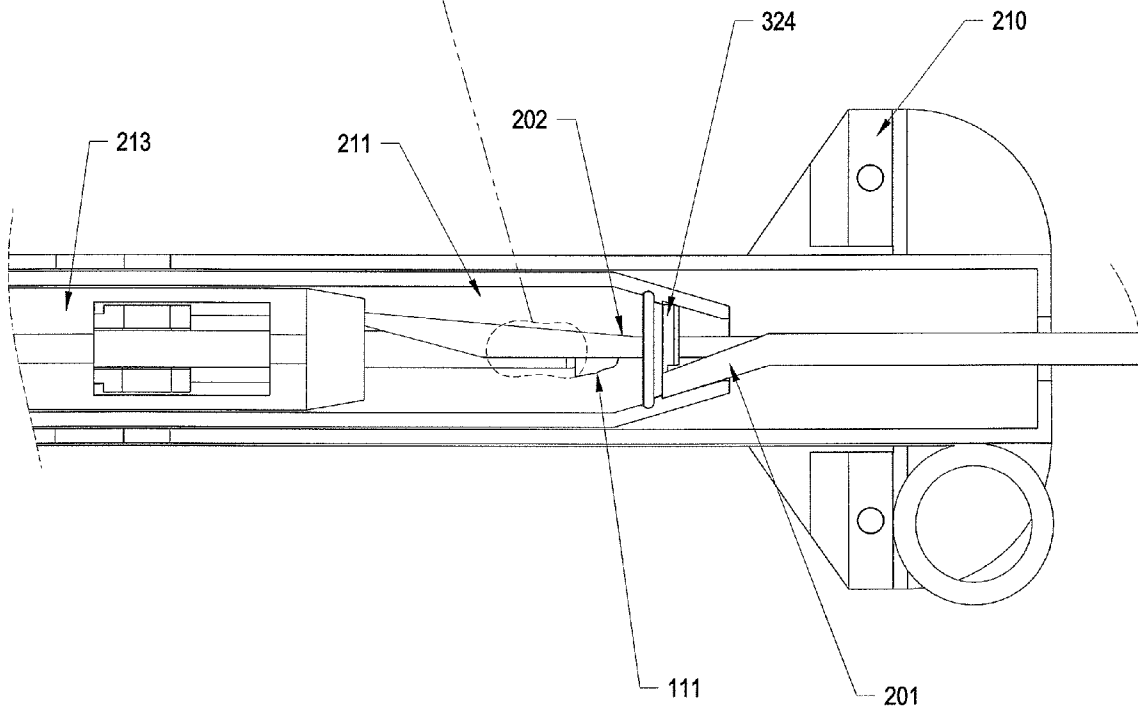


Fig. 10a

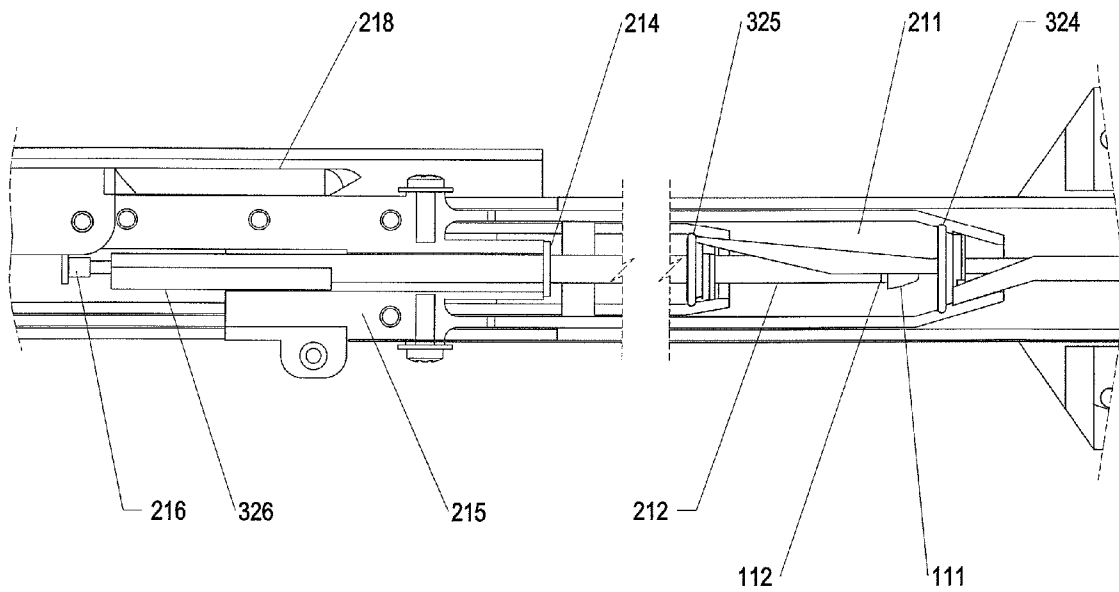


Fig. 11

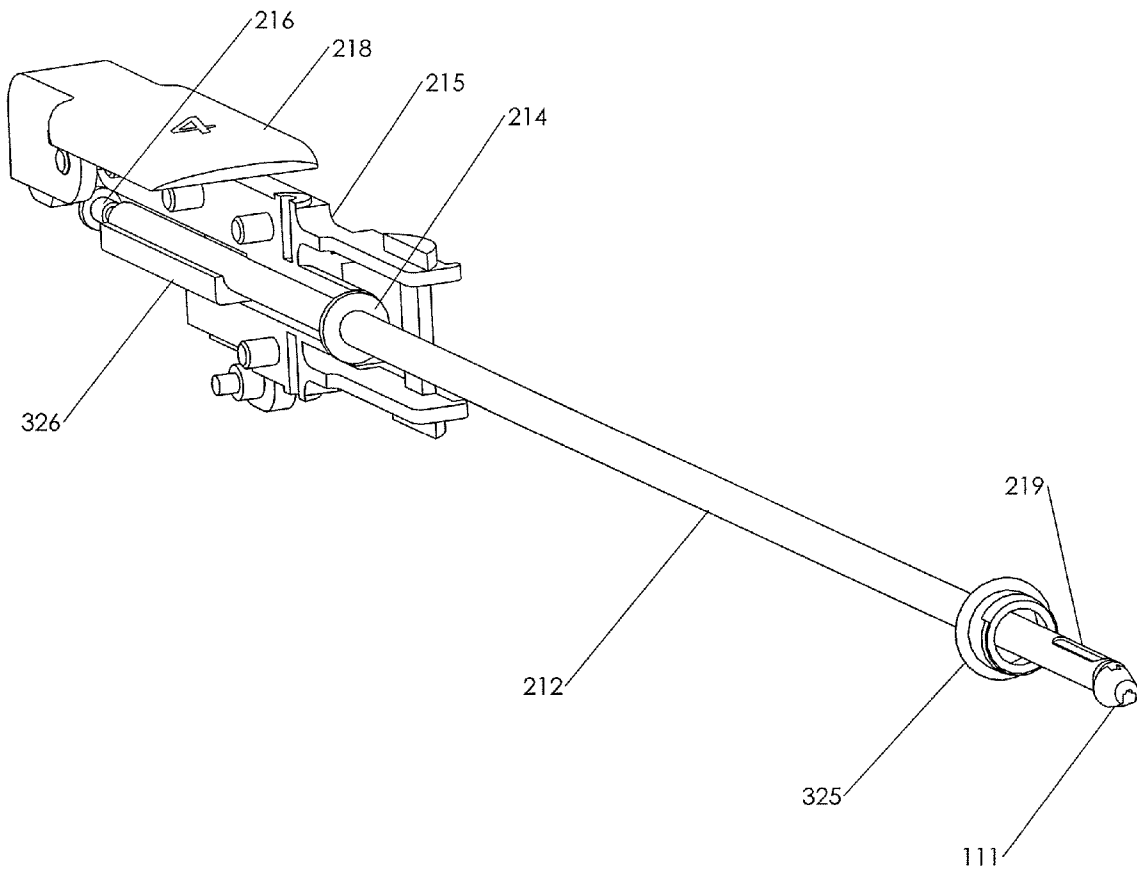


Fig. 12

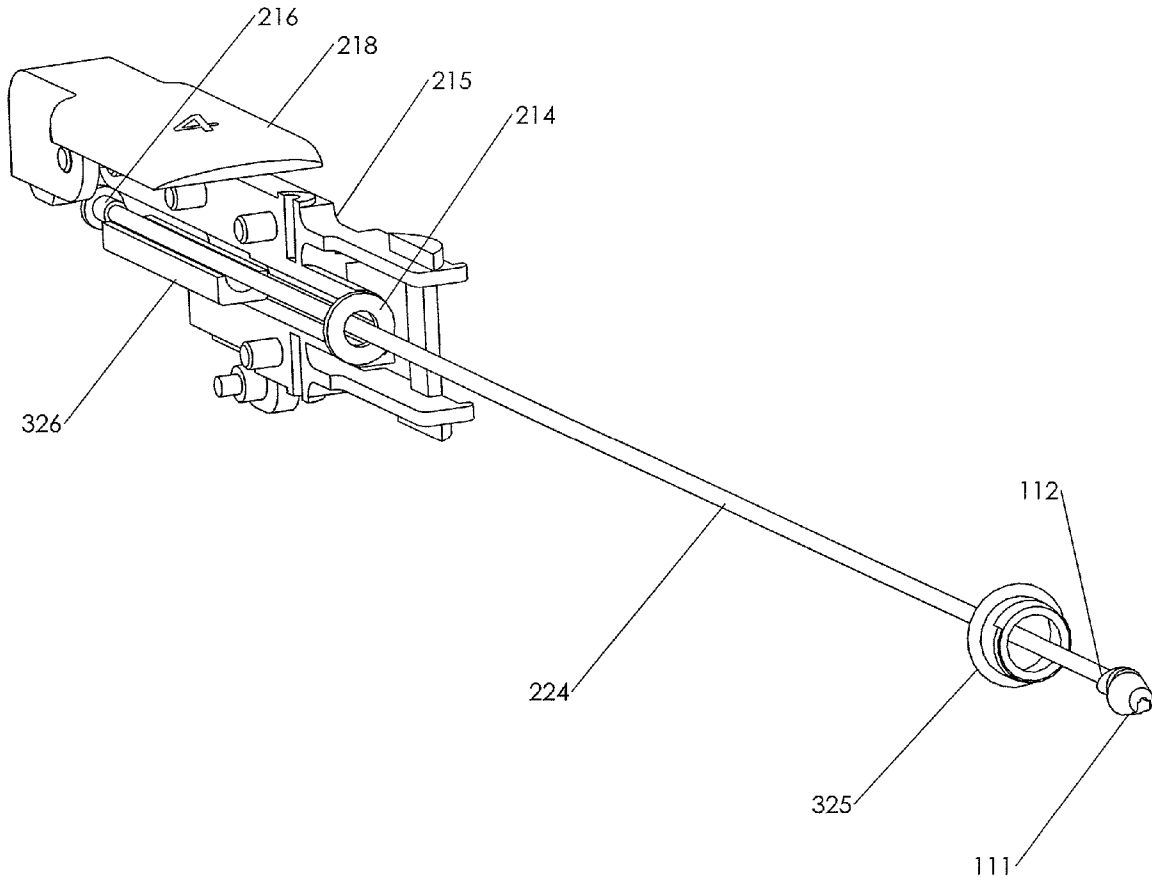


Fig. 13

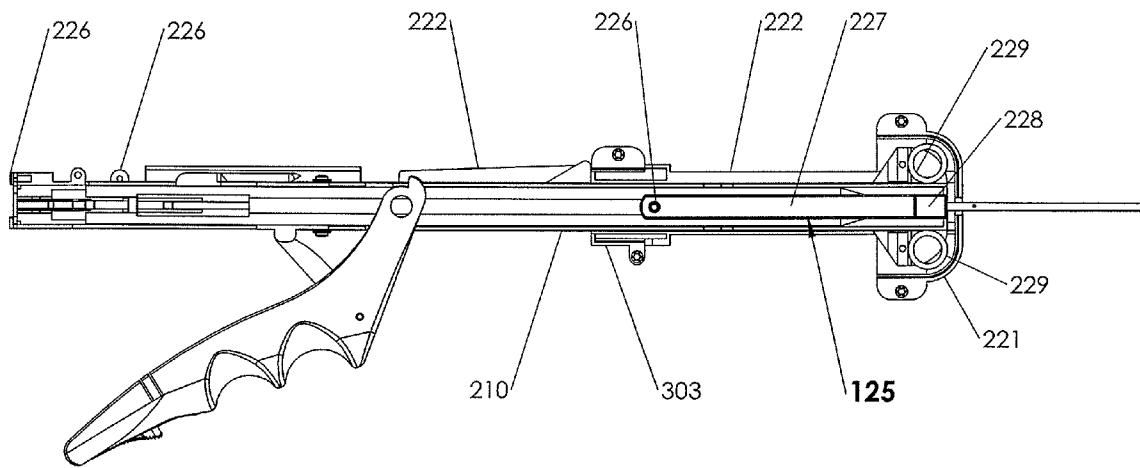
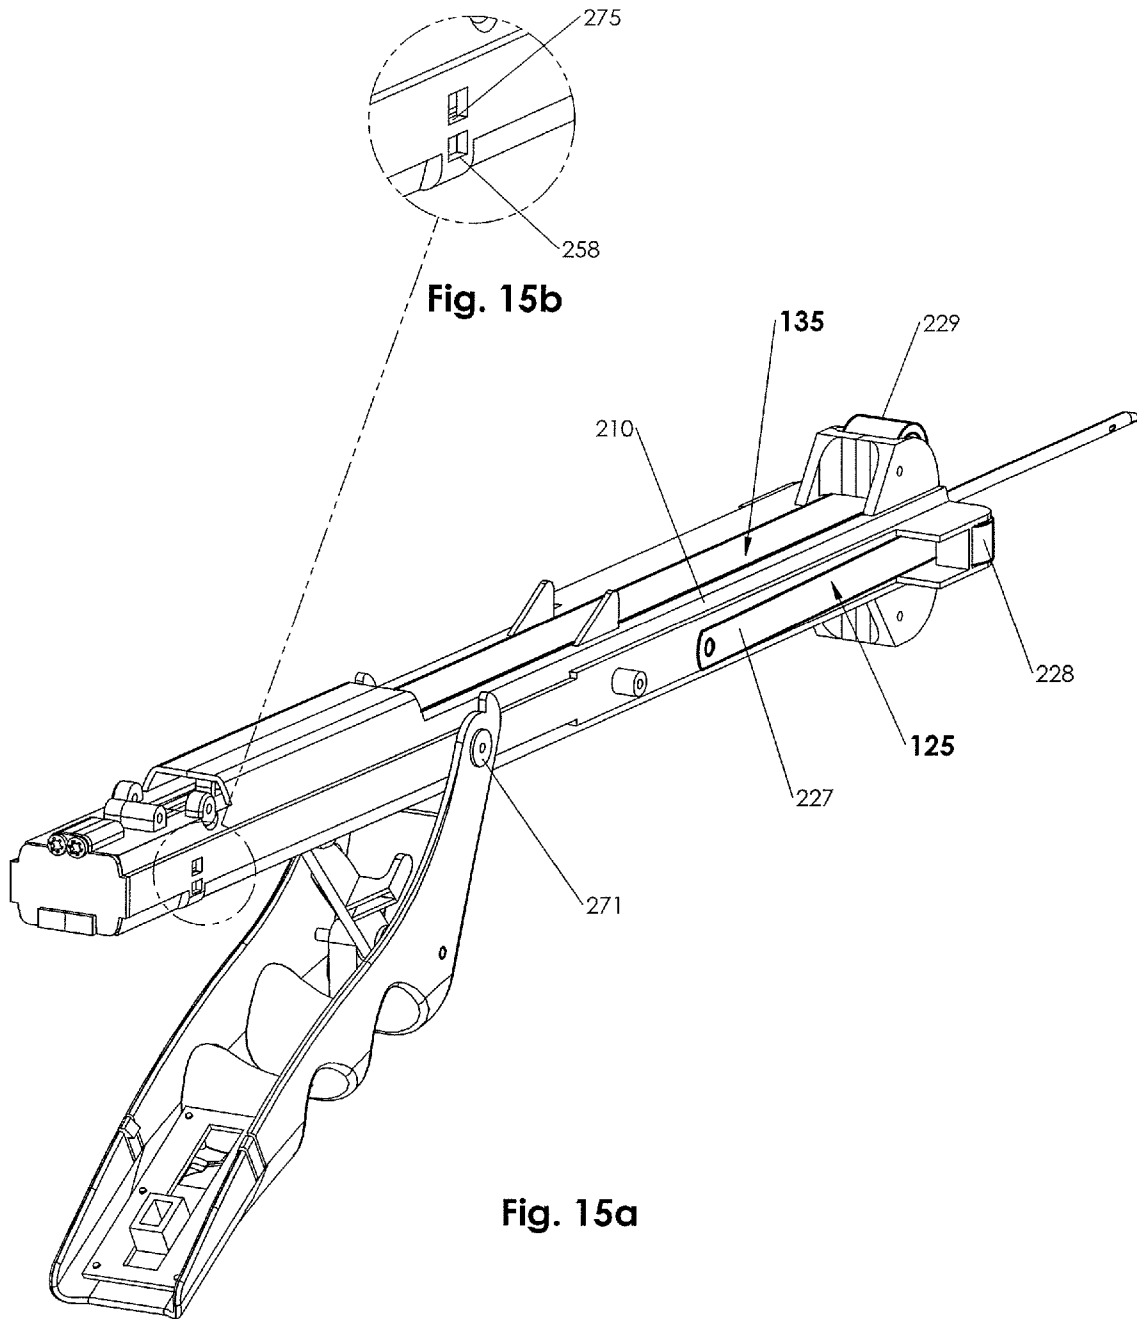


Fig. 14



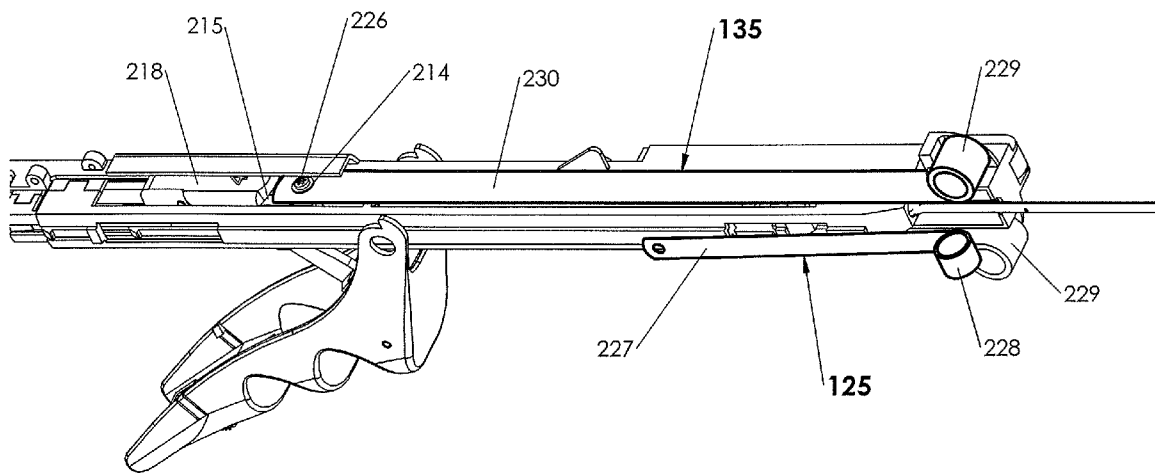


Fig. 16

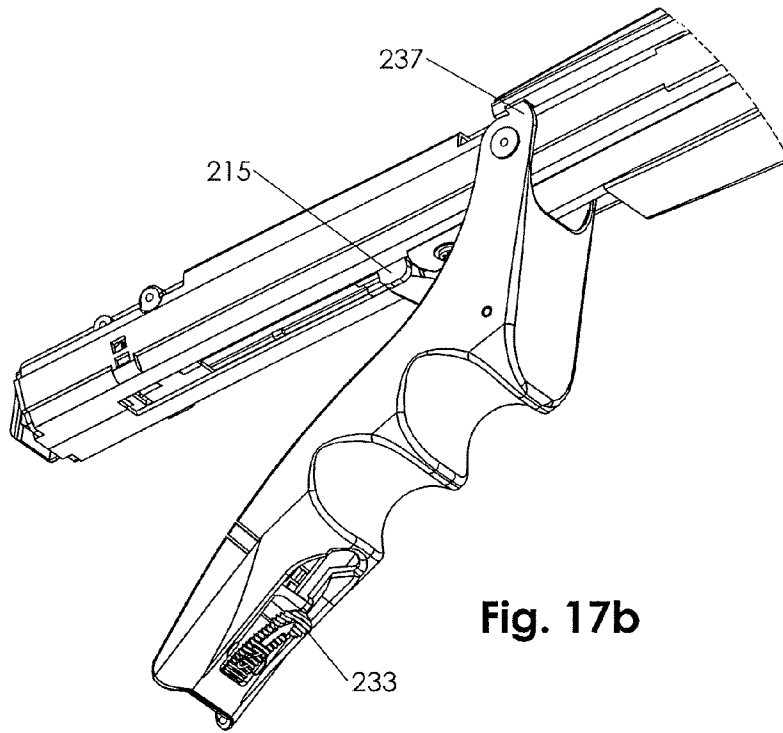


Fig. 17b

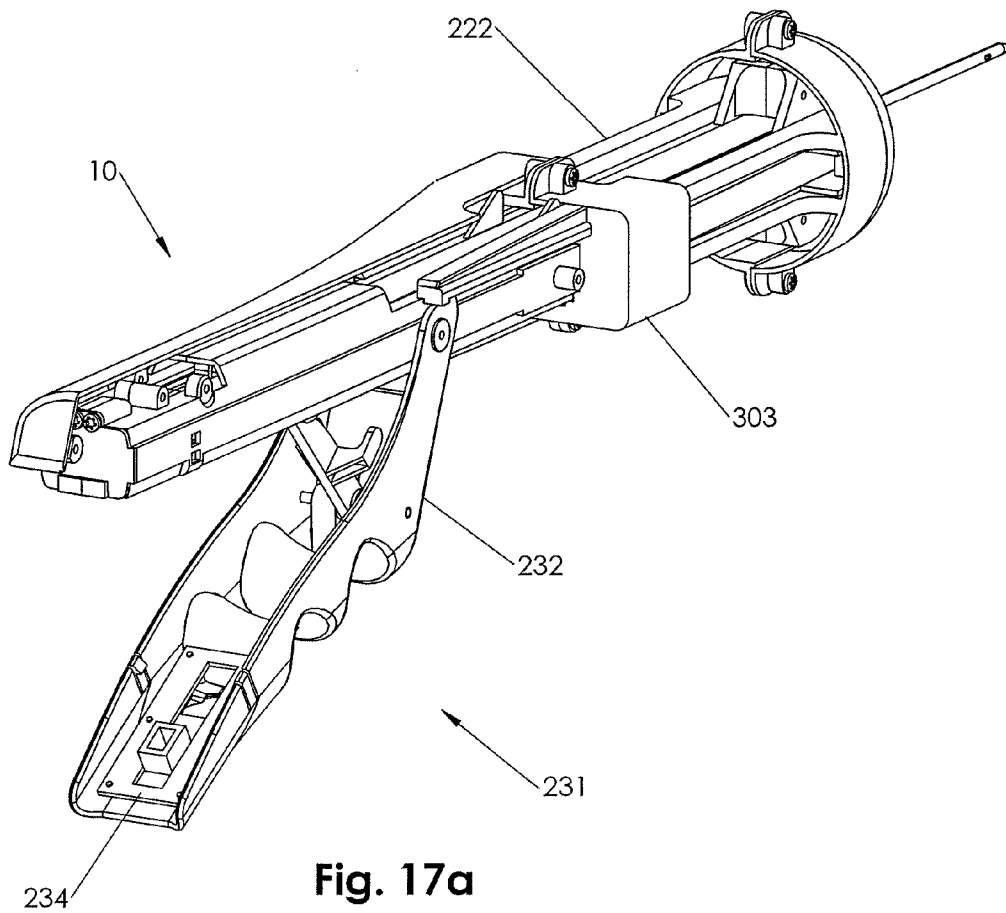


Fig. 17a

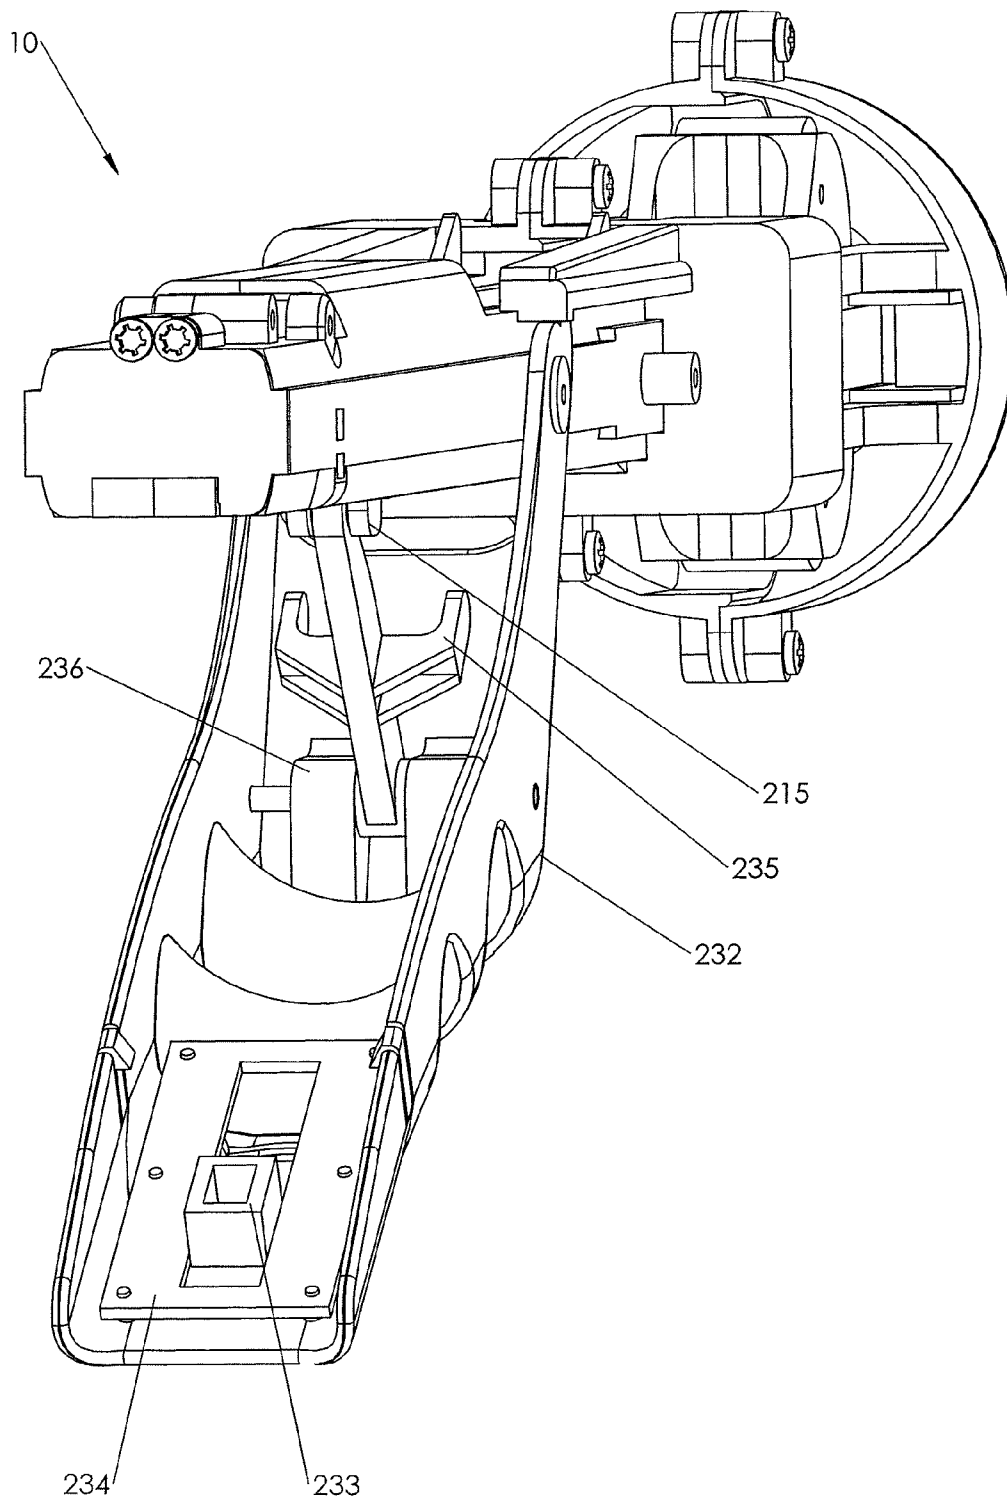


Fig. 18

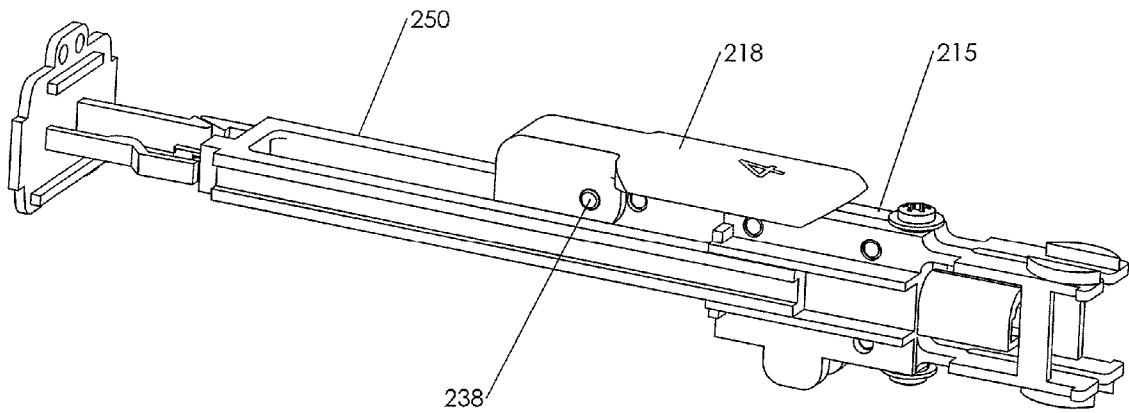


Fig. 19

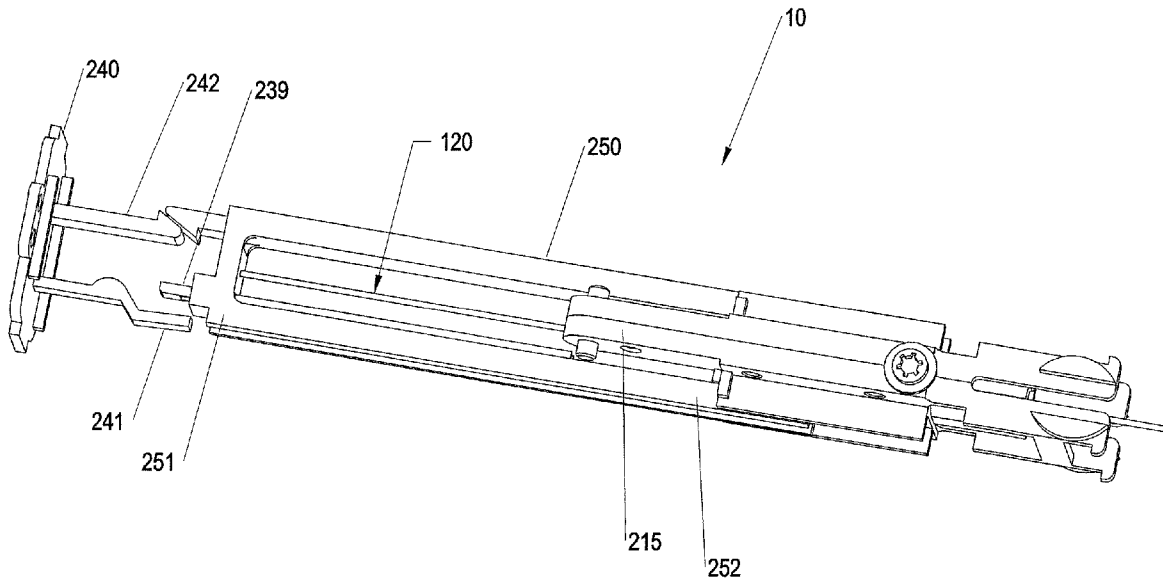


Fig. 20

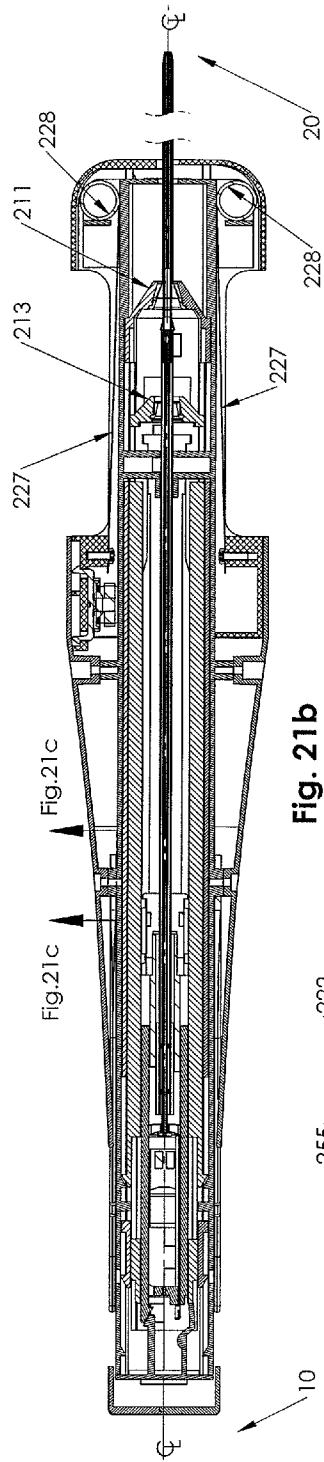


Fig. 21b

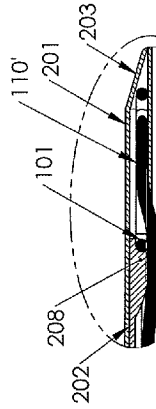


Fig. 21d




Fig. 21c

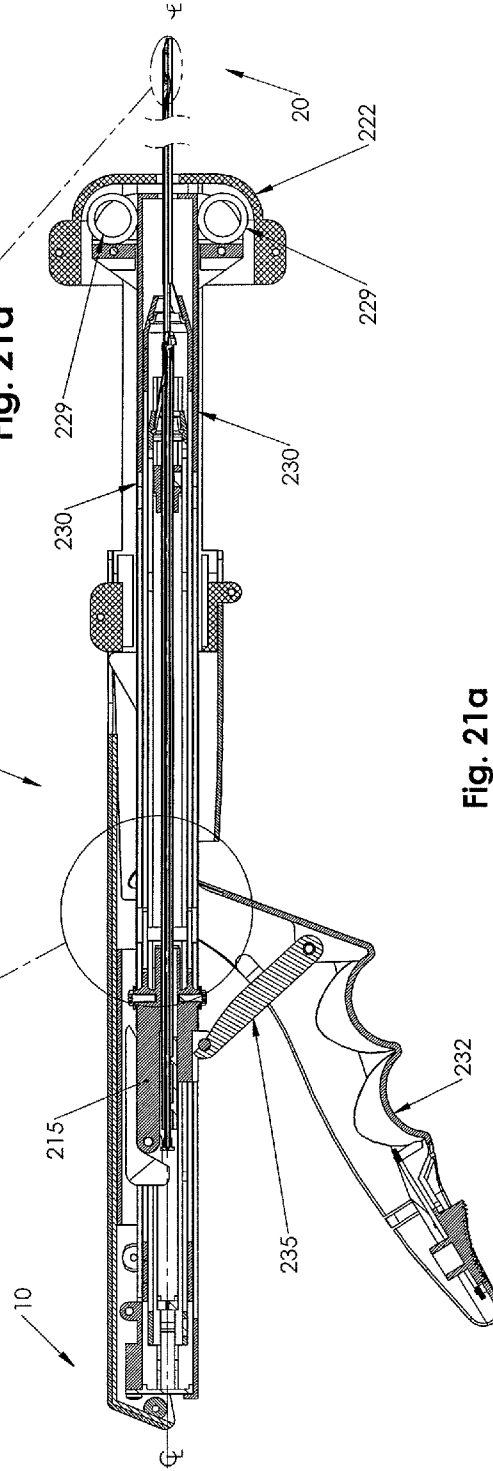
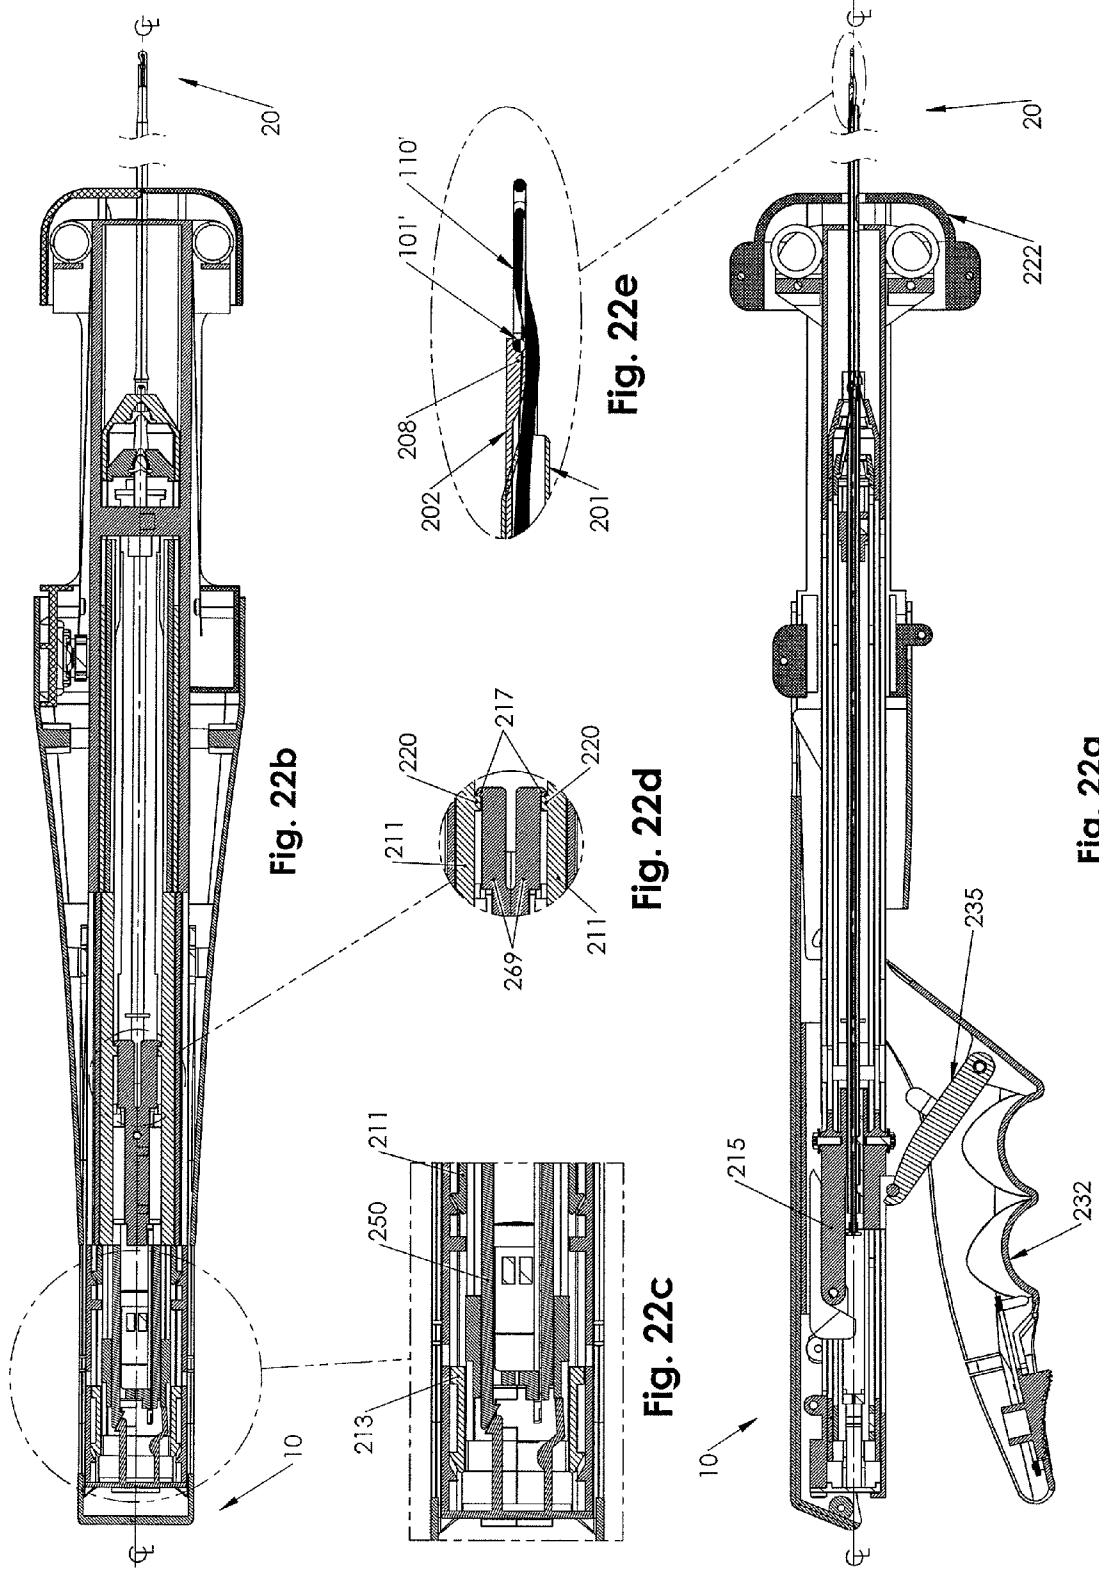


Fig. 21a



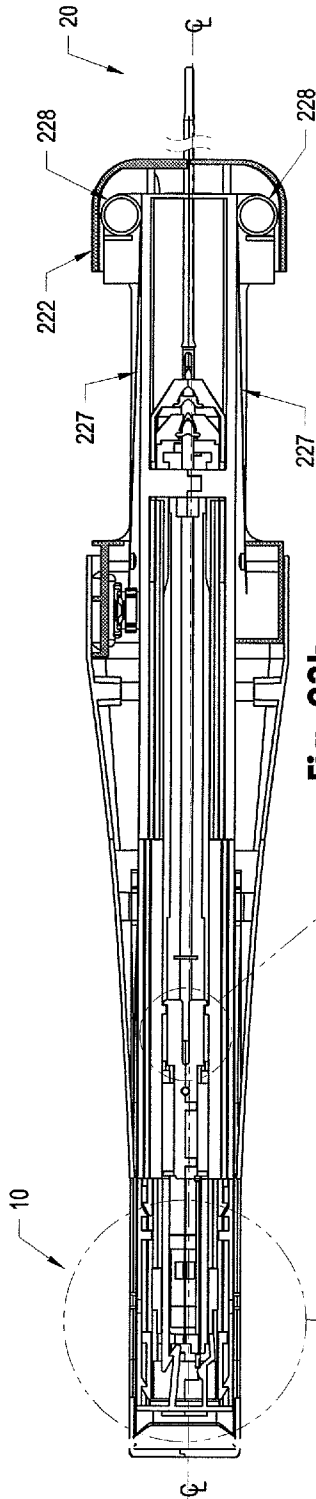


Fig. 23b

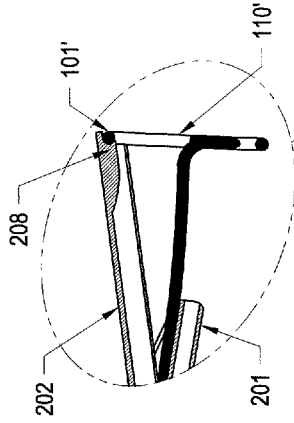


Fig. 23e




Fig. 23d

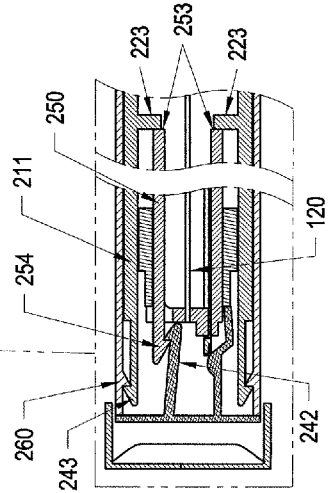


Fig. 23c

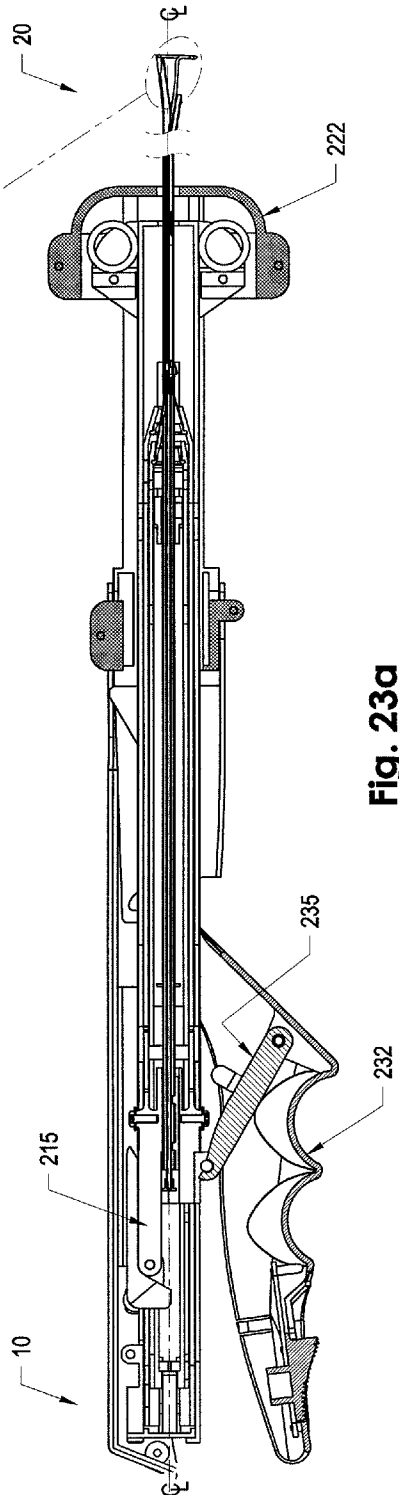


Fig. 23a

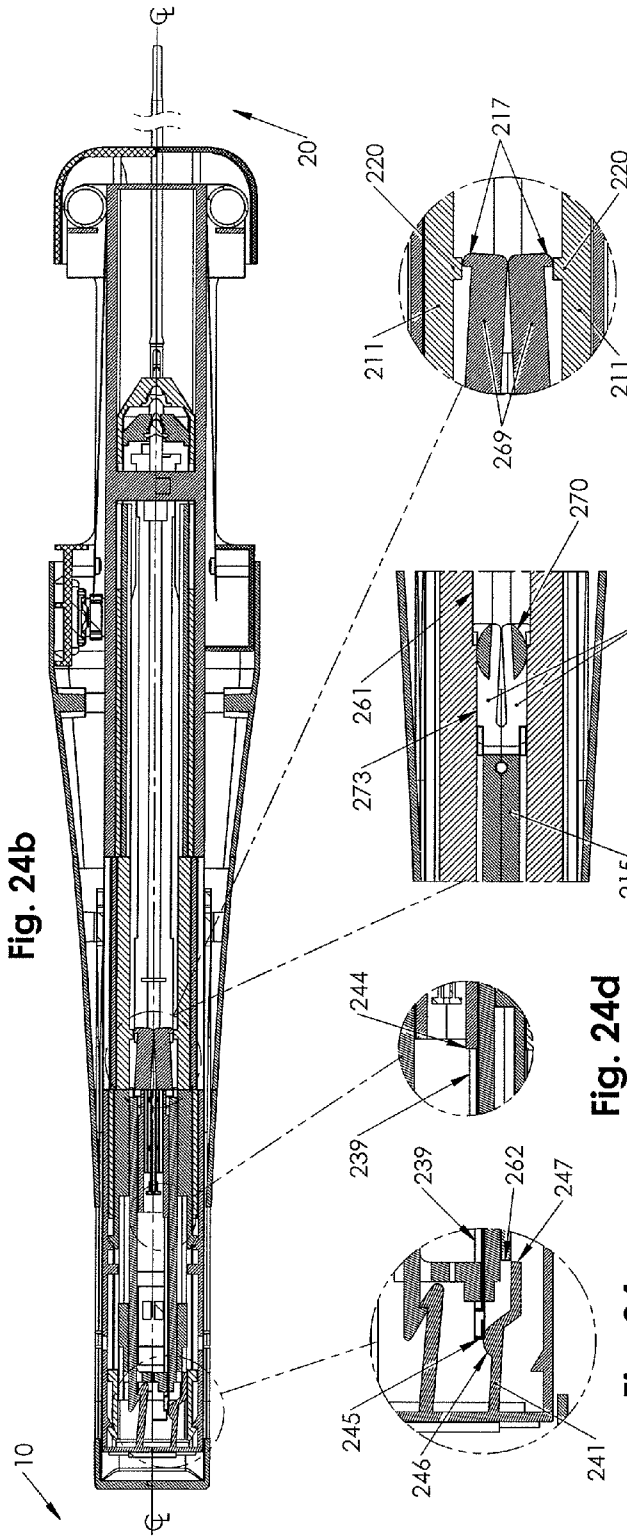


Fig. 24b

Fig. 24c

Fig. 24d

Fig. 24e

Fig. 24f

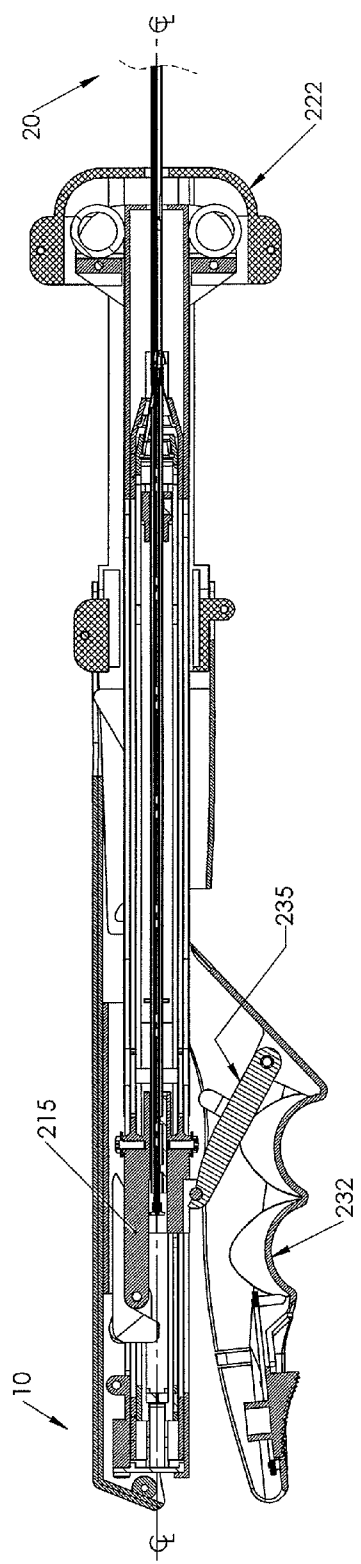


Fig. 24a

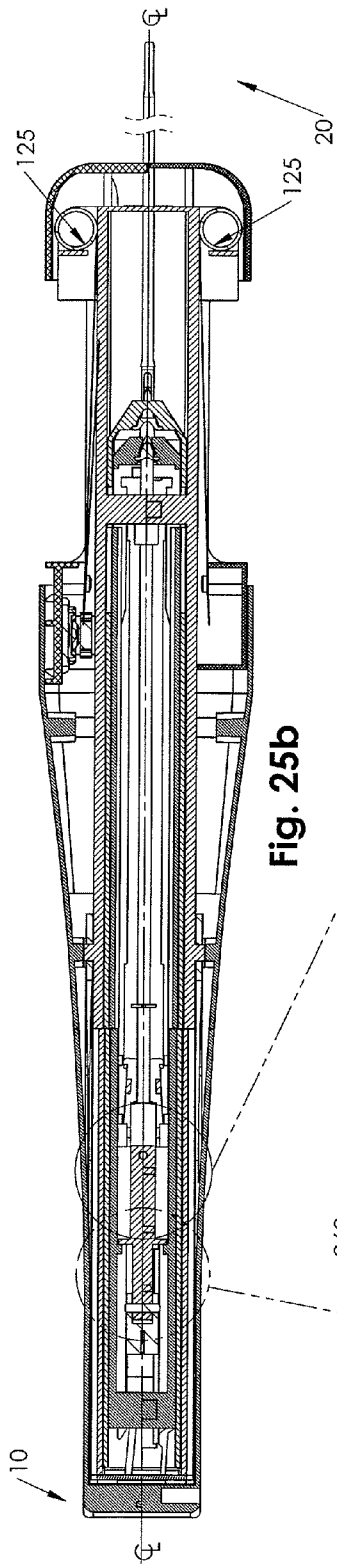


Fig. 25b

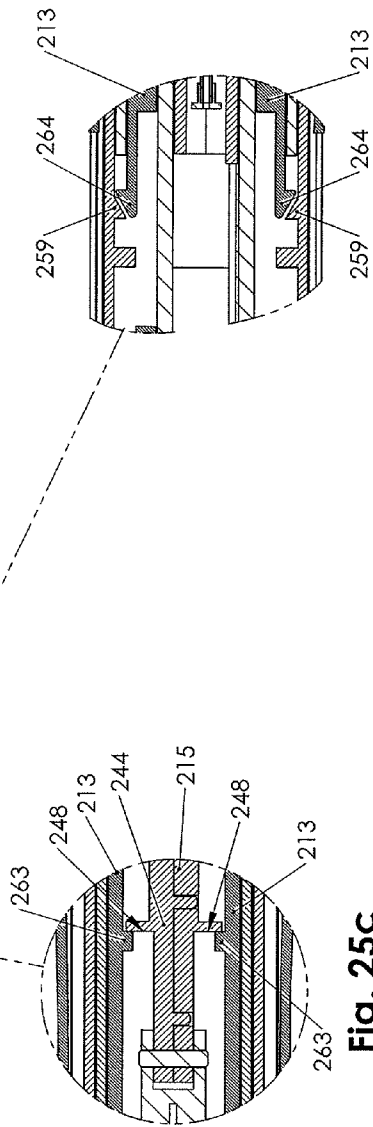


Fig. 25c




Fig. 25d

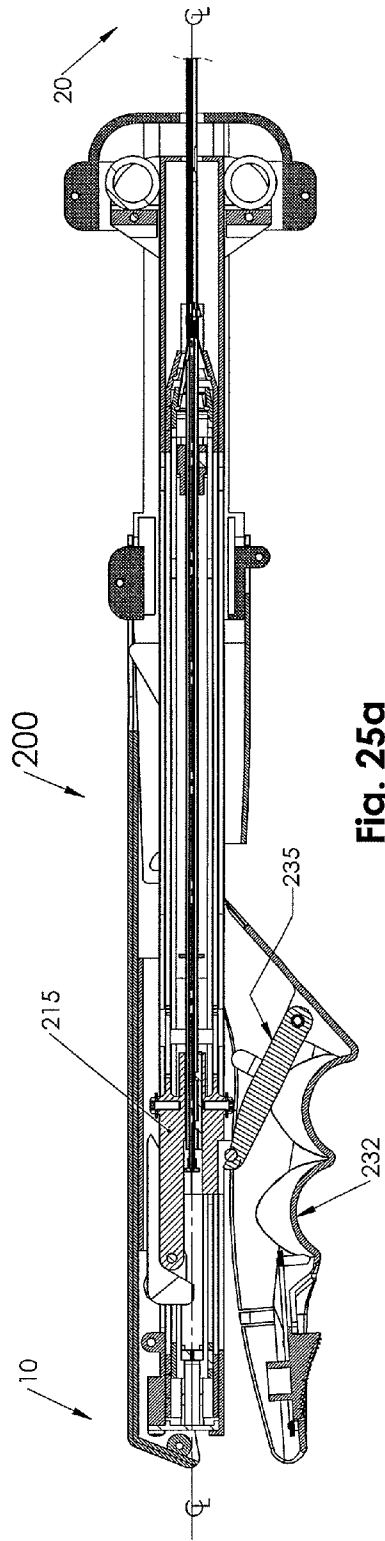
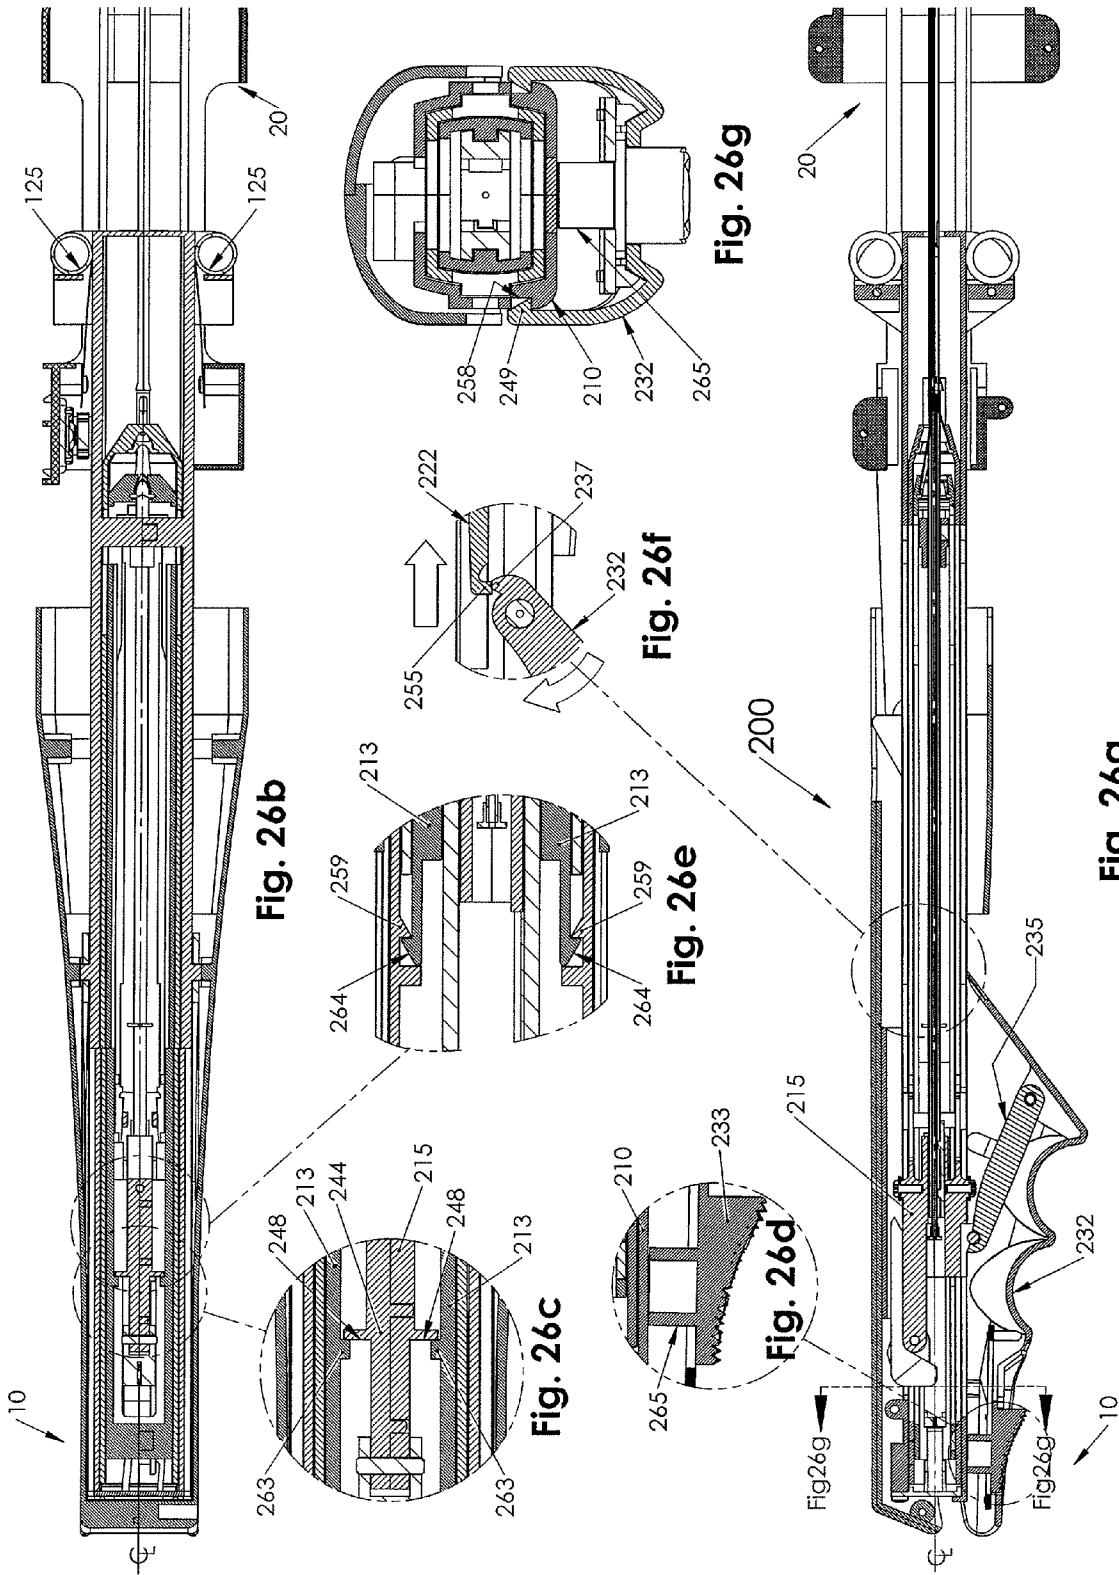


Fig. 25a



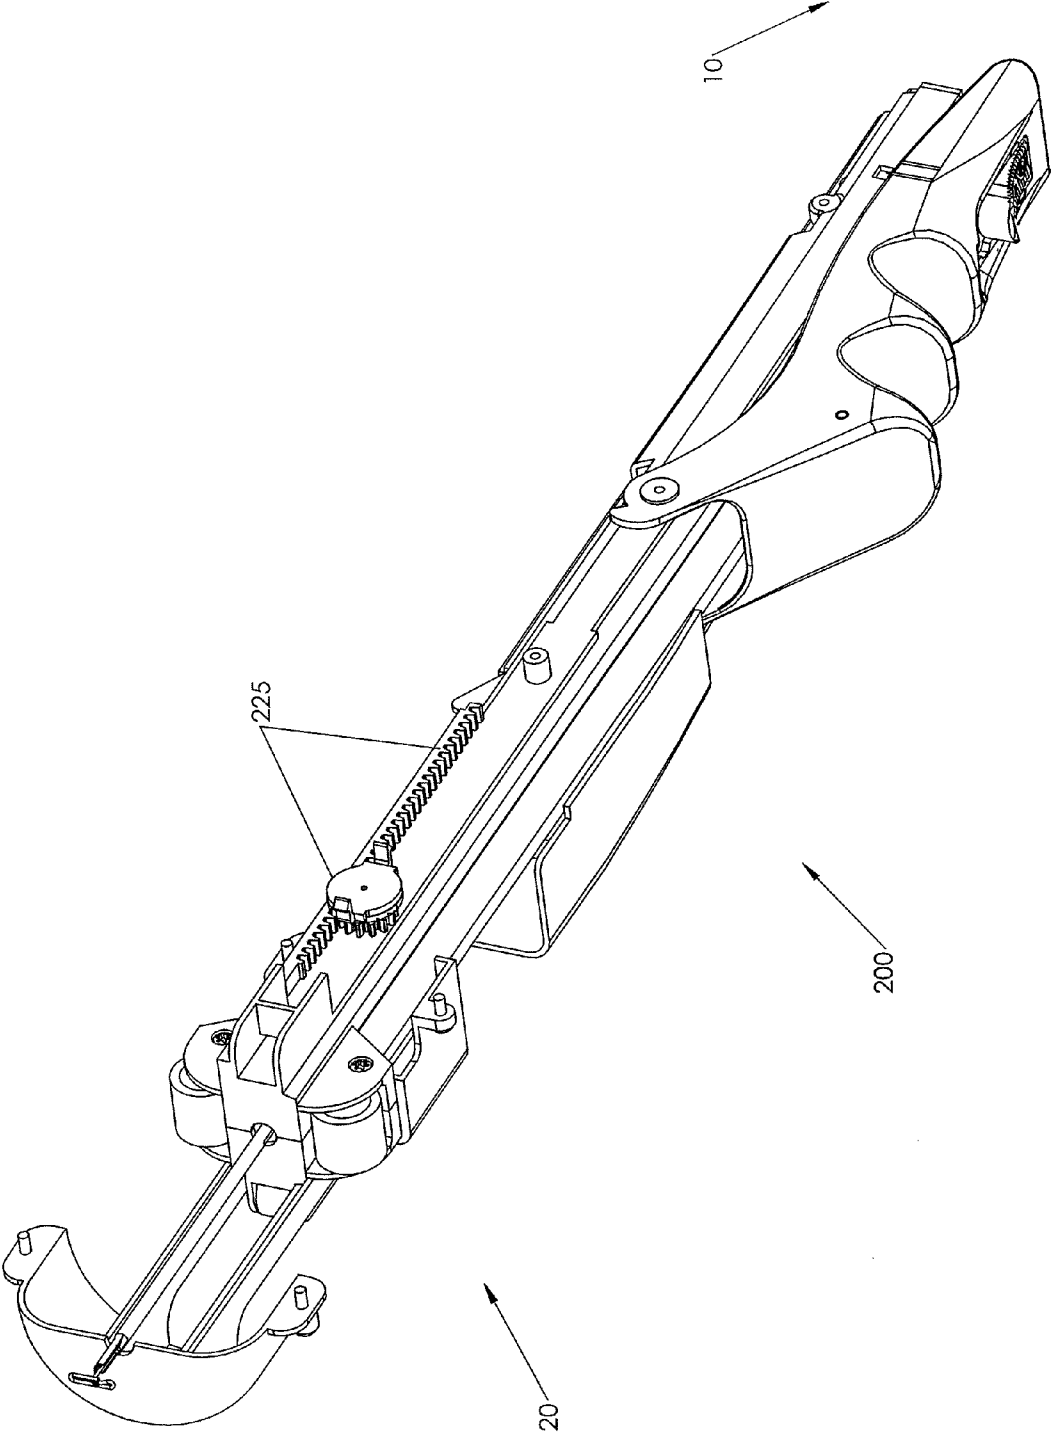


Fig. 27

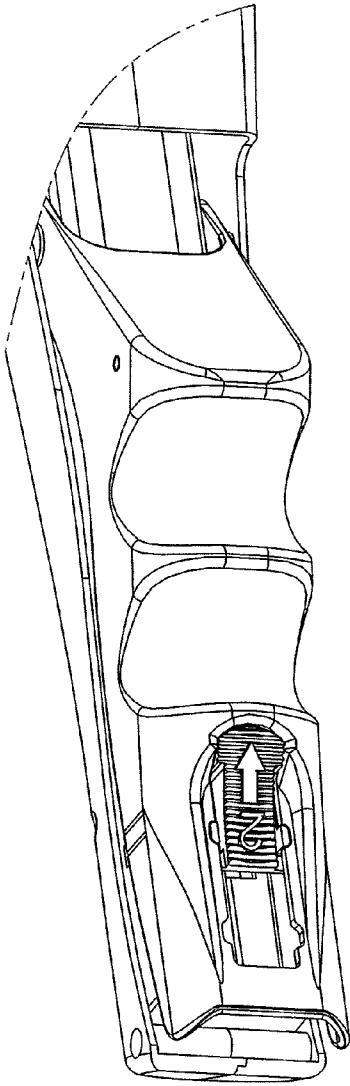


Fig. 28b

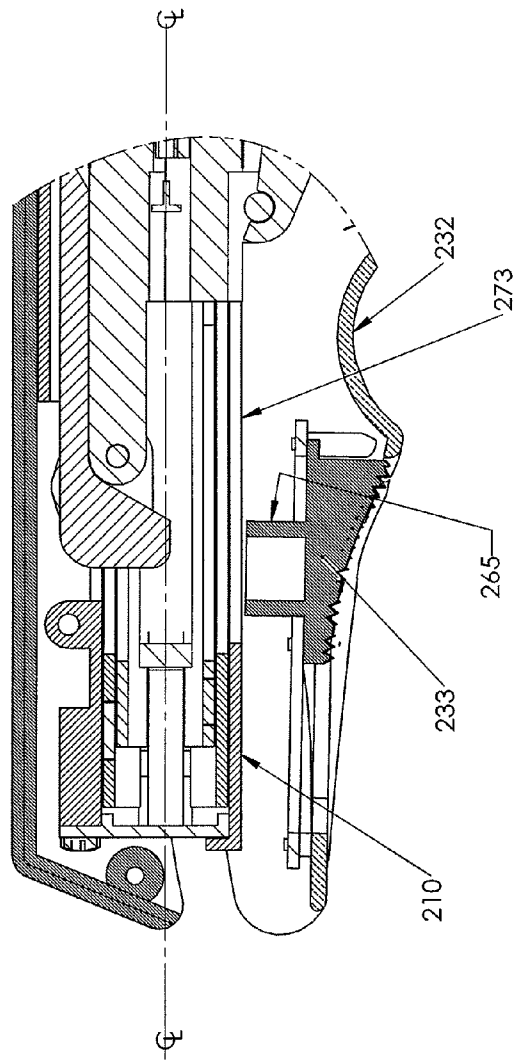


Fig. 28a

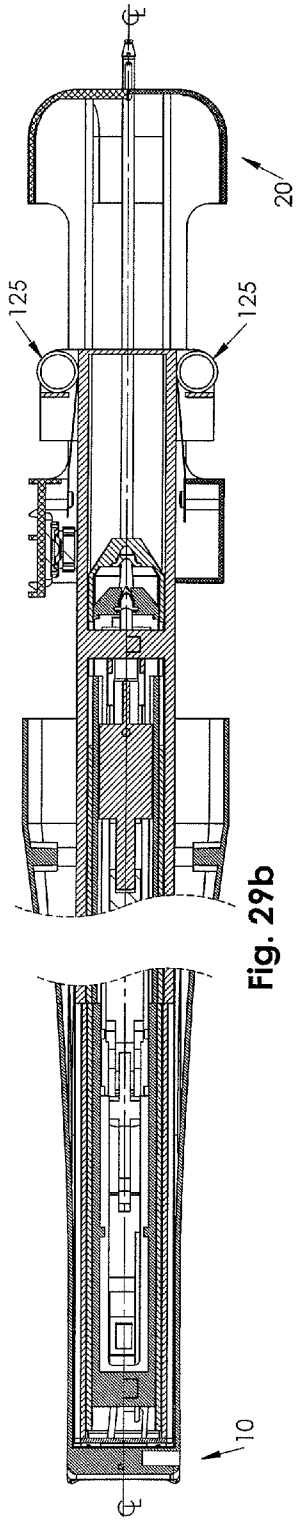


Fig. 29a

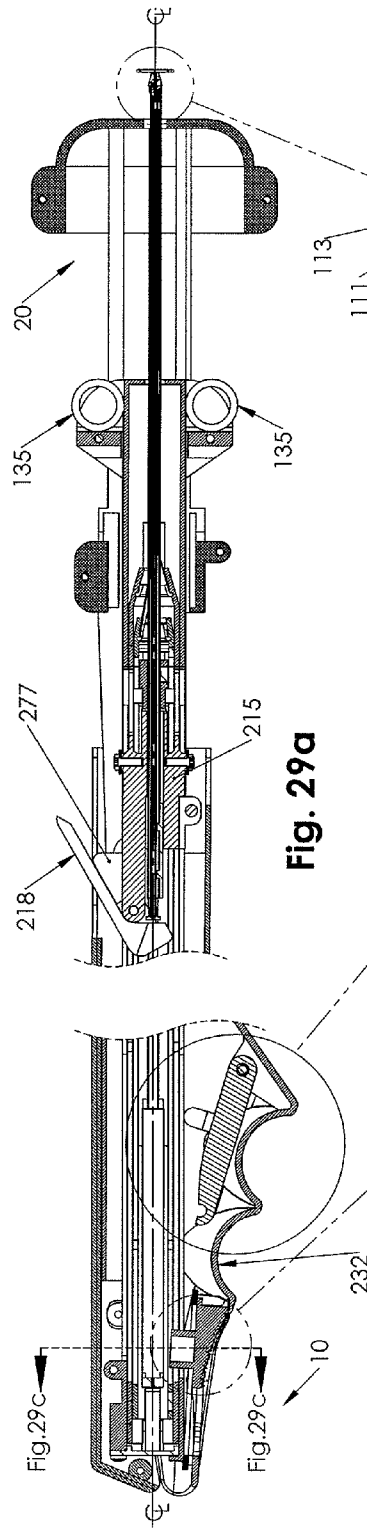


Fig. 29b

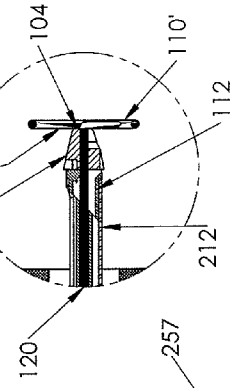


Fig. 29c

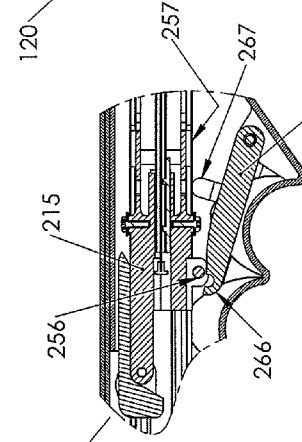


Fig. 29d

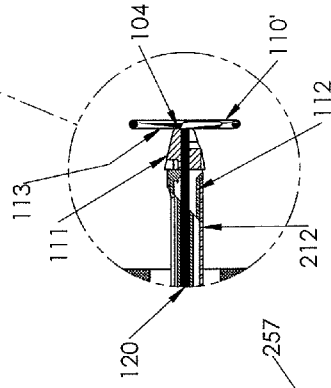


Fig. 29e

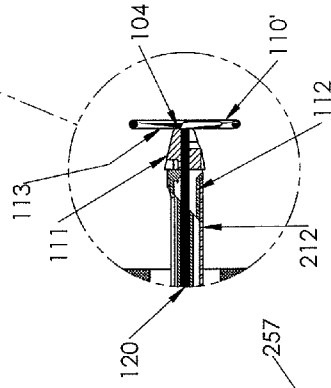


Fig. 29f

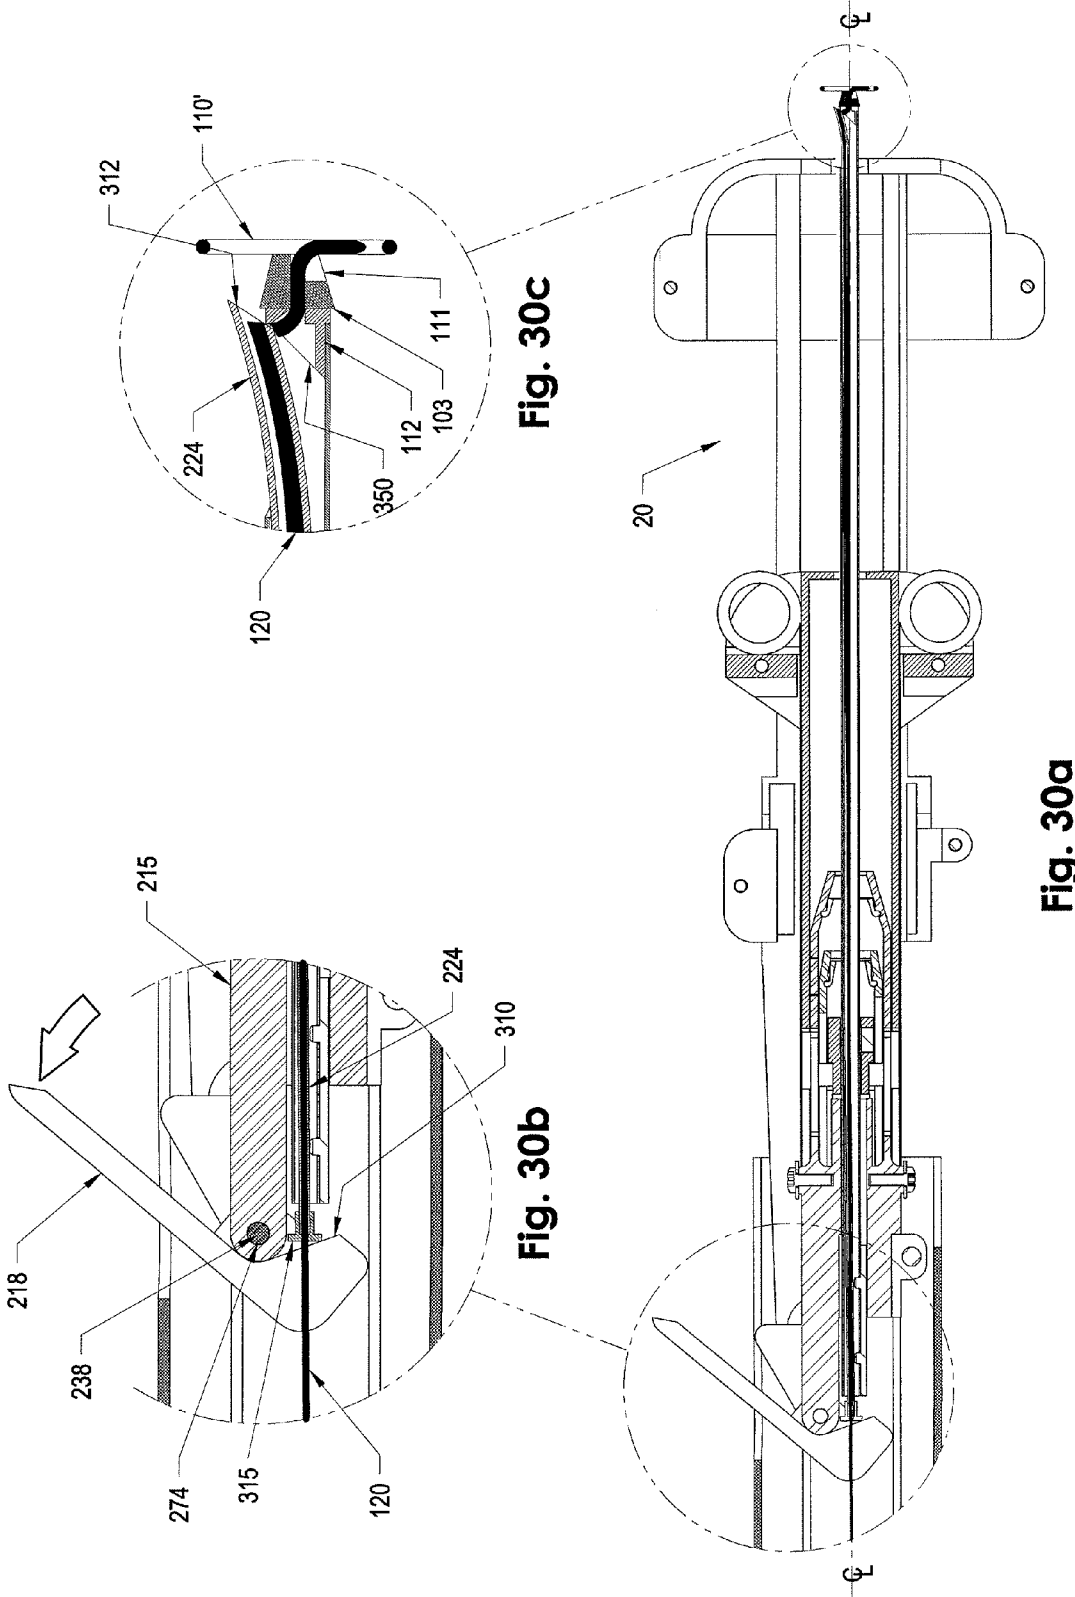


Fig. 30c

Fig. 30b

Fig. 30a

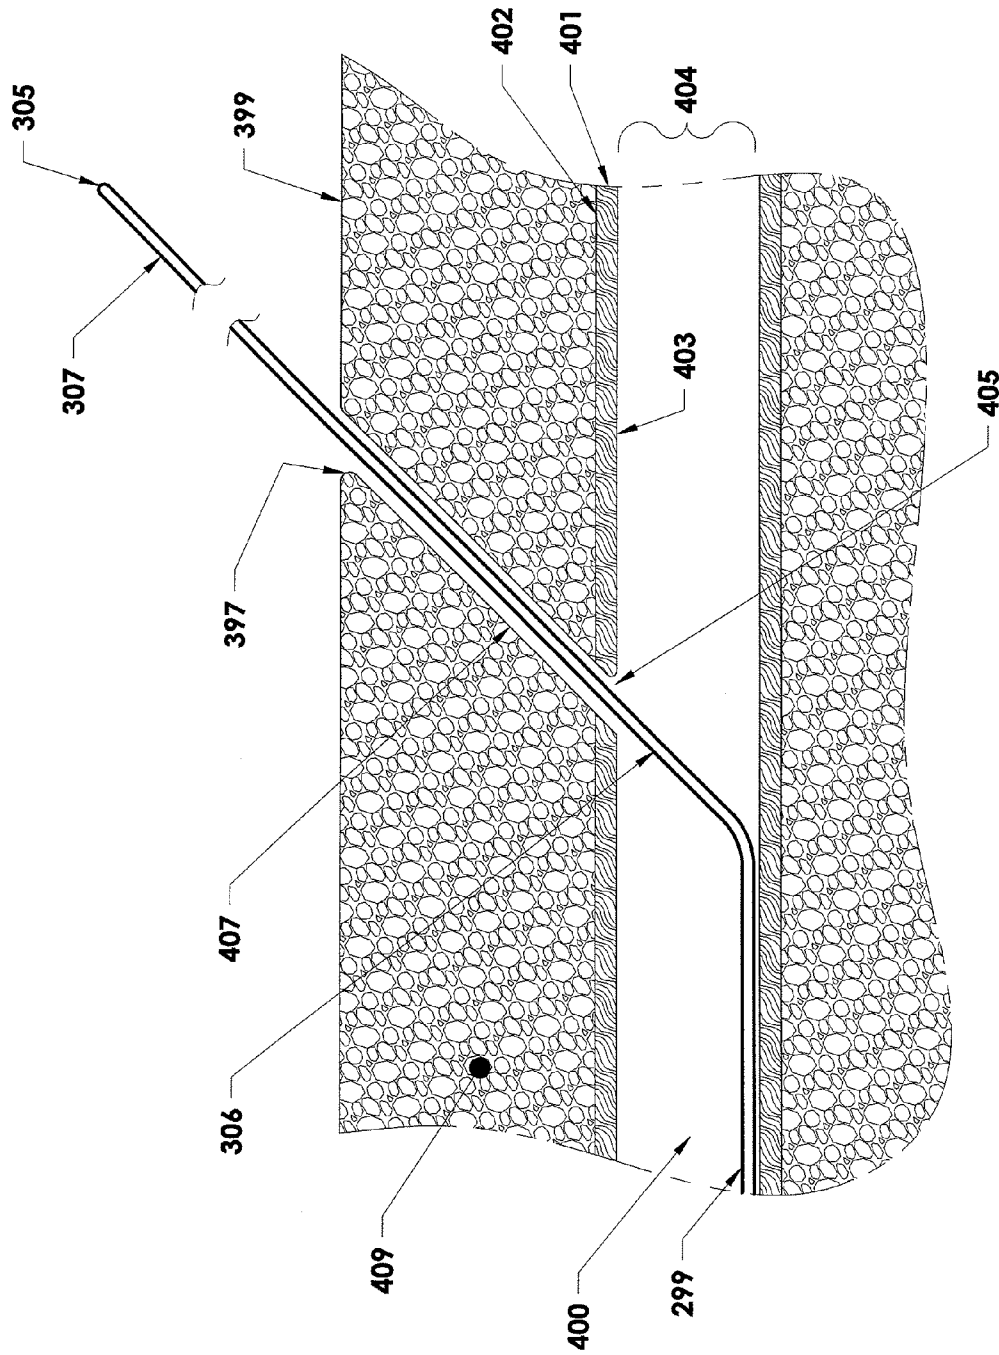


Fig. 31a

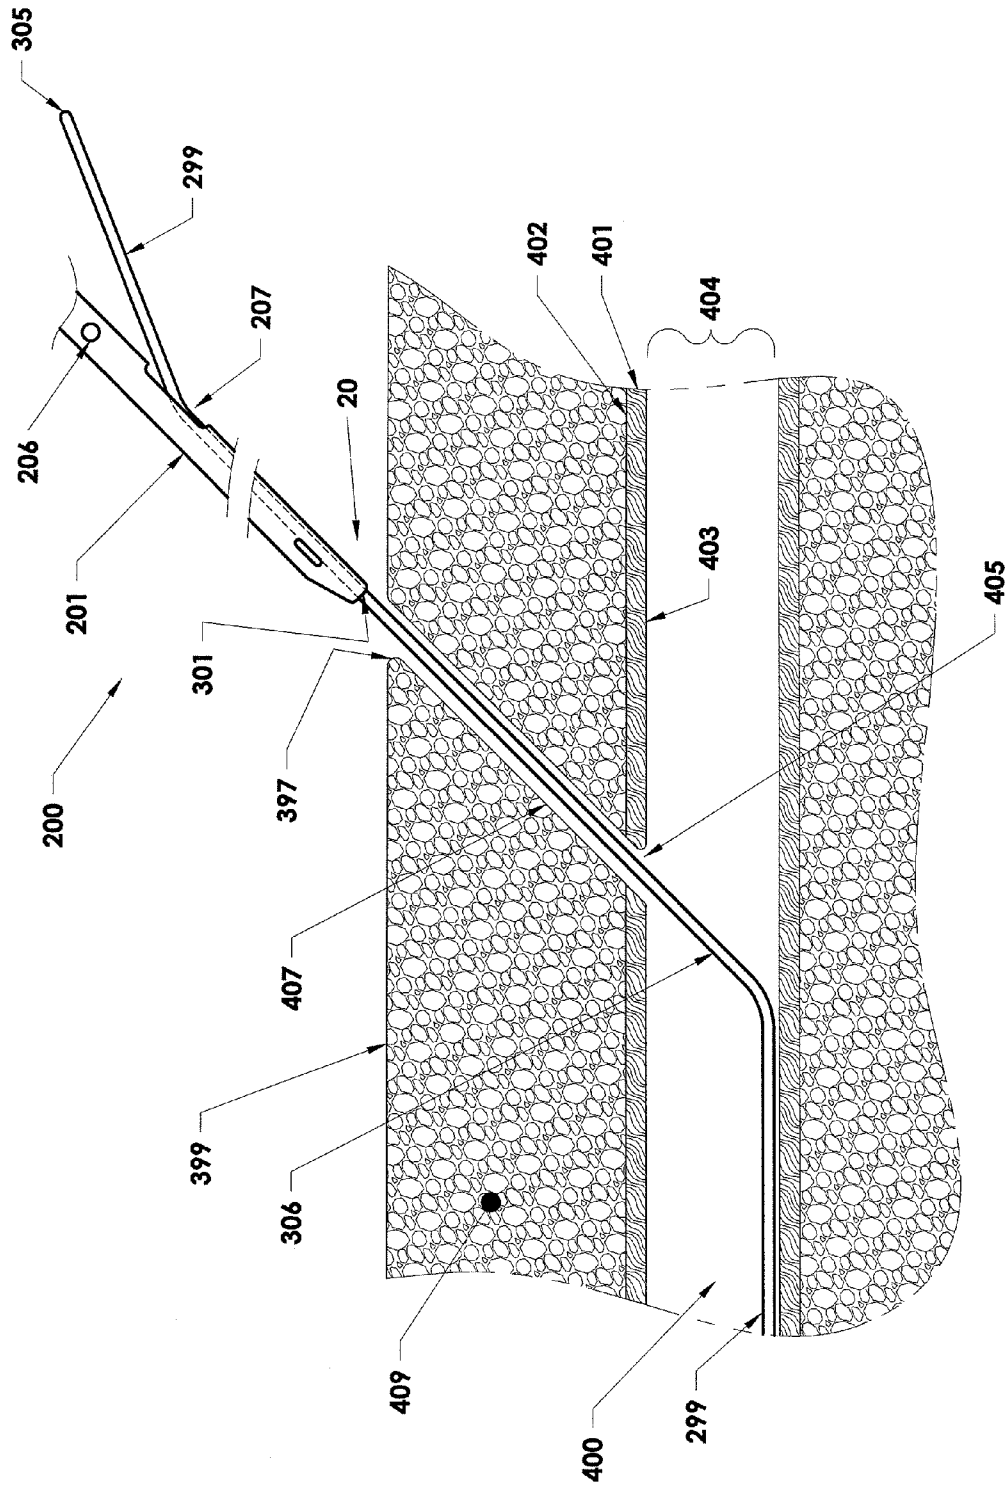


Fig. 31b

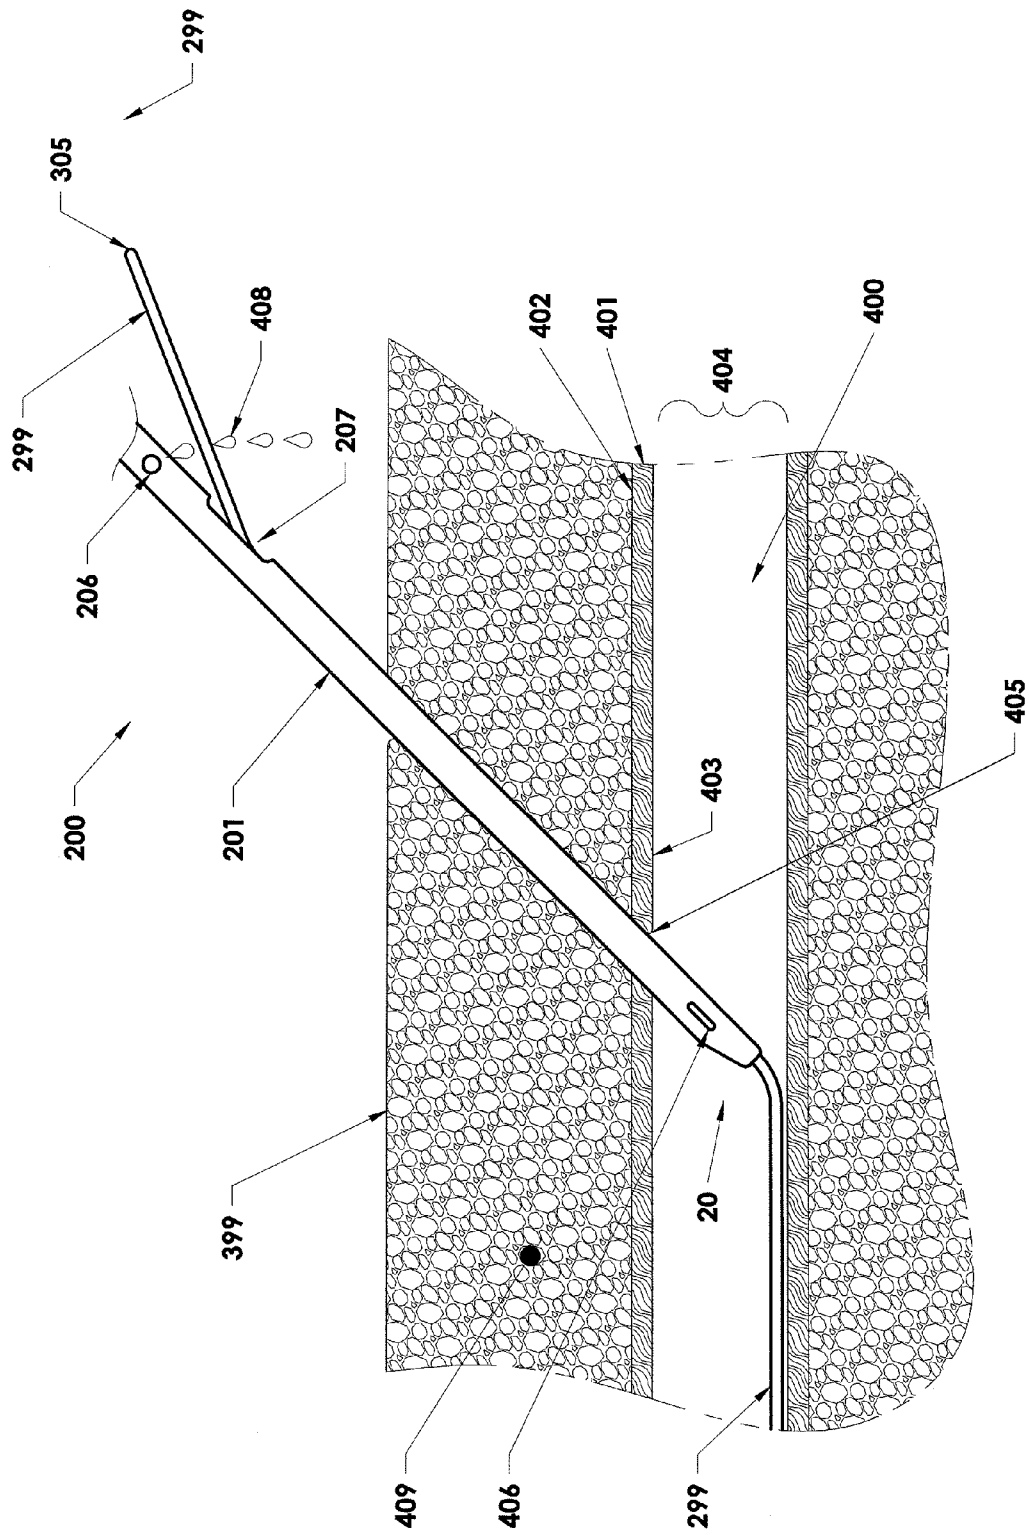


Fig. 32

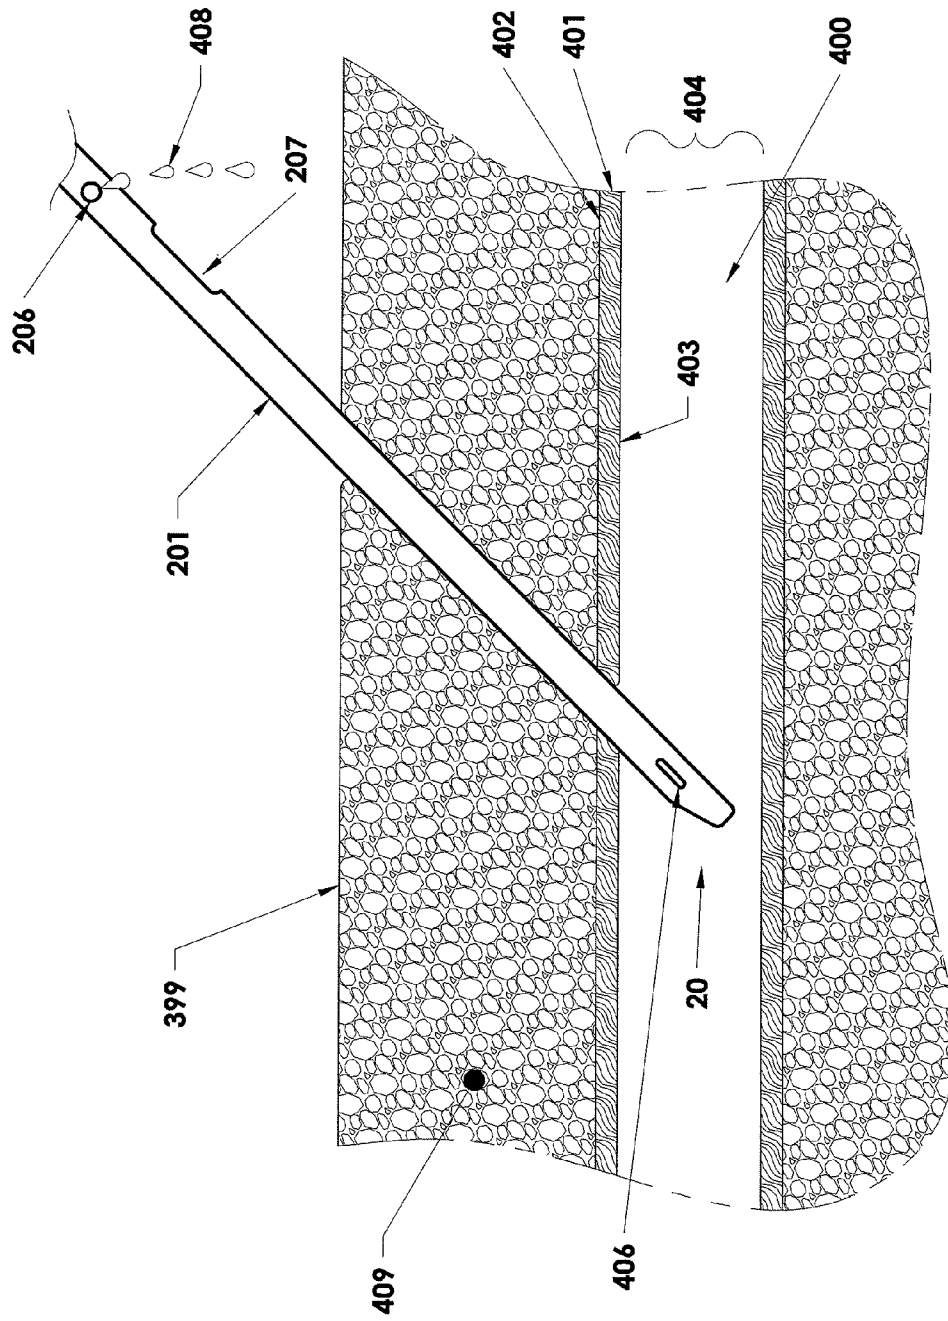


Fig. 33

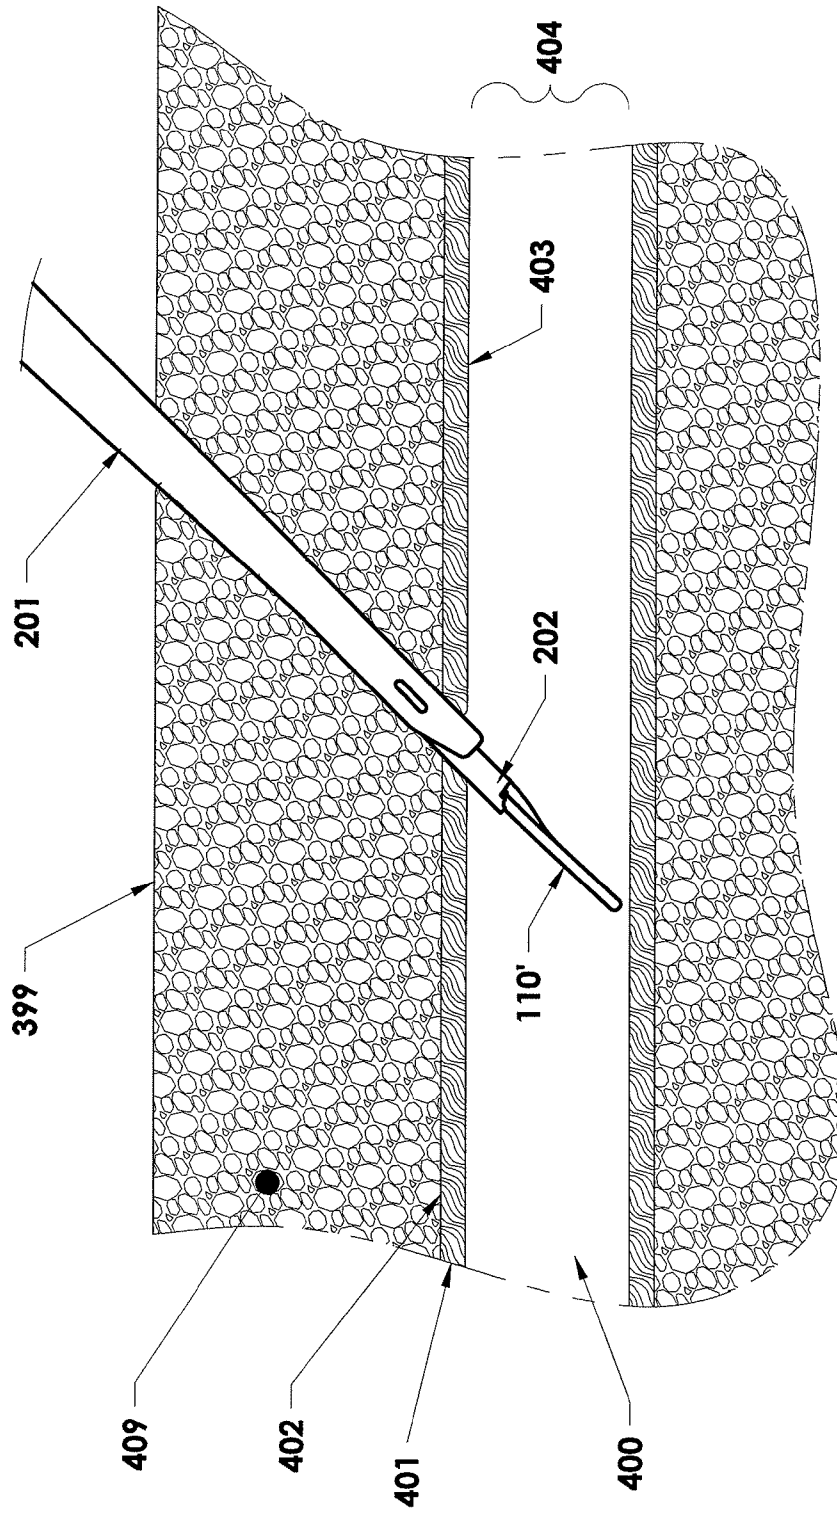


Fig. 34

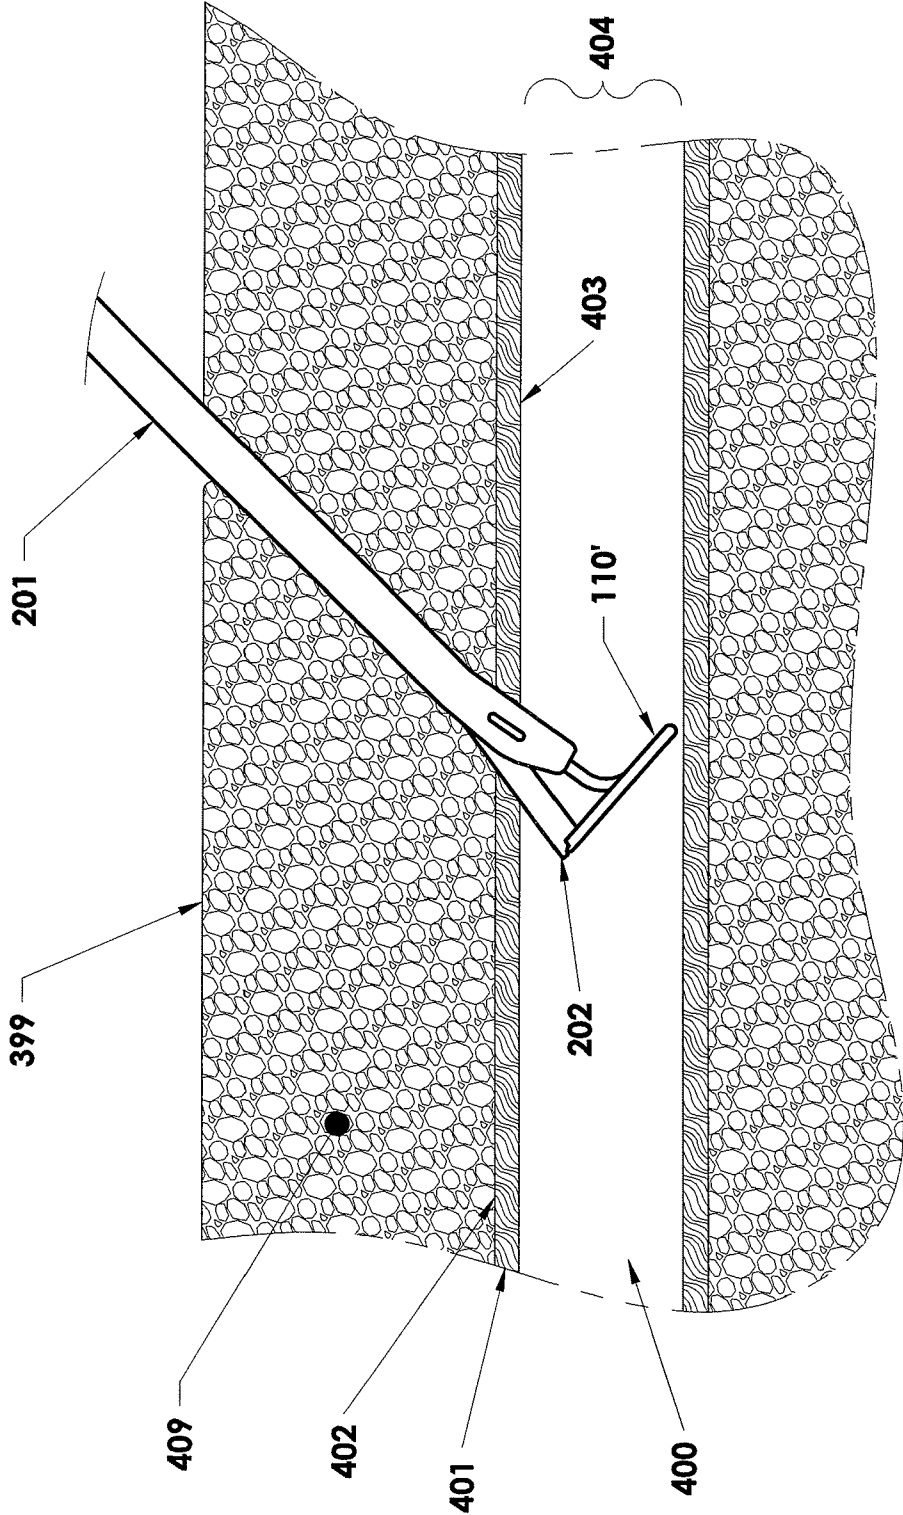


Fig. 35

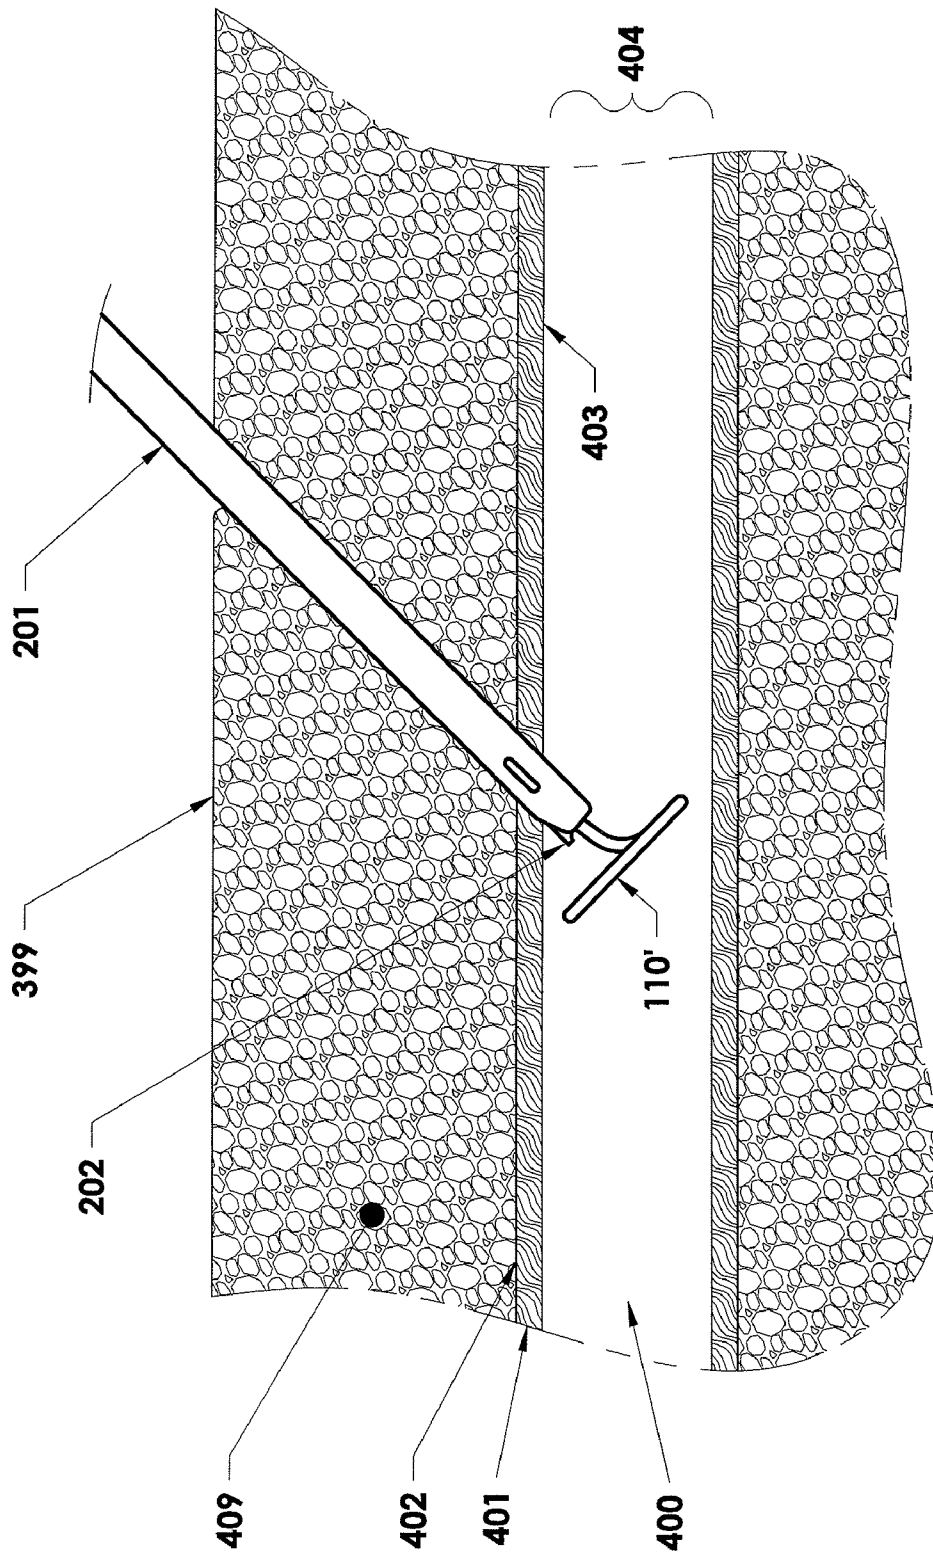


Fig. 36

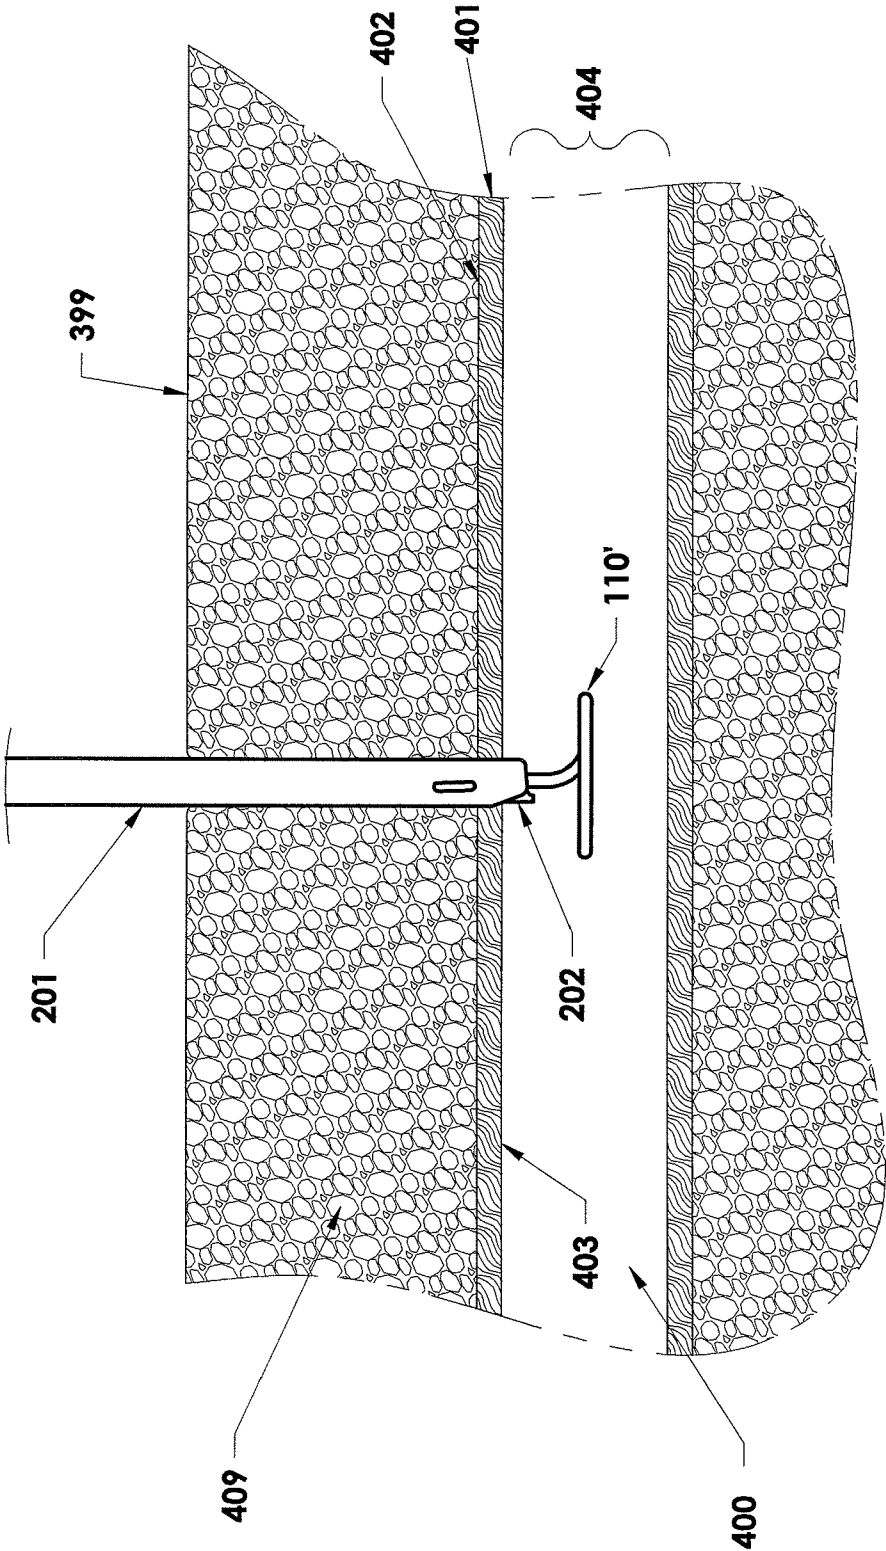


Fig. 37

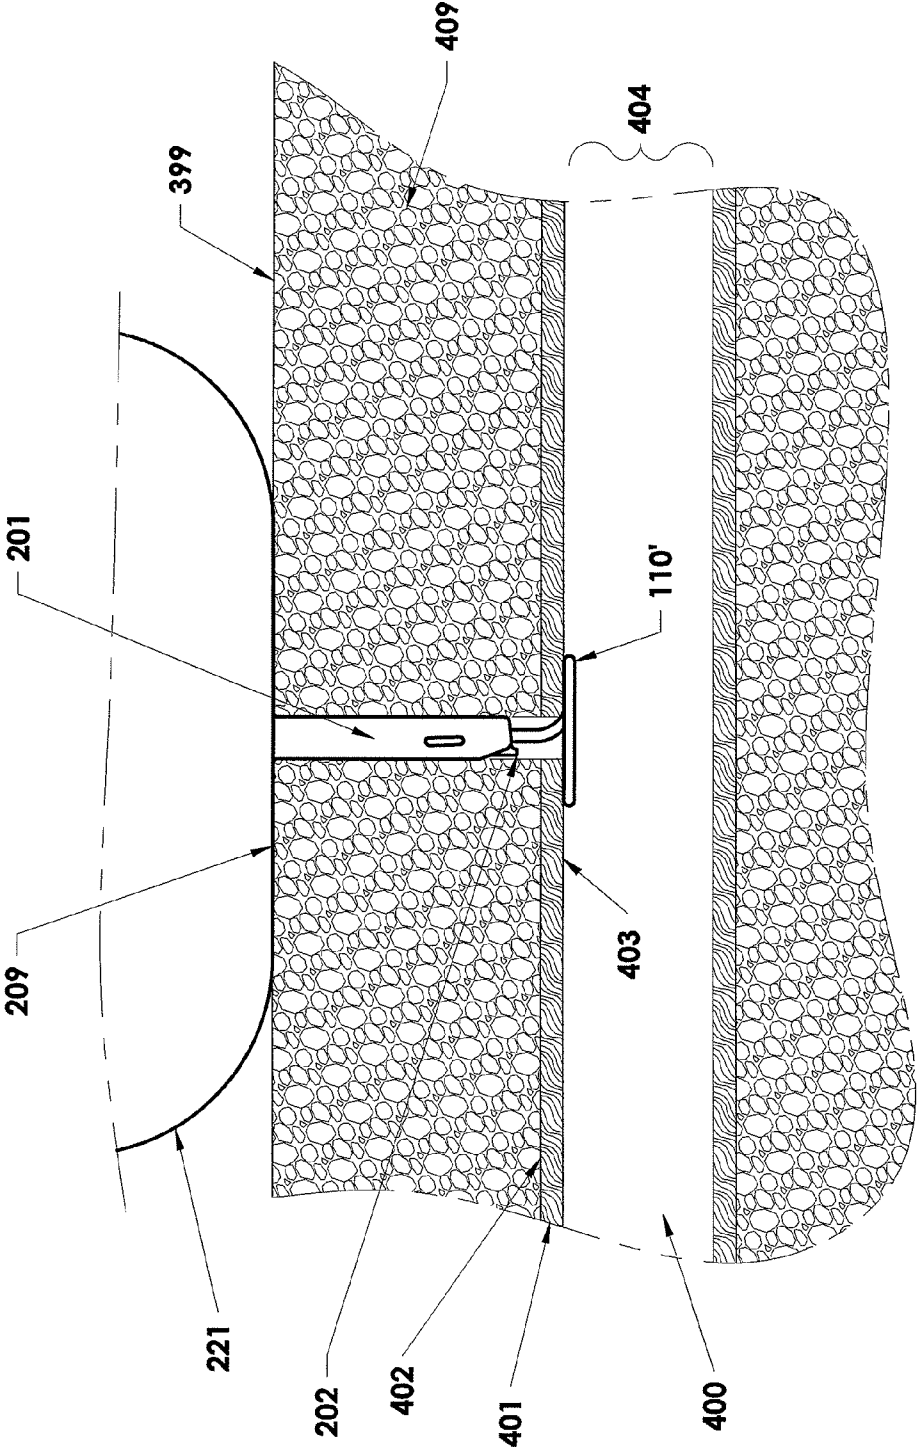


Fig. 38

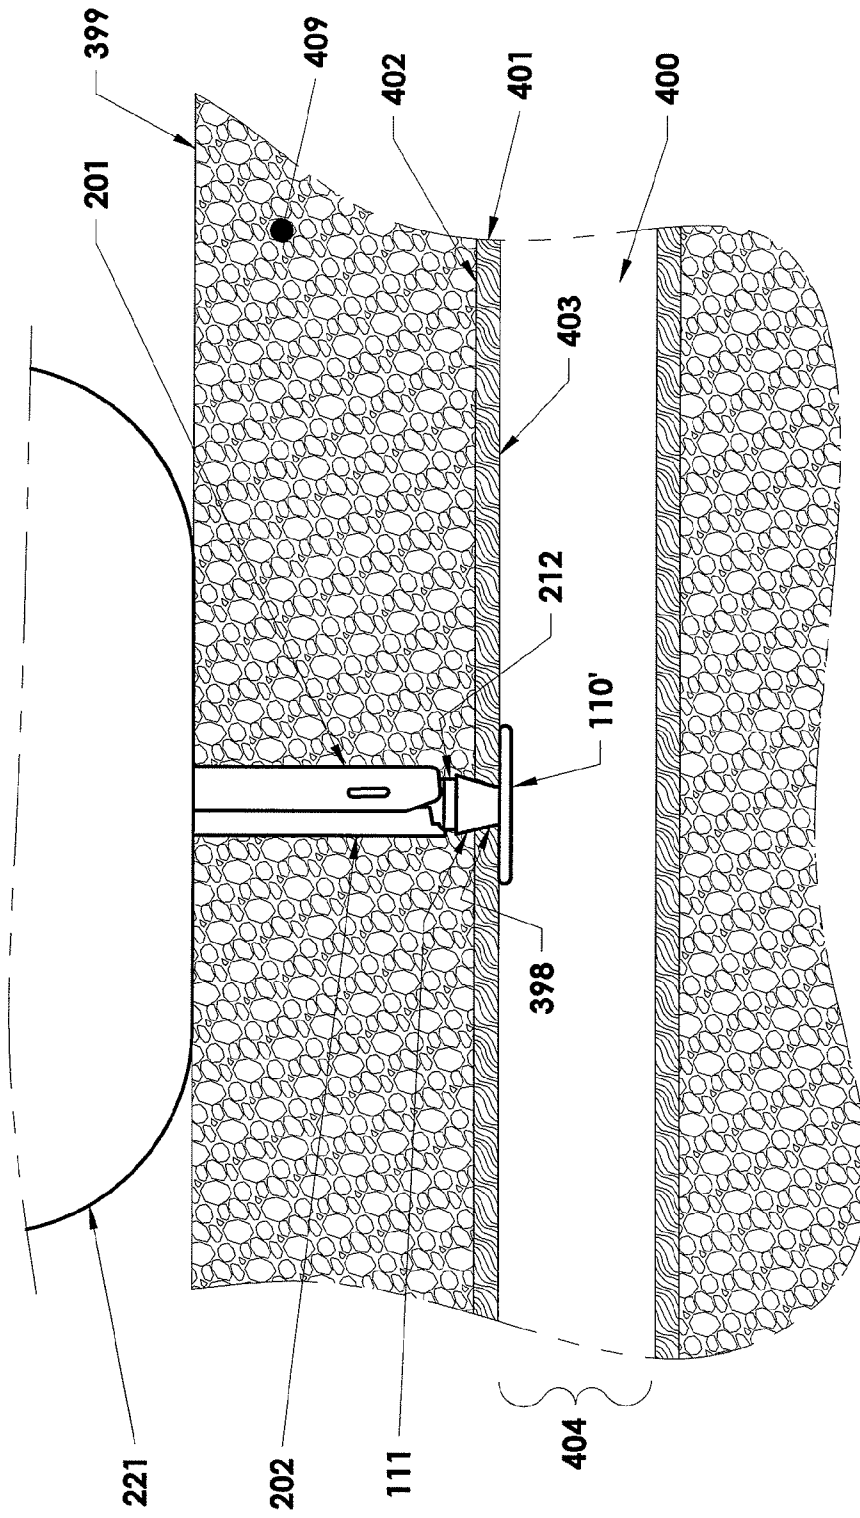


Fig. 39

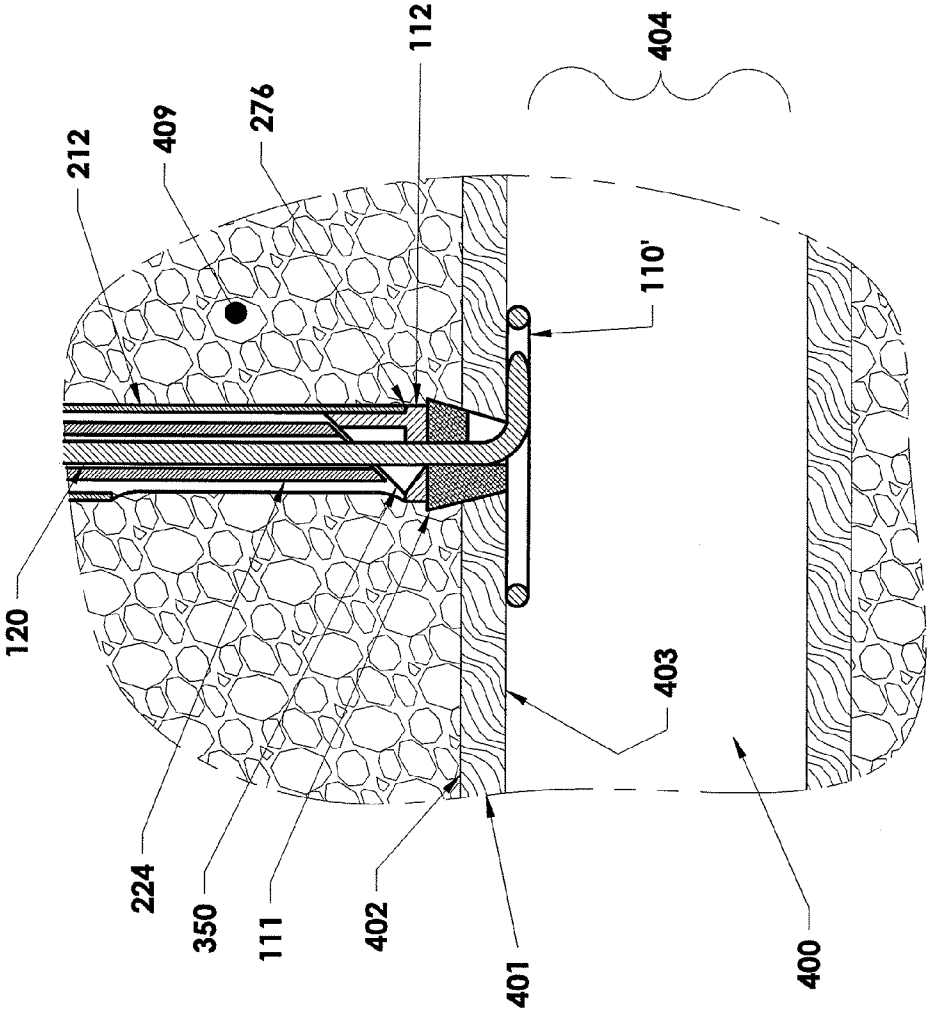


Fig. 40

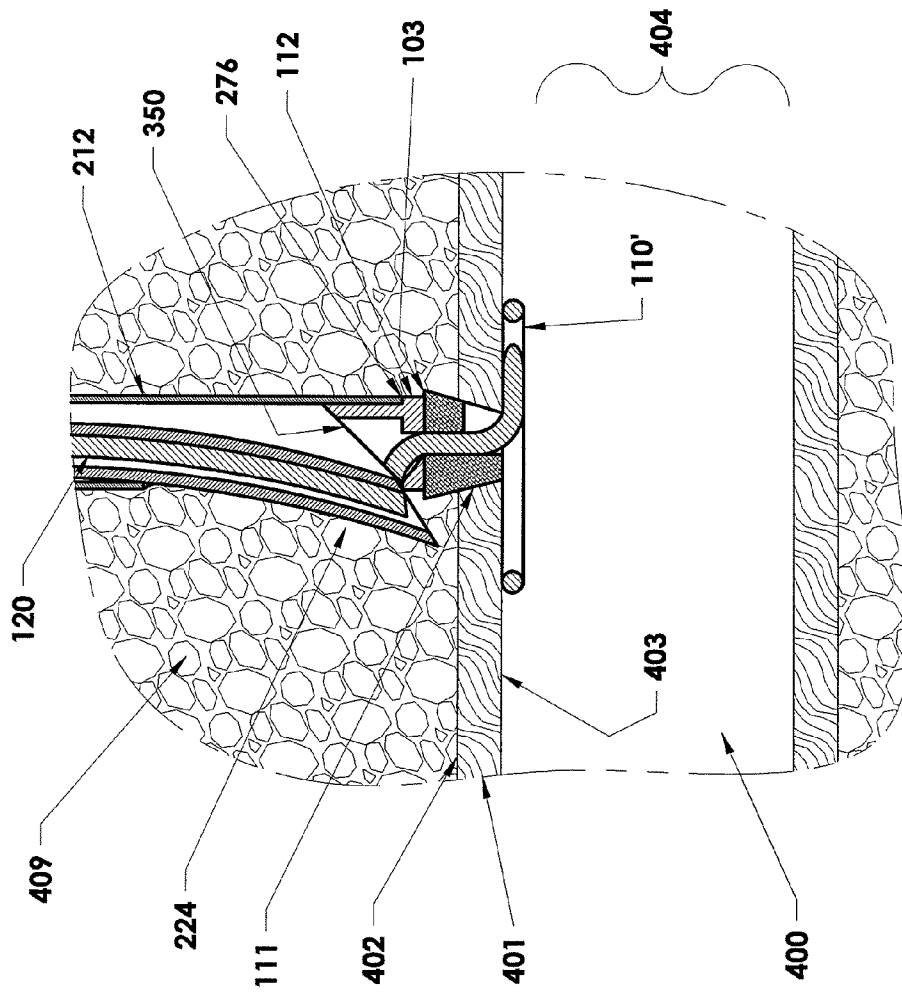


Fig. 41

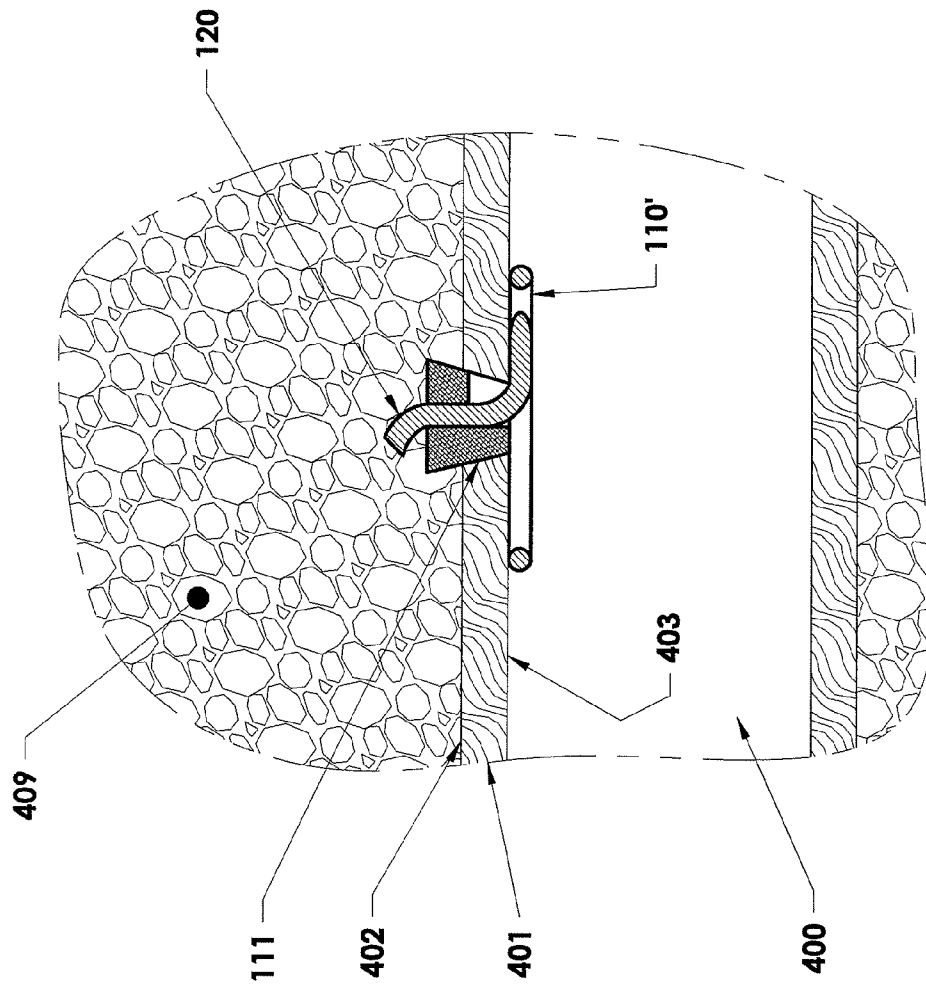


Fig. 42

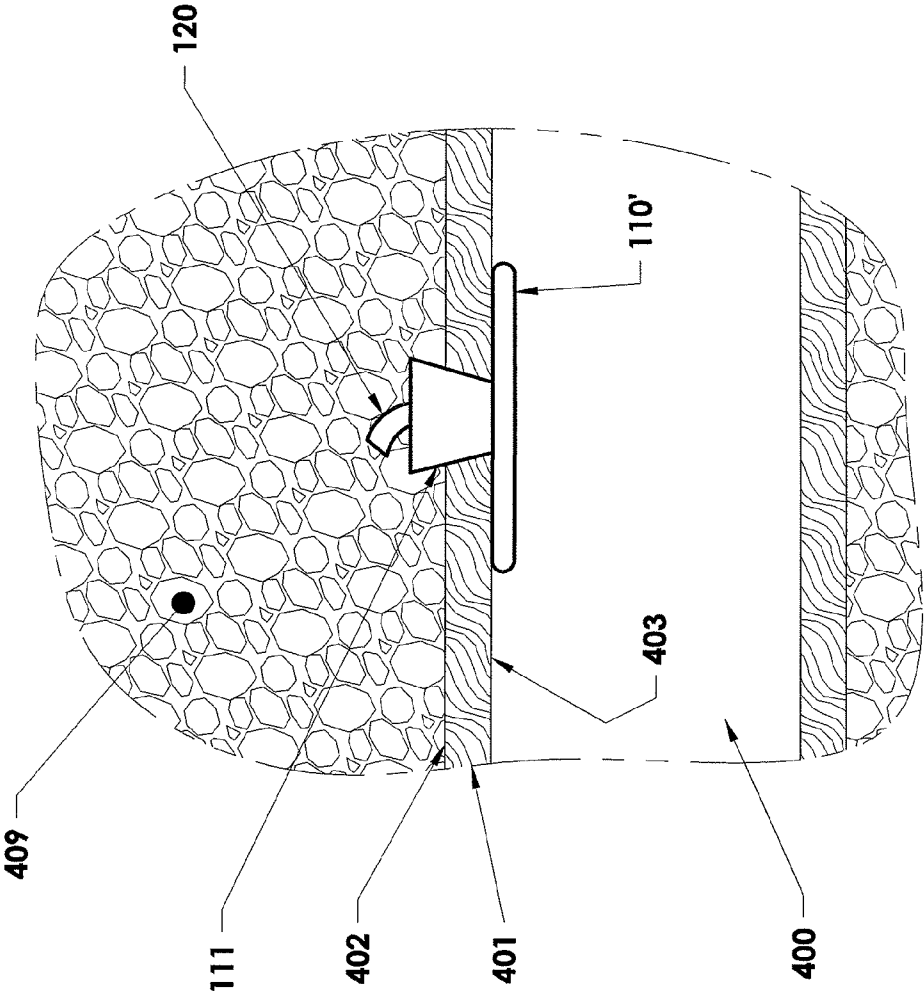


Fig. 43

**CLOSURE DEVICE, DEPLOYMENT
APPARATUS, AND METHOD OF DEPLOYING
A CLOSURE DEVICE**

RELATED APPLICATION DATA

The present application claims priority to: U.S. provisional patent application No. 60/971,618, filed on Sep. 12, 2007, the entire contents of which are incorporated herein by reference.

BACKGROUND OF THE INVENTION

1. Field of Invention

The present invention relates generally to medical devices and methods for sealing and closing passages formed through tissue. More specifically, the present invention relates to devices for sealing or closing an opening formed through biological tissue comprising a distal or outside margin or surface, and a proximal or inside margin or surface (i.e., a wall thickness), and to apparatuses and methods for delivering such devices, to control (or prevent or stop) bleeding (or the flow of other biological fluid or tissue). The openings comprise punctures, incisions, or other openings formed through biological tissue such as blood vessels or organs.

2. Description of Prior Art

Access to arterial and venous vascular systems is necessary for intravascular surgical procedures such as cardiac catheterizations and interventional procedures such as percutaneous transluminal coronary angioplasty or stenting. These intravascular surgical procedures generally are performed by inserting a hollow needle through a patient's skin (percutaneously) and any intervening tissue into the vascular system, e.g., an artery such as a femoral artery. A guide wire may then be passed through the needle lumen into the patient's blood vessel. Once the guide wire is in place the needle may be removed, leaving the guide wire in place. An introducer sheath may be advanced over the guide wire into the vessel, e.g., in conjunction with or subsequent to a dilator. A catheter or other device utilizing the percutaneous opening may then be advanced through a lumen of the introducer sheath and over the guide wire into the desired intravascular position.

Upon completing the intravascular procedure, the catheter, introducer sheath, guide wire and other medical device components may be removed, leaving an opening in the blood vessel wall (the so-called puncture site, or arteriotomy) and the proximal tissue tract through which blood can flow to the outside (bleeding). External pressure (manual compression) may be applied to the percutaneous puncture site until clotting and wound sealing occur. This procedure, however, may be expensive and time consuming, requiring as much as an hour of a physician's or nurse's time. It is also uncomfortable for the patient, and requires that the patient remain immobilized in the operating room, catheterization laboratory, or holding area. In addition, a risk of hematoma exists from bleeding before hemostasis occurs.

Once the bleeding has stopped, an elastic bandage (pressure bandage) or sandbag is often placed over the site of the puncture; this exerts pressure so as to prevent the blood clot from being washed away by the pressure in the blood vessel which can easily happen, especially in the case of an arterial puncture. This pressure bandage or sandbag must remain in place for some time, varying from clinic to clinic from 8 to 24 hours. During the period of time that the pressure bandage is in place, the patient must remain resting in bed. After removing the pressure bandage, the patient can become mobile again. This usually means, in practice, that following a per-

cutaneous arterial procedure, the patient must stay in the hospital for a prolonged period of time, often overnight.

This external pressure procedure (manual compression) is associated with quite a few complications which are inherent in the technique. Intense bleeding can occur in addition to pseudo-aneurysms (whereby a passage exists, via the puncture site, between the lumen of the blood vessel and a clot situated around the blood vessel (hematoma), arteriovenous fistulas (passages between the arterial and venous systems of blood vessels) and retroperitoneal hematomas can also arise. Neighboring nerves can also become compressed or traumatized from direct pressure or profuse bleeding, resulting in pain, sensation disturbances or even paralysis of the groups of muscles which are innervated by these nerves. These complications arise in approximately 1-3% of all procedures. Surgical intervention is sometimes necessary whereby the hematoma is relieved and the puncture site is sutured over (and, if required, any fistula is sealed).

Various apparatuses and devices have been suggested and are being used for percutaneously sealing a vascular puncture by occluding or approximating the margins (edges) of the puncture site (These apparatuses and devices should be known to those skilled in the art, all of which need not be specifically referenced herein). These apparatuses and devices relate to closure devices that must be manually deployed via a deployment instrument. See, e.g., U.S. Pat. No. 5,676,689, issued to Kensey et al. With respect to the prior art, the efficacy of vascular closure depends strongly on the user's ability to position the closure means accurately with respect to the puncture site while the procedure is performed blindly. The manual deployment means of such vascular closure devices (characterized by multiple user-performed steps and device manipulations) necessitates the user to develop a highly subjective "feel" or "tactile technique" to reliably position the closure device correctly.

This requirement of tactile manipulation coupled with the many user-induced procedural steps, difficulty of use, long learning curves, and low precision (of the prior art devices) has led to a slow adoption rate for vascular closure devices among cardiac catheterization laboratories. As a result, the benefits to the patient (comfort and improved medical outcome) and to the institution (enhanced throughput and decreased costs) are compromised.

SUMMARY OF THE INVENTION

It is therefore a principal object and an advantage of the present invention to provide deployment devices or instruments (that are used to deploy closure implants) that offer improved ease-of-use as compared with the current devices (as discussed supra), i.e., that: (1) minimize tactile manipulation, (2) minimize user-induced procedural steps, (3) minimize user training time to learn how to effectively use the deployment devices or instruments, (4) increase closure precision, and (5) increase the typical user's desire to use such deployment devices or instruments. More specifically, it is a principal object and an advantage of the present invention to provide deployment devices or instruments with automated functionality.

It is another object and advantage of the present invention to provide a closure device that provides a better, more effective seal on a repeatable basis, as compared with the first generation closure devices described supra.

It is a further object and advantage of the present invention to provide a closure device that dissolves (biodegrades) in vivo, allowing for future arterial access, i.e. 're-sticks'.

It is another object and advantage of the present invention to provide a closure device that is operable to lock in place, to stabilize the closure implant (the device) across the vessel wall, i.e., where the implant construct compresses the vessel wall and then is held in place (locked) such that it is immovable. One of the risks of bleeding in existing devices is that they don't provide a closure construct which is resistant to dislodgement due to physiologic motion (hip flexion, etc.). Hence, a locked (or stable) device in accordance with an embodiment of the present invention would allow for a more secure early ambulation of the patient.

In accordance with the foregoing objects and advantages, an embodiment of the present invention provides medical devices and methods for sealing and closing passages formed through tissue that overcome the problems of the prior art. More specifically, devices for sealing or closing an opening formed through biological tissue comprising a distal or outside margin or surface, and a proximal or inside margin or surface (i.e., a wall thickness), and apparatuses and methods for delivering such devices, to control (or prevent or stop) bleeding (or the flow of other biological fluid or tissue), are provided. The openings comprise punctures, incisions, or other openings formed through biological tissue such as blood vessels or organs.

In accordance with an embodiment of the present invention, a closure device is provided for sealing openings formed through biological tissue of various sizes (e.g., openings formed as a result of small percutaneous puncture procedures such as diagnostic catheterization or coronary angioplasty or stenting, and openings formed as a result of large percutaneous puncture procedures such as mitral valve repair techniques).

In accordance with an embodiment of the present invention, a closure device for sealing an opening formed through biological tissue is provided which comprises a footplate, a plug, and a wire in a pre-deployed closure device deployment configuration and position.

In accordance with an embodiment of the present invention, a closure device for sealing an opening formed through biological tissue is provided which comprises a footplate, a plug, and a wire in a post-deployed closure device deployment configuration and position.

In accordance with an embodiment of the present invention, the footplate comprises a monolithic structure, i.e., fabricated as a single structure (wire form) comprising a distal portion of the wire. The distal portion of the wire that comprises the footplate comprises a looped or elliptically shaped distal portion of the wire. The monolithic embodiment of the footplate is operable to plastically deform.

In accordance with an embodiment of the present invention, the footplate comprises a structure which is separate from and permanently fixed to the wire. The footplate portion comprises a stamped or machined plate portion. In this embodiment, a portion, preferably a distal portion, of the wire can be welded to the footplate. This welded embodiment of the footplate is operable to plastically deform. Alternatively, a portion, preferably a distal portion, of the wire is attached to the footplate either by a ball-and-socket mechanism/configuration, or hingedly attached to the footplate by a hinge mechanism.

In accordance with an embodiment of the present invention, the footplate is separate from and may be hingedly attached to the wire, such as the ball-and-socket mechanism mentioned supra.

In accordance with an embodiment of the present invention, the wire is attached to the footplate by a ball-and-socket configuration whereby the ball is integral to, and coaxial with,

the wire, and whereby the diameter of the ball (sphere) is greater than the diameter of the wire. Further, whereby the ball is co-located with the distal end of the wire. The ball may be formed on the distal end of the wire by a method such as melting (making the wire material molten to flow into a ball, or spherical shape and then allowing the ball to cool and solidify) where the heating source may be, e.g., a laser or an induction-type heating means, or other heating source. Alternatively, the ball-shaped end may be a separate spherically-shaped part (such as a solid sphere with a through-hole) which is attachable to the distal end of the wire by such means as, e.g., crimping, rotary swaging, laser welding, or other acceptable means.

In accordance with an embodiment of the present invention, the footplate and the wire (including a separate spherically-shaped part as the ball-end) comprise a biocompatible and biocorrosible metal.

In accordance with an embodiment of the present invention, the footplate and the wire (including a separate spherically-shaped ball-end) comprise a biocompatible and biocorrosible metal comprising magnesium.

In accordance with an embodiment of the present invention, the footplate and the wire (including a separate spherically-shaped ball-end) comprise a biocompatible and biocorrosible metal comprising a magnesium alloy (e.g., Mg 9980A, Mg 9990A, Mg 9995A, AM100A, AZ63A, AZ91A, AZ91B, AZ91C, AZ92A, AZ81A, EK30A, EK41A, EZ33A, HK31A, HZ32A, KIA, ZE41A, ZH62A, ZK51A, ZK61A, AZ31B, AZ31C, AZ61A, AZ80A, HM31A, MIA, ZK21A, ZK60A, (P)ZK60B, HM21A, ZE10A, TA54A, WE54, WE43, ZW3, AZM, AZ80, AZ31, ZM21, ZK60, and the like).

In accordance with an embodiment of the present invention, the footplate and the wire (including a separate spherically-shaped ball-end) comprise a biocompatible and biocorrosible metal comprising a magnesium alloy comprising magnesium and a rare earth metal.

In accordance with an embodiment of the present invention, the footplate and the wire (including a separate spherically-shaped ball-end) comprise a biocompatible and biocorrosible metal comprising a magnesium alloy comprising magnesium and at least one rare earth metal, wherein the rare earth metal is selected from the group consisting of scandium, lanthanum, cerium, praseodymium, neodymium, promethium, samarium, europium, gadolinium, terbium, dysprosium, holmium, erbium, thulium, ytterbium and lutetium, among others.

In accordance with an embodiment of the present invention, the footplate comprises a bioabsorbable polymer and the wire (including a separate spherically-shaped ball-end) comprises a biocompatible and biocorrosible metal, including the biocompatible and biocorrosible metals discussed supra.

In accordance with an embodiment of the present invention, the footplate comprises a bioabsorbable polymer (e.g., Poly-L-Lactic Acid (PLLA), Poly-Lactic-Co-Glycolic Acid (PLGA), and Poly-Glycolic Acid (PGA), and the like), and the wire may comprise a biocompatible and biocorrosible metal as disclosed supra.

In accordance with an embodiment of the present invention, the footplate may comprise a biocompatible and biocorrosible metal and the wire may comprise a bioabsorbable polymer, including the biocompatible and biocorrosible metals and bioabsorbable polymers as disclosed supra.

Embodiments of the footplate can be fabricated by using a number of manufacturing techniques. These include, but are not limited to, molding, extruding, machining, stamping, casting, forging, laser cutting and/or processing, laminating,

5

adhesively fixing, welding, combinations thereof, among others, with effectiveness, as needed or desired.

In accordance with an embodiment of the present invention, the wire comprises a tensile element.

In accordance with an embodiment of the present invention, the wire comprises a tensile element, wherein the tensile element comprises a multifilament.

In accordance with an embodiment of the present invention, the wire comprises a tensile element, wherein the tensile element comprises a multifilament braided section.

In accordance with an embodiment of the present invention, the wire comprises a tensile element, wherein the tensile element comprises a monofilament.

In accordance with an embodiment of the present invention, the footplate and the wire may both comprise a bioabsorbable polymer, including the bioabsorbable polymers as disclosed supra.

In accordance with an embodiment of the present invention, the plug comprises a bioabsorbable polymer, including the bioabsorbable polymers as disclosed supra.

In accordance with an embodiment of the present invention, the plug comprises a biocompatible and biocorrosible metal, including the biocompatible and biocorrosible metals as disclosed supra.

In accordance with an embodiment of the present invention, the plug is conically-shaped and comprises a distal portion and a proximal portion, wherein a diameter of the plug's distal portion is smaller than a diameter of the plug's proximal portion.

Embodiments of the plug can be fabricated by using a number of manufacturing techniques. These include, but are not limited to, molding, extruding, machining, deep drawing, casting, forging, laser cutting and/or processing, laminating, adhesively fixing, welding, combinations thereof, among others, with effectiveness, as needed or desired.

In accordance with an embodiment of the present invention, the closure device is biodegradable.

In accordance with an embodiment of the present invention, the footplate is formulated to biodegrade in vivo at a rate greater than the plug such that the footplate completely degrades prior to the complete degradation of the plug.

In accordance with an embodiment of the present invention, a deployment device or instrument that is easy to use, that minimizes the need for tactile manipulation, provides for a minimal number of user-induced procedural steps, requires a minimal amount of user training time ("short learning curve") to learn how to effectively use the deployment device or instrument, and which has high precision, all of which leads to an increase in the typical user's desire to use such a deployment device or instrument, is provided. More specifically, in accordance with an embodiment of the present invention, a deployment device or instrument with automated functionality for deploying closure devices of an embodiment of the present invention is provided.

In accordance with an embodiment of the present invention, a deployment device or instrument that utilizes a housing, at least one first bias or elastic member (e.g., coil spring, leaf spring, constant force spring, or other member or mechanism capable of storing and releasing kinetic energy), a first moveable/slidable element, and a first release mechanism (e.g., pin release, hook-and-shoulder release, cam-action release, toggle release, or other mechanism capable of releasing a component or components under a spring load), is provided.

In accordance with an embodiment of the present invention, a deployment device or instrument that utilizes a hous-

6

ing, at least one second bias or elastic member (e.g., coil spring, leaf spring, constant force spring, or other member or mechanism capable of storing and releasing kinetic energy), a second moveable/slidable element, and a second release mechanism (e.g., pin release, hook-and-shoulder release, toggle release, or other mechanism capable of releasing a component or components under a spring load), is provided.

In accordance with an embodiment of the present invention, a deployment device or instrument manufactured primarily of thermoplastic parts is provided, which is disposable immediately after the vascular closure device of an embodiment of the present invention has been deployed. The deployment device of an embodiment of the present invention manufactured primarily of thermoplastic parts can offer a cost effective means (via inexpensive materials) to close an opening formed in biological tissue.

In accordance with an embodiment of the present invention, a system for sealing an opening formed through biological tissue (such as a percutaneously formed puncture comprising an opening formed in a wall of a blood vessel) comprising a closure device for sealing the opening and a deployment device for deploying the closure device into the opening to seal the opening, to control (or prevent or stop) bleeding (or the flow of other biological fluid or tissue), is provided. The percutaneously formed puncture further comprises a tissue tract contiguous with the opening formed in the wall of the blood vessel, which extends through the tissue to the surface of the skin overlying the blood vessel. The closure device comprises a plug, a wire, and a footplate, as described supra. The deployment device comprises: distal C-tubes comprising an outer distal C-tube and an inner distal C-tube housed within the outer distal C-tube, a skin flange assembly (a portion of which is coaxial with the longitudinal axis of the wire), a housing shell, a control housing, proximal tubes comprising an outer proximal tube and an inner proximal tube, a push tube, a slide barrel assembly comprising a slide barrel and a cut-off lever, a bias member comprising a plurality of lateral constant force springs, a second bias member comprising an upper constant force spring and a lower constant force spring, a wire ferrule comprising an elongated U-shaped structure wherein the U-shaped structure comprises a closed proximal end and an open distal end, and a squeeze lever handle assembly comprising a squeeze lever handle, a button held within a retainer portion of the squeeze lever handle, wherein the button is slidable within the retainer portion, and a link.

In accordance with an embodiment of the present invention, in a pre-deployed closure device deployment configuration and position, the footplate resides within the distal end of the outer distal C-tube. The proximal end of the footplate abuts the distal end of the inner distal C-tube. The plug is proximal to the footplate, and resides along the longitudinal axis of the wire within the distal portion of the outer proximal tube and is distally adjacent to the push tube. The wire extends proximally from the proximal end of the footplate through the inner distal C-tube, through an axial hole in the plug, and through the push tube, and attaches to an inner portion of the proximal closed end of the wire ferrule.

In accordance with an embodiment of the present invention, the distal C-tubes are concentrically nested together forming a main conduit area therethrough. The main conduit area is operable to serve as a blood marking passageway. The outer distal C-tube and an inner distal C-tube each comprise a side hole which are concentrically lined up with one another and are operable to serve as an atmospheric exit for proximal blood flow from the blood vessel through the blood marking passageway. The outer distal C-tube includes an inlet hole

towards the outer distal C-tube's distal end. This inlet hole serves as an entrance to the blood marking passageway and is preferably located towards the proximal end of the footplate's pre-deployed closure device deployment position. This allows for an indication that the entire footplate is within the blood vessel. The proximal blood flow through the blood marking passageway is due to a lower pressure at the atmospheric exit than at the inlet hole.

In accordance with an embodiment of the present invention, the main conduit area is operable to serve as a deployment area for deploying the plug. The distal C-tubes are operable to locally expand and disassociate creating an irreversible un-nested condition to allow passage of the plug into the post-vascular deployment configuration and position, wherein the plug comprises a proximal diameter which is larger than an inner diameter of the main conduit area.

In accordance with an embodiment of the present invention, the distal C-tubes are operable to independently slide coaxially with the longitudinal axis of the wire.

In accordance with an embodiment of the present invention, the deployment device further comprises a guide wire lumen comprising a proximal guide wire exit and a distal guide wire entrance for insertion of a guide wire. Upon insertion of the guide wire, the guide wire extends percutaneously in a proximal direction from the lumen of a blood vessel through the percutaneously formed puncture and to the distal guide wire entrance. From the distal guide wire entrance, the guide wire extends proximally through the guide wire lumen to the proximal guide wire exit wherein the guide wire proximally exits from the guide wire lumen.

In accordance with an embodiment of the present invention, the skin flange assembly comprises a distal end and a proximal end, and is operable to distally slide along the longitudinal axis of the control housing. The proximal portion slides along the outside portion of the control housing and the distal portion slides along the outside portion of the distal C-tubes.

In accordance with an embodiment of the present invention, the control housing is partially housed by the skin flange assembly.

In accordance with an embodiment of the present invention, the proximal tubes are housed within the control housing and are operable to independently slide along the longitudinal axis of the wire.

In accordance with an embodiment of the present invention, the slide barrel is generally distal to the position where the proximal portion of the wire attaches to the wire ferrule within the control housing. The slide barrel assembly is operable to distally slide along the longitudinal axis of the wire.

In accordance with an embodiment of the present invention, the push tube is operable to push the plug into a post-deployed closure device deployment configuration and position. The push tube resides within the proximal tubes. A distal end of the push tube is adjacent to the plug. (Alternatively, the distal end of the push tube can be adjacent to an insert, which is adjacent to the plug). A proximal end of the push tube partially stretches through the slide barrel assembly, is distal to a proximal portion of a slide barrel assembly, and is underneath a cut-off lever. The proximal end of the push tube can be nested within an alignment key. The push tube is operable to distally slide along the longitudinal axis of the wire, and is operable to push the plug through the main conduit area.

In accordance with an embodiment of the present invention, the cut-off lever comprises a proximal portion that is hingedly attached by a hinge pin mechanism to the slide barrel. The cut-off lever is operable to move (hingedly mov-

able) about the hinge pin mechanism in a perpendicular direction such that its distal end rotates up and away from the longitudinal axis of the wire.

In accordance with an embodiment of the present invention, the lateral constant force springs reside partially within the skin flange assembly and comprise a left lateral constant force spring and a right lateral constant force spring. The left lateral constant force spring and the right lateral constant force spring each comprises a flat portion and a roll spring portion. The roll spring portions of the lateral constant force springs reside at a lateral outside distal portion of the control housing (within the distal end of the skin flange assembly). A proximal end of the flat portion of the left lateral constant force spring resides within the left inside proximal portion of the skin flange assembly and is attached to the inside proximal portion of the skin flange assembly by an acceptable attachment means (e.g., screw), and extends distally along a left outside portion of the control housing to the roll spring portion of the left lateral constant force spring. A proximal end of the flat portion of the right lateral constant force spring resides within the right inside proximal portion of the skin flange assembly and is attached to the inside proximal portion of the skin flange assembly by an acceptable attachment means (e.g., screw), and extends distally along a right outside portion of the control housing to the roll spring portion of the right lateral constant force spring.

In accordance with an embodiment of the present invention, the lateral constant force springs are operable to move the skin flange portion in a distal direction by a constant distal force.

In accordance with an embodiment of the present invention, the lateral constant force springs are operable to apply a constant distal force to an outside surface of the skin, just proximal to the percutaneous puncture.

In accordance with an embodiment of the present invention, the lateral constant force springs are operable to apply a constant tensile proximal force to the wire wherein the constant tensile proximal force seats the footplate against an inside wall of the blood vessel. A datum is created at a point where the footplate is seated.

In accordance with an embodiment of the present invention, the deployment device further comprises a rotary damping system partially residing within the skin flange assembly and along an outside portion of the control housing. The rotary damping system is operable to partially resist, and not fully negate, the constant distal force created by the lateral constant force springs on the skin flange assembly.

In accordance with an embodiment of the present invention, the upper and lower constant force springs partially reside within the skin flange assembly, wherein the upper constant force spring and lower constant force spring each comprises a flat portion and a roll spring portion. A proximal end of the lower flat spring portion of the lower constant force spring is attached (by an acceptable fastening means, e.g., a screw) to a lower portion of the slide barrel, and distally extends along a lower outside portion of the control housing to the lower roll spring portion. The lower roll spring portion resides at a lower distal outside portion of the control housing (within the distal portion of the skin flange assembly). A proximal end of the upper flat spring portion of the upper constant force spring is attached (by an acceptable fastening means, e.g., a screw) to an upper portion of the slide barrel, and distally extends along an upper outside portion of the control housing to the upper roll spring portion. The upper roll spring portion resides at an upper distal outside portion of the control housing (within the distal portion of the skin flange assembly).

In accordance with an embodiment of the present invention, the upper constant force spring and the lower constant force spring are operable to move the slide barrel assembly in a distal direction by a constant distal force. The slide barrel assembly is operable to push the push tube in a distal direction by the constant distal force applied by the upper and lower constant force springs to the slide barrel. The plug is pushed percutaneously into the percutaneous puncture and into a post-deployed closure device deployment configuration and position (e.g., within the opening formed in the wall of the blood vessel), wherein the post-vascular closure device deployment position is controlled by the creation of the datum with the wire and the footplate in order to seal the opening formed in the wall of the blood vessel. Thus, this opening through biological tissue (e.g., formed in the wall of the blood vessel) comprising a distal or outside margin or surface, and a proximal or inside margin or surface (i.e., a wall thickness), provides a "platform" for which the closure device of an embodiment of the present invention is useful.

In accordance with an embodiment of the present invention, the wire ferrule resides within the proximal tubes and is operable to longitudinally slide along the longitudinal axis of the control housing.

In accordance with an embodiment of the present invention, the squeeze lever handle of the squeeze lever handle assembly is removably attached to the proximal end of the skin flange assembly by lateral upper hook-shaped ends. The lateral upper hook-shaped ends comprise a left upper hook-shaped end and a right upper hook-shaped end. The link of the squeeze lever handle assembly comprises an upper hook-shaped portion and a lower portion. The upper hook-shaped portion of the link is removably attachable to a lower hinge pin mechanism of the slide barrel and the lower portion of the link is attached to the squeeze lever handle by a hinge pin mechanism.

The deployment device can be formed from a number of suitably durable materials. In one embodiment, the deployment device is formed from a combination of suitable plastic (such as thermoplastic), and metal. In modified embodiments, other suitable plastics, metals, alloys, ceramics, or combinations thereof, among others, may be effectively utilized, as needed or desired. Suitable surface coatings or finishes may be applied, as required or desired.

Embodiments of the deployment device can be fabricated by using a number of manufacturing techniques. These include, but are not limited to; molding, extruding, machining, stamping, casting, forging, laser cutting and/or processing, laminating, adhesively fixing, welding, combinations thereof, among others, with effectiveness, as needed or desired.

In accordance with an embodiment of the present invention, a method of actuating a deployment device for purposes of automatically deploying a closure device is provided. The method employs a user-induced first squeezing action which creates automatic actuation of a first release mechanism (e.g., a hook-and-shoulder release) and simultaneously, at least one first elastic member is allowed to impart kinetic energy on a first moveable/slidable element.

In accordance with an embodiment of the present invention, a method of actuating a deployment device for purposes of automatically deploying a closure device is provided. The method employs a second user-induced squeezing action which creates automatic actuation of a second release mechanism (e.g., a hook-and-shoulder release) and simultaneously, at least one second elastic member is allowed to impart kinetic energy on a second movable/slidable element.

In accordance with an embodiment of the present invention, a method of deploying a closure device of an embodiment of the present invention to control (or prevent or stop) bleeding (or the flow of other biological fluid or tissue) by sealing or closing openings formed through biological tissue such as percutaneously formed punctures, incisions, or other openings, such as in blood vessels (e.g., an artery such as the femoral artery), organs, and the like, is provided. For example, this method can be performed at the conclusion of a diagnostic or therapeutic intravascular surgical procedure.

In accordance with an embodiment of the present invention, a closure device for sealing an opening formed through biological tissue comprising a plug, a rigid wire comprising a plastically deformable portion configurable between an unrestrained position and a restrained position relative to the plug, and a footplate attached to the wire is provided.

At least one of the plug, wire, and footplate can be at least partially formed of a biocorrosible metal. The biocorrosible metal can comprise magnesium or a magnesium alloy. The magnesium alloy can comprise AZ31.

The plug of the closure device can comprise a first portion having a first dimension and a second portion having a second dimension that is greater than the first dimension. The footplate can be positioned distally to the first portion of the plug and the deformable portion can be positioned proximally to the second portion of the plug.

The plug can comprise a distal surface and a proximal surface, wherein an area of the plug's distal surface is smaller than an area of the plug's proximal surface. The wire of the closure device can be in the restrained position, and contain a plastically deformed bend that is positioned in secure engagement with the proximal surface of the plug. The wire can comprise a longitudinal axis, and the plastically deformed bend can be bent at about a 30 to 90 degree angle from the longitudinal axis.

The plug can also be substantially t-shaped, substantially conically-shaped, or substantially bugle-shaped. The plug can include a passageway through which the wire extends, and the plug can be movable along the wire.

The footplate of the closure device can be a substantially looped distal portion of the wire. The footplate can comprise an elongated plate portion attached to a distal end of the wire, and an aperture formed therethrough. The footplate can comprise an elongated plate portion comprising a socket, wherein a distal end of the wire is captured by the socket. The distal end of the wire can be substantially spherically shaped. The footplate can comprise a longitudinally shaped plate portion that is hingedly attached to the distal end of the wire.

The wire of the closure device can be a tensile element selected from the group consisting of a monofilament and a multifilament.

The footplate and plug can be biodegradable. The footplate can be operable, or adapted, to biodegrade at a rate greater than that of the plug, such that the footplate completely biodegrades prior to the complete biodegradation of the plug.

In accordance with an embodiment of the present invention, a closure device deployment device comprising (a) a housing extending along a longitudinal axis, (b) at least one bias member adapted to exert a bias force, (c) a first sliding member connected to the bias member so that the bias force is applied to the sliding member, and (d) a bias member release mechanism moveable between a first position and a second position so that the first sliding member is constrained with respect to the housing when the bias member release mechanism is in the first position is provided. Also, the bias member release mechanism is moveable between a first position and a second position so that the first sliding member is slidable

along the direction of the longitudinal axis when the bias member release mechanism is in the second position, wherein the bias force actuates the first sliding member to slide along the direction of the longitudinal axis when the bias member release mechanism is in the second position. The closure device can be a footplate extending along an elongated plane.

The deployment device can further comprise at least a first distal C-tube interconnected to the elongated housing. The first distal C-tube can comprise a pivot point adapted to actuate the footplate from an elongated planar position parallel to the longitudinal axis to an elongated planar position substantially perpendicular to the longitudinal axis.

The deployment device can further comprise a second distal C-tube interconnected to the housing, wherein the first distal C-tube is concentrically housed within the second distal C-tube forming a main conduit area therethrough. The closure device can comprise a plug, wherein the plug is movable through the main conduit area. The outer distal C-tube can further comprise an elongated guidewire lumen attached thereto. The second distal C-tube can comprise an inlet aperture that is operable, or adapted, to allow biological fluid from the biological tissue to proximally flow into the main conduit area.

Each of the first and second distal C-tubes can comprise an outlet aperture which are concentrically aligned and are operable, or adapted, to serve as an atmospheric exit for the proximal flow of the biological fluid. Each of the inner and outer distal C-tubes can be adapted to locally expand and disassociate from one another to allow the movement of the plug through the main conduit area. Each of the inner and outer distal C-tubes can be adapted to independently coaxially slide along the longitudinal axis.

The at least one bias member can comprise a lateral constant force spring comprising a distal portion and a proximal portion. The first sliding member can comprise a skin flange assembly, wherein the proximal end of the lateral constant force spring is interconnected to the skin flange assembly. The lateral constant force spring can be adapted to displace the skin flange assembly in a distal direction when the bias member release mechanism is in the second position. The skin flange assembly can further comprise at least one proximal portion, wherein at least one proximal portion of the skin flange assembly further comprises a proximal end including the bias member release point, wherein the bias member release point further comprises an undercut portion. The bias member release mechanism can further comprise a handle interconnected to the housing comprising at least one hooked shaped end, the at least one hooked shaped end is configured to selectively engage the undercut portion.

The at least one bias member can comprise a constant force spring comprising a proximal end and a distal end selected from the group consisting of an upper constant force spring and a lower constant force spring. The first sliding member can comprise a slide barrel, wherein the proximal end of the constant force spring is interconnected to the slide barrel. The slide barrel can further comprise a bottom portion including the bias member release point, wherein the bias member release point can further comprise a hinge pin. The bias member release mechanism can further comprise a squeeze lever handle assembly interconnected to the housing comprising a link having a hooked shaped end, the hooked shaped end being configured to selectively disengage from the hinge pin.

In accordance with an embodiment of the present invention, a closure device comprising a rigid plastically deformable wire extending along a longitudinal axis and having a proximal portion and a distal end, a footplate extending along an elongated plane and located at the distal end of the wire

pivotable between a first position where the elongated plane is at least substantially parallel to the longitudinal axis and a second position where the elongated plane is not substantially parallel to the longitudinal axis, and a substantially rigid plug adapted to move along the wire from the proximal portion to the distal end to a position adjacent to the footplate in the second position is provided. The footplate can be unitary with the wire, and the footplate and wire can be constructed as separate pieces.

In accordance with an embodiment of the present invention, a closure device for sealing an opening formed through biological tissue comprising a plug, a wire, and a footplate, wherein at least one of the plug, the wire, and the footplate is at least partially formed of a biocorrosible metal, is provided. The biocorrosible metal can comprise magnesium or a magnesium alloy. The magnesium alloy can comprise AZ31. The plug can be at least partially formed of a first magnesium alloy and the footplate can be at least partially formed of a second magnesium alloy, wherein the first magnesium alloy and the second magnesium alloy are different magnesium alloys.

In accordance with an embodiment of the present invention, a closure device for sealing an opening formed through biological tissue comprising a plug, a wire, a footplate, and a connection mechanism adapted to connect the wire and the footplate together. The connection mechanism comprises a substantially spherically shaped ball portion, and a socket portion adapted to capture the ball portion. The ball portion can be connected to the footplate and the socket portion can be connected to the wire. Alternatively, the ball portion can be connected to the wire and the socket portion can be connected to the footplate. The footplate can be rotatable with respect to the wire about at least a first and a second axis. The footplate can be rotatable with respect to the wire about more than two axes.

In accordance with an embodiment of the present invention, a closure device deployment device comprising a housing extending along a longitudinal axis, a first distal C-tube interconnected to the housing, a second distal C-tube interconnected to the housing, wherein the first distal C-tube is concentrically housed within the second distal C-tube forming a main conduit area therethrough, and each of the first and second distal C-tubes are adapted to independently coaxially slide along the longitudinal axis. The closure device can comprise a plug, wherein the plug is movable through the main conduit area. Each of the inner and outer distal C-tubes can be adapted to locally expand and disassociate from one another to allow the movement of the plug through the main conduit area.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be more fully understood and appreciated by reading the following Detailed Description in conjunction with the accompanying drawings, in which:

FIGS. 1a-1p are perspective views of footplates according to embodiments of the present invention.

FIG. 2a shows a fully assembled right side perspective view of the deployment device, according to an embodiment of the present invention.

FIG. 2b is a partially exposed right side perspective view of the deployment device, according to an embodiment of the present invention.

FIG. 3a is a partially exposed right side perspective view of the deployment device, according to an embodiment of the present invention.

13

FIG. 3*b* is a magnified window view of a portion of the deployment device of FIG. 3*a*, according to an embodiment of the present invention.

FIG. 4*a* is a perspective view of a distal portion of the of the deployment device, according to an embodiment of the present invention. 5

FIG. 4*b* is a magnified window view of a portion of the deployment device of FIG. 4*a*, according to an embodiment of the present invention.

FIGS. 5*a*-5*f* are perspective views of the plug, according to an embodiment of the present invention. 10

FIG. 6*a* is a partially exposed right side perspective view of the deployment device, according to an embodiment of the present invention. 15

FIG. 6*b* is a magnified window view of a portion of the deployment device of FIG. 6*a*, according to an embodiment of the present invention.

FIG. 6*c* is a partially exposed right side perspective view of the deployment device, according to an embodiment of the present invention. 20

FIG. 7*a* is a partially exposed top side perspective view of the deployment device, according to an embodiment of the present invention.

FIG. 7*b* is a magnified window view of a portion of the deployment device of FIG. 7*a*, according to an embodiment of the present invention. 25

FIG. 7*c* is a magnified window view of a portion of the deployment device of FIG. 7*a*, according to an embodiment of the present invention. 30

FIG. 8 is a perspective view of a partially exposed distal portion of the deployment device, according to an embodiment of the present invention.

FIG. 9*a* is a perspective view of a distal portion of the deployment device, according to an embodiment of the present invention. 35

FIG. 9*b* is a magnified window view of a portion of the deployment device of FIG. 9*a*, according to an embodiment of the present invention.

FIG. 9*c* is a cutaway perspective view of the distal end of the deployment device, according to an embodiment of the present invention. 40

FIG. 9*d* is a perspective view showing the local expansion of a portion of the distal C-Tubes while allowing passage of the plug therethrough, according to an embodiment of the present invention. 45

FIG. 10*a* is a right side perspective view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIG. 10*b* is a magnified window view of a portion of the deployment device of FIG. 10*a*, according to an embodiment of the present invention. 50

FIG. 11 is a right side perspective view of a partially exposed section of the deployment device, according to an embodiment of the present invention. 55

FIG. 12 is a right side perspective view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIG. 13 is a right side perspective view of a partially exposed section of the deployment device, according to an embodiment of the present invention. 60

FIG. 14 is a right side perspective view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIG. 15*a* is a partially exposed right side perspective view of the deployment device, according to an embodiment of the present invention. 65

14

FIG. 15*b* is a magnified window view of a portion of the deployment device of FIG. 15*a*, according to an embodiment of the present invention.

FIG. 16 is a right side perspective view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIG. 17*a* is a partially exposed right side perspective view of the deployment device, according to an embodiment of the present invention.

FIG. 17*b* is a right side perspective view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIG. 18 is a partially exposed rear side perspective view of the deployment device, according to an embodiment of the present invention. 15

FIG. 19 is a right side perspective view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIG. 20 is a top side perspective view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIG. 21*a* is a right side cross-sectional view of a partially exposed section of the deployment device, according to an embodiment of the present invention. 25

FIG. 21*b* is a top side cross-sectional view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIGS. 21*c* and 21*d* are magnified window views of portions of the deployment device of FIG. 21*a*, according to an embodiment of the present invention. 30

FIG. 22*a* is a right side cross-sectional view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIG. 22*b* is a top side cross-sectional view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIGS. 22*c* and 22*d* are magnified window views of portions of the deployment device of FIG. 22*b*, according to embodiments of the present invention.

FIG. 22*e* is a magnified window view of a portion of the deployment device of FIG. 22*a*, according to embodiments of the present invention.

FIG. 23*a* is a right side cross-sectional view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIG. 23*b* is a top side cross-sectional view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIGS. 23*c* and 23*d* are magnified window views of portions of the deployment device of FIG. 23*b*, according to embodiments of the present invention.

FIG. 23*e* is a magnified window view of a portion of the deployment device of FIG. 23*a*, according to embodiments of the present invention. 55

FIG. 24*a* is a right side cross-sectional view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIG. 24*b* is a top side cross-sectional view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIGS. 24*c*-24*f* are magnified window views of portions of the deployment device of FIG. 24*b*, according to embodiments of the present invention.

FIG. 25*a* is a right side cross-sectional view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIG. 25*b* is a top side cross-sectional view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIGS. 25*c*-25*d* are magnified window views of portions of the deployment device of FIG. 25*b*, according to embodiments of the present invention.

FIG. 26*a* is a right side cross-sectional view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIG. 26*b* is a top side cross-sectional view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIGS. 26*d* and 26*f* are magnified window views of portions of the deployment device of FIG. 26*a*, according to embodiments of the present invention.

FIG. 26*g* is a magnified vertical cross-sectional view through a portion of the deployment device of FIG. 26*a*, according to embodiments of the present invention.

FIGS. 26*c* and 26*e* are magnified window views of portions of the deployment device of FIG. 26*b*, according to embodiments of the present invention.

FIG. 27 is a left side perspective view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIG. 28*a* is a right side cross-sectional view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIG. 28*b* is an under side perspective view of the deployment device, according to an embodiment of the present invention.

FIG. 29*a* is a right side cross-sectional view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIG. 29*b* is a top side cross-sectional view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIGS. 29*d*, 29*e* and 29*f* are magnified window views of portions of the deployment device of FIG. 29*a*, according to embodiments of the present invention.

FIG. 29*c* is a magnified vertical cross-sectional view through a portion of the deployment device of FIG. 29*a*, according to embodiments of the present invention.

FIG. 30*a* is a right side cross-sectional view of a partially exposed section of the deployment device, according to an embodiment of the present invention.

FIGS. 30*b*-30*c* are magnified window views of portions of the deployment device of FIG. 30*a*, according to embodiments of the present invention.

FIGS. 31-41 show the sequential steps in the use of the deployment device to deploy the closure device to seal an opening formed through a blood vessel, according to an embodiment of the present invention.

FIGS. 42-43 show a closure device in a sealing relationship with the opening formed through a blood vessel (i.e., post-closure device deployment configuration and position), according to an embodiment of the present invention.

DETAILED DESCRIPTION

Reference will now be made in detail to the present preferred embodiments of the invention, examples of which are illustrated in the accompanying drawings.

In accordance with an embodiment of the present invention, closure device 100 comprising a footplate 110 (the footplate may include any of the embodiments of the footplate, as discussed infra), a plug 111, and a wire 120 is provided and can be used to seal or close an opening formed through

biological tissue, such as a percutaneously formed puncture (the puncture comprises the opening formed through the wall of the blood vessel and a tissue tract contiguous with the opening formed through the biological tissue, which extends through the tissue and to skin overlying the blood vessel), an incision, or some other type of opening formed through biological tissue, such as a blood vessel, organ, or the like, to control (or prevent or stop) bleeding (or the flow of other biological fluid or tissue). For example, the closure device 100 of an embodiment of the present invention can be used to seal an arteriotomy, which is an opening or incision in an artery, such as the femoral artery, and is formed in conjunction with a percutaneously formed puncture (an open tissue tract through the skin and tissue just above the blood vessel) by a clinician during a diagnostic or therapeutic intravascular surgical procedure.

In accordance with an embodiment of the present invention, the closure device 100 may be in a pre-deployed closure device deployment configuration and position or in a post-vascular closure device deployment configuration and position. A pre-deployed closure device deployment configuration and position includes a configuration and position where the closure device 100 resides within a deployment device 200 of an embodiment of the present invention (which is used to deploy the closure device 100 into, e.g., an opening in the wall of a blood vessel, to seal the blood vessel to stop blood from flowing through the opening). A post-deployed closure device deployment configuration and position includes a configuration and position where the closure device 100 resides within and through the opening in the wall of the blood vessel.

The closure device 100, the pre- and post-deployed closure device deployment configurations and positions, the deployment device 200, and the method of deploying the closure device 100 to seal an opening in the wall of a blood vessel, with reference to the figures, is more fully described infra.

Referring now to the drawings where like numbers refer to like parts throughout, FIG. 1*a* shows a footplate 110 according to an embodiment of the present invention. This embodiment shows a footplate 110 in a pre-deployed closure device deployment configuration and position, wherein the footplate 110 is within a distal end of a deployment device 200 (not shown). The footplate 110 comprises a unitary length of a distal portion of the wire 120 (monolithic structure) bent into an elongated configuration presenting an elongated U-shaped loop 30. The elongated U-shaped loop 30 comprises an open proximal end 101, a closed distal end 102, and a pair of longitudinally laterally spaced extending legs 31, 32. The closed distal end 102 and pair of longitudinally laterally spaced extending legs 31, 32 are substantially coplanar in a common plane and substantially parallel to the longitudinal axis of the control housing 210 of the deployment device 200. The closed distal end 102 of the elongated U-shaped loop 30 defines a longitudinal distal end of the bent wire elongated configuration. The pair of longitudinally-extending laterally spaced legs 31, 32 of the elongated U-shaped loop comprises a free leg 31, having a free proximal end located at the open proximal end of the elongated U-shaped loop 101, and a connecting leg 32. A helically shaped connecting portion 33 connects to the wire 120. The helically shaped connecting portion 33 is operable to permanently (plastically) deform at a bending region. The wire 120 is axial to a longitudinal axis of the control housing 210. The wire 120 is proximal to the footplate 110, and the helically shaped connecting portion 33 extends between a joining leg 34 (which is substantially coplanar with the longitudinally-extending laterally spaced legs 31, 32) and the wire 120 at the open proximal end 101 of the elongated U-shaped loop 30.

17

Turning to FIG. 1*b*, the footplate 110 according to an embodiment of the present invention is illustrated. This embodiment shows the footplate 110 (of FIG. 1*a*) in a post-deployed closure device deployment configuration and position, wherein a portion of the footplate 110 is seated against an inside wall of a blood vessel (e.g., an artery, not shown) under a percutaneous puncture therein (not shown). The helically shaped connecting portion 33 comprises a bending region, wherein the bending region is permanently (plastically) deformed. The closed end 102 and pair of longitudinally laterally spaced extending legs 31, 32 remain substantially coplanar in a common plane, and are substantially perpendicular to a longitudinal axis of the puncture and substantially parallel to a plane of the inside wall of the blood vessel. The wire 120 extends proximally from the helically shaped connecting portion 33 through the opening in the wall of the blood vessel to the tissue tract wherein the wire 120 is axial to the longitudinal axis of the puncture (prior to being cut and bent by the deployment device 200).

Turning to FIG. 1*c*, a footplate according to an embodiment of the present invention is illustrated. This embodiment shows a footplate 110' in a pre-deployed closure device deployment configuration and position, wherein the footplate 110' is within the distal end of a deployment device 200 (not shown). The footplate 110' comprises a unitary length of a distal portion of the wire 120 (monolithic structure) bent into an elongated configuration presenting an elongated U-shaped loop 30'. The elongated U-shaped loop 30' comprises an open distal end 102', a closed proximal end 101', and a pair of longitudinally laterally spaced extending legs 31', 32'. The closed proximal end 101' of the elongated U-shaped loop 30' defines a longitudinal proximal end of the bent wire elongated configuration. The pair of longitudinally-extending laterally spaced legs of the elongated U-shaped loop 30' comprise a free leg 31' having a free distal end located at the open distal end 102' of the elongated U-shaped loop 30, and a connecting leg 32'. An arcuately-curved connecting portion 33', and a medial leg 34' comprising a bending region are shown. The arcuately-curved connecting portion 33' extends between the connecting leg 32' and the medial leg 34' at the open distal end 102', defining a longitudinal distal end of the bent wire configuration. The elongated U-shaped loop 30' and the arcuately-curved connecting portion 33' are substantially coplanar in a common plane and axial to a longitudinal axis of the control housing 210 of the deployment device 200. The arcuately-curved connecting portion 33' medially curves toward the connecting leg 32' to the medial leg 34', in between the free leg 31' and the connecting leg 32'. Each of the free leg 31' and the connecting leg 32' is secured to a distal portion of the medial leg by a spot weld 35. The spot weld 35 may comprise an electron beam spot weld or a laser spot weld. The distal end of the free leg ends at a point where the free leg is spot welded to the medial leg 34' (but could be longer or shorter). The medial leg 34' extends proximally toward and under (but could extend over) the closed proximal end 101', and extends beyond the closed proximal end 101' at an angle from the common plane to the wire 120, wherein the wire 120 is proximal to the footplate 110'.

Turning to FIG. 1*d*, the footplate 110' according to an embodiment of the present invention is illustrated. This embodiment shows the footplate 110' of FIG. 1*c* in a post-deployed closure device deployment configuration and position, wherein a portion of the footplate 110' is seated against an inside wall of a blood vessel (e.g., an artery, not shown) under a percutaneous puncture therein (not shown). The bending region (preferably at the proximal margin of the spot weld 35 in the medial leg 34') is permanently (plastically)

18

deformed. The elongated U-shaped loop 30' and the arcuately-curved connecting portion 33' remain substantially coplanar in a common plane, and are substantially perpendicular to a longitudinal axis of the puncture and substantially parallel to a plane of the inside wall of the blood vessel. The wire 120 extends proximally from the bending region through the opening in the wall of the blood vessel and inside the tissue tract wherein the wire 120 is axial to the longitudinal axis of the puncture (prior to being cut and bent by the deployment device 200).

Turning to FIGS. 1*e-1f*, a footplate 710 according to an embodiment of the present invention is shown. These embodiments of the footplate are similar to the footplates illustrated in FIGS. 1*c-1d*, respectively, except for free leg 731 and spot weld 735. As shown in FIG. 1*e* and FIG. 1*f*, free leg 731 comprises a hooked distal end, and the spot weld 735 only secures medial leg 734 to connecting leg 732. An elongated U-shaped loop 730, a proximal 1101 and distal end 1102, and an arcuately-curved connecting portion 733 are also shown.

Turning to FIG. 1*g*, a footplate 810 according to an embodiment of the present invention is shown. This embodiment shows a footplate 810 in a pre-deployed closure device deployment configuration and position, wherein the footplate 810 is within a distal end of a deployment device 200 (not shown). The footplate 810 is a longitudinally shaped block or bar 837. The bar 837 comprises longitudinal aperture 840, a top arcuately-shaped surface 838, a bottom arcuately-shaped surface (not shown) (alternatively, the top and bottom surfaces can be substantially planar), a peripheral side surface 839, a proximal end 2101 and a distal end 2102. The wire 120 is connected to the bar 837 by a flat or coined distal end 836 (preferably welded), which is connected to the distal portion 2102 of the top arcuately-shaped surface 838 of the bar 837 (could also be connected to the bottom arcuately-shaped surface). The coined distal end 836 proximally extends to a medial portion 834, which proximally extends through the aperture 840 and under (but could extend over) the proximal end 2101.

Turning to FIG. 1*h*, the footplate 810 according to an embodiment of the present invention is illustrated. This embodiment shows the footplate 810 of FIG. 1*g* in a post-deployed closure device deployment configuration and position, wherein a portion of the footplate 810 is seated against an inside wall of a blood vessel (e.g., an artery, not shown) under a percutaneous puncture therein (not shown). The medial portion 834 comprises a bending region wherein the bending region is permanently (plastically) deformed. The medial portion 834 proximally extends through the aperture 840. The wire 120 extends proximally from the medial portion 834 through the opening in the wall of the blood vessel to the tissue tract, wherein the wire 120 is coaxial to the longitudinal axis of the puncture (not shown) (prior to being cut and bent by the deployment device 200).

Turning to FIGS. 1*i-1j*, a footplate 1010 according to an embodiment of the present invention is shown. These embodiments of the footplate are similar to the footplates illustrated in FIGS. 1*g-1h*, respectively, except for the distal end 1036 of the wire 120. The distal end 1036 is neither flattened nor coined (but is left as the same circular cross-section as the remainder of the wire). The wire 120 is affixed (preferably welded) on both sides along the longitudinal interface between the distal portion of the wire 120 and the arcuately-shaped top surface 1038 at the distal end 4102 of the bar 1037 of the footplate 1010. A proximal end 4101, a medial portion 1034, an aperture 1040, and a peripheral side surface 1039 are also shown.

Turning to FIG. 1*k*, a top perspective view of footplate 910 according to an embodiment of the present invention is shown. This embodiment shows a footplate 910 in a pre-deployed closure device deployment configuration and position, wherein the footplate 910 is within a distal end of a deployment device 200 (not shown). The footplate 910 comprises a longitudinally shaped block or bar 937. The bar 937 comprises a top substantially planar surface 938, a bottom substantially planar surface (not shown), a peripheral side surface 939, a proximal end 3101 and a distal end 3102. The wire 120 is connected to the bar 937 by a ball-shaped end 936, which is connected to a socket 941 of the top planar surface 938 of the bar 937 (could also be connected to the bottom planar surface). The socket 941 is shaped like a "C" to allow for the actuation of the footplate 910, as shown in FIG. 1*l*. A portion of the wire 120 may sit in an arcuately-shaped depressed section 942 of the top surface 938 of the bar 937.

Turning to FIG. 11, a bottom perspective view of the footplate 910 according to an embodiment of the present invention is shown. This embodiment shows the footplate 910 of FIG. 1*i* in a post-deployed closure device deployment configuration and position, wherein a portion of the footplate 910 is seated against an inside wall of a blood vessel (e.g., an artery, not shown) under a percutaneous puncture therein (not shown). There is no bending region in this embodiment of the footplate 910. The bar 937 is operable to rotate pursuant to the ball 936 and socket 941 configuration/mechanism. This establishes a rotation point with the proximal end 3101 rotating down and in the distal direction and the distal end 3102 rotating up (could alternatively rotate in the opposite direction with an alternative configuration) and in the proximal direction about the established rotation point. FIG. 11 shows the footplate 910 in its fully actuated or rotated position. The wire 120 extends proximally from the ball 936 through the opening in the wall of the blood vessel to the tissue tract, wherein the wire 120 is axial to the longitudinal axis of the puncture (not shown) (prior to being cut and bent by the deployment device 200). A bottom substantially planar surface 943 is shown, which may further comprise a protruding section comprising the bottom portion of the depressed section 942 of the top surface 938 of the bar 937.

Turning to FIG. 1*m*, a top perspective view of footplate 1110 according to an embodiment of the present invention is shown. This embodiment shows a footplate 1110 in a pre-deployed closure device deployment configuration and position, wherein the footplate 1110 is within a distal end of a deployment device 200 (not shown). The footplate 1110 comprises a longitudinally shaped block or bar 1137. The bar 1137 is "y-shaped" and comprises a top substantially planar surface 1138, a bottom substantially planar surface 1143 (not shown), a peripheral side surface 1139, a proximal end 5101, a distal end 5102 and two proximally extending substantially coplanar legs 1144 and 1145 (not shown) which are separated by a slot 1146. The wire 120 is connected to the bar 1137 by a hinge mechanism comprising a hooked shaped end 1136, which is connected to a half-circled portion 1141 that is attached to the top substantially planar surface 1138 of the bar 1137 (could also be connected to the bottom planar surface).

Turning to FIG. 1*n*, a bottom perspective view of footplate 1110 according to an embodiment of the present invention is shown. This embodiment shows the footplate 1110 of FIG. 1*m* in a post-deployed closure device deployment configuration and position, wherein a portion of the footplate 1110 is seated against an inside wall of a blood vessel (e.g., an artery, not shown) under a percutaneous puncture therein (not shown). There is no bending region in this embodiment of the footplate 1110. The bar 1137 is operable to rotate pursuant to

the hinge mechanism, which establishes a rotation point, with the proximal end 5101 rotating down and in the distal direction and the distal end 5102 rotating up and in the proximal direction, about the established rotation point (could alternatively rotate in the opposite direction with an alternative configuration). FIG. 1*n* shows the footplate 1110 in its fully actuated or rotated position. The wire 120 extends proximally through the opening in the wall of the blood vessel to the tissue tract, wherein the wire 120 is axial to the longitudinal axis of the puncture (not shown) (prior to being cut and bent by the deployment device 200). A bottom substantially planar surface 1143 is also shown.

Turning to FIGS. 1*o*-1*p*, a footplate 1210 according to an embodiment of the present invention is shown. These embodiments of the footplate are similar to the footplate embodiments illustrated in FIGS. 1*m*-1*n*, respectively, except for the hook-shaped distal end 1236 of the wire 120 and its attachment through an aperture 1241 and slot 1246. The hooked-shaped distal end 1236 is attached to the bar 1237 through an aperture 1241. The hooked-shaped distal end 1236 stretches through the aperture 1241 from the bottom substantially planar surface 1243 to the top substantially planar surface 1238, and then hooks through the slot 1246 thereby securing the footplate 1210 to the wire 120. A bar 1237, a distal end 6102 and a proximal end 6101, a top substantially planar surface 1238, a bottom substantially planar surface 1243, a peripheral side surface 1239, two proximally extending substantially coplanar legs 1244 and 1245, a slot 1246, and a wire 120, are also shown.

In accordance with an embodiment of the present invention, the deployment device 200 with the closure device 100 of an embodiment of the present invention is described below with reference to the figures. References regarding the footplate are specifically made to footplate 110', as an example of a footplate that may be used. However, it is to be understood that any footplate embodiment including those referenced supra, may be used in place of footplate 110'.

Turning to FIGS. 2*a*-4*b*, right side views (FIG. 2*a* shows a fully assembled deployment device 200, and FIGS. 2*b*, 3 and 4 are partially exposed views of the deployment device 200, i.e., missing parts to reveal other parts of the deployment device 200) of a deployment device 200, with a proximal end 10 and a distal end 20, according to an embodiment of the present invention is illustrated. In accordance with an embodiment of the present invention, prior to deployment into a vessel that requires sealing, the footplate 110' is located at the distal end 20 of a deployment device 200 and resides within an outer distal C-tube 201, while the remainder of the wire 120 is located proximally to the distal footplate 110' within the deployment device 200 ending at a wire ferrule 250 (see FIG. 7*a*, which is described infra). The footplate 110' is in an axial position relative to the longitudinal axis of the control housing 210 of the deployment device 200. The footplate's 110' proximal end 101 abuts the distal end of an inner distal C-tube 202, as described infra (see FIGS. 4*a*-4*b*).

Turning to FIGS. 5*a*-*f*, a plug 111 according to an embodiment of the present invention is illustrated. These embodiments show a plug 111 that is conically-shaped and comprises a distal portion (or end) 104 and a proximal portion (or end) 103, wherein a diameter of the plug's distal portion 104 is smaller than a diameter of the plug's proximal portion 103. The diameter of the plug 111 at its largest point is greater than the diameter of the main conduit area 205 of the deployment device, as discussed infra. Turning to FIG. 5*a*, a right side view of the plug 111 is shown. Turning to FIG. 5*b*, a top side view of the plug 111 is shown. Turning to FIG. 5*c*, a left side inverted view of the plug 111 is shown. Turning to 5*d*, a front

side view of the plug **111** with a lumen **105** is shown. Turning to FIG. **5e**, a bottom side view of the plug **111** is shown. Turning to FIG. **5f**, a rear side view of the plug **111** with a lumen **105** is shown. One or more “cutouts” or “cavities” may be provided in the distal end of the plug to allow nesting of the plug **111** with the footplate **110'** and wire **120**, according to an embodiment of the present invention. Also, one or more “cutouts” or “cavities” may be provided in the proximal end of the plug **111** to allow the insert **112** (see FIG. **10b**) in the distal end of a push tube **212** to maintain rotational control of the plug **111** with respect to the footplate **110'**, according to an embodiment of the present invention. Embodiments of the present invention contemplate a plug **111** with various combinations of “cutouts” or without any “cutouts”.

Turning to FIGS. **6a-6c**, a partially exposed right side view of a deployment device **200** in accordance with an embodiment of the present invention is illustrated. In accordance with an embodiment of the present invention, prior to deployment into a vessel that requires sealing (i.e., a pre-deployed closure device deployment configuration and position), the plug **111** is located proximally to the footplate **110'** and along the longitudinal axis of the wire **120**. The plug **111** is distally adjacent to the push tube **212**, inside a distal portion of an outer proximal tube **211** (which is inside a control housing **210**) of the deployment device **200**.

Turning to FIGS. **7a-7c**, a partially exposed top view of the deployment device according to an embodiment of the present invention is illustrated. This embodiment shows the location of the wire **120** within the deployment device **200**. The wire **120** stretches from the footplate **110'** through a longitudinally axial hole **105** (not shown) in the plug **111** in a distal to proximal direction. The wire **120** stretches from the footplate **110'** through an inner distal C-tube **202** (not shown), and a sheer tube **224** (within the push tube **212**), to the inner proximal end of a wire ferrule **250**.

In accordance with an embodiment of the present invention, a pre-deployed closure device deployment configuration (default configuration) of the deployment device **200** of an embodiment of the present invention will be described generally from its distal end **20** to its proximal end **10**, *infra*. Generally, in appropriate figures, acceptable fastening means (e.g., screws) are labeled with the number **226** and washers are labeled with the number **214**. The method of use of the deployment device **200**, and the closure device **100** in its post-deployed closure device deployment configuration and position, will be described *infra*.

Turning back to FIGS. **2a-2b**, these embodiments show a deployment device **200** comprising an outer distal C-tube **201**. The outer distal C-tube's **201** distal end comprises a narrowed nose or tip portion **203**. This nose portion **203** of the outer distal C-tube **201** is the portion of the deployment device which houses the footplate **110'** (not shown). The remainder of the outer distal C-tube **201** houses an inner distal C-tube **202** (see FIG. **8**), comprising a longitudinal opening **204** in its bottom portion, and the wire **120**. These distal C-tubes are concentrically nested together forming a main conduit area **205**, which is described *infra*.

Turning to FIGS. **8, 9a-9c**, distal views of the deployment device **200** according to an embodiment of the present invention are illustrated. FIG. **9b** shows the entrance—inlet hole **406**—to a main conduit area **205** (see FIG. **9c**) formed by the outer distal C-tube **201** and inner distal C-tube **202**, which serves as a blood marking passageway. The inlet hole **406** resides toward the outer distal C-tube's **201** distal end. Further, the outer distal C-tube **201** and inner distal C-tube **202** each contains a side hole **206** (an atmospheric exit) which are concentrically aligned with one another. The side hole **206** is

proximal to the footplate **110'** and distal to the plug **111** (not shown). The side hole **206** is operable to serve as an atmospheric exit for proximal blood flow flowing from the blood vessel and into the inlet hole **406**, and through the blood marking passageway **205**. This proximal blood flow that exits the side hole **206** indicates that the footplate and distal portion of the deployment device **200** have entered the blood vessel (not shown, which is described *infra*). The main conduit area **205** additionally is operable to serve as a deployment area for deploying the plug **111**, wherein the distal C-tubes are operable to locally expand and disassociate creating an irreversible un-nested condition to allow passage of the plug **111** into a post-vascular deployment configuration and position (see FIG. **9d**).

In accordance with an embodiment of the present invention, FIGS. **9a & 9b** are views of the distal portion of the deployment device **200** and FIG. **9c** is a cut-away view of the distal portion of the deployment device **200**, which shows the nested configuration of the outer distal C-tube **201** (including the guidewire lumen **300**) and the inner distal C-tube **202**, which together form the blood marking passageway **205**, and a passageway in which the wire **120** nests, according to an embodiment of the present invention. The outer distal C-tube **201** comprises a guide wire lumen **300** (see FIG. **9c**) comprising a proximal guide wire exit **207** (see FIG. **9a**) and a distal guide wire entrance **301** (see FIGS. **9b & 9c**) for insertion of a guide wire (not shown). The proximal guide wire exit **207** is proximal to the footplate **110'** and distal to the plug's **111** pre-deployed closure device deployment position. The distal guide wire entrance **301** is located at the most distal point (at the distal nose portion **203**) of the deployment device **200**.

In accordance with an embodiment of the present invention, the outer distal C-tube **201** and inner distal C-tube **202** can move independently of one another in the longitudinal direction, i.e., the distal C-tubes are operable to independently slide along the longitudinal axis of the wire **120** (e.g., to allow and to assist in the actuation of the footplate **110'** to a substantially perpendicular position relative to the longitudinal axis of the control housing **210** once inside the lumen of the artery, as will be discussed *infra*).

Turning to FIG. **10a-10b**, a partially exposed right side view of the deployment device **200** in accordance with an embodiment of the present inventions is illustrated. This embodiment shows that the proximal ends of the outer distal C-tube **201** and inner distal C-tube **202** end just within an outer proximal tube **211** (the inner distal C-tube **202** ends at a retainer ring **325** (see FIG. **11**, which is described *infra*) and slightly more proximally than the outer distal C-tube **201**, which ends at a ring retainer **324** (see FIG. **11**). The outer proximal tube **211** is surrounded by a control housing **210**, which is in turn partially surrounded by a skin flange assembly **222** (not shown) comprising a distal portion **221** and a proximal portion **303** (see FIG. **2b**). The skin flange assembly **222** (not shown) is operable to distally slide along a longitudinal axis of the wire **120**, and along an outside portion of the control housing **210** and an outside portion of the distal C-tubes. The plug **111** is distally adjacent to an insert **112** and the distal end of a push tube **212**, which mainly resides directly within an inner proximal tube **213** (which resides within the outer proximal tube **211**, etc.) which stretches in the proximal direction to about the proximal end **10** of the deployment device **200** (see FIGS. **6a-6b**). The proximal tubes are operable to independently slide along the longitudinal axis of the wire **120**.

Turning to FIGS. **11-13**, partially exposed right side views of the deployment device **200** of an embodiment of the

23

present invention are illustrated. This embodiment shows the push tube 212, which resides within the proximal tubes (211, 213) and is surrounded by a ring retainer 325 at its distal end, and is cradled by an alignment key 326 at its proximal end. The push tube 212 extends proximally from the push tube insert 112 (which is affixed to the distal end of the push tube 212 by an appropriate means such as a weld) through a washer 214 (which is welded to the push tube 212 and whose proximal surface is adjacent to the distal end of a slide barrel 215), and protrudes through the main body of the slide barrel 215 such that its most proximal tip is approximately adjacent to the most proximal end of the slide barrel. At its distal end on the top, the push tube 212 has an opening 219 (which is a slot) that extends in a proximal direction from a point just slightly proximal of the distal tip of the push tube 212. Concentrically contained within the push tube 212 is a shear tube 224 which extends in a proximal direction from the push tube insert's 112 angled proximal surface 350 (see FIG. 30c) back to its most proximal end (slightly proximal of the most proximal end of the push tube 212). The proximal end of the shear tube 224 has a cap 216 affixed to it. The push tube 212 and the shear tube 224 are operable to distally slide along the longitudinal axis of the wire 120. The push tube 212 is operable to push the plug 111 through the main conduit area 205 into its post-deployed closure device deployment configuration and position as is discussed infra. The shear tube 224 (in conjunction with the push tube insert 112) is operable to both bend and shear-off the wire 120 into its post-vascular closure deployment configuration, as described infra.

Turning to FIGS. 14-16, a partially exposed right side view of the deployment device 200 (shown in the default position) according to an embodiment of the present invention is illustrated. In accordance with an embodiment of the present invention, constant force springs comprising a plurality of lateral constant force springs, comprising a left lateral constant force spring 125 and a right lateral constant force spring 125, are provided. The lateral constant force springs 125 (left and right) each comprise a flat portion 227 and a roll spring portion 228. The roll spring portion 228 of each of the lateral constant force springs 125 (left and right) resides (nests) partially within the distal portion of the control housing 210, on the left and right side respectively (see FIG. 15a) and is covered by (contained within) the distal portion 221 of the skin flange assembly 222 (see FIG. 14). The flat portion 227 of the lateral constant force springs 125 (left and right) stretches flatly along the outside of the control housing 210 (on the left and right sides respectively) in a proximal direction from the roll spring portion 228, to the inside proximal portion 303 of the right and left sides (respectively) of the skin flange assembly 222 where they are fastened by an acceptable fastening means 226 (see FIG. 14). The lateral constant force springs are operable to move the skin flange assembly 222 in a distal direction by a constant distal force. The lateral constant force springs are also operable to apply a constant distal force to an outside surface of a patient's skin. Further, the lateral constant force springs are operable to apply a constant tensile proximal force to the wire 120. This constant tensile proximal force seats the footplate 110' against an inside wall 403 (not shown) of a blood vessel, wherein a datum is created at a point where the footplate 110' is seated, as discussed infra.

In accordance with an embodiment of the present invention, constant force springs comprising an upper and lower constant force spring 135, each comprising a flat portion 230 and a roll spring portion 229, are provided. The roll spring portions 229 of the upper and lower constant force springs 135 reside (nest) on the outside (on the top and bottom) of the distal end of the control housing 210, and are covered (con-

24

tained within) the distal portion 221 of the skin flange assembly 222 (see FIG. 14). The flat portions 230 of the upper and lower constant force springs 135 extend proximally from the respective roll spring portions 229 (within the distal portion of the control housing 210) and stretch flatly along the outside of the control housing 210 (on the top and bottom respectively), and are fastened by an acceptable fastening means (e.g., a screw 226 and washer 214) to about the middle portion (top and bottom, respectively) of the slide barrel 215 (see FIG. 16). The upper and lower constant force springs 135 are operable to move the slide barrel 215 in a distal direction by application of a constant distal force to the slide barrel 215. The slide barrel 215 is operable to advance the push tube 212 in a distal direction by the constant distal force applied by the upper and lower constant force springs 135 to the slide barrel 215, wherein the plug 111 is pushed percutaneously into a percutaneous puncture (see FIG. 39) and into a post-deployed closure device deployment configuration and position. This post-deployed closure device deployment configuration and position is controlled by the creation of the datum (as discussed infra) with the wire 120 and the footplate 110', in order to seal the opening in the wall of the blood vessel.

Turning to FIGS. 17a, 17b, and 18, the proximal end 10 (partially exposed right rear side and rear view) of the deployment device 200 according to an embodiment of the present invention is illustrated. This embodiment shows a squeeze lever handle assembly 231 of the deployment device 200. The squeeze lever handle assembly 231 comprises a squeeze lever handle 232, a button 233 held within a retainer plate 234 of the squeeze lever handle 232, and a link 235. The button 233 is slidable within the retainer portion 234. The link 235 is removably attached at its proximal end (by an upwardly hook-shaped portion or C-feature 266, not shown) to the bottom part (by a hinge pin 256, not shown) of the slide barrel 215 (which transfers mechanical energy to, and creates distal movement of, the slide barrel, upon the squeezing of the squeeze lever handle 232, described infra). The link 235 is attached at the other end (lower portion) to the squeeze lever handle 232 by a hinge pin mechanism 236. The squeeze lever handle 232 is removably attached to the proximal portion 303 of the skin flange assembly 222 (on both the left and right sides of the device) by lateral upper hook-shaped ends 237.

Turning to FIG. 19, an exposed right side view of components interlocated in the proximal portion of the deployment device 200 according to an embodiment of the present invention is illustrated. This embodiment shows a slide barrel assembly comprising a slide barrel 215, and a cut-off lever 218 that comprises a proximal portion which is hingedly attached by a hinge pin mechanism 238 to the slide barrel 215. A distal portion of the cut-off lever 218 is hingedly movable about the hinge pin mechanism 238 in a perpendicular direction away from the longitudinal axis of the wire 120 (not shown). The slide barrel 215 is distal to where the proximal end of the wire 120 (not shown) attaches to the wire ferrule 250 and is contained within the control housing 210 (not shown). The slide barrel assembly is operable to distally slide along the longitudinal axis of the wire 120 (not shown).

Turning to FIG. 20, an exposed top view of components interlocated in the proximal portion of the deployment device 200 according to an embodiment of the present invention is illustrated. This embodiment shows the wire ferrule 250, which comprises an elongated U-shaped structure. The elongated U-shaped structure comprises a closed proximal end 251 and an open distal end 252. The wire ferrule 250 resides within the inner proximal tube 213 (not shown) and is operable to longitudinally slide along the longitudinal axis of the wire 120 (not shown). Protruding through the right-side

proximal end of the wire ferrule **250** is a release shaft **239** that extends distally to about the proximal end of the slide barrel **215**. Also shown, at the most proximal end **10** of the deployment device **200** is a proximal control housing cap **240**, that has two laterally spaced cap fingers (right cap finger **241**, left cap finger **242**) extending from the proximal control housing cap's **240** distal inner surface.

In accordance with an embodiment of the present invention, at the conclusion of a diagnostic or therapeutic intravascular surgical procedure, a closure device **100** of an embodiment of the present invention is deployed by a deployment device **200** of an embodiment of the present invention to control (or stop or prevent) the bleeding by plugging or sealing the arteriotomy (the method of deployment is described, *infra*).

In accordance with an embodiment of the present invention, following a intravascular surgical procedure, a guide wire **299** (as shown in FIG. **31a**) is preferably left in the site of the arteriotomy (vessel wall is shown by number **401**) after the operating cannula is removed by the clinician. (Alternatively, a new guide wire **299** may be inserted into the arteriotomy). This guide wire **299** extends distally from its exposed portion **307** (outside the patient's body), to its unexposed portion **306** (inside the patient's body), *i.e.*, through the skin puncture **397** of the patient's skin **399**, through the tissue tract **407**, through the arteriotomy **405**, and into the lumen **404** of the blood vessel **400**, as described *supra*.

In accordance with an embodiment of the present invention, a method of sealing an opening (an arteriotomy) formed in the wall **401** of a blood vessel **400** (e.g., an artery such as the femoral artery, where the opening in the wall of the blood vessel was percutaneously formed in conjunction with a tissue tract contiguous with the opening and extending proximally through subcutaneous tissue and through the surface of the skin overlying the blood vessel (the percutaneous puncture) (see FIG. **31a**), by a clinician during a diagnostic or therapeutic intravascular surgical procedure, will now be described in a series of motions. That is, those motions/actions initiated by the user, and those motions which occur passively within the assemblies of both the closure device **100** and the deployment device **200**. The method comprises providing a system comprising a closure device **100** for sealing an opening (an arteriotomy) formed in the wall **401** of a blood vessel **400** (see FIG. **43**), and a deployment device **200** (see FIG. **2a**) for deploying the closure device **100** into the opening (the arteriotomy) formed in the wall **401** of a blood vessel **400**, to seal the opening **405**.

Embodiments of the methods of the present invention, with are described and illustrated herein, are not limited to the sequence of motions/actions described, nor are they necessarily limited to the practice of all of the motions set forth. Other sequences of motions, or less than all of the motions, or simultaneous occurrence of the motions, may be utilized in practicing the embodiments of the invention.

FIGS. **31a-43** show the functionality of the distal portion **20** of the deployment device **200** and the closure device **100** (including the guide wire **299**, as described *supra*) with respect to a patient's anatomy and the incisional architecture of the percutaneously formed puncture created prior to a vascular closure procedure, *i.e.* skin puncture, tissue tract, arteriotomy, etc., as described *infra*, in accordance with an embodiment of the present invention.

Turning to FIG. **31a**, prior to the beginning of the use of the deployment device **200**, the guide wire **299** is in place, *i.e.*, an unexposed portion **306** of the guide wire **299** extends from the patient's skin **399**, in a distal direction through the skin puncture **397** and the tissue tract **407**, to a position inside the lumen

of the blood vessel **404**; and an exposed portion **307** (contiguous with the unexposed portion **306**) of the guide wire **299** extends in a proximal direction from the patient's skin such that it is outside the patient's body.

Turning to FIGS. **31b** & **32**, at the beginning of the deployment of the closure device **100** by the deployment device **200**, the proximal tip **305** of the guide wire **299** (which is in a pre-existing position partially inside the patient's body and partially outside the patient's body, as described *supra*) is inserted into the guide wire entrance **301** (in a proximal direction). The guide wire **299** is further advanced proximally until the proximal end **305** of the guide wire **299** travels through the guide wire exit **207**. Once the proximal end **305** of the guide wire **299** has protruded through the guide wire exit **207** and is exposed outside the device, the guide wire **299** is grasped and pulled by the user to remove any slack in the guide wire **299** without changing the position of the guide wire **299** inside the patient's body. The deployment device **200** may then be advanced in a distal direction, over the guide wire **299** such that the distal end **20** of deployment device **200** passes through the skin puncture **397** (at an angle of less than 90° relative to the plane of the surface of a patient's skin **399**), continues moving distally through the length of the percutaneously formed puncture, *i.e.*, through the tissue tract **407** (extending through the subcutaneous tissue **409** overlying the vessel **400**), and through the arteriotomy **405** into the lumen **404** of the blood vessel **400**, until the distal end **20** of the deployment device **200** (comprising the footplate **110'** and the distal ends of the distal C-tubes) are intraluminal (inside lumen **404** of the blood vessel **400**).

In accordance with an embodiment of the present invention, once inside the vessel **400**, owing to the positive arterial blood pressure, blood flows into the main conduit area **205** (which acts as a blood marking passageway) via the inlet hole **406** and then proximally to the side hole **206**, where blood droplets **408** can be observed ("blood marking") (see FIG. **32**). Such visual observation of proximal blood flow is an affirmative indication to the user that the footplate **110'** is positioned inside the vessel **400**. The distal end **20** of the deployment device **200** is then preferably advanced a few millimeters more to make sure that the footplate **110'** is completely within the lumen **404** of the blood vessel **400**, and that the clinician is not observing false blood marking. The guide wire **299** is then completely removed by the user (by pulling it in the proximal direction through the proximal guide wire exit **207**) and then disposed of in a proper medical waste container, while the deployment device **200** is held in place by the user. (See FIG. **33**—guide wire **299** has been removed, while the distal end **20** of the deployment device **200** remains within the lumen **404** of the blood vessel **400**, *i.e.*, the default position).

FIGS. **21a-30c** relate to the deployment of the closure device **100** by the deployment device **200** in accordance with an embodiment of the present invention. These figures show the action and automatic functionality of the deployment device **200** as well as depict the sequential displacements (movements) of the various parts within the assembly of the deployment device **200**. FIGS. **21a-30c** are shown primarily as section views to enable a better understanding of the relative movements of the individual parts within the assembly of the deployment device **200** (without showing the percutaneous puncture, blood vessel, etc.), according to an embodiment of the present invention. In these figures, an axial center-line is indicated which is coincident with the longitudinal center-line of the wire **120**. These figures also provide "windows" for close-up views of the inner workings of specific portions (shown by a dashed line and circle) of the device **200**. Parts of

the deployment device such as the inner proximal tube 213, the outer proximal tube 211, wire ferrule 250, the slide barrel 215, cut-off lever 218, squeeze lever handle 232, link 235 and button 233, right and left side lateral constant force springs 125 (comprising the roll spring portion 228 and the flat portion 227), lateral upper hook-shaped ends 237, upper and lower constant force springs 135 (comprising roll spring portions 229 and the flat portions 230), the outer distal C-tube 201, the inner distal C-Tube 202, the footplate 110' (monolithic footplate embodiment shown), the plug 111, sheer tube 224, and the nose portion 203 of the outer distal C-tube 201, are shown.

As described supra, FIGS. 33-43 show the relative movements of the individual parts of the distal portion 20 of the deployment device 200 and the closure device 100, with respect to the patient's anatomy and the architecture of the percutaneous passageway, i.e., skin puncture, subcutaneous tissue tract, arteriotomy, and blood vessel, according to an embodiment of the present invention.

Turning to FIGS. 21a-21d, a deployment device 200 is shown in its default position, prior to the squeeze lever handle 232 being squeezed by the user. The squeeze lever handle 232 is in the fully open (un-squeezed) position. The squeeze lever handle 232 is hingedly attached to the control housing 210 via cylindrical features 271 that extend from both sides of the control housing 210 and are coaxial with the through-holes 272 in the distal ears of the squeeze lever handle 232. A link 235 is hingedly attached to both the squeeze lever handle 232 and the slide barrel 215. This link 235 is a coupling element that transmits force from the squeeze lever handle 232 to the slide barrel 215. At this step, the inner proximal tube 213 and outer proximal tube 211 are in their fully distal positions. The lateral upper hook-shaped ends 237 of the squeeze lever handle 232 are engaged with the hooked features 255 of the proximal end 222 of the skin flange assembly 222. The inner distal C-tube 202 (not shown) and outer distal C-tube 201 are in their fully distal positions. The footplate 110' (not shown) is housed in the outer distal C-tube 201. The closed end of the footplate 101' is in frictional contact with the under-cut feature 208 at the distal end of the inner distal C-tube 202 (see FIG. 22e).

In accordance with an embodiment of the present invention, after the guide wire 299 is removed from the deployment device 200, the distal end 20 of the deployment device 200 (in which the footplate 110' resides) is within the lumen of the vessel (see FIG. 33) prior to the squeeze lever handle 232 being squeezed. The description of this forthcoming squeezing action is detailed in a series of successive steps for a better understanding of how the deployment device 200 operates, infra, as shown in FIGS. 22a-26g. However, in a preferred embodiment, this squeezing motion/action occurs all in one squeezing motion/action.

Turning to FIGS. 22a-22e, the squeeze lever handle 232 is squeezed such that the slide barrel 215 is moved proximally via the link 235 which is hingedly attached to both the squeeze lever handle 232 and the slide barrel 215. The slide barrel's 215 squeeze finger catch tabs 217 are in frictional contact with the outer proximal tube's 211 catch tabs 220 such that the outer proximal tube 211 is pulled proximally. The outer distal C-tube 201 is slid proximally with respect to the inner distal C-tube 202, thus exposing the footplate 110 on the inside of the lumen 404 of the vessel 400. (See also FIG. 34, showing the exposure of the footplate 110' within the lumen of the blood vessel.)

Turning to FIG. 23a-23e, the squeeze lever handle 232 is further squeezed such that the slide barrel 215 moves further proximally via the link 235 (which is hingedly attached to

both the squeeze lever handle 232 and the slide barrel 215) (see FIG. 23a). Proximal movement of the slide barrel's 215 squeeze finger catch tabs 217 (engaged with the outer proximal tube's 211 catch tabs 220) (see FIG. 23d) results in further proximal movement of the outer proximal tube 211. This further proximal movement of the outer proximal tube 211 creates engagement of the outer proximal tube's push tabs 223 with the distal surface 253 of the wire ferrule 250 (see FIG. 23c). The proximal movement of the wire ferrule 250 translates into proximal movement and force (tensile load) applied to the wire 120. This force actuates the footplate 110' (which has a stable pivot/hinge point provided by the undercut feature 208 on the distal end of the inner distal C-tube 202) to a substantially perpendicular position relative to the longitudinal axis of the control housing 210 inside the vessel 400 (see FIGS. 23e & 35). The embodiments of the footplate that are related to the monolithic footplate and the footplate comprising more than one part that are permanently fixed to each other, and permanently deform (plastically deform) due to this applied tensile load. The embodiments of the footplate related to the hinge and ball-and-socket mechanisms, do not plastically deform, but rotate into the actuated position due to the applied tensile load. At the end of the proximal travel of the wire ferrule 250, the proximal snap finger 243 of the outer proximal tube 211 locks with the snap feature 260 of the control housing 210 (see FIG. 23c). Further, the wire ferrule's proximal snap finger 254 engages with the cap finger 242 such that the wire ferrule 250 is locked in its fully proximal position (see FIG. 23c).

Turning to FIGS. 24a-24f, the squeeze lever handle 232 is further squeezed such that the slide barrel 215 moves further proximally via the link 235 (which is hingedly attached to both the squeeze lever handle 232 and the slide barrel 215) (see FIG. 24a). As the slide barrel 215 moves proximally, the outside radiused portion 270 of the squeeze fingers 269 at the distal portion of the slide barrel 215 come into frictional contact with a reduced-width region 273 in the cut-out 261 in the top portion of the control housing 210 (see FIG. 24e). The two squeeze fingers 269 are squeezed together (elastically deformed, each in an inward direction) until there is complete disengagement of the squeeze finger catch tabs 217 from the catch tabs 220 of the outer proximal tube 211 (see FIG. 24f). This proximal movement of the slide barrel 215 creates contact of the proximal end of the slide barrel 244 with the release shaft 239 (see FIG. 24d). Consequently, the release shaft 239 is moved proximally such that the release shaft's proximal end 245 comes into frictional contact with the radiused feature 246 of the cap finger, right 241. The cap finger, right 241 is elastically deformed in an outward direction such that the distal end of the cap finger, right 241 becomes disengaged from the proximal end 262 of the inner proximal tube 213 (see FIG. 24c).

Turning to FIGS. 25a-25d, the squeeze lever handle 232 is further squeezed such that the slide barrel 215 is moved further proximally via the link 235 (which is hingedly attached to both the squeeze lever handle 232 and the slide barrel 215) (see FIG. 25a). At this point in the actuation process, the slide barrel is engaged with neither the inner nor the outer proximal tube. Rather, this step simply offsets the sequence timing of the relative movement of the inner proximal tube 213 and the outer proximal tube 211. At the end of this step, the proximal surfaces of the push features 248 on the proximal end 244 of the slide barrel 215 are in frictional contact with the distal surfaces of the catch tabs 263 of the inner proximal tube 213.

Turning to FIG. 26a-26g, the squeeze lever handle 232 is further squeezed such that the slide barrel 215 moves further

29

proximally via the link **235** (which is hingedly attached to both the squeeze lever handle **232** and the slide barrel **215**) (see FIG. **26a**). At the end of this squeezing motion, the squeeze lever handle **232** is disallowed from being further squeezed owing to a box-shaped feature **265** protruding upwards from the slide button **233** (which is slidably attached to the squeeze lever handle **232**) coming into frictional contact with the underside of the control housing **210** (see FIGS. **26d** & **26g**). During the squeezing motion, the proximal surfaces of the push features on the proximal end **248** of the slide barrel **215** push the inner proximal tube (via the distal surfaces of the catch tabs **263** of the inner proximal tube **213**) in a proximal direction (see FIG. **26c**) to the inner proximal tube's **213** full and final proximal position. At the end of this step, the snap fingers **264** of the inner proximal tube **213** are locked with the catch features **259** of the control housing **210** (see FIG. **26e**). Also at the end of this step, the snap fingers **249** of the squeeze lever handle **232** have snapped into the primary undercut features **258** on the outside of the control housing **210** (see FIG. **26g**). At this point, the inner distal C-tube **202** has been moved in the proximal direction (to its fully-most proximal position) such that it is completely detached from the footplate **110'**, leaving the footplate **110'** completely exposed within the lumen **404** of the blood vessel **400** (see also FIG. **36**). This squeezing action also disconnects the lateral upper hook-shaped ends **237** of the squeeze lever handle **232** (on both the left and right sides of the device) from the hook features **255** on the proximal end of the skin flange assembly **222**, thereby releasing the skin flange assembly **222**, which moves in the distal direction until the distal surface **209** of the distal portion **221** of the skin flange assembly **222** contacts the outside surface of the patient's skin **399** (see also, FIG. **38**). The distal movement of the skin flange assembly **222** is due to a constant distal force created by the lateral constant force springs **125** (on the left and right sides of the control housing **210**). As the skin flange assembly **222** is moving in a distal direction, but prior to the distal surface **209** of the distal portion **221** coming into contact with the outside surface of the patient's skin **399**, the user may vertically orient the deployment device **200** to a substantially perpendicular position with respect to the plane of the surface of the patient's skin **399** (see FIG. **37**). This vertical orientation of the deployment device **200** creates a planar relationship between the distal surface **209** of the distal portion **221**, and the outside of the patient's skin **399** such that an approximately even contact pressure exists between the planar interface of the distal surface **209** of the distal portion **221** of the skin flange assembly **222**, and the outside of the patient's skin **399** (see FIG. **38**). A rotary damping system **225** (see FIG. **27**), which comprises a rack and pinion configuration, may be provided to provide a force to the skin flange portion in opposition to the distal force exerted by the lateral constant force springs, which partially resists, but does not fully negate, the constant distal force. This rotary damping system **225** serves to maintain an appropriately low velocity of the skin flange which offers two benefits; (1) it allows the user time to vertically orient the deployment device **200** (as discussed supra) and, (2) it minimizes the impact force at the moment that the distal surface **209** comes into contact with the outside of the patient's skin **399**. Once the distal surface **209** of the distal portion **221** of the skin flange assembly **222** is in contact with the skin **399** of a patient, it applies a constant distal force to the skin **399** which, in turn, creates a tensile proximal force in the wire **120**, which seats the footplate **110'** against the inside of the vessel wall **403**. A datum is created at the point where the footplate is seated (see also, FIG. **38**). At this point, the distal ends of both the outer distal C-tube **201**

30

and the inner distal C-tube **202** have been moved in the proximal direction to a position proximal (outside) of the outside surface **402** of the blood vessel wall **401** of the blood vessel **400** (see FIG. **38**).

Turning successively to FIGS. **28a-28b**, the slide button **233** is slid in a distal direction, which allows the squeeze lever handle **232** to be free for further squeezing in the next step. When the slide button **233** has been actuated (slid distally), the box-shaped feature **265** is placed in a distal position such that it is free (from mechanical interference) to enter a rectangularly-shaped opening **273** in the bottom side of the control housing **210**. The entrance of the box-shaped feature **265** into the rectangularly-shaped opening **273** does not occur until the next step during further squeezing of the squeeze lever handle **232**.

Turning to FIG. **29a-29f**, the squeeze lever handle **232** is further squeezed a final time, to its fully-most squeezable position. In accordance with the distal movement of the slide button **233** (as described supra), the box-shaped feature **265** (protruding upwardly from the slide button **233**), is allowed to protrude into the rectangularly-shaped opening **273** in the bottom of the control housing **210**, during the final squeeze, thus allowing the squeeze lever handle **232** (to which the slide button **233** is slidably attached) to come to its final, fully-most squeezed position (see FIGS. **29a** & **29d**). At the end of this step, the snap fingers **249** of the squeeze lever handle **232** snap into the secondary undercut features **275** on the outside of the control housing **210** (see FIG. **29c**). This final squeeze releases the slide barrel **215** at the lower hinge pin **256** from the C-feature **266** on the proximal end of the link **235**. The C-feature **266** is stripped from the lower hinge pin **256** via cam-action of the centrally located cam features **267** of the link **235** with the underside (outside surface) **257** of the control housing **210** (see FIG. **29e**). Immediately upon disassociation of the link **235** from the slide barrel **215**, the slide barrel **215** moves distally under the force of the upper and lower constant force springs **135** (see FIG. **29a**). As the slide barrel **215** moves in a distal direction, so does the push tube **212**, the push tube insert **112**, and the plug **111**. The plug **111** moves over the wire **120**, while remaining concentric with the wire **120**, and rotationally aligned with the wire **120** and the footplate **110'**. When the distal end **104** of the plug **111** comes into proximity of the proximal margin **113** of the footplate **110'**, motion ceases (see FIG. **29f**). In accordance with an embodiment with the present invention, the distal C-tubes locally expand and disassociate creating an irreversible un-nested condition that allows passage of the plug **111** into the post-vascular deployment configuration and position, wherein the plug **111** comprises a proximal diameter which is larger than an inner diameter of the main conduit area **205**. The distal C-tubes remain disassociated (un-nested) from one another after the plug **111** has traveled (proximal-to-distal) through the longitudinal length of the distal C-tubes (see FIG. **9d**). At the end of the distal movement of the slide barrel **215**, the cut-off lever **218** flips up as a result of its distal, underside portion coming into contact with the ramp features **277** on the top side of the control housing **210** (see FIG. **29a**).

As shown in FIG. **39**, at the end of this step, the plug **111** has entered the arteriotomy **405**, and the plug **111** and the footplate **110'** are in their final positions relative to one another, and the vessel wall **401** (a post-deployed closure device deployment configuration and position, as described infra). The post-deployed closure device deployment position (in the distal-proximal direction) is controlled by the datum that was created, as discussed supra.

Turning to FIGS. **30a-30c**, the distal portion of the cut-off lever **218** is pulled up in a direction perpendicularly away

from the longitudinal axis of the wire, by the user. During the cut-off procedure, the cut-off lever 218 rotates about a hinge pin 238, co-located with a through-hole 274 at a proximal margin of a proximal extension on the slide barrel 215. The contact surface 310 at the underside of the cut-off lever 218 comes into frictional contact with the most proximal surface 315 of the cap 240 at the proximal end of the shear tube 224. The shear tube 224 is driven in a distal direction owing to the cam-action imparted by the contact surface 310 of the cut-off lever 218. As the shear tube 224 is displaced distally over the static (stationary) wire 120, the angled, distal end 312 of the shear tube 224 is placed in high contact force with the angled proximal surface 350 of the push tube insert 112 (which is resisting the distally directed force being applied to the shear tube 224). A scissor-type shearing force is applied to the wire 120 at a position just slightly proximal of the proximal end 103 of the plug 111, as the angled distal surface 312 of the shear tube 224 slides over (and past) the angled proximal surface 350 of the push tube insert 112. When the ultimate shear strength of the wire 120 has been exceeded, the wire material fails (disassociates). Simultaneously, the short remaining wire section that is left protruding proximally from the proximal end 103 of the plug 111, is bent in the direction of the movement of the shear tube 224 (see FIGS. 30c & 41). The bend that is created in the wire is sufficient to lock the relative positions of the plug 111 and the footplate 110' in order to provide a stable and secure final implant construct. Details of the cut off system are shown in FIG. 40 (the pre-cut/pre-bent configuration)—including the shear tube 224 and wire 120. The cutting and bending of the wire 120 by the shear tube 224 (the post-cut/post-bent configuration) is shown in FIGS. 30c and 41. The deployment device 200 may then be removed from the percutaneous puncture and disposed of in a proper medical waste container.

Turning to FIGS. 42 & 43, the closure device's 100 post-deployed closure device deployment configuration and position will now be described. This configuration and position can include any of the various embodiments of the footplate as described supra. The discussion of the closure device's 100 post-deployed closure device deployment configuration and position, however, will specifically refer to footplate 110' (with plug 111 and wire 120), as an example of this configuration and position with brief references to some of the other footplate embodiments.

In accordance with an embodiment of the present invention, during the method of deploying the closure device 100 of an embodiment of the present invention as described supra, the plug 111 is pushed through the main conduit area 205 and over the proximal portion of the wire 120 as the footplate 110' rests against the inner wall 403 of the vessel 400 in its post-deployed closure device deployment configuration and position. Additionally, the plug 111 is pushed percutaneously into the puncture, down through the tissue tract and into the arteriotomy. The plug's 111 distal portion 104 extends through the vessel wall over the distal portion of the wire 120 and into contact with the footplate 110' at the proximal leg 34', at about the common plane established by the elongated U-shaped loop 30' and the arcuately-curved connecting portion 33'. (In the closure device embodiment comprising footplate 110, for example, the distal portion 104 of the plug 111 pinches (traps) part of the artery wall at the margin of the arteriotomy 405 (drawing this part of the artery wall and holding it) as it nests itself within the U-shaped looped portion 30 of the footplate 110, where the distal end 104 of the plug 111 can reside slightly distal of the inside surface of the vessel wall 403 (within the lumen 404 of the blood vessel 400)). The portion of the footplate 110' that is seated against the inside wall 403

of the artery comprises the elongated U-shaped loop 30'. The wire 120 of the footplate 110' extends through the axial hole 105 in the plug 111 in a proximal direction, where the wire 120 is bent at an acute angle in a direction away from a longitudinal axis of the plug's axial hole 105 at the proximal end 103 of the plug 111. The proximal portion 103 of the plug 111 resides outside the wall 401 of the artery in the tissue tract. Alternatively, the entire plug may reside within the arterial wall. Generally, the diameter of the proximal portion 103 of the plug 111 is larger than the opening in the wall of the blood vessel (the arteriotomy 405) at the radial interface between the arteriotomy 405 and the proximal portion 103 of the plug 111. In this post-deployed closure device deployment configuration and position, the closure device's 100 seal is formed by the radial interface of the plug 111 and the arteriotomy 405. (In the closure device embodiment comprising footplate 110, for example, the vessel wall tissue that was drawn into the looped portion (and supported by the footplate 110) can also help form the seal of the closure device 100.) The mechanism of retention (locking) of the closure device 100 comprises the portion of the wire 120, which is proximal to the plug 111, that was cut and bent (by the action of the cut-off lever 218 of the deployment device 200, as described supra) to secure the plug 111 and footplate 110' together in conjunction with the footplate's 110' substantially parallel configuration with respect to the inside wall 403 of the blood vessel. This mechanism of retention allows the footplate 110' to resist passage back through the arteriotomy 405, in a proximal direction. Likewise, this mechanism of retention aids in preventing the plug 111 from migrating (passing) completely through the arteriotomy 405, in a distal direction. Hence the closure device 100 (the final implant construct) is stable, i.e. locked, as to resist dislodgement in vivo in either the distal or proximal direction.

The same basic post-deployed closure device deployment configuration and position can be established with any of the embodiments of the footplate, as described supra. For instance, the portion of the footplate that can be seated against the inside wall of the blood vessel (and is in contact with the distal portion 104 of the plug 111) comprises, for example; the elongated U-shaped loop 730 for footplate 710 (see FIG. 1f), where the plug's 111 distal portion 104 extends through the vessel wall over the distal portion of the wire 120 and into contact with the footplate 710 at the proximal leg 734, at about the common plane established by the elongated U-shaped loop 730 and the arcuately-curved connecting portion 33. In the embodiments where the footplate is represented by a longitudinally shaped bar (e.g., footplates 810, 910, 1010, 1110, and 1210) either the top or bottom surface of the footplate is seated against the inside wall of the blood vessel. For example, the bottom arcuately-shaped surfaces of footplates 810 and 1010 (see FIGS. 1g, 1h, 1i, and 1j) are seated against the inside wall of the blood vessel; or the substantially planar top surfaces (938 and 1138) of footplates 910 and 1110 respectively (see FIGS. 1k, 1l, 1m, and 1n) are seated against the inside wall of the blood vessel; or the bottom substantially planar surface 1243 of footplate 1210 (see FIGS. 1o and 1p) is seated against the inside wall of the blood vessel.

While the invention is susceptible to various modifications, and alternative forms, specific examples thereof have been shown in the drawings and are herein described in detail. It should be understood, however, that the invention is not to be limited to the particular forms or methods disclosed, but to the contrary, the invention is to cover all modifications, equivalents and alternatives falling within the spirit and scope of the appended claims.

33

What is claimed is:

1. A closure device for sealing an opening formed through biological tissue, said closure device comprising:

- (a) a plug comprising a proximal end and a distal end;
- (b) a rigid wire extending from a position distal to said plug's distal end through said plug and comprising a plastically deformed bend that is positioned in secure engagement with said proximal end of said plug; and
- (c) a footplate attached to said wire, and positioned distally to said distal end of said plug.

2. The closure device of claim **1**, wherein at least one of said plug, said wire, and said footplate is at least partially formed of a biocorrosible metal.

3. The closure device of claim **2**, wherein said biocorrosible metal comprises magnesium.

4. The closure device of claim **2**, wherein said biocorrosible metal comprises a magnesium alloy.

5. The closure device of claim **4**, wherein said magnesium alloy is AZ31.

6. The closure device of claim **1**, wherein said plug includes a passageway through which the wire extends.

7. The closure device of claim **6**, wherein said plug is movable along said wire.

8. The closure device of claim **1**, wherein said plug comprises a first portion having a first dimension and a second portion having a second dimension that is greater than the first dimension.

9. The closure device of claim **8**, wherein said footplate is positioned distally to the first portion of said plug and said deformable portion is positioned proximally to the second portion of said plug.

34

10. The closure device of claim **8**, wherein said plug is substantially conically-shaped.

11. The closure device of claim **10**, wherein said plug comprises a distal surface at said distal end and a proximal surface at said proximal end, wherein an area of said plug's distal surface is smaller than an area of said plug's proximal surface.

12. The closure device of claim **11**, said wire further comprising a longitudinal axis, and said plastically deformed bend is bent at about a 30 to 90 degree angle from said longitudinal axis.

13. The closure device of claim **1**, wherein said footplate is a substantially looped distal portion of the wire.

14. The closure device of claim **1**, wherein said footplate comprises an elongated plate portion attached to a distal end of said wire, and an aperture formed therethrough.

15. The closure device of claim **1**, wherein said footplate comprises a longitudinally shaped plate portion, and is hingedly attached to a distal end of said wire.

16. The closure device of claim **1**, wherein said wire comprises a tensile element selected from the group consisting of a monofilament and a multifilament.

17. The closure device of claim **1**, wherein said footplate and said plug are biodegradable.

18. The closure device of claim **17**, wherein said footplate biodegrades at a rate greater than that of said plug, such that the footplate completely biodegrades prior to the complete biodegradation of said plug.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION


PATENT NO. : 8,137,380 B2
APPLICATION NO. : 12/204977
DATED : March 20, 2012
INVENTOR(S) : Stephen M. Green et al.

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Column 33, line 29, claim 9, please delete “deformable portion” and add --plastically deformed bend--

Signed and Sealed this
Seventeenth Day of July, 2012

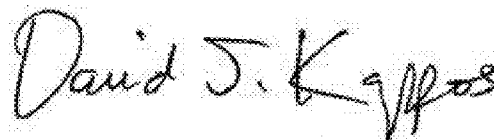A handwritten signature in black ink that reads "David J. Kappos". The signature is written in a cursive style with a large initial "D".

David J. Kappos
Director of the United States Patent and Trademark Office