



(11) **EP 3 853 327 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:

16.08.2023 Bulletin 2023/33

(21) Application number: **19770155.0**

(22) Date of filing: **12.09.2019**

(51) International Patent Classification (IPC):
C10L 1/222^(2006.01)

(52) Cooperative Patent Classification (CPC):
C10L 1/2222; C10L 1/1905; C10L 1/191; C10L 1/2225; C10L 10/04; C10L 2270/023; C10L 2270/026

(86) International application number:
PCT/GB2019/052554

(87) International publication number:
WO 2020/058672 (26.03.2020 Gazette 2020/13)

(54) **QUATERNARY AMMONIUM COMPOUND AND FUEL COMPOSITION**

QUARTERNÄRE AMMONIUM VERBINDUNG UND TREIBSTOFFZUSAMMENSETZUNG

COMPOSÉ D' AMMONIUM QUATERNAIRE ET UN CARBURANT

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **19.09.2018 GB 201815257**

(43) Date of publication of application:
28.07.2021 Bulletin 2021/30

(73) Proprietor: **Innospec Limited**
Ellesmere Port, Cheshire CH65 4EY (GB)

(72) Inventors:
• **ROSS, Alan Norman**
Cheshire CH65 4EY (GB)
• **PETTS, Matthew**
Cheshire CH65 4EY (GB)

(74) Representative: **Appleyard Lees IP LLP**
15 Clare Road
Halifax HX1 2HY (GB)

(56) References cited:
WO-A1-2016/016641 WO-A1-2018/178683
US-A- 3 808 173

EP 3 853 327 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to novel quaternary ammonium compounds, to compositions comprising these compounds and methods and uses relating thereto. In particular the invention relates to compositions, methods and uses for improving the performance of engines, especially diesel engines, using fuel additives. In particular the invention relates to additives for diesel fuel compositions for use in diesel engines with high pressure fuel systems.

[0002] Due to consumer demand and legislation, diesel engines have in recent years become much more energy efficient, show improved performance and have reduced emissions.

[0003] These improvements in performance and emissions have been brought about by improvements in the combustion process. To achieve the fuel atomisation necessary for this improved combustion, fuel injection equipment has been developed which uses higher injection pressures and reduced fuel injector nozzle hole diameters. The fuel pressure at the injection nozzle is now commonly in excess of 1500 bar (1.5×10^8 Pa). To achieve these pressures the work that must be done on the fuel also increases the temperature of the fuel. These high pressures and temperatures can cause degradation of the fuel. Furthermore, the timing, quantity and control of fuel injection has become increasingly precise. This precise fuel metering must be maintained to achieve optimal performance.

[0004] Diesel engines having high pressure fuel systems can include but are not limited to heavy duty diesel engines and smaller passenger car type diesel engines. Heavy duty diesel engines can include very powerful engines such as the MTU series 4000 diesel having 20 cylinder variants designed primarily for ships and power generation with power output up to 4300 kW or engines such as the Renault dXi 7 having 6 cylinders and a power output around 240kW. A typical passenger car diesel engine is the Peugeot DW10 having 4 cylinders and power output of 100 kW or less depending on the variant.

[0005] A common problem with diesel engines is fouling of the injector, particularly the injector body, and the injector nozzle. Fouling may also occur in the fuel filter. Injector nozzle fouling occurs when the nozzle becomes blocked with deposits from the diesel fuel. Fouling of fuel filters may be related to the recirculation of fuel back to the fuel tank. Deposits increase with degradation of the fuel. Deposits may take the form of carbonaceous coke-like residues, lacquers or sticky or gum-like residues. Diesel fuels become more and more unstable the more they are heated, particularly if heated under pressure. Thus diesel engines having high pressure fuel systems may cause increased fuel degradation. In recent years the need to reduce emissions has led to the continual redesign of injection systems to help meet lower targets. This has led to increasingly complex injectors and lower tolerance to deposits.

[0006] The problem of injector fouling may occur when using any type of diesel fuels. However, some fuels may be particularly prone to cause fouling or fouling may occur more quickly when these fuels are used. For example, fuels containing biodiesel and those containing metallic species may lead to increased deposits.

[0007] When injectors become blocked or partially blocked, the delivery of fuel is less efficient and there is poor mixing of the fuel with the air. Over time this leads to a loss in power of the engine and increased exhaust emissions and poor fuel economy.

[0008] Deposits are known to occur in the spray channels of the injector, leading to reduced flow and power loss. As the size of the injector nozzle hole is reduced, the relative impact of deposit build up becomes more significant. Deposits are also known to occur at the injector tip. Here they affect the fuel spray pattern and cause less effective combustion and associated higher emissions and increased fuel consumption.

[0009] In addition to these "external" injector deposits in the nozzle hole and at the injector tip which lead to reduced flow and power loss, deposits may occur within the injector body causing further problems. These deposits may be referred to as internal diesel injector deposits (or IDIDs). IDIDs occur further up inside the injector on the critical moving parts. They can hinder the movement of these parts affecting the timing and quantity of fuel injection. Since modern diesel engines operate under very precise conditions these deposits can have a significant impact on performance.

[0010] IDIDs cause a number of problems, including power loss and reduced fuel economy due to less than optimal fuel metering and combustion. Initially the engine may experience cold start problems and/or rough engine running. These deposits can lead to more serious injector sticking. This occurs when the deposits stop parts of the injector from moving and thus the injector stops working. When several or all of the injectors stick the engine may fail completely.

[0011] IDIDs are recognised as a serious problem by those working in the field and a new engine test has been developed by the industry based organisation, the Coordinating European Council (CEC). The IDID DW10C test was developed to be able to discriminate between a fuel that produces no measurable deposits and one which produces deposits that cause startability issues considered unacceptable. The objective of the test is to discriminate between fuels that differ in their ability to produce IDIDs in direct injection common rail diesel engines.

[0012] The present inventors have studied internal diesel injector deposits and have found that they contain a number of components. As well as carbonaceous deposits the presence of lacquers and/or carboxylate residues can lead to injector sticking.

[0013] Lacquers are varnish-like deposits which are insoluble in fuel and common organic solvents. Some occurrences of lacquers have been found by analysis to contain amide functionality and it has been suggested that they form due to

the presence of low molecular weight amide containing species in the fuel.

[0014] Carboxylate residues may be present from a number of sources. By carboxylate residues we mean to refer to salts of carboxylic acids. These may be short chain carboxylic acids but more commonly long chain fatty acid residues are present. The carboxylic residues may be present as ammonium and/or metal salts. Both carboxylic acids and metals may be present in diesel fuel from a number of sources. Carboxylic acids may occur due to oxidation of the fuel, may form during the combustion process and are commonly added into fuel as lubricity additives and/or corrosion inhibitors. Residual fatty acids may be present in the fatty acid methyl esters included as biodiesel and they may also be present as byproducts in other additives. Derivatives of fatty acids may also be present and these may react or decompose to form carboxylic acids.

[0015] Various metals may be present in fuel compositions. This may be due to contamination of the fuel during manufacture, storage, transport or use or due to contamination of fuel additives. Metal species may also be added to fuels deliberately. For example, transition metals are sometimes added as fuel borne catalysts to improve the performance of diesel particulate filters.

[0016] The present inventors believe that one of the many causes of injector sticking occurs when metal or ammonium species react with carboxylic acid species in the fuel. One example of injector sticking has arisen due to sodium contamination of the fuel. Sodium contamination may occur for a number of reasons. For example, sodium hydroxide may be used in a washing step in the hydrosulfurisation process and could lead to contamination. Sodium may also be present due to the use of sodium-containing corrosion inhibitors in pipelines. Another example can arise from the presence of calcium from, for example, interaction with or contamination with a lubricant or from calcium chloride used in salt drying processes in refineries. Other metal contamination may occur for example during transportation due to water bottoms.

[0017] Metal contamination of diesel fuel and the resultant formation of carboxylate salts is believed to be a significant cause of injector sticking. The formation of lacquers is yet another major cause of injector sticking.

[0018] One approach to combatting IDIDs and injector sticking resulting from carboxylate salts is to try to eliminate the source of metal contamination and/or carboxylic acids or to try to ensure that particularly problematic carboxylic acids are eliminated. This has not been entirely successful and there is a need for additives to provide control of IDIDs.

[0019] Deposit control additives are often included in fuel to combat deposits in the injector nozzle or at the injector tip. These may be referred to herein as "external injector deposits". Additives are also used to control deposits on vehicle fuel filters. However additives which have been found to be useful to control "external deposits" and fuel filter deposits are not always effective at controlling IDIDs. A challenge for the additive formulator is to provide more effective detergents.

[0020] It is an aim of the present invention to provide methods and uses which improve the performance of a diesel engine, especially a diesel engine having a high pressure fuel system. This may be achieved for example by preventing or reducing the formation of IDIDs and/or by reducing or removing existing IDIDs. The invention also provides methods and uses which control "external injector deposits" and/or fuel filter deposits.


[0021] Reducing or preventing the formation of deposits may be regarded as providing "keep clean" performance. Reducing or removing existing deposits may be regarded as providing "clean up" performance. It is an aim of the present invention to provide "keep clean" and/or "clean up" performance.

[0022] Many different types of compounds are known in the art for use as detergent additives in fuel oil compositions, for the control of deposits in engines.

[0023] The present invention relates to novel quaternary ammonium compounds having a counterion that is the partial ester of a polycarboxylic acid that are useful as detergents.

[0024] WO2016/016641 describes quaternary ammonium compounds useful as fuel and lubricant additives.

[0025] Described herein is a quaternary ammonium compound of formula (I):

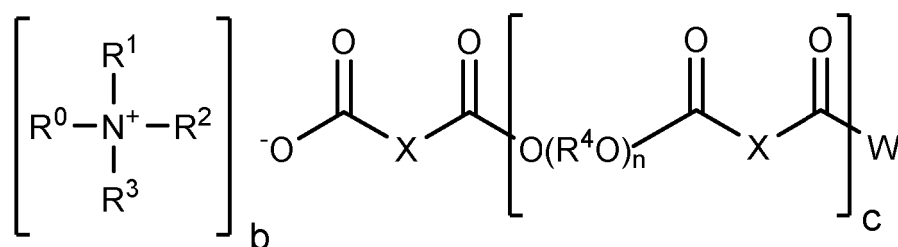

(I)

wherein R^0 , R^1 , R^2 and R^3 is each independently an optionally substituted hydrocarbyl group, X is a linking group; R^4 is an optionally substituted alkylene group; n is a positive integer; c is at least 1; W is O^- or OH ; b is 1 when W is OH , and b is 2 when W is O^- .


[0026] In some embodiments b is 2 and W is O⁻.

[0027] In some preferred embodiments, b is 1 and W is OH.

[0028] The present invention relates to quaternary ammonium compounds including an anion (IIA) as follows:

5

10

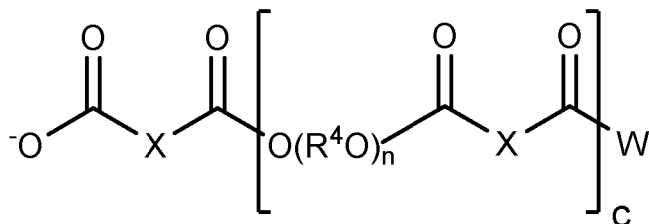

(IIA)


15

c is at least 1. In some embodiments c may be greater than 1.

[0029] The anion is suitably formed from an anion precursor compound which is a dicarboxylic acid of formula (IIB):

20

25

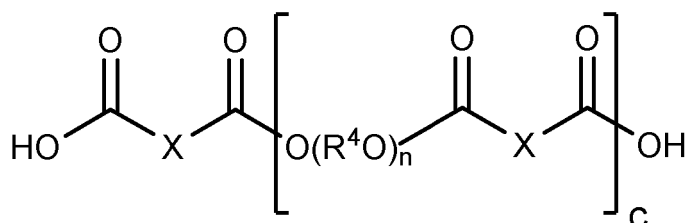

(IIB)

30

[0030] The anion precursor compound (IIB) is suitably formed by the reaction of a diol of formula HO(R⁴O)_nH and a dicarboxylic acid of formula HOOCXCOOH or an anhydride thereof. In preferred embodiments the anion precursor compound (IIB) is formed by the reaction of a diol of formula HO(R⁴O)_nH and an anhydride.

[0031] The value of c will depend on the ratio of diacid/anhydride to diol used to prepare the anion precursor (IIB).


[0032] In some embodiments c may be greater than 1.

35

[0033] In preferred embodiments c is 1. In such embodiments the ratio of diacid/anhydride to diol used to prepare the anion precursor compound (IIB) is preferably at least 1.5:1, more preferably at least 1.8:1, preferably at least 2:1.

[0034] The quaternary ammonium compound of formula (I) includes at least one quaternary ammonium cationic species of formula (III):

40




45

(III)


[0035] In some embodiments W is OH, b is 1 and the compound of formula (I) has the formula (IA):

50

55

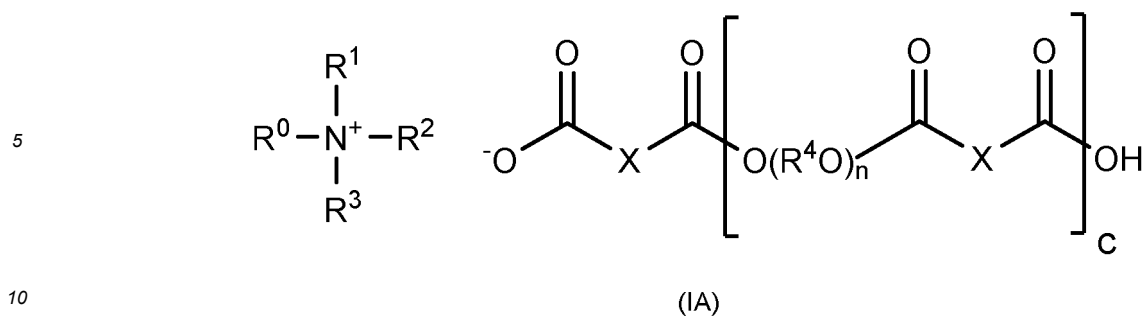

[0036] In some embodiments W is O⁻, b is 2 and the compound of formula (I) has the structure (IB):

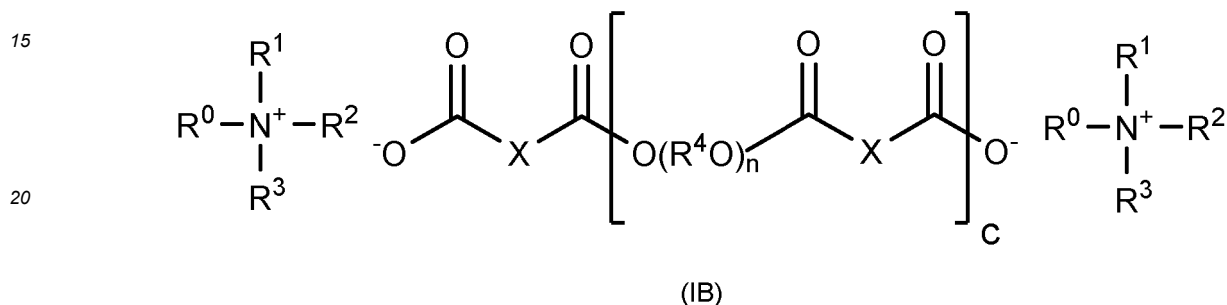

25 [0037] In embodiments in which the quaternary ammonium compound is a compound of formula (IB), each cationic species of formula (III) may be the same or different.

[0038] In some preferred embodiments each quaternary ammonium species (III) is the same.

[0039] Each of R⁰, R¹, R² and R³ is independently an optionally substituted hydrocarbyl group.

30 [0040] As used herein, the term "hydrocarbyl" substituent or group is used in its ordinary sense, which is well-known to those skilled in the art. Specifically, it refers to a group having a carbon atom directly attached to the remainder of the molecule and having predominantly hydrocarbon character. Examples of hydrocarbyl groups include:

35 (i) hydrocarbon groups, that is, aliphatic (which may be saturated or unsaturated, linear or branched, e.g., alkyl or alkenyl), alicyclic (e.g., cycloalkyl, cycloalkenyl) substituents, and aromatic (including aliphatic- and alicyclic-substituted aromatic) substituents, as well as cyclic substituents wherein the ring is completed through another portion of the molecule (e.g., two substituents together form a ring);

40 (ii) substituted hydrocarbon groups, that is, substituents containing non-hydrocarbon groups (e.g., halo (especially chloro and fluoro), hydroxy, alkoxy, keto, acyl, cyano, mercapto, alkylmercapto, amino, alkylamino, nitro, nitroso, and sulphony);

45 (iii) hetero substituents, that is, substituents which, while having a predominantly hydrocarbon character, in the context of this invention, contain other than carbon in a ring or chain otherwise composed of carbon atoms. Heteroatoms include sulphur, oxygen, nitrogen, and encompass substituents as pyridyl, furyl, thienyl and imidazolyl. In general, no more than two, preferably no more than one, non-hydrocarbon substituent will be present for every ten carbon atoms in the hydrocarbyl group; typically, there will be no non-hydrocarbon substituents in the hydrocarbyl group.

[0041] Preferably each of R⁰, R¹, R² and R³ is an optionally substituted alkyl, alkenyl or aryl group.

50 [0042] In this specification, unless otherwise stated references to optionally substituted alkyl groups may include aryl-substituted alkyl groups and references to optionally-substituted aryl groups may include alkyl-substituted or alkenyl-substituted aryl groups.

[0043] The quaternary ammonium compound used in the present invention may be prepared by any suitable means. Suitable methods will be known to the person skilled in the art.

55 [0044] In some embodiments R⁰ may be a lower alkyl group and the quaternary ammonium compound is prepared from an ester of formula R⁰OOCXCO[O(R⁴O)_nCOXCO]_cOR⁰. In such embodiments R⁰ is preferably methyl.

[0045] In some embodiments, R⁰ may be a lower alkyl group and the quaternary ammonium compound may be prepared from an ester quaternising agent of formula RCOOR⁰, followed by ion exchange reaction with an acid of formula

HOOCXCO[O(R⁴O)_nCOXCO]_cOH. In such embodiments R may be an optionally substituted aryl or alkyl group or an ester. For example R^o may be methyl and RCOOR^o may be methyl salicylate or dimethyl oxalate.

[0046] In some embodiments R^o is preferably a C1 to C5 alkyl group, preferably methyl.

[0047] In preferred embodiments the quaternary ammonium compound is prepared from a tertiary amine, an acid-activated alkylating agent and an acid. Thus R^o is preferably the residue of an alkylating agent.


[0048] Preferably the alkylating agent is an epoxide.

[0049] In preferred embodiments the first aspect of the present invention provides a quaternary ammonium compound which is the reaction product of:

(a) a tertiary amine of formula R¹R²R³N;


(b) an epoxide; and

(c) a compound of formula (IIB):

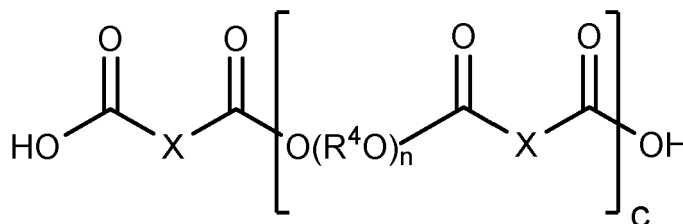

wherein R⁴ is an optionally substituted alkylene group, X is a linking group, n is a positive integer, and c is at least 1

[0050] According to an aspect of the present invention there is provided a method of preparing a quaternary ammonium compound, the method comprising reacting (a) a tertiary amine of formula R¹R²R³N with (b) an epoxide in the presence of (c) a compound of formula (IIB):

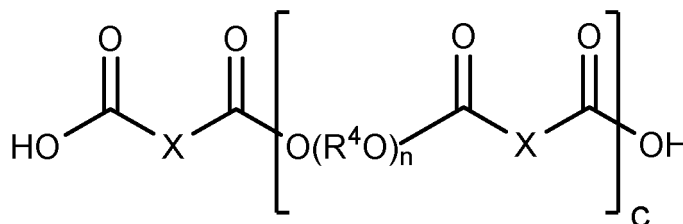

wherein R⁴ is an optionally substituted alkylene group, X is a linking group, n is a positive integer, and c is at least 1.

[0051] Preferred features of the invention will now be described.

[0052] In this specification any feature of any aspect of the invention may be combined with any feature of any other aspect as appropriate.

[0053] X is a linking group. Preferably X is an optionally substituted alkylene or arylene group. X is further defined herein.

[0054] The present invention relates to a composition, a method and a use involving a quaternary ammonium salt. This compound may be referred to herein as "the quaternary ammonium salt" or as "the quaternary ammonium compound".

[0055] The quaternary ammonium salt may comprise a single compound. In some embodiments mixtures containing more than one quaternary ammonium salt additive may be used. References herein to "a quaternary ammonium salt", "a quaternary ammonium compound" of the invention or "the quaternary ammonium salt" or "the quaternary ammonium compounds" include mixtures comprising two or more such compounds.

[0056] Component (a) used to prepare the quaternary ammonium salts/compounds of the present invention is a tertiary amine. Any suitable tertiary amine may be used.

[0057] In some embodiments of the present invention the tertiary amine may be a small compound of low complexity and low molecular weight. In some embodiments the tertiary amine may be a complex molecule and/or a molecule of high molecular weight which includes a tertiary amine moiety.

[0058] The tertiary amine compounds of the present invention preferably do not include any primary or secondary amine groups. In some embodiments they may be derived from compounds including these groups but preferably these have been subsequently reacted to form additional tertiary amine species. The tertiary amine compound used as component (a) may contain more than one tertiary amine group. However tertiary amine compounds including primary or secondary amine groups are within the scope of the invention provided these groups do not prevent quaternisation of

the tertiary amine species.

[0059] Tertiary amines for use herein are preferably compounds of formula $R^1R^2R^3N$, wherein each of R^1 , R^2 and R^3 is independently an optionally substituted alkyl, alkenyl or aryl group.

[0060] R^1 , R^2 and R^3 may be the same or different. In some preferred embodiments R^1 and R^2 are the same and R^3 is different.

[0061] Preferably each of R^1 and R^2 is independently an optionally substituted alkyl, alkenyl or aryl group having from 1 to 50 carbon atoms, preferably from 1 to 40 carbon atoms, more preferably from 1 to 30 carbon atoms.

[0062] Each of R^1 and R^2 may be optionally substituted with one or more groups selected from halo (especially chloro and fluoro), hydroxy, alkoxy, keto, acyl, cyano, mercapto, alkylmercapto, dialkylamino, nitro, nitroso, and sulphony. The alkyl groups of these substituents may be further substituted.

[0063] Preferably each of R^1 and R^2 is independently an optionally substituted alkyl or alkenyl group. Preferably each of R^1 and R^2 is independently an optionally substituted alkyl group. Preferably each of R^1 and R^2 is independently an optionally substituted alkyl or alkenyl group having from 1 to 50 carbon atoms, preferably from 1 to 40 carbon atoms, more preferably from 1 to 30 carbon atoms, suitably from 1 to 20 carbon atoms, preferably from 1 to 12 carbon atoms, more preferably from 1 to 10 carbon atoms, suitably from 1 to 8 carbon atoms, for example from 1 to 6 carbon atoms.

[0064] In some embodiments each of R^1 and R^2 is methyl and R^3 is a C_6 to C_{36} , preferably a C_{10} to C_{30} , alkyl or alkenyl group.

[0065] In some embodiments R^1 is methyl and each of R^2 and R^3 is a C_6 to C_{36} , preferably a C_{10} to C_{30} alkyl or alkenyl group.

[0066] Preferably R^1 is an optionally substituted alkyl or alkenyl group, preferably having from 1 to 10, preferably from 1 to 4 carbon atoms. Preferably R^1 is an alkyl group. It may be a substituted alkyl group, for example a hydroxy substituted alkyl group. Preferably R^1 is an unsubstituted alkyl group. The alkyl chain may be straight-chained or branched. In some preferred embodiments R^1 is selected from methyl, ethyl, propyl and butyl, including isomers thereof. In some especially preferred embodiments R^1 is methyl or ethyl.

[0067] Preferably R^2 is an optionally substituted alkyl or alkenyl group, preferably having from 1 to 10, preferably from 1 to 4 carbon atoms. Preferably R^2 is an alkyl group. It may be a substituted alkyl group, for example a hydroxy substituted alkyl group. Preferably R^2 is an unsubstituted alkyl group. The alkyl chain may be straight-chained or branched. In some preferred embodiments R^2 is selected from methyl, ethyl, propyl and butyl, including isomers thereof. In some especially preferred embodiments R^2 is methyl or ethyl.

[0068] In some embodiments R^3 is an optionally substituted alkyl or alkenyl group having from 1 to 50 carbon atoms, preferably from 1 to 40 carbon atoms, more preferably from 1 to 30 carbon atoms, suitably from 1 to 20 carbon atoms, preferably from 1 to 12 carbon atoms, more preferably from 1 to 10 carbon atoms, suitably from 1 to 8 carbon atoms, for example from 1 to 6 carbon atoms. Suitable substituents include halo (especially chloro and fluoro), hydroxy, alkoxy, keto, acyl, cyano, mercapto, alkylmercapto, amino, alkylamino, nitro, nitroso, sulphony, amido, alkyamido, imido and alkylimido. The alkyl groups of these substituents may be further substituted.

[0069] In some embodiments R^3 is an optionally substituted alkyl or alkenyl group, preferably having from 1 to 10, preferably from 1 to 4 carbon atoms. Suitably R^3 is an optionally substituted alkyl group. In some embodiments R^3 is an unsubstituted alkyl group, for example a C_1 to C_{10} , suitably a C_1 to C_6 or a C_1 to C_4 alkyl group. The alkyl group may be straight chain or branched.

[0070] In some preferred embodiments R^3 is a substituted alkyl group. Preferred substituents include alkoxy and hydroxyl groups.

[0071] In some embodiments the alkyl chain may be interrupted by one or more hetero atoms, for example one or more oxygen atoms.

[0072] In some preferred embodiments R^3 is a hydroxyl-substituted alkyl group. The alkyl chain may be straight-chained or branched. In some especially preferred embodiments R^3 is a hydroxyethyl group.

[0073] In one embodiment R^3 is a hydroxyethoxyethyl group.

[0074] In some embodiments each of R^1 , R^2 and R^3 is independently selected from an alkyl or hydroxyalkyl group having 1 to 12, preferably 1 to 6, more preferably 1 to 4 carbon atoms.

[0075] In some embodiments trialkylamines and hydroxyalkyl dialkyl amines are especially preferred.

[0076] In some embodiments R^3 is an optionally substituted hydrocarbyl group, for example an optionally substituted hydrocarbyl group having from 1 to 300 carbon atoms, for example from 1 to 200 carbon atoms. R^3 may be an optionally substituted hydrocarbyl group having a number average molecular weight of from 100 to 5000, preferably from 500 to 2500.

[0077] In some embodiments each of R^1 and R^2 is methyl and R^3 is an optionally substituted alkaryl group, preferably benzyl.


[0078] In some embodiments R^3 is an optionally substituted alkyl or alkenyl group. R^3 may be an unsubstituted alkyl or alkenyl group. Suitably R^3 is an alkyl or alkenyl group having from 1 to 200 carbon atoms.

[0079] In some embodiments R^3 is an alkyl group or alkenyl group having 10 to 36 carbon atoms.


EP 3 853 327 B1

[0080] In some embodiments R^3 is a polyisobutenyl group, preferably a polyisobutenyl group having a number average molecular weight of from 100 to 5000, preferably from 300 to 4000, suitably from 450 to 2500, for example from 500 to 2000 or from 600 to 1500.

[0081] In some embodiments R^3 is an optionally substituted alkylene phenol moiety and the tertiary amine $R^1R^2R^3N$ is the product of a Mannich reaction between an aldehyde, an optionally substituted phenol and an amine. Suitably the aldehyde is formaldehyde. The amine used to prepare the Mannich compound may be a monoamine and R^3 would have the structure (X):

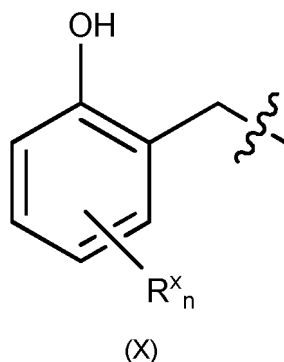

[0082] The amine used to prepare the Mannich compound may be a polyamine, including at least one tertiary amine group and R^3 may have the structure (Y):

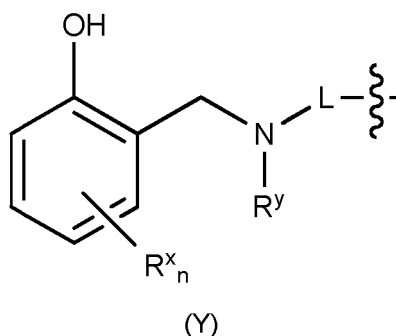

[0083] In structures (X) and (Y) n is 0 to 4, preferably 1, each R^x is an optionally substituted hydrocarbyl group, R^y is an optionally substituted alkyl, alkenyl or aryl group; and L is a linking group.

[0084] R^y and L may together form a heterocyclic group.

[0085] R^y is preferably an alkyl group, preferably an unsubstituted alkyl group. R^y is suitably a C_1 to C_4 alkyl group.

[0086] Preferably L is an optionally substituted alkylene group, preferably an alkylene group having 1 to 10, preferably 1 to 6 carbon atoms. More preferably L is an unsubstituted alkylene group, for example ethylene, propylene or butylene. Most preferably L is a propylene group.

[0087] In some preferred embodiments, the phenol includes an ortho-methyl substituent and a further substituent R^x at the para-position.

[0088] In a preferred embodiment, n is 1 and the optionally substituted hydrocarbyl substituent R is preferably para to the hydroxyl group.

[0089] The optionally substituted hydrocarbyl substituent R^x of the phenol can have 6 to 400 carbon atoms, suitably 30 to 180 carbon atoms, for example 10 or 40 to 110 carbon atoms. This hydrocarbyl substituent can be derived from an olefin or a polyolefin.

[0090] The polyolefins which can form the hydrocarbyl substituent can be prepared by polymerizing olefin monomers by well known polymerization methods and are also commercially available.

[0091] Some preferred polyolefins include polyisobutylenes having a number average molecular weight of 200 to 3000, in another instance of 400 to 2500, and in a further instance of 400 or 500 to 1500.


[0092] In some embodiments the phenol may include a lower molecular weight alkyl substituent for example a phenol which carries one or more alkyl chains having a total of less than 28 carbon atoms, preferably less than 20 carbon atoms, more preferably less than 14 carbon atoms.

[0093] A monoalkyl phenol may be preferred, suitably having from 4 to 20 carbons atoms, preferably 8 to 16 carbon

atoms, for example a phenol having a C₁₂ alkyl substituent.

[0094] In some embodiments R³ may include an ether, amide or ester group.

[0095] In some embodiments R³ includes succinimide moiety. R³ may have the formula:



wherein R^Z is an optionally substituted hydrocarbyl group and L is a linking group.

[0096] In some embodiments the optionally substituted hydrocarbyl substituent R^Z can have 6 to 36 carbon atoms, preferably 8 to 22, for example 10 to 18 or 16 to 18 carbon atoms.

[0097] In some embodiments the optionally substituted hydrocarbyl substituent R^Z can have 6 to 400 carbon atoms, suitably 30 to 180 carbon atoms, for example 10 or 40 to 110 carbon atoms. This hydrocarbyl substituent can be derived from an olefin or a polyolefin.

[0098] Some preferred polyolefins include polyisobutylenes having a number average molecular weight of 200 to 3000, in another instance of 400 to 2500, and in a further instance of 400 or 500 to 1500.

[0099] Preferably L is an optionally substituted alkylene group, preferably an alkylene group having 1 to 10, preferably 1 to 6 carbon atoms. More preferably L is an unsubstituted alkylene group, for example ethylene, propylene or butylene. Most preferably L is a propylene group.

[0100] R³ may suitably be selected from an optionally substituted alkyl or alkenyl group having 1 to 10 carbon atoms; an optionally substituted hydrocarbyl group having a number average molecular weight of 100 to 5000; an optionally substituted alkylene phenol moiety and an optionally substituted alkylene succinimide group.

[0101] Suitable tertiary amine compounds for use as component (a) include simple alkylamino and hydroxyalkylamino compounds; trialkylamino compounds having a high molecular weight substituent; Mannich reaction products including a tertiary amine and substituted acylated amines or alcohols including a tertiary amine.

[0102] Simple alkylamino and hydroxyalkyl amino compounds are preferably compounds of formula R¹R²R³N, wherein each of R¹, R² and R³ is an alkyl group or a hydroxyalkyl group. Each of R¹, R² and R³ may be the same or different. Suitably each of R¹, R² and R³ is independently selected from an alkyl or hydroxyalkyl group having 1 to 10, preferably 1 to 6 carbon atoms, for example 1 to 4 carbon atoms. Each of R¹, R² and R³ may be independently selected from methyl, ethyl, propyl, butyl, pentyl, hexyl, hydroxymethyl, hydroxyethyl, hydroxypropyl, hydroxybutyl, hydroxypentyl and hydroxyhexyl. Component (a) may be a trialkylamine, a dialkylhydroxyalkylamine, a dihydroxyalkylalkylamine or a trihydroxyalkylamine. There are many different compounds of this type and these will be known to the person skilled in the art.

[0103] In some embodiments the amine may include alkyl or hydroxyalkyl groups which have been reacted with an epoxide compound (for example ethylene oxide or propylene oxide) to provide an ether.

[0104] Trialkylamino compounds having a high molecular weight substituent suitable for use herein are typically polyalkene-substituted amines including at least one tertiary amino group.

[0105] The polyalkene-substituted amines having at least one tertiary amino group of the present invention may be derived from an olefin polymer and an amine, for example ammonia, monoamines, polyamines or mixtures thereof. They may be prepared by a variety of methods such as those described and referred to in US 2008/0113890.

[0106] Suitably the polyalkene substituent of the polyalkene-substituted amine is derived from a polyisobutylene.

[0107] The amines that can be used to make the polyalkene-substituted amine include ammonia, monoamines, polyamines, or mixtures thereof, including mixtures of different monoamines, mixtures of different polyamines, and mixtures of monoamines and polyamines (which include diamines). The amines include aliphatic, aromatic, heterocyclic and carbocyclic amines. Preferred amines are generally substituted with at least one hydrocarbyl group having 1 to about 50 carbon atoms, preferably 1 to 30 carbon atoms. Saturated aliphatic hydrocarbon radicals are particularly preferred.

[0108] The monoamines and polyamines suitably include at least one primary or secondary amine group.

[0109] The number average molecular weight of the polyalkene-substituted amines can range from 500 to 5000, or from 500 to 3000, for example from 1000 to 1500.

[0110] Any of the above polyalkene-substituted amines which are secondary or primary amines, may be alkylated to tertiary amines using alkylating agents. Suitable alkylating agents and methods using these will be known to the person

skilled in the art.

[0111] Suitable Mannich reaction products having a tertiary amine for use as component (a) are described in US 2008/0052985.

[0112] The Mannich reaction product having a tertiary amine group is prepared from the reaction of an optionally substituted hydrocarbyl-substituted phenol, an aldehyde and an amine. The optionally substituted hydrocarbyl-substituted phenol is suitably as previously described herein.

[0113] Preferably the optionally substituted hydrocarbyl-substituted phenol is a polyisobutenyl-substituted phenol or a polyisobutenyl-substituted cresol.

[0114] The aldehyde used to form the Mannich detergent can have 1 to 10 carbon atoms, and is generally formaldehyde or a reactive equivalent thereof such as formalin or paraformaldehyde.

[0115] The amine used to form the Mannich detergent can be a monoamine or a polyamine.

[0116] Examples of monoamines and polyamines are known to the person skilled in the art.

[0117] Preferred polyamines are polyethylene polyamines.

[0118] In especially preferred embodiments the amine used to form the Mannich detergent comprises a diamine. Suitably it includes a primary or secondary amine which takes part in the Mannich reaction and in addition a tertiary amine.

[0119] One preferred amine is dimethylaminopropylamine.

[0120] In preferred embodiments the Mannich detergent is the product directly obtained from a Mannich reaction and comprising a tertiary amine. For example the amine may comprise a single primary or secondary amine which when reacted in the Mannich reaction forms a tertiary amine which is capable of being quaternised. Alternatively the amine may comprise a primary or secondary amine capable of taking part in the Mannich reaction and also a tertiary amine capable of being quaternised. However the Mannich detergent may comprise a compound which has been obtained from a Mannich reaction and subsequently reacted to form a tertiary amine, for example a Mannich reaction may yield a secondary amine which is then alkylated to form a tertiary amine.


[0121] Suitable preferred amines include dimethylamine and dibutylamine.

[0122] Substituted acylated amines or alcohols including a tertiary amine for use as component (a) include the reaction product of an optionally substituted hydrocarbyl-substituted acylating agent and a compound having an oxygen or nitrogen atom capable of condensing with said acylating agent and further having a tertiary amino group.


[0123] The optionally substituted hydrocarbyl substituted acylating agent is preferably a mono- or polycarboxylic acid (or reactive equivalent thereof) for example a substituted succinic, phthalic or propionic acid.

[0124] Preferred hydrocarbyl substituted acylating agents for use in the preparation of component (i) are polyisobutenyl substituted succinic acid derivatives. Preferred compounds are those having a polyisobutenyl group with a number average molecular weight of from 100 to 5000, preferably from 300 to 4000, suitably from 450 to 2500, for example from 500 to 2000 or from 600 to 1500.

[0125] In some preferred embodiments the tertiary amine comprises a compound formed by the reaction of an optionally substituted hydrocarbyl-substituted acylating agent and an amine of formula (Y) or (Z):



(Y)

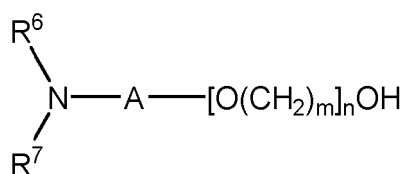

(Z)

wherein R^6 and R^7 are the same or different alkyl, alkenyl or aryl groups having from 1 to 22 carbon atoms; A is a bond or is an alkylene group having from 1 to 20 carbon atoms; n is from 0 to 20; m is from 1 to 5; and R^8 is hydrogen or a C_1 to C_{22} alkyl group.

[0126] The conditions of the above reaction may be selected to ensure that there are no free acid groups present in the tertiary amine component (a) that is formed. For example when a compound of formula (Y) is reacted with a succinic acid derived acylating agent the reaction conditions or ratio of reactants are selected to ensure that the imide or diamide are formed. The monoamide is not formed. When a compound of formula (Z) is reacted with a succinic acid derived acylating agent the reaction conditions or ratio of reactants are selected to ensure that the diester is formed. The monoester is not formed.

[0127] When a compound of formula (Y) is used, R^8 is preferably hydrogen or a C_1 to C_{18} , suitably a C_1 to C_{16} alkyl group. More preferably R^8 is selected from hydrogen, methyl, ethyl, propyl, butyl and isomers thereof. Most preferably R^8 is hydrogen.

[0128] When a compound of formula (Z) is used, m is preferably 2 or 3, most preferably 2; n is preferably from 0 to

15, preferably 0 to 10, more preferably from 0 to 5. Most preferably n is 0 and the compound of formula (Z) is an alcohol.

[0129] In some preferred embodiments the optionally substituted hydrocarbyl substituted acylating agent is reacted with a diamine compound of formula (Y).

[0130] R⁶ and R⁷ are the same or different alkyl, alkenyl or aryl groups having from 1 to 22 carbon atoms. In some embodiments R⁶ and R⁷ may be joined together to form a ring structure, for example a piperidine, imidazole or morpholine moiety. Thus R⁶ and R⁷ may together form an aromatic and/or heterocyclic moiety. R⁶ and R⁷ may be branched alkyl or alkenyl groups. Each may be substituted, for example with a hydroxy or alkoxy substituent.

[0131] Preferably each of R⁶ and R⁷ is independently a C₁ to C₁₆ alkyl group, preferably a C₁ to C₁₀ alkyl group. R⁶ and R⁷ may independently be methyl, ethyl, propyl, butyl, pentyl, hexyl, heptyl, octyl, or an isomer of any of these. Preferably R⁶ and R⁷ is each independently C₁ to C₄ alkyl. Preferably R⁶ is methyl. Preferably R⁷ is methyl.

[0132] A is a bond or alkylene group having from 1 to 20 carbon atoms. A is preferably an alkylene group having 1 to 12 carbon atoms, more preferably 1 to 8 carbon atoms, for example 2 to 6 carbon atoms or 2 to 5 carbon atoms. Most preferably A is an ethylene, propylene or butylene group, especially a propylene group.

[0133] Examples of compounds of formula (Y) suitable for use herein will be known to the person skilled in the art.

[0134] In some preferred embodiments the compound of formula (Y) is selected from dimethylaminopropylamine, N,N-diethyl-1,3- diaminopropane, N,N-dimethylethylenediamine, N,N-diethylethylenediamine, N,N-dibutylethylenediamine, or combinations thereof.

[0135] Examples of compounds of formula (Z) suitable for use herein will be known to the person skilled in the art.

[0136] In some preferred embodiments the compound of formula (Z) is selected from triisopropanolamine, 1-[2-hydroxyethyl]piperidine, 2-[2-(dimethylamino)ethoxy]-ethanol, N-ethyl-diethanolamine, N-methyl-diethanolamine, N-butyl-diethanolamine, N,N-diethylaminoethanol, N,N-dimethylaminoethanol, 2-dimethylamino-2-methyl-1-propanol, dimethyl aminopropanol or combinations thereof.

[0137] An especially preferred compound of formula (Y) is dimethylaminopropylamine.

[0138] An especially preferred compound of formula (Z) is dimethyl aminopropanol.

[0139] In some preferred embodiments tertiary amine (a) is the reaction product of a polyisobutenyl substituted succinic acid-derived acylating agent and a compound of formula (Y) or (Z).

[0140] Preferably the polyisobutenyl substituted succinic acid-derived acylating agent is a succinic acid or succinic acid anhydride substituted with a polyisobutenyl group having a number average molecular weight of from 200 to 3000, preferably from 400 to 2000, suitably from 500 to 1500, for example from 700 to 1300.

[0141] The compound of formula (Y) or (Z) may be suitably selected from dimethylaminopropylamine, N,N-diethyl-1,3- diaminopropane, N,N-dimethylethylenediamine, N,N-diethylethylenediamine, N,N-dibutylethylenediamine, triisopropanolamine, 1-[2-hydroxyethyl]piperidine, 2-[2-(dimethylamino)ethoxy]-ethanol, N-ethyl-diethanolamine, N-methyl-diethanolamine, N-butyl-diethanolamine, N,N-diethylaminoethanol, N,N-dimethylaminoethanol, 2-dimethylamino-2-methyl-1-propanol, dimethyl aminopropanol or combinations thereof.

[0142] Preferred compounds of formula (Y) or (Z) are dimethylaminopropylamine and dimethyl aminopropanol.

[0143] In one embodiment the tertiary amine component (a) is the reaction product of a succinic anhydride substituted with a polyisobutenyl group having a number average molecular weight of between 700 and 1300 and an amine selected from dimethylaminopropylamine and dimethyl aminopropanol.

[0144] Further especially preferred tertiary amine compounds (a) are formed by the reaction of a compound including a primary amine group and a tertiary amine group and a polyisobutenyl-substituted succinic acid. One especially preferred amine compound having a primary and a tertiary amine group is dimethylaminopropylamine. The polyisobutenyl substituent preferably has a number average molecular weight of from 300 to 2500, suitably from 500 to 1500. Thus an especially preferred compound for use as component (a) is a polyisobutenyl-substituted succinimide prepared from dimethylaminopropylamine.

[0145] In some preferred embodiments R¹ is a C₁ to C₄ alkyl group, R² is a C₁ to C₄ alkyl group and R³ is an alkyl or aryl group having 1 to 30 carbon atoms.

[0146] In some preferred embodiments, R¹ is methyl or ethyl, R² is ethyl or methyl and R³ is selected from hydroxyalkyl, hydroxyalkoxyalkyl, benzyl and a C₁₂ to C₂₄ alkyl group.

[0147] In some preferred embodiments, R¹ is methyl or ethyl, R² is methyl or ethyl and R³ is selected from hydroxyethyl, hydroxyethoxyethyl, benzyl and octadecyl.

[0148] Some preferred tertiary amine compounds for use as component (a) include N,N-dimethyl ethanolamine, dimethyloctadecylamine, N-methyl N,N-ditallowamine, N,N-diethyl ethanolamine, triethylamine, tripropylamine and tributylamine.

[0149] Preferred tertiary amine compounds for use as component (a) include N,N-dimethyl ethanolamine, dimethyloctadecylamine, N-methyl N,N-ditallowamine, N,N-diethyl ethanolamine, triethylamine, tripropylamine, tributylamine, dimethylbenzylamine and dimethylamino ethoxy ethanol.


[0150] Some especially preferred tertiary amines for use as component (a) include N, N-dimethylethanolamine, N, N-diethylethanolamine, triethylamine and tributylamine.

[0151] Especially preferred tertiary amines for use as component (a) include N, N-dimethylethanolamine, N,N-diethylethanolamine, triethylamine, tributylamine, dimethylbenzylamine and dimethylamino ethoxyethanol.

[0152] Other suitable amine that may be used as component (a) include small cyclic amines. These include for example compounds based on N-alkyl heterocycles, suitably selected from pyrrolidine, piperidine, morpholine, piperazine, pyrrole, imidazole and dihydropyrrole, pyridine, pyrimidine, isoxansole and oxazole. Suitable amine starting materials of this type are described, for example, in the applicant's application WO2017/017454.


[0153] Component (b) used to prepare the quaternary ammonium compound of the present invention is an epoxide.

[0154] Any suitable epoxide compound may be used. Suitable epoxide compounds are those of formula:



wherein each of R⁹, R¹⁰, R¹¹, R¹² is independently selected from hydrogen or an optionally substituted alkyl, alkenyl or aryl group.

[0155] In such embodiments R⁰ as shown in formula (I) is thus suitably a group of formula:

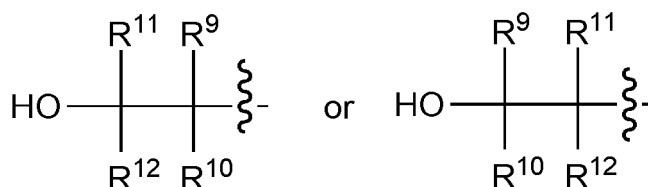

[0156] Preferably at least one of R⁹, R¹⁰, R¹¹ and R¹² is hydrogen. Preferably at least two of R⁹, R¹⁰, R¹¹ and R¹² are hydrogen. Most preferably three of R⁹, R¹⁰, R¹¹ and R¹² are hydrogen. R⁹, R¹⁰, R¹¹ and R¹² may be all hydrogen.

[0157] In the structure above and the definitions which follow R⁹ and R¹⁰ are interchangeable and thus when these groups are different either enantiomer or diastereomer may be used as component (b).

[0158] In the structure above and the definitions which follow R¹¹ and R¹² are interchangeable and thus when these groups are different either enantiomer or diastereomer may be used as component (b).

[0159] Preferably R⁹ is hydrogen or an optionally substituted alkyl, alkenyl or aryl group, preferably having from 1 to 10, preferably from 1 to 4 carbon atoms. Preferably R⁹ is hydrogen or an alkyl group. Most preferably R⁹ is hydrogen.

[0160] Preferably R¹⁰ is hydrogen or an optionally substituted alkyl, alkenyl or aryl group, preferably having from 1 to 10 carbon atoms. For example R¹⁰ may be benzyl.

[0161] In some preferred embodiments R¹⁰ is an optionally substituted aryl group. For example R¹⁰ may be phenyl.

[0162] In some preferred embodiments R¹⁰ is an optionally substituted alkyl or alkenyl group. Suitably R¹⁰ is an alkyl group, for example an unsubstituted alkyl group. R¹⁰ may be an alkyl group having 1 to 12, for example 1 to 8 or 1 to 4 carbon atoms.

[0163] Preferably R¹⁰ is hydrogen or an alkyl group. Most preferably R¹⁰ is hydrogen.

[0164] Preferably R¹¹ is hydrogen or an optionally substituted alkyl, alkenyl or aryl group, preferably having from 1 to 10, preferably from 1 to 4 carbon atoms. Preferably R¹¹ is hydrogen or an alkyl group. Most preferably R¹¹ is hydrogen.

[0165] Preferably R¹² is hydrogen or an optionally substituted alkyl, alkenyl or aryl group.

[0166] In some preferred embodiments R¹² is an optionally substituted aryl group. For example R¹² may be phenyl.

[0167] In some preferred embodiments R¹² is an optionally substituted alkyl or alkenyl group. R¹² may be an alkyl group, for example an unsubstituted alkyl group. R¹² may be an alkyl group having 1 to 50 carbon atoms, preferably from 1 to 30 carbon atoms, suitably 1 to 20 carbon atoms.

[0168] In some embodiments R¹² is an alkyl group having from 1 to 12 carbon atoms, suitably from 1 to 8, preferably from 1 to 4 carbon atoms.

[0169] In one embodiment R¹² is butyl.

[0170] In some embodiments R¹² is an alkyl group having 6 to 20 carbon atoms, suitably 8 to 16 carbon atoms, for example 12 carbon atoms.

[0171] In some embodiments R¹² is hydrogen.

[0172] In some preferred embodiments R¹² is the moiety CH₂OR¹³ or CH₂OCOR¹⁴ wherein each of R¹³ and R¹⁴ may be an optionally substituted alkyl, alkenyl or aryl group.

[0173] R¹³ is preferably an optionally substituted alkyl or aryl group, preferably having from 1 to 30 carbon atoms, preferably from 1 to 20 carbon atoms, suitably from 1 to 12 carbon atoms. When R¹³ is an alkyl group it may be straight-

chained or branched. In some embodiments it is branched. R^{13} may be an optionally substituted phenyl group.

[0174] In one embodiment R^{13} is a 2-methyl phenyl group. In another embodiment R^{13} is $\text{CH}_2\text{C}(\text{CH}_2\text{CH}_3)\text{CH}_2\text{CH}_2\text{CH}_2\text{CH}_3$.

[0175] R^{14} may be an optionally substituted alkyl, alkenyl or aryl group.

[0176] R^{14} is preferably an optionally substituted alkyl or aryl group, preferably having from 1 to 30 carbon atoms, preferably from 1 to 20 carbon atoms, suitably from 1 to 12 carbon atoms. When R^{14} is an alkyl group it may be straight-chained or branched. In some preferred embodiments it is branched. R^{14} may be an optionally substituted phenyl group.

[0177] In one embodiment R^{14} is $\text{C}(\text{CH}_3)\text{R}_2$ wherein each R is an alkyl group. The R groups may be the same or different.

[0178] Component (b) is an epoxide.

[0179] Some preferred epoxide compounds for use as component (b) include 2-ethylhexylglycidyl ether, styrene oxide, ethylene oxide, propylene oxide, butylene oxide, epoxyhexane, octene oxide, dodecylepoxy, stilbene oxide and other alkyl and alkenyl epoxides having 2 to 50 carbon atoms, including other glycidyl ethers.


[0180] Preferred epoxide compounds for use as component (b) include styrene oxide, ethylene oxide, propylene oxide, butylene oxide, epoxyhexane, octene oxide, stilbene oxide and other alkyl and alkenyl epoxides having 2 to 50 carbon atoms.

[0181] Other suitable epoxide compounds include glycidyl ethers and glycidyl esters, for example glycidyl 2 methyl phenyl ether and the glycidyl ester of versatic acid.

[0182] Some preferred epoxide compounds for use as component (b) include 2-ethylhexylglycidyl ether, styrene oxide, ethylene oxide, propylene oxide, butylene oxide, epoxyhexane, octene oxide, dodecylepoxy, stilbene oxide and other alkyl and alkenyl epoxides or glycidyl ethers having 2 to 50 carbon atoms.

[0183] In some preferred embodiments component (b) is selected from 2-ethylhexylglycidyl ether, butylene oxide, styrene oxide and dodecylepoxy.

[0184] Suitably the quaternary ammonium compound is prepared by reaction of (a) a quaternary amine; (b) an epoxide; and (c) an acid of formula (IIB):

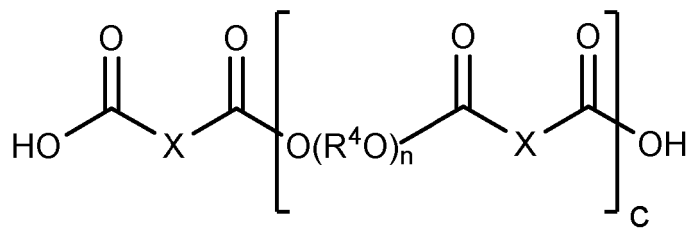

(IIB)

[0185] The compound of formula (IIB) is suitably an ester which is the reaction product of an optionally substituted dicarboxylic acid or anhydride thereof and an alcohol of formula $\text{HO}(\text{R}^4\text{O})_n\text{H}$.

[0186] Preferably the molar ratio of the acid/anhydride to polyhydric alcohol used to prepare the ester of formula (IIB) is at least 1.5:1, preferably at least 1.7:1, for example at least 1.9:1.

[0187] The molar ratio of the acid/anhydride to polyhydric alcohol used to prepare the ester of formula (IIB) may be up to 10:1, for example up to 5:1.

[0188] Preferably the molar ratio of the acid/anhydride to polyhydric alcohol used to prepare the ester of formula (IIB) is from 2.5:1 to 1.8:1, for example from 2.2:1 to 1.9:1.

[0189] Suitably the compound of formula (IIB) is a bis ester.

[0190] In some embodiments the dicarboxylic acid or anhydride is unsubstituted. In preferred embodiments the additive is prepared from a hydrocarbyl substituted dicarboxylic acid or an anhydride thereof.

[0191] Suitable dicarboxylic acids include maleic acid, glutaric acid, fumaric acid, oxalic acid, malonic acid, pimelic acid, suberic acid, adipic acid, phthalic acid, succinic acid, azelaic acid, sebacic acid and dimerised fatty acids. Anhydrides of these acids may also be used.

[0192] In some embodiments the ester may be prepared from a dicarboxylic acid of formula $\text{HOOC}(\text{CH}_2)_n\text{COOH}$ wherein n is from 1 to 20, preferably from 2 to 16, more preferably from 4 to 12, for example from 6 to 10. In one embodiment the dicarboxylic acid is sebacic acid.

[0193] In some embodiments the compound of formula (IIB) (component (c)) is prepared from a dimerised fatty acid. Such compounds are formed from the dimerization of unsaturated fatty acids, for example unsaturated fatty acids having 6 to 50, suitably 8 to 40, preferably 10 to 36, for example 10 to 20 carbon atoms, or 16 to 20 carbon atoms.


[0194] Such dimerised fatty acids may have 12-100 carbon atoms, preferably 16-72 carbon atoms such as 20-40 carbon atoms for example 32-40 carbon atoms.

[0195] These compounds are well known in the art, particularly for their use as corrosion inhibitors. Particularly preferred dimerised fatty acids are mixtures of C36 dimer acids such as those prepared by dimerising oleic acid, linoleic acid and mixtures comprising oleic and linoleic acid, for example, tall oil fatty acids.

[0196] The quaternary ammonium compound of formula (I) includes at least two linking groups X. Each X may be the same or different. Preferably each X is the same. For the avoidance of doubt, references to X herein refer to each X present in the compound.

[0197] Preferably X includes a hydrocarbyl substituent. Preferably X is an optionally substituted arylene or alkylene group.

[0198] In some embodiments component (c) is prepared from phthalic acid or an anhydride thereof, having the formula (A1) or (A2):

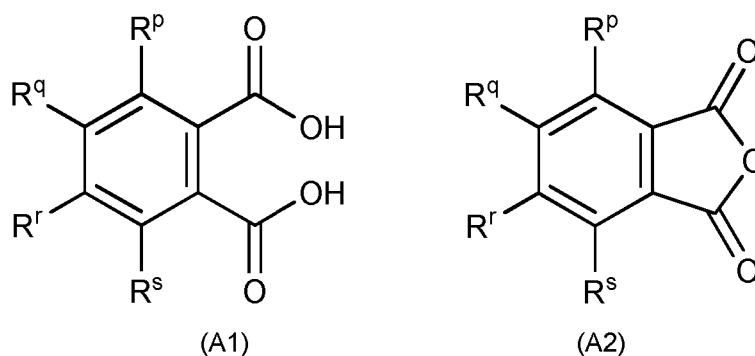

wherein each of R^p , R^q , R^r and R^s is independently hydrogen or an optionally substituted hydrocarbyl group.

[0199] Preferably each of R^p , R^q , R^r and R^s is hydrogen or an optionally substituted alkyl or alkenyl group. Preferably three of R^p , R^q , R^r and R^s are hydrogen and the other is an optionally substituted C_1 to C_{500} alkyl or alkenyl group, preferably a C_2 to C_{100} alkyl or alkenyl group, preferably a C_6 to C_{50} alkyl or alkenyl group, preferably a C_8 to C_{40} alkyl or alkenyl group, more preferably a C_{10} to C_{36} alkyl or alkenyl group, preferably a C_{12} to C_{22} alkyl or alkenyl group, suitably a C_{16} to C_{28} alkyl or alkenyl group, for example a C_{20} to C_{24} alkyl or alkenyl group. The alkyl or alkenyl group may be straight chain or branched. Preferably R^p , R^q and R^s are hydrogen and R^r is an optionally substituted alkyl or alkenyl group.

[0200] X in formula (I) is preferably an optionally substituted hydrocarbylene group. Preferably X is an optionally substituted alkylene group. Preferably X is a substituted alkylene group.


[0201] Suitably X is an alkyl or alkenyl substituted alkylene group.

[0202] Preferably X is an alkyl substituted alkylene group.

[0203] Preferably X is an alkyl substituted alkylene group wherein the alkylene group has 1 to 10, preferably 1 to 6, suitably 1 to 4, preferably 2 or 3, and most preferably 2 carbon atoms in the alkylene chain.

[0204] In some preferred embodiments X is CH_2CHR or $CHRCH_2$ wherein R is an optionally substituted hydrocarbyl group.

[0205] Preferably component (c) used to prepare the quaternary ammonium compound of the present invention is the reaction product of an alcohol of formula $HO(R^4O)H$ an optionally substituted succinic acid or anhydride thereof of formula (A3) or (A4):

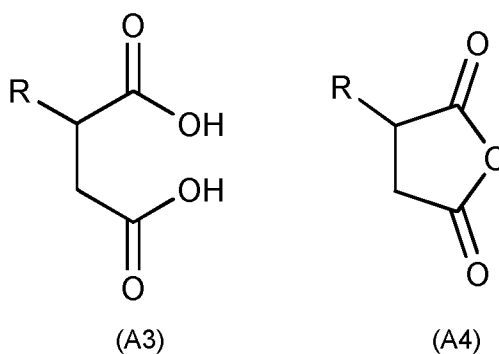

wherein R is hydrogen or an optionally substituted hydrocarbyl group. Preferably R is an optionally substituted alkyl or

alkenyl group.

[0206] In some embodiments R is an optionally substituted C₁ to C₅₀₀ alkyl or alkenyl group, preferably a C₂ to C₁₀₀ alkyl or alkenyl group, preferably a C₆ to C₅₀ alkyl or alkenyl group, preferably a C₈ to C₄₀ alkyl or alkenyl group, more preferably a C₁₀ to C₃₈ alkyl or alkenyl group, preferably a C₁₆ to C₃₆ alkyl or alkenyl group, suitably a C₁₈ to C₃₂ alkyl or alkenyl group.

[0207] R may be substituted with one or more groups selected from halo (e.g. chloro, fluoro or bromo), nitro, hydroxy, mercapto, sulfoxy, amino, nitril, acyl, carboxy, alkyl (e.g. C₁ to C₄ alkyl), alkoxy (e.g. C₁ to C₄ alkoxy), amido, keto, sulfoxy and cyano.

[0208] Preferably R is an unsubstituted alkyl or alkenyl group. The substituted succinic acid or anhydrides may suitably be prepared by reacting maleic anhydride with an alkene.

[0209] In some embodiments the R has a molecular weight of from 100 to 5000, preferably from 300 to 4000, suitably from 450 to 2500, for example from 500 to 2000 or from 600 to 1500.

[0210] In some embodiments the substituted succinic acid or anhydride thereof may comprise a mixture of compounds including groups R of different lengths. In such embodiments any reference to the molecular weight of the group R relates to the number average molecular weight for the mixture.

[0211] In some embodiments R is a polyisobutenyl group, preferably having a number average molecular weight of from 100 to 5000, preferably from 200 to 2000, suitably from 220 to 1300, for example from 240 to 900, suitably from 400 to 700.

[0212] In some embodiments R is a polyisobutenyl group having a number average molecular weight of from 180 to 400.

[0213] In some embodiments R is a polyisobutenyl group having a number average molecular weight of from 800 to 1200.

[0214] In some embodiments R is an alkyl or alkenyl group having 6 to 40 carbon atoms, preferably 10 to 38 carbon atoms.

[0215] In some preferred embodiments R is an alkyl or alkenyl group having 16 to 36 carbon atoms, suitably 18 to 26 carbon atoms, for example 20 to 24 carbon atoms.

[0216] In some embodiments R is an alkyl or alkenyl group having 8 to 16 carbon atoms, for example 12 carbon atoms.

[0217] In some embodiments R is an alkyl or alkenyl group having 26 to 28 carbon atoms.

[0218] In some embodiments R may be the residue of an internal olefin. In such embodiments the compound of formula (A3) or (A4) is suitably obtained by the reaction of maleic acid with an internal olefin.

[0219] An internal olefin as used herein means any olefin containing predominantly a non-alpha double bond that is a beta or higher olefin. Preferably such materials are substantially completely beta or higher olefins, for example containing less than 10% by weight alpha olefin, more preferably less than 5% by weight or less than 2% by weight. Typical internal olefins include Neodene 1518IO available from Shell.

[0220] Internal olefins are sometimes known as isomerised olefins and can be prepared from alpha olefins by a process of isomerisation known in the art, or are available from other sources. The fact that they are also known as internal olefins reflects that they do not necessarily have to be prepared by isomerisation.


[0221] In some especially preferred embodiments component (c) is prepared from a succinic acid or anhydride having a C₁₀ to C₃₀, preferably a C₂₀ to C₂₄ alkyl or alkenyl group.

[0222] In some preferred embodiments the acid used to prepare the compound of formula (IIB) has less than 32 carbon atoms, suitably less than 30 carbon atoms.

[0223] In some embodiments the compound of formula (IIB) is the reaction product of a succinic acid or anhydride of formula (A3) or (A4) and an alcohol of formula H-(OR⁴)_n-OH; wherein R¹ is an alkyl or alkenyl group having 6 to 36 carbon atoms or a polyisobutenyl group having a number average molecular weight of from 200 to 1300.

[0224] Preferably the compound of formula (IIB) is the reaction product of a polyhydric alcohol and at least 1.5 equivalents of an optionally substituted succinic acid or anhydride thereof.

[0225] Component (c) may thus include compounds having the formula (B1) or (B2):

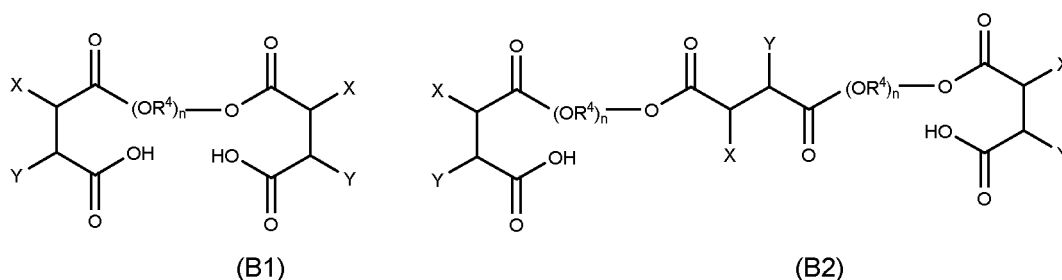

wherein one of each X and Y is hydrogen and the other is a group R¹ as previously defined herein in relation to structure

(A3) or (A4).

[0226] Preferably the acid/anhydride and the alcohol are reacted in a molar ratio of from 10:1 to 1:1, preferably from 5:1 to 1.5:1, more preferably from 3:1 to 1.8:1, for example from 2.5:1 to 2:1.


[0227] Most preferably the acid/anhydride and the alcohol are reacted in an approximately 2:1 molar ratio, for example from 2.2:1 to 1.8:1.

[0228] Suitably compound of formula (IIB) is the reaction product of a hydrocarbyl substituted polycarboxylic acid or an anhydride thereof and an alcohol of formula $H-(OR^4)_n-OH$ wherein R is an optionally substituted alkylene group and n is at least 1, in which the acid/anhydride and the alcohol are preferably reacted in an approximately 2:1 molar ratio, for example from 2.2:1 to 1.8:1 or from 2.1:1 to 1.9:1.

[0229] In some embodiments the compound of formula (IIB) is the reaction product of an acid of formula $HOOC(CHR^x)_nCOOH$ wherein each R^x is independently hydrogen or an optionally substituted hydrocarbyl group.

[0230] n may be from 1 to 50, preferably from 1 to 30, more preferably from 1 to 20, suitably from 2 to 16, preferably from 4 to 12, more preferably from 6 to 10. Preferably 0 or 1 R^x group is an optionally substituted hydrocarbyl group and all others are hydrogen. When R^x is an optionally substituted hydrocarbyl it is suitably group R^1 as previously defined herein in relation to compounds (A3) and (A4).

[0231] Most preferably each R^x is hydrogen and the compound of formula (IIB) has the structure of formula (D):

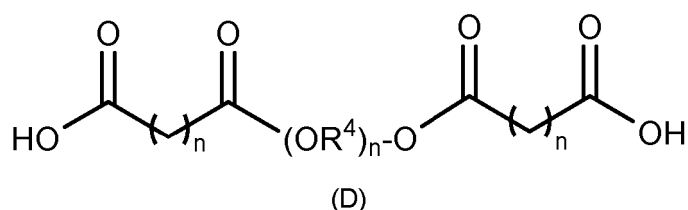

[0232] In an especially preferred embodiment n is 8 and the ester additive is the reaction product of sebacic acid and an alcohol of formula $H-(OR^4)_n-OH$.


[0233] In preferred embodiments the alcohol of formula $H-(OR^4)_n-OH$ is reacted with at approximately 2 molar equivalents of polycarboxylic acid. Such additive products contain the residues of two acid moieties per molecule. The two acid moieties may be the same or different. In some embodiments both acid moieties are the same. In some embodiments the two acid moieties are different.

[0234] In some embodiments the compound of formula (IIB) may be prepared from the reaction of a polyhydric alcohol of formula $H-(OR^4)_n-OH$ with approximately one equivalent of a first polycarboxylic acid or anhydride thereof and one equivalent of a second polycarboxylic acid or anhydride thereof.

[0235] For example the compound of formula (IIB) may be prepared from the reaction of a polyhydric alcohol of formula $H-(OR^4)_n-OH$ with approximately one equivalent of a succinic acid or anhydride substituted with an alkyl or alkenyl group having 6 to 36 carbon atoms and one equivalent of a succinic acid or anhydride substituted with a polyisobutenyl group having a number average molecular weight of from 200 to 1300.

[0236] In a further example the compound of formula (IIB) may be prepared from the reaction of a polyhydric alcohol of formula $H-(OR^4)_n-OH$ with approximately one equivalent of a succinic acid or anhydride substituted with an alkyl or alkenyl group having 6 to 36 carbon atoms and one equivalent of an unsubstituted succinic acid.

[0237] In preferred embodiments the compound of formula (IIB) is the reaction product of a substituted succinic acid or succinic anhydride. In such embodiments, the additive preferably includes compounds having the formula (C1), (C2) or (C3), and mixtures and isomers thereof.

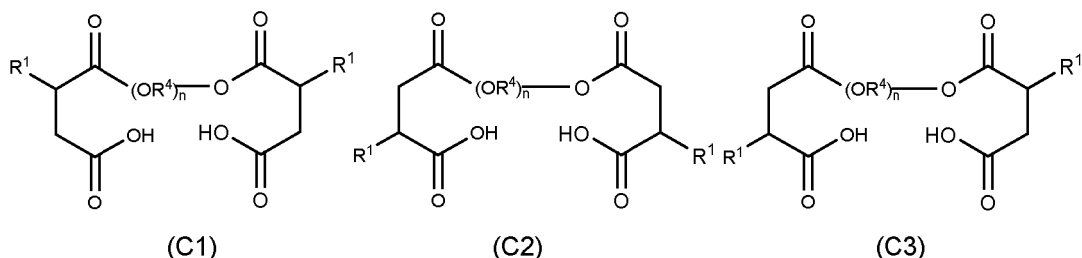

[0238] In the structures (B1), (B2), (D), (C1), (C2) and (C3), each acid residue shown may be the same or different.

[0239] In some embodiments each acid residue is the same. In some embodiments the acid residues are different.

[0240] Suitably n is from 1 to 30, preferably from 1 to 20, suitably from 1 to 16.

- [0241]** Preferably R⁴ is an alkylene group having 1 to 12, preferably 1 to 6, more preferably 2 or 3 carbon atoms.
- [0242]** R⁴ is an optionally substituted alkylene group.
- [0243]** In some embodiments the alcohol of formula H-(OR⁴)_n-OH has more than 2 hydroxy groups and the group R⁴ is a hydroxy substituted alkylene group. Such a group may have 1, 2 or more hydroxyl groups.
- 5 **[0244]** In some embodiments the alcohol H-(OR⁴)_n-OH may be a sugar derived unit in which R includes one or more hydroxy residues.
- [0245]** R may be substituted to form a cyclic alkylene unit. One or more heteroatoms may be present in the cyclic alkylene unit. For example the unit may contain an ether linkage.
- 10 **[0246]** In some embodiments R may be one or more saccharide units or may be substituted with one or more saccharide units.
- [0247]** For example in some embodiments the alcohol H-(OR⁴)_n-OH may be glycerol, pentaerythritol or trimethylolpropane.
- [0248]** In some embodiments H-(OR⁴)_n-OH may be a sugar component for example trehalose or sorbitol.
- [0249]** Preferably R⁴ is an unsubstituted alkylene group.
- 15 **[0250]** Preferably R⁴ is an optionally substituted alkylene group having 1 to 50 carbon atoms, preferably 1 to 40 carbon atoms, preferably 1 to 30 carbon atoms, more preferably 1 to 20 carbon atoms, suitably 1 to 10 carbon atoms, for example 2 to 6 or 2 to 4 carbon atoms.
- [0251]** Preferably R⁴ is an unsubstituted alkylene group having 1 to 50 carbon atoms, preferably 1 to 20, more preferably 1 to 10, suitably 2 to 6, for example 2 to 4 carbon atoms. R⁴ may be straight chained or branched.
- 20 **[0252]** Suitably R⁴ may be an ethylene, propylene, butylene, pentylene, or hexylene group. When R⁴ has more than 2 carbon atoms any isomer may be present. Preferably R⁴ is an ethylene or a propylene group, most preferably a propylene group.
- [0253]** In some embodiments in which n is 1, R⁴ may be a group of formula (CH₂)_x wherein x is from 2 to 12, preferably from 2 to 6.
- 25 **[0254]** In some preferred embodiments in which n is 1, R⁴ is a straight chain or branched alkylene group having 2 to 8, preferably 3 to 6 carbon atoms.
- [0255]** Suitable compounds of this type include propylene glycol, 1-3-propanediol, 1-6-hexanediol, 1-2-butanediol, 1,3-butane diol, 1-4-butane diol and neopentyl glycol.
- [0256]** In some preferred embodiments R⁴ is preferably CR^aR^bCR^cR^d and the polyhydric alcohol has the formula H-(OCR^aR^bCR^cR^d)_nOH wherein each of R^a, R^b, R^c and R^d is independently hydrogen or an optionally substituted alkyl group. Preferably each R^a, R^b, R^c and R^d is independently selected from hydrogen or an optionally substituted alkyl group having 1 to 20, preferably 1 to 12, more preferably 1 to 4, for example 1 to 2 carbon atoms.
- 30 **[0257]** Preferably each of R^a, R^b, R^c and R^d is independently selected from hydrogen and an unsubstituted alkyl group, preferably having 1 to 20 carbon atoms, suitably 1 to 12 carbon atoms, preferably 1 to 4 atoms, for example 1 or 2 carbon atoms. Preferably at least two of R^a, R^b, R^c and R^d is hydrogen, more preferably at least three of R^a, R^b, R^c and R^d is hydrogen.
- 35 **[0258]** In some embodiments R^a, R^b, R^c and R^d are all hydrogen and R is an ethylene group CH₂CH₂.
- [0259]** In some embodiments three of R^a, R^b, R^c, and R^d is hydrogen and the other is an unsubstituted alkyl group having 1 to 12, preferably 1 to 4, suitably 1 to 2, and most preferably 1 carbon atoms.
- 40 **[0260]** In some embodiments the polyhydric alcohols used to prepare component (c) are prepared from epoxides, preferably terminal epoxides.
- [0261]** R⁴ may comprise a mixture of isomers. For example when R⁴ is propylene, the polyhydric alcohol may include moieties -CH₂CH(CH₃)- and -CH(CH₃)CH₂- in any order within the chain.
- [0262]** R⁴ may comprise a mixture of different groups for example ethylene, propylene or butylene units. Block copolymer units are preferred in such embodiments.
- 45 **[0263]** R⁴ is preferably an ethylene, propylene or butylene group. R⁴ may be an n-propylene or n-butylene group or an isopropylene or isobutylene group. For example R⁴ may be -CH₂CH₂-, -CH₂CH(CH₃)-, -CH₂C(CH₃)₂-, -CH(CH₃)CH(CH₃)- or -CH₂CH(CH₂CH₃)-
- [0264]** Preferably R⁴ is ethylene or propylene. More preferably R⁴ is -CH₂CH₂- or -CH(CH₃)CH₂-. Most preferably R⁴ is -CH(CH₃)CH₂-.
- 50 **[0265]** n is at least 1. Preferably n is from 1 to 100, preferably from 1 to 50, more preferably from 1 to 30, more preferably from 1 to 24, preferably from 1 to 20, suitably from 1 to 16, preferably from 1 to 14.
- [0266]** In some embodiments n is from 4 to 10, for example from 6 to 8.
- [0267]** In some embodiments n is from 1 to 6, suitably from 2 to 5, for example 3 or 4.
- 55 **[0268]** In some embodiments n is from 8 to 16, for example from 11 to 14.
- [0269]** Preferably the polyhydric alcohol has a number average molecular weight of from 60 to 6000, preferably from 60 to 3000, more preferably from 60 to 2000, more preferably from 60 to 1500, preferably from 60 to 1200, suitably from 60 to 1000, preferably from 60 to 850.

[0270] In some embodiments, the number average molecular weight is from 190 to 600, for example from 280 to 490

[0271] In some embodiments the number average molecular weight is from 60 to 370, suitably from 110 to 320, for example 190 to 260 or 140 to 200

[0272] In some embodiments the number average molecular weight is from 360 to 950, for example 500 to 840.

[0273] In some embodiments the polyhydric alcohol may be a polypropylene glycol having a number average molecular weight of 425.

[0274] In some embodiments the polyhydric alcohol may be selected from triethylene glycol, tetraethylene glycol, propylene glycol, dipropylene glycol and tripropylene glycol.

[0275] In some embodiments the polyhydric alcohol may be a polypropylene glycol having a number average molecular weight of 725.

[0276] In some embodiments the polyhydric alcohol may be a polyethylene glycol having a number average molecular weight of 400.

[0277] In some embodiments the polyhydric alcohol may be selected from triethylene glycol, tetraethylene glycol, propylene glycol, dipropylene glycol and tripropylene glycol.

[0278] In some embodiments the polyhydric alcohol is selected from ethylene glycol, propylene glycol and oligomers or polymers thereof.

[0279] The skilled person will appreciate that commercial sources of alcohols of formula $H-(OR^4)_n-OH$ will often contain mixtures of compounds, for example in which n may be between 6 and 10.

[0280] Commercial sources of substituted succinic acids and anhydrides may also contain mixtures of compounds, for example including different compounds with substituents having 20 to 24 carbon atoms.

[0281] In some embodiments n is from 10 to 40, preferably 15 to 30, more preferably 20 to 25 and; R^4 is ethylene or propylene, most preferably propylene.

[0282] In some embodiments the compound of formula (IIB) is the reaction product of a polyhydric alcohol of formula $H-(OR^4)_n-OH$ selected from ethylene glycol, propylene glycol and oligomers or polymers thereof; alkane diols having 1 to 12, preferably 3 to 6 carbon atoms and sugar alcohols and at least 1.5 molar equivalents of one or more optionally substituted polycarboxylic acids or anhydrides thereof selected from pyromellitic acid, malonic acid, sebacic acid and succinic acid.

[0283] In some embodiments the compound of formula (IIB) is the reaction product of a polyhydric alcohol of formula $H-(OR^4)_n-OH$ selected from ethylene glycol, diethylene glycol, triethylene glycol, tetraethylene glycol, propylene glycol, dipropylene glycol, tripropylene glycol, tetrapropylene glycol, trehalose, 1,3-propanediol, 1,2-butanediol, 1,3-butanediol, 1,4-butanediol, 1,6-hexanediol, neopentyl glycol and a polyethylene or polypropylene glycol having a number average molecular weight of 300 to 1200; and at least 1.5 molar equivalents of one or more optionally substituted polycarboxylic acids or anhydrides thereof selected from pyromellitic acid and succinic acid.

[0284] In some embodiments the compound of formula (IIB) is the reaction product of an alcohol of formula $H-(OR^4)_n-OH$ selected from ethylene glycol, diethylene glycol, triethylene glycol, tetraethylene glycol, propylene glycol, dipropylene glycol, tripropylene glycol, tetrapropylene glycol, trehalose, sorbitol, glycerol, pentaerythritol, trimethylolpropane, 1,3-propanediol, 1,2-butanediol, 1,3-butanediol, 1,4-butanediol, 1,6-hexanediol, neopentyl glycol and a polyethylene or polypropylene glycol having a number average molecular weight of 300 to 1200; and at least 1.5 molar equivalents of one or more optionally substituted succinic acids or anhydrides of formula (A3) or (A4) wherein each R is an alkyl or alkenyl group having 6 to 36 carbon atoms or a polyisobutenyl group having a number average molecular weight of from 200 to 1300.

[0285] In some embodiments the compound of formula (IIB) is the reaction product of an alcohol of formula $H-(OR^4)_n-OH$ selected from ethylene glycol, diethylene glycol, triethylene glycol, tetraethylene glycol, propylene glycol, dipropylene glycol, tripropylene glycol, tetrapropylene glycol, trehalose, sorbitol, glycerol, pentaerythritol, trimethylolpropane, 1,3-propanediol, 1,2-butanediol, 1,3-butanediol, 1,4-butanediol, 1,6-hexanediol, neopentyl glycol and a polyethylene or polypropylene glycol having a number average molecular weight of 300 to 1200; approximately one molar equivalent of an optionally substituted succinic acid or anhydride of formula (A3) or (A4) wherein R is an alkyl or alkenyl group having 6 to 36 carbon atoms; and approximately one molar equivalent of an optionally substituted succinic acid or anhydride of formula (A3) or (A4) wherein R is a polyisobutenyl group having a number average molecular weight of from 200 to 1300.

[0286] In some embodiments the compound of formula (IIB) is the reaction product of a polypropylene glycol having a number average molecular weight of 300 to 800 and least 1.5 molar equivalents of a succinic acid or anhydride thereof having an alkyl or alkenyl substituent having 6 to 36 carbon atoms.

[0287] In some embodiments the compound of formula (IIB) is the reaction product of a polyhydric alcohol selected from ethylene glycol, diethylene glycol, triethylene glycol, tetraethylene glycol, propylene glycol, dipropylene glycol, tripropylene glycol and tetrapropylene glycol and at least 1.5 molar equivalents of a succinic acid or anhydride thereof having an alkyl or alkenyl substituent having 6 to 36 carbon atoms.

[0288] In some embodiments the compound of formula (IIB) is the reaction product of a polyhydric alcohol selected from glycerol, pentaerythritol and trimethylolpropane and at least 1.5 molar equivalents of a succinic acid or anhydride

thereof having an alkyl or alkenyl substituent having 6 to 36 carbon atoms.

[0289] In some especially preferred embodiments the compound of formula (IIB) is the reaction product of a polyethylene or polypropylene glycol having 4 to 16, preferably 6 to 8 alkoxy groups and at least 1.5 molar equivalents of a succinic acid or anhydride having a C₁₀ to C₃₀, preferably a C₂₀ to C₂₄ alkyl or alkenyl substituent.

[0290] In some embodiments the compound of formula (IIB) is the reaction product of a succinic acid or anhydride thereof having an alkyl or alkenyl substituent having 6 to 36 carbon atoms and an alcohol selected from propylene glycol, dipropylene glycol, 1,3-propanediol, 1,2-butanediol, 1,3-butanediol, 1,4-butanediol, 1,6-hexanediol and neopentyl glycol.

[0291] In some embodiments the compound of formula (IIB) is the reaction product of a succinic acid or anhydride having a C₁₀ to C₃₀, preferably a C₂₀ to C₂₄ alkyl or alkenyl substituent and an alcohol selected from propylene glycol, dipropylene glycol, 1,3-propanediol, 1,2-butanediol, 1,3-butanediol, 1,4-butanediol, 1,6-hexanediol and neopentyl glycol.

[0292] In some preferred embodiments the compound of formula (IIB) is the reaction product of a succinic acid or anhydride thereof having an alkyl or alkenyl substituent having less than 30 carbon atoms, preferably less than 26 carbon atoms and an alcohol selected from ethylene glycol, diethylene glycol, triethylene glycol, tetraethylene glycol, propylene glycol, dipropylene glycol, tripropylene glycol, tetrapropylene glycol, polypropylene glycol, polyethylene glycol, 1,3-propanediol, 1,2-butanediol, 1,3-butanediol, 1,4-butanediol, 1,6-hexanediol and neopentyl glycol.

[0293] In some embodiments the compound of formula (IIB) is the reaction product of a succinic acid or anhydride of formula (A3) or (A4) and an alcohol of formula H-(OR⁴)_n-OH; wherein R¹ is an alkyl or alkenyl group having 6 to 36 carbon atoms or a polyisobutenyl group having a number average molecular weight of from 200 to 1300; and an alcohol selected from ethylene glycol, diethylene glycol, triethylene glycol, tetraethylene glycol, propylene glycol, dipropylene glycol, tripropylene glycol, tetrapropylene glycol, polypropylene glycol, polyethylene glycol, 1,3-propanediol, 1,2-butanediol, 1,3-butanediol, 1,4-butanediol, trehalose, 1,6-hexanediol and neopentyl glycol.

[0294] In some embodiments component (c) used to prepare the quaternary ammonium compound of the present invention is the reaction product of a succinic acid or anhydride thereof having an alkyl or alkenyl substituent having 6 to 36 carbon atoms and a polypropylene glycol having a number average molecular weight of 300 to 800.


[0295] In some especially preferred embodiments the compound of formula (IIB) is the reaction product of a succinic acid or anhydride having a C₂₀ to C₂₄ alkyl or alkenyl substituent and an alcohol selected from 1,2-butanediol, 1,3-butanediol, 1,4-butanediol, tripropylene glycol and polypropylene glycols having a number average molecular weight of from 300 to 600.

[0296] For avoidance of doubt component (c) may comprise a mixture of compounds. Compounds that may be present include mixtures formed by reacting a mixture of different polyhydric alcohols with a polycarboxylic acid and/or mixtures formed by reacting a polyhydric alcohol with a mixture of polycarboxylic acids and/or compounds formed by reacting a mixture of polyhydric alcohols with a mixture of carboxylic acids. Such mixtures may also include mixtures of initially pure fully formed ester compounds.

[0297] In some preferred embodiments the quaternary ammonium compound (I) of the present invention is the reaction product of:


(a) a tertiary amine of formula R¹R²R³N in which each of R¹ and R² is an optionally substituted alkyl or alkenyl group and R³ is selected from:

- an alkyl, hydroxyalkyl or hydroxyalkoxyalkyl group having 1 to 20 carbon atoms;
- an optionally substituted alkaryl group, for example benzyl;
- a polyisobutyl group having a number average molecular weight of from 100 to 5000;
- an optionally substituted alkylene phenol moiety of formula (X) or (Y):

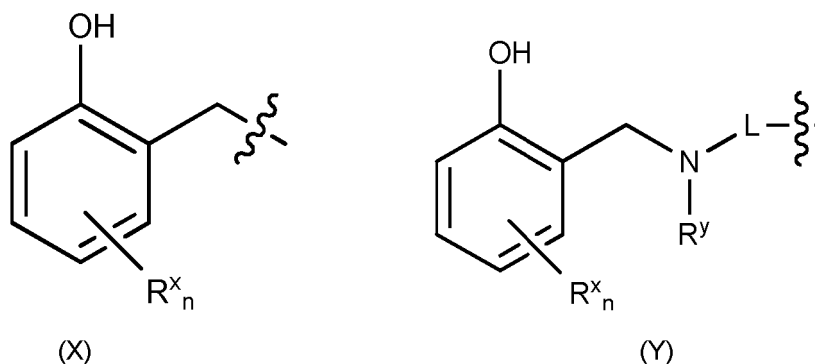

wherein n is 0 to 4, preferably 1, each R^x is an optionally substituted hydrocarbyl group, R^y is an optionally

- substituted alkyl, alkenyl or aryl group; and L is a linking group; and
 - a succinimide moiety of formula (Z):



wherein R^Z is an optionally substituted hydrocarbyl group and L is a linking group.


(b) an epoxide; and

(c) the reaction product of an alcohol of formula $H-(OR^4)-OH$ and an optionally substituted succinic acid or anhydride thereof; wherein R^4 is an optionally substituted alkylene group.

[0298] In some preferred embodiments the quaternary ammonium compound (I) of the present invention is the reaction product of:

(a) a tertiary amine of formula $R^1R^2R^3N$ in which each of R^1 and R^2 is a C_1 to C_4 alkyl group and R^3 is selected from a C_1 to C_{24} alkyl group; benzyl; and hydroxyalkyl or hydroxyalkoxyalkyl groups having 2 to 20 carbon atoms;

(b) an epoxide of formula




wherein R^9 is hydrogen, R^{10} is hydrogen, phenyl or C_1 to C_4 alkyl, R^{11} is hydrogen and R^{12} is hydrogen, C_1 to C_{30} alkyl, phenyl or CH_2OR^{13} wherein R^{13} is C_1 to C_{12} alkyl; and

(c) the reaction product of a succinic acid or anhydride thereof having an alkyl or alkenyl substituent having 1 to 200 carbon atoms and an alcohol selected from ethylene glycol, diethylene glycol, triethylene glycol, tetraethylene glycol, propylene glycol, dipropylene glycol, tripropylene glycol, tetrapropylene glycol, polypropylene glycol, polyethylene glycol, 1,3-propanediol, 1,2-butanediol, 1,3-butanediol, 1,4-butanediol, trehalose, 1,6-hexanediol and neopentyl glycol.

[0299] In some preferred embodiments the quaternary ammonium compound (I) of the present invention is the reaction product of:

(a) a tertiary amine of formula $R^1R^2R^3N$ in which each of R^1 and R^2 is a C_1 to C_4 alkyl group and R^3 is selected from a C_1 to C_{24} alkyl group; benzyl; and hydroxyalkyl or hydroxyalkoxyalkyl groups having 2 to 20 carbon atoms;

(b) an epoxide of formula



wherein R^9 is hydrogen, R^{10} is hydrogen, phenyl or C_1 to C_4 alkyl, R^{11} is hydrogen and R^{12} is C_1 to C_{30} alkyl, phenyl

or CH₂OR¹³ wherein R¹³ is C₁ to C₁₂ alkyl; and

(c) the reaction product of a succinic acid or anhydride thereof having an alkyl or alkenyl substituent having 6 to 36 carbon atoms and a polyethylene or polypropylene glycol having a number average molecular weight of 200 to 1000.

[0300] In some preferred embodiments the quaternary ammonium compound (I) of the present invention is the reaction product of:

(a) a tertiary amine selected from N,N-dimethyl ethanolamine, dimethyloctadecylamine, N-methyl N,N-ditallowamine, N,N-diethyl ethanolamine, triethylamine, tripropylamine and tributylamine, dimethylbenzylamine and dimethylamino ethoxy ethanol;

(b) an epoxide selected from 2-ethylhexylglycidyl ether, styrene oxide, ethylene oxide, propylene oxide, butylene oxide, epoxyhexane, octene oxide, dodecylepoxide, stilbene oxide and other alkyl and alkenyl epoxides or glycidyl ethers having 2 to 50 carbon atoms, especially 2-ethylhexylglycidyl ether, butylene oxide, styrene oxide and dodecylepoxide; and

(c) the reaction product of a succinic acid or anhydride thereof having an alkyl or alkenyl substituent having less than 30, for example 20 to 24 carbon atoms and a polyethylene or polypropylene glycol having a number average molecular weight of 200 to 1000.

[0301] In some preferred embodiments the quaternary ammonium compound (I) of the present invention is the reaction product of:

(a) a tertiary amine selected from N,N-dimethyl ethanolamine, dimethyloctadecylamine, N-methyl N,N-ditallowamine, N,N-diethyl ethanolamine, triethylamine, tripropylamine and tributylamine, dimethylbenzylamine and dimethylamino ethoxy ethanol;

(b) an epoxide selected from 2-ethylhexylglycidyl ether, styrene oxide, ethylene oxide, propylene oxide, butylene oxide, epoxyhexane, octene oxide, dodecylepoxide, stilbene oxide and other alkyl and alkenyl epoxides or glycidyl ethers having 2 to 50 carbon atoms, especially 2-ethylhexylglycidyl ether, butylene oxide, styrene oxide and dodecylepoxide; and

(c) the reaction product of a succinic acid or anhydride thereof having an alkyl or alkenyl substituent having less than 30, for example 20 to 24 carbon atoms and an alcohol selected from ethylene glycol, 1,3-propanediol, 1,2-butanediol, 1,3-butanediol, 1,4-butanediol, trehalose, 1,6-hexanediol and neopentyl glycol.


[0302] In some preferred embodiments the quaternary ammonium compound (I) of the present invention is the reaction product of:

(a) a tertiary amine selected from N,N-dimethyl ethanolamine, dimethyloctadecylamine, N-methyl N,N-ditallowamine, N,N-diethyl ethanolamine, triethylamine, tripropylamine and tributylamine, dimethylbenzylamine and dimethylamino ethoxy ethanol;

(b) an epoxide selected from 2-ethylhexylglycidyl ether, styrene oxide, ethylene oxide, propylene oxide, butylene oxide, epoxyhexane, octene oxide, dodecylepoxide, stilbene oxide and other alkyl and alkenyl epoxides or glycidyl ethers having 2 to 50 carbon atoms, especially 2-ethylhexylglycidyl ether, butylene oxide, styrene oxide and dodecylepoxide; and

(c) the reaction product of a succinic acid or anhydride thereof having a polyisobutenyl substituent having a number average molecular weight of from 500 to 2500, for example a number average molecular weight of 500 to 1500 and an alcohol selected from ethylene glycol, 1,3-propanediol, 1,2-butanediol, 1,3-butanediol, 1,4-butanediol, trehalose, 1,6-hexanediol and neopentyl glycol.

[0303] According to an aspect of the present invention there is provided a composition comprising a quaternary ammonium compound of formula (I):

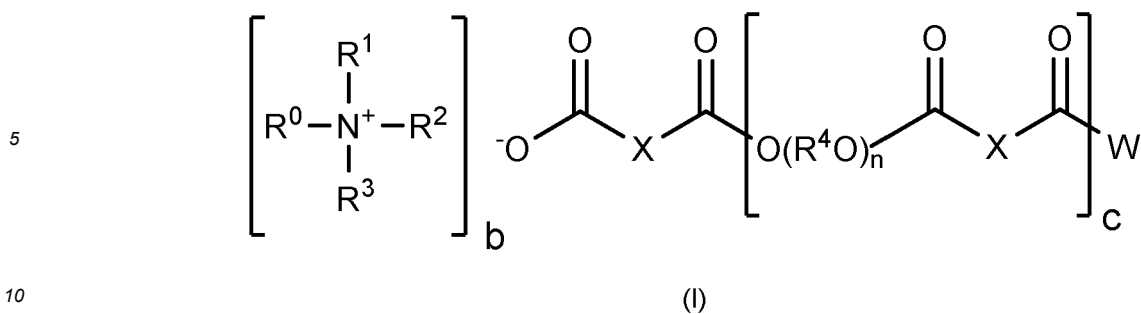

wherein R^0 , R^1 , R^2 and R^3 is each independently an optionally substituted hydrocarbyl group, X is a linking group; R^4 is an optionally substituted alkylene group; n is a positive integer; c is at least 1; W is O^- or OH; b is 1 when W is OH, and b is 2 when W is O^- .

15 **[0304]** In some embodiments the composition is an additive composition comprising a quaternary ammonium compound of the first aspect and a diluent or carrier.

[0305] The additive composition may be an additive composition for lubricating oil.

[0306] Preferably the additive composition is an additive composition for a fuel composition, preferably a diesel fuel composition.

20 **[0307]** The quaternary ammonium compound is suitably present in the additive composition in an amount of from 1 to 99 wt%, for example from 1 to 75 wt%.


[0308] The additive composition may comprise a mixture of two or more quaternary ammonium compounds of the present invention. In such embodiments the above amounts suitably refer to the total amount of all such compounds present in the composition.

25 **[0309]** The additive composition may include one or more further additives. These may be selected from antioxidants, dispersants, detergents, metal deactivating compounds, wax anti-settling agents, cold flow improvers, cetane improvers, dehazers, stabilisers, demulsifiers, antifoams, corrosion inhibitors, lubricity improvers, dyes, markers, combustion improvers, metal deactivators, odour masks, drag reducers and conductivity improvers.

30 **[0310]** In some preferred embodiments the additive composition includes one or more further nitrogen-containing detergents.


[0311] The present invention may provide a fuel or lubricating oil composition comprising a quaternary ammonium salt/compound as described herein.

[0312] In some embodiments the present invention provides a lubricating composition comprising an oil of lubricating viscosity and as an additive a quaternary ammonium compound of formula (I):

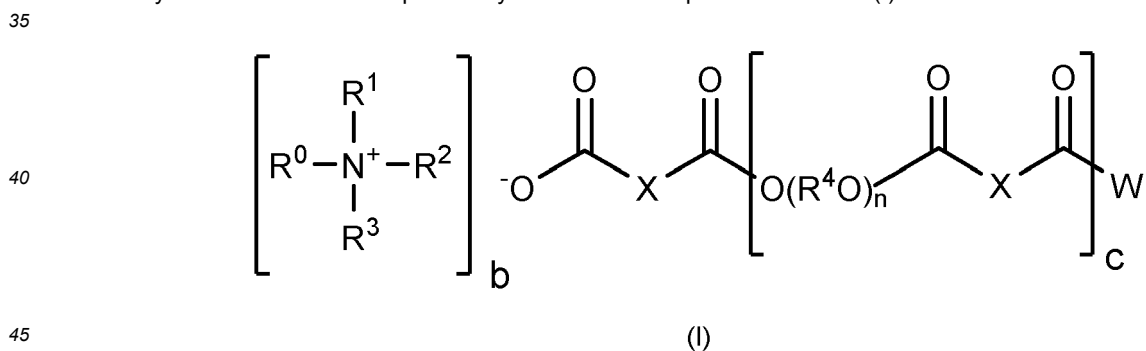

wherein R^0 , R^1 , R^2 and R^3 is each independently an optionally substituted hydrocarbyl group, X is a linking group; R^4 is an optionally substituted alkylene group; n is a positive integer; c is at least 1; W is O^- or OH; b is 1 when W is OH, and b is 2 when W is O^- .

50 **[0313]** In some preferred embodiments the present invention provides a fuel composition comprising as an additive a quaternary ammonium compound of formula (I):

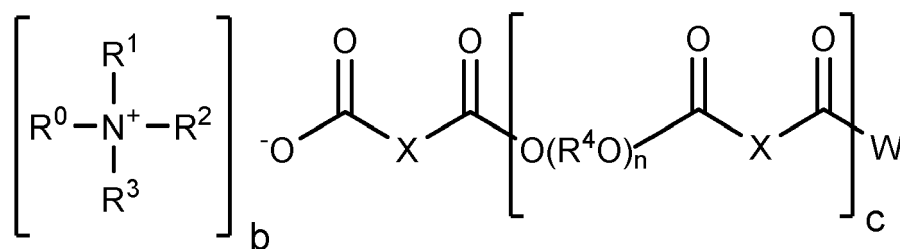

(I)

wherein R^0 , R^1 , R^2 and R^3 is each independently an optionally substituted hydrocarbonyl group, X is a linking group; R^4 is an optionally substituted alkylene group; n is a positive integer; c is at least 1; W is O^- or OH ; b is 1 when W is OH , and b is 2 when W is O^- .

[0314] The present invention may further provide a method of preparing a fuel composition, the method comprising preparing a quaternary ammonium compound as previously described herein, and mixing the quaternary ammonium compound into the fuel.

[0315] The fuel composition of the present invention is preferably a diesel fuel composition.

[0316] Suitably the quaternary ammonium additive compound is present in the diesel fuel composition in an amount of at least 0.1 ppm, preferably at least 1 ppm, more preferably at least 5 ppm, suitably at least 10 ppm, preferably at least 20 ppm, for example at least 30 ppm or at least 50 ppm.

[0317] Suitably the quaternary ammonium additive compound is present in the diesel fuel composition in an amount of less than 10000 ppm, preferably less than 1000 ppm, preferably less than 500 ppm, preferably less than 300 ppm, for example less than 250 ppm.

[0318] In some embodiments the quaternary ammonium additive compound is present in the diesel fuel composition in an amount of suitably less than 200 ppm, for example less than 150 ppm.

[0319] Suitably the quaternary ammonium additive compound is present in the diesel fuel in an amount of from 80 to 130 ppm.

[0320] In this specification any reference to ppm is to parts per million by weight.

[0321] The diesel fuel compositions of the present invention may comprise a mixture of two or more quaternary ammonium compounds. In such embodiments the above amounts refer to the total amounts of all such additives present in the composition.

[0322] The use of mixtures may arise due to the availability of starting materials or a particular mixture may be deliberately selected to use in order to achieve a benefit. For example, a particular mixture may lead to improvements in handling, a general improvement in performance or a synergistic improvement in performance.

[0323] In this specification any reference to "an additive" or "the additive" of the invention includes embodiments in which a single additive compound is present and embodiments in which two or more additive compounds are present. In embodiments in which two or more compounds are present the mixtures may be present due to a mixture of starting materials being used to prepare the additive compounds (e.g. a mixture of polyhydric alcohols and/or a mixture of polycarboxylic acids and/or a mixture of tertiary amines and/or a mixture of quaternising agents). Alternatively and/or additionally two or more pre-formed compounds of formula (I) may be mixed into a composition, for example a fuel or lubricating composition.

[0324] The quaternary ammonium salt additives may be added to diesel fuel at any convenient place in the supply chain. For example, the additives may be added to fuel at the refinery, at a distribution terminal or after the fuel has left the distribution terminal. If the additive is added to the fuel after it has left the distribution terminal, this is termed an aftermarket application. Aftermarket applications include such circumstances as adding the additive to the fuel in the delivery tanker, directly to a customer's bulk storage tank, or directly to the end user's vehicle tank. Aftermarket applications may include supplying the fuel additive in small bottles suitable for direct addition to fuel storage tanks or vehicle tanks.

[0325] By diesel fuel we include any fuel suitable for use in a diesel engine either for road use or non-road use. This includes but is not limited to fuels described as diesel, marine diesel, heavy fuel oil, industrial fuel oil, etc.

[0326] The diesel fuel composition used in the present invention may comprise a petroleum-based fuel oil, especially a middle distillate fuel oil. Such distillate fuel oils generally boil within the range of from 110°C to 500°C, e.g. 150°C to 400°C. The diesel fuel may comprise atmospheric distillate or vacuum distillate, cracked gas oil, or a blend in any proportion of straight run and refinery streams such as thermally and/or catalytically cracked and hydro-cracked distillates.

[0327] The diesel fuel composition may comprise non-renewable Fischer-Tropsch fuels such as those described as GTL (gas-to-liquid) fuels, CTL (coal-to-liquid) fuels and OTL (oil sands-to-liquid).

[0328] The diesel fuel composition may comprise a renewable fuel such as a biofuel composition or biodiesel com-

position.

[0329] The diesel fuel composition may comprise 1st generation biodiesel. First generation biodiesel contains esters of, for example, vegetable oils, animal fats and used cooking fats. This form of biodiesel may be obtained by transesterification of oils, for example rapeseed oil, soybean oil, canola oil, safflower oil, palm oil, corn oil, peanut oil, cotton seed oil, tallow, coconut oil, physic nut oil (*Jatropha*), sunflower seed oil, used cooking oils, hydrogenated vegetable oils or any mixture thereof, with an alcohol, usually a monoalcohol, usually in the presence of a catalyst.

[0330] The diesel fuel composition may comprise second generation biodiesel. Second generation biodiesel is derived from renewable resources such as vegetable oils and animal fats and processed, often in the refinery, using, for example, hydroprocessing such as the H-Bio process developed by Petrobras. Second generation biodiesel may be similar in properties and quality to petroleum based fuel oil streams, for example renewable diesel produced from vegetable oils, animal fats etc. and marketed by ConocoPhillips as Renewable Diesel and by Neste as NExBTL.

[0331] The diesel fuel composition may comprise third generation biodiesel. Third generation biodiesel utilises gasification and Fischer-Tropsch technology including those described as BTL (biomass-to-liquid) fuels. Third generation biodiesel does not differ widely from some second generation biodiesel, but aims to exploit the whole plant (biomass) and thereby widens the feedstock base.

[0332] The diesel fuel composition may contain blends of any or all of the above diesel fuel compositions.

[0333] In some embodiments the diesel fuel composition may be a blended diesel fuel comprising bio-diesel. In such blends the bio-diesel may be present in an amount of, for example up to 0.5%, up to 1%, up to 2%, up to 3%, up to 4%, up to 5%, up to 10%, up to 20%, up to 30%, up to 40%, up to 50%, up to 60%, up to 70%, up to 80%, up to 90%, up to 95% or up to 99%.

[0334] In some embodiments the fuel composition may comprise neat biodiesel.

[0335] In some preferred embodiments the fuel composition comprises at least 5 wt% biodiesel.

[0336] In some embodiments the fuel composition may comprise a neat GTL fuel.

[0337] In some embodiments the diesel fuel composition may comprise a secondary fuel, for example ethanol. Preferably however the diesel fuel composition does not contain ethanol.

[0338] The diesel fuel composition used in the present invention may contain a relatively high sulphur content, for example greater than 0.05% by weight, such as 0.1% or 0.2%.

[0339] However, in preferred embodiments the diesel fuel composition has a sulphur content of at most 0.05% by weight, more preferably of at most 0.035% by weight, especially of at most 0.015%. Fuels with even lower levels of sulphur are also suitable such as, fuels with less than 50 ppm sulphur by weight, preferably less than 20 ppm, for example 10 ppm or less.

[0340] The diesel fuel composition of the present invention preferably comprises at least 5 wt% biodiesel and less than 50 ppm sulphur.

[0341] The quaternary ammonium additive compounds of the present invention have been found to be effective at controlling deposits in fuel and lubricating compositions.

[0342] The present invention may provide the use of a quaternary ammonium compound as defined herein as an additive for fuel or lubricating oil compositions.


[0343] The present invention may provide the use of a quaternary ammonium compound as defined herein as a deposit control additive for fuel or lubricating oil compositions.

[0344] The present invention may provide the use of a quaternary ammonium compound as defined herein as a deposit control additive for lubricating oil compositions.

[0345] The present invention may provide the use of a quaternary ammonium compound as defined herein as a deposit control additive for fuel compositions.

[0346] The present invention may provide the use of a quaternary ammonium compound as defined herein as a deposit control additive for diesel fuel compositions.

[0347] According to an aspect of the present invention there is provided the use of a quaternary ammonium compound of formula (I):

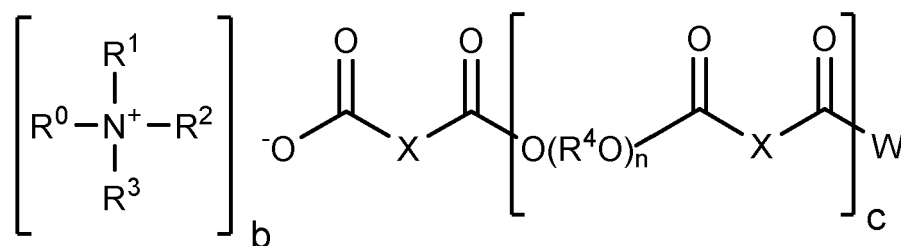

(I)

as and additive wherein R^0 , R^1 , R^2 and R^3 is each individually an optionally substituted alkyl, alkenyl or aryl group; X is a linking group; R^4 is an optionally substituted alkylene group; n is a positive integer; c is at least 1; W is O^- or OH; b is 1 when W is OH, and b is 2 when W is O^- .


[0348] The use of this aspect preferably relates to use of the quaternary ammonium compound as a fuel additive, preferably a diesel fuel additive.

[0349] Preferably the invention relates to the use of the quaternary ammonium compound as defined herein as a detergent additive.

[0350] The present invention may provide the use of a quaternary ammonium compound of formula (I) to improve the performance of an engine. The use is suitably achieved when a composition comprising the quaternary ammonium compound is combusted in the engine.

[0351] Preferably the engine is a diesel engine.

[0352] According to an aspect of the present invention there is provided a method of improving the performance of an engine, the method comprising combusting in the engine a fuel composition comprising as an additive a quaternary ammonium compound of formula (I):

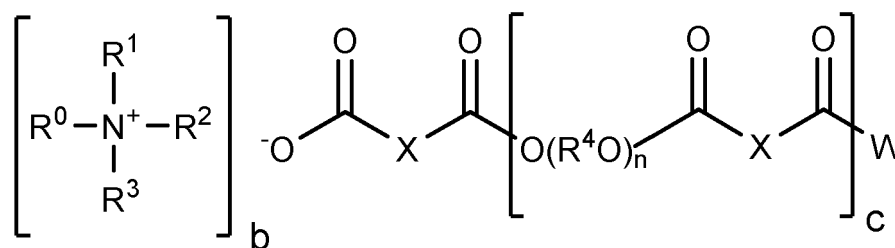

(I)

wherein R^0 , R^1 , R^2 and R^3 is each independently an optionally substituted hydrocarbyl group, X is a linking group, R^4 is an optionally substituted alkylene group; n is a positive integer, c is at least 1; W is O^- or OH; b is 1 when W is OH, and b is 2 when W is O^- .

[0353] The method preferably involves combusting in the engine a composition as defined herein.

[0354] The invention relates to a method of improving the performance of an engine.

[0355] Preferably the engine is a diesel engine.

[0356] Most preferably the engine is a direct injection diesel engine.

[0357] The present invention relates to improving the performance of diesel engines by combusting diesel fuel compositions comprising a quaternary ammonium compound.

[0358] Preferably the improvement in performance of the engine is achieved by combatting deposits in the engine.

[0359] In preferred embodiments the present invention relates to a method of combatting deposits in an engine, preferably a diesel engine.

[0360] The method may be achieved by combusting in the engine a composition quaternary ammonium compound which functions as a detergent.

[0361] Thus the present invention may provide a method of combatting deposits in a diesel engine, the method comprising combusting in the engine a fuel composition comprising as an additive a quaternary ammonium compound of the first aspect.

[0362] Suitably the use of an additive improves the performance of an engine, preferably a diesel engine. This improvement in performance may, for example, be achieved by combatting deposits in the engine.

[0363] The present invention relates to the use of the quaternary ammonium additive compound as a detergent.

[0364] References herein to improving performance and/or combating deposits may apply to either the fourth and/or the fifth aspect of the invention.

[0365] The quaternary ammonium additive compounds used in the present invention have been found to be particularly effective in modern diesel engines having a high pressure fuel system. Some features of engines of this type have been previously described herein.

[0366] Suitably the present invention combats deposits and/or improves performance of a diesel engine having a high pressure fuel system. Suitably the diesel engine has a pressure in excess of 1350 bar (1.35×10^8 Pa). It may have a pressure of up to 2000 bar (2×10^8 Pa) or more.

[0367] Two non-limiting examples of such high pressure fuel systems are: the common rail injection system, in which the fuel is compressed utilizing a high-pressure pump that supplies it to the fuel injection valves through a common rail; and the unit injection system which integrates the high-pressure pump and fuel injection valve in one assembly, achieving the highest possible injection pressures exceeding 2000 bar (2×10^8 Pa). In both systems, in pressurising the fuel, the

fuel gets hot, often to temperatures around 100°C, or above.

[0368] In common rail systems, the fuel is stored at high pressure in the central accumulator rail or separate accumulators prior to being delivered to the injectors. Often, some of the heated fuel is returned to the low pressure side of the fuel system or returned to the fuel tank. In unit injection systems the fuel is compressed within the injector in order to generate the high injection pressures. This in turn increases the temperature of the fuel.

[0369] In both systems, fuel is present in the injector body prior to injection where it is heated further due to heat from the combustion chamber. The temperature of the fuel at the tip of the injector can be as high as 250 - 350 °C.

[0370] Thus the fuel is stressed at pressures from 1350 bar (1.35×10^8 Pa) to over 2000 bar (2×10^8 Pa) and temperatures from around 100°C to 350°C prior to injection, sometimes being recirculated back within the fuel system thus increasing the time for which the fuel experiences these conditions.

[0371] A common problem with diesel engines is fouling of the injector, particularly the injector body, and the injector nozzle. Fouling may also occur in the fuel filter. Injector nozzle fouling occurs when the nozzle becomes blocked with deposits from the diesel fuel. Fouling of fuel filters may be related to the recirculation of fuel back to the fuel tank. Deposits increase with degradation of the fuel. Deposits may take the form of carbonaceous coke-like residues, lacquers or sticky or gum-like residues. Diesel fuels become more and more unstable the more they are heated, particularly if heated under pressure. Thus diesel engines having high pressure fuel systems may cause increased fuel degradation. In recent years the need to reduce emissions has led to the continual redesign of injection systems to help meet lower targets. This has led to increasingly complex injectors and lower tolerance to deposits.

[0372] The problem of injector fouling may occur when using any type of diesel fuels. However, some fuels may be particularly prone to cause fouling or fouling may occur more quickly when these fuels are used. For example, fuels containing biodiesel and those containing metallic species may lead to increased deposits.

[0373] When injectors become blocked or partially blocked, the delivery of fuel is less efficient and there is poor mixing of the fuel with the air. Over time this leads to a loss in power of the engine, increased exhaust emissions and poor fuel economy.

[0374] Deposits are known to occur in the spray channels of the injector, leading to reduced flow and power loss. As the size of the injector nozzle hole is reduced, the relative impact of deposit build up becomes more significant. Deposits are also known to occur at the injector tip. Here, they affect the fuel spray pattern and cause less effective combustion and associated higher emissions and increased fuel consumption.

[0375] In addition to these "external" injector deposits in the nozzle hole and at the injector tip which lead to reduced flow and power loss, deposits may occur within the injector body causing further problems. These deposits may be referred to as internal diesel injector deposits (or IDIDs). IDIDs occur inside the injector on the critical moving parts. They can hinder the movement of these parts affecting the timing and quantity of fuel injection. Since modern diesel engines operate under very precise conditions these deposits can have a significant impact on performance.

[0376] IDIDs cause a number of problems, including power loss and reduced fuel economy due to less than optimal fuel metering and combustion. Initially the user may experience cold start problems and/or rough engine running. These deposits can lead to more serious injector sticking. This occurs when the deposits stop parts of the injector from moving and thus the injector stops working. When several or all of the injectors stick the engine may fail completely.

[0377] The CEC have recently introduced an Internal Diesel Injector Deposit Test, CEC F-110-16, to discriminate between fuels that differ in their ability to produce IDID in direct injection common rail diesel engines.

[0378] As mentioned above, the problem of injector fouling may be more likely to occur when using fuel compositions comprising metal species. Various metal species may be present in fuel compositions. This may be due to contamination of the fuel during manufacture, storage, transport or use or due to contamination of fuel additives. Metal species may also be added to fuels deliberately. For example, transition metals are sometimes added as fuel borne catalysts, for example to improve the performance of diesel particulate filters.

[0379] Problems of injector sticking may occur when metal or ammonium species, particularly sodium species, react with carboxylic acid species in the fuel.

[0380] Sodium contamination of diesel fuel and the resultant formation of carboxylate salts is believed to be a major cause of injector sticking.

[0381] In some embodiments the diesel fuel compositions used in the present invention comprise sodium and/or calcium. Suitably they comprise sodium. The sodium and/or calcium is typically present in a total amount of from 0.01 to 50 ppm, preferably from 0.05 to 5 ppm preferably 0.1 to 2ppm such as 0.1 to 1 ppm.

[0382] Other metal-containing species may also be present as a contaminant, for example through the corrosion of metal and metal oxide surfaces by acidic species present in the fuel or from lubricating oil. In use, fuels such as diesel fuels routinely come into contact with metal surfaces for example, in vehicle fuelling systems, fuel tanks, fuel transportation means etc. Typically, metal-containing contamination may comprise transition metals such as zinc, iron and copper; Group I or Group II metals and other metals such as lead.

[0383] The presence of metal containing species may give rise to fuel filter deposits and/or external injector deposits including injector tip deposits and/or nozzle deposits.

5 **[0384]** In addition to metal-containing contamination which may be present in diesel fuels there are circumstances where metal-containing species may deliberately be added to the fuel. For example, as is known in the art, metal-containing fuel-borne catalyst species may be added to aid with the regeneration of particulate traps. The presence of such catalysts may also give rise to injector deposits when the fuels are used in diesel engines having high pressure fuel systems.

[0385] Metal-containing contamination, depending on its source, may be in the form of insoluble particulates or soluble compounds or complexes. Metal-containing fuel-borne catalysts are often soluble compounds or complexes or colloidal species.

10 **[0386]** In some embodiments, the diesel fuel may comprise metal-containing species comprising a fuel-borne catalyst. Preferably, the fuel borne catalyst comprises one or more metals selected from iron, cerium, platinum, manganese, Group I and Group II metals e.g., calcium and strontium. Most preferably the fuel borne catalyst comprises a metal selected from iron and cerium.

[0387] In some embodiments, the diesel fuel may comprise metal-containing species comprising zinc. Zinc may be present in an amount of from 0.01 to 50 ppm, preferably from 0.05 to 5 ppm, more preferably 0.1 to 1.5 ppm.

15 **[0388]** Typically, the total amount of all metal-containing species in the diesel fuel, expressed in terms of the total weight of metal in the species, is between 0.1 and 50 ppm by weight, for example between 0.1 and 20 ppm, preferably between 0.1 and 10 ppm by weight, based on the weight of the diesel fuel.

[0389] It is advantageous to provide a diesel fuel composition which prevents or reduces the occurrence of deposits in a diesel engine. In some embodiments such deposits may include "external" injector deposits such as deposits in and around the nozzle hole and at the injector tip. In some preferred embodiments the deposits include "internal" injector deposits or IDIDs. Such fuel compositions may be considered to perform a "keep clean" function i.e. they prevent or inhibit fouling. It is also desirable to provide a diesel fuel composition which would help clean up deposits of these types. Such a fuel composition which when combusted in a diesel engine removes deposits therefrom thus effecting the "clean-up" of an already fouled engine.

20 **[0390]** As with "keep clean" properties, "clean-up" of a fouled engine may provide significant advantages. For example, superior clean up may lead to an increase in power and/or an increase in fuel economy. In addition removal of deposits from an engine, in particular from injectors may lead to an increase in interval time before injector maintenance or replacement is necessary thus reducing maintenance costs.

25 **[0391]** Although for the reasons mentioned above deposits in injectors is a particular problem found in modern diesel engines with high pressure fuels systems, it is desirable to provide a diesel fuel composition which also provides effective detergency in older traditional diesel engines such that a single fuel supplied at the pumps can be used in engines of all types.

30 **[0392]** It is also desirable that fuel compositions reduce the fouling of vehicle fuel filters. It is useful to provide compositions that prevent or inhibit the occurrence of fuel filter deposits i.e. provide a "keep clean" function. It is useful to provide compositions that remove existing deposits from fuel filter deposits i.e. provide a "clean up" function. Compositions able to provide both of these functions are especially useful.

[0393] The method of the present invention is particularly effective at combatting deposits in a modern diesel engine having a high pressure fuel system.

[0394] Such diesel engines may be characterised in a number of ways.

35 **[0395]** Such engines are typically equipped with fuel injection equipment meeting or exceeding "Euro 5" emissions legislation or equivalent legislation in the US or other countries.

[0396] Such engines are typically equipped with fuel injectors having a plurality of apertures, each aperture having an inlet and an outlet.

40 **[0397]** Such engines may be characterised by apertures which are tapered such that the inlet diameter of the spray-holes is greater than the outlet diameter.

[0398] Such modern engines may be characterised by apertures having an outlet diameter of less than 500 μ m, preferably less than 200 μ m, more preferably less than 150 μ m, preferably less than 100 μ m, most preferably less than 80 μ m or less.

[0399] Such modern diesel engines may be characterised by apertures where an inner edge of the inlet is rounded.

45 **[0400]** Such modern diesel engines may be characterised by the injector having more than one aperture, suitably more than 2 apertures, preferably more than 4 apertures, for example 6 or more apertures.

[0401] Such modern diesel engines may be characterised by an operating tip temperature in excess of 250°C.

50 **[0402]** Such modern diesel engines may be characterised by a fuel injection system which provides a fuel pressure of more than 1350 bar, preferably more than 1500 bar, more preferably more than 2000 bar. Preferably, the diesel engine has fuel injection system which comprises a common rail injection system.

55 **[0403]** The method of the present invention preferably combats deposits in an engine having one or more of the above-described characteristics.

[0404] The use of the present invention preferably improves the performance of an engine. This improvement in

performance is suitably achieved by reducing deposits in the engine.

[0405] The first aspect of the present invention relates to a method of combating deposits in a diesel engine. Combating deposits may involve reducing or the preventing of the formation of deposits in an engine compared to when running the engine using unadditised fuel. Such a method may be regarded as achieving "keep clean" performance.

[0406] Combating deposits may involve the removal of existing deposits in an engine. This may be regarded as achieving "clean up" performance.

[0407] In especially preferred embodiments the method and the of the present invention may be used to provide "keep clean" and use "clean up" performance.

[0408] As explained above deposits may occur at different places within a diesel engine, for example a modern diesel engine.

[0409] The present invention is particularly useful in the prevention or reduction or removal of internal deposits in injectors of engines operating at high pressures and temperatures in which fuel may be recirculated and which comprise a plurality of fine apertures through which the fuel is delivered to the engine. The present invention finds utility in engines for heavy duty vehicles and passenger vehicles. Passenger vehicles incorporating a high speed direct injection (or HSDI) engine may for example benefit from the present invention.

[0410] The present invention may also provide improved performance in modern diesel engines having a high pressure fuel system by controlling external injector deposits, for example those occurring in the injector nozzle and/or at the injector tip. The ability to provide control of internal injector deposits and external injector deposits is a useful advantage of the present invention.

[0411] Suitably the present invention may reduce or prevent the formation of external injector deposits. It may therefore provide "keep clean" performance in relation to external injector deposits.

[0412] Suitably the present invention may reduce or remove existing external injector deposits. It may therefore provide "clean up" performance in relation to external injector deposits.

[0413] Suitably the present invention may reduce or prevent the formation of internal diesel injector deposits. It may therefore provide "keep clean" performance in relation to internal diesel injector deposits.

[0414] Suitably the present invention may reduce or remove existing internal diesel injector deposits. It may therefore provide "clean up" performance in relation to internal diesel injector deposits.

[0415] The present invention may also combat deposits on vehicle fuel filters. This may include reducing or preventing the formation of deposits ("keep clean" performance) or the reduction or removal of existing deposits ("clean up" performance).

[0416] The removal or reduction of IDIDs according to the present invention will lead to an improvement in performance of the engine.

[0417] The improvement in performance of the diesel engine system may be measured by a number of ways. Suitable methods will depend on the type of engine and whether "keep clean" and/or "clean up" performance is measured.

[0418] An improvement in "keep clean" performance may be measured by comparison with a base fuel. "Clean up" performance can be observed by an improvement in performance of an already fouled engine.

[0419] The effectiveness of fuel additives is often assessed using a controlled engine test.

[0420] In Europe the Co-ordinating European Council for the development of performance tests for transportation fuels, lubricants and other fluids (the industry body known as CEC), has developed a test for additives for modern diesel engines such as HSDI engines. The CEC F-98-08 test is used to assess whether diesel fuel is suitable for use in engines meeting new European Union emissions regulations known as the "Euro 5" regulations. The test is based on a Peugeot DW10 engine using Euro 5 injectors, and is commonly referred to as the DW10B test. This test measures power loss in the engine due to deposits on the injectors, and is further described in example 4.

[0421] Preferably the use of the fuel composition of the present invention leads to reduced deposits in the DW10B test. For "keep clean" performance a reduction in the occurrence of deposits is preferably observed.

[0422] For "clean up" performance removal of deposits is preferably observed. The DW10B test is used to measure the power loss in modern diesel engines having a high pressure fuel system.

[0423] Suitably the use of a fuel composition of the present invention may provide a "keep clean" performance in modern diesel engines, that is the formation of deposits in the injectors of these engines may be inhibited or prevented. Preferably this performance is such that a power loss of less than 5%, preferably less than 2% is observed after 32 hours as measured by the DW10B test.

[0424] Suitably the use of a fuel composition of the present invention may provide a "clean up" performance in modern diesel engines that is, deposits on the injectors of an already fouled engine may be removed. Preferably this performance is such that the power of a fouled engine may be returned to within 1% of the level achieved when using clean injectors within 16 hours, preferably 12 hours, more preferably 8 hours as measured in the DW10B test.

[0425] In some preferred embodiments, clean up may also provide a power increase. Thus a fouled engine may be treated to remove the existing deposits and provide an additional power gain.

[0426] Clean injectors can include new injectors or injectors which have been removed and physically cleaned, for

example in an ultrasound bath.

[0427] The CEC have also developed a new test, commonly known as the DW10C which assesses the ability of a fuel composition to prevent the formation of IDIDs that lead to injector sticking. This test is described in example 5. A modified version of this test adapted to measure clean up, is described in example 6.

[0428] The DW10C test may be used to measure the "keep clean" or "clean up" performance of an engine.

[0429] In some embodiments the present invention provides a "keep clean" performance in relation to the formation of IDIDs. Such performance may be illustrated by achieving a merit score of at least 7 as measured by the DW10C test, preferably at least 8, more preferably at least 9.

[0430] In some embodiments a merit score of at least 9.3 may be achieved, for example at least 9.4, at least 9.5, at least 9.6 or at least 9.7.

[0431] In some embodiments the present invention provides a "clean-up" performance in relation to IDIDs, whereby existing IDIDs may be removed. Such a performance is illustrated in the examples.

[0432] The diesel fuel compositions of the present invention may also provide improved performance when used with traditional diesel engines. Preferably the improved performance is achieved when using the diesel fuel compositions in modern diesel engines having high pressure fuel systems and when using the compositions in traditional diesel engines. This is important because it allows a single fuel to be provided that can be used in new engines and older vehicles.

[0433] For older engines an improvement in performance may be measured using the XUD9 test. This test is described in relation to example 5.

[0434] Suitably the use of a fuel composition of the present invention may provide a "keep clean" performance in traditional diesel engines, that is the formation of deposits on the injectors of these engines may be inhibited or prevented. Preferably this performance is such that a flow loss of less than 50%, preferably less than 30% is observed after 10 hours as measured by the XUD-9 test.

[0435] Suitably the use of a fuel composition of the present invention may provide a "clean up" performance in traditional diesel engines, that is deposits on the injectors of an already fouled engine may be removed. Preferably this performance is such that the flow loss of a fouled engine may be reduced by 10% or more within 10 hours as measured in the XUD-9 test.

[0436] The benefits provided by the present invention mean that engines need to be serviced less frequently, leading to cost savings and an increase in maintenance intervals.

[0437] Preferably the method and use of the present invention provide an improvement in the performance of a diesel engine. This improvement in performance is suitably selected from one or more of:

- a reduction in power loss of the engine;
- a reduction in external diesel injector deposits;
- a reduction in internal diesel injector deposits;
- an improvement in fuel economy;
- a reduction in fuel filter deposits;
- a reduction in emissions; and
- an increase in maintenance intervals.

[0438] The additives of the present invention may provide a further benefit in addition to those listed above. For example the additive may provide lubricity benefits and/or corrosion inhibition and/or cold flow improvement.

[0439] The diesel fuel compositions of the present invention may include one or more further additives such as those which are commonly found in diesel fuels. These include, for example, antioxidants, dispersants, detergents, metal deactivating compounds, wax antisetling agents, cold flow improvers, cetane improvers, dehazers, stabilisers, demulsifiers, antifoams, corrosion inhibitors, lubricity improvers, dyes, markers, combustion improvers, metal deactivators, odour masks, drag reducers and conductivity improvers. Examples of suitable amounts of each of these types of additives will be known to the person skilled in the art.

[0440] In some embodiments the combination of an additive of the invention and a further additive may provide synergistic improvement in performance.

[0441] For example the use of a quaternary ammonium additive compound of the invention in combination with a cold flow improver may provide an unexpected improvement in detergency and/or cold flow performance compared with the performance of the individual additives used alone.

[0442] In some embodiments the use of a quaternary ammonium additive compound of the present invention may enable a lower treat rate of cold flow improver to be used.

[0443] For example the use of a quaternary ammonium additive compound of the invention in combination with a corrosion inhibitor may provide an unexpected improvement in detergency and/or corrosion inhibition compared with the performance of the individual additives used alone.

[0444] In some embodiments the use of a quaternary ammonium additive compound of the present invention may enable a lower treat rate of corrosion inhibitor to be used.

[0445] For example the use of a quaternary ammonium additive compound of the invention in combination with a lubricity improver may provide an unexpected improvement in detergency and/or lubricity compared with the performance of the individual additives used alone.

[0446] In some embodiments the use of a quaternary ammonium additive compound of the present invention may enable a lower treat rate of lubricity improver to be used.

[0447] In some preferred embodiments the diesel fuel composition of the present invention comprises one or more further detergents. Nitrogen-containing detergents are preferred.

[0448] The one or more further detergents may provide a synergistic benefit such that an improved performance is observed when using the combination of a quaternary ammonium additive compound of the invention and a nitrogen-containing detergent compared to the use of an equivalent amount of either additive alone.

[0449] The use of a combination of a quaternary ammonium additive compound and a nitrogen-containing detergent may also combat deposits and improve performance in a traditional diesel engine.

[0450] The one or more further detergents may be selected from:

(i) a quaternary ammonium salt additive which is not a compound of formula (I);

(ii) the product of a Mannich reaction between an aldehyde, an amine and an optionally substituted phenol;

(iii) the reaction product of a carboxylic acid-derived acylating agent and an amine;

(iv) the reaction product of a carboxylic acid-derived acylating agent and hydrazine;

(v) a salt formed by the reaction of a carboxylic acid with di-n-butylamine or tri-n-butylamine;

(vi) the reaction product of a hydrocarbyl-substituted dicarboxylic acid or anhydride and an amine compound or salt which product comprises at least one amino triazole group; and

(vii) a substituted polyaromatic detergent additive.

[0451] Preferably one or more further detergents are selected from one or more of:

(i) a quaternary ammonium salt additive which is not a compound of formula (I);

(ii) the product of a Mannich reaction between an aldehyde, an amine and an optionally substituted phenol; and

(iii) the reaction product of a carboxylic acid-derived acylating agent and an amine.

[0452] The ratio of the quaternary ammonium additive compound to the nitrogen containing detergent is suitable from 5:1 to 1:5, preferably from 2:1 to 1:2.

[0453] In some embodiments the diesel fuel composition further comprises (i) a quaternary ammonium salt additive which is not a compound of formula (I).

[0454] The quaternary ammonium salt additive is suitably the reaction product of a nitrogen-containing species having at least one tertiary amine group and a quaternising agent.

[0455] The nitrogen containing species may be selected from:

(x) the reaction product of a hydrocarbyl-substituted acylating agent and a compound comprising at least one tertiary amine group and a primary amine, secondary amine or alcohol group;

(y) a Mannich reaction product comprising a tertiary amine group; and

(z) a polyalkylene substituted amine having at least one tertiary amine group.

[0456] Examples of quaternary ammonium salt and methods for preparing the same are described in the following patents, US2008/0307698, US2008/0052985, US2008/0113890 and US2013/031827.

[0457] The preparation of some suitable quaternary ammonium salt additives in which the nitrogen-containing species includes component (x) is described in WO 2006/135881 and WO2011/095819.

[0458] Component (y) is a Mannich reaction product having a tertiary amine. The preparation of quaternary ammonium salts formed from nitrogen-containing species including component (y) is described in US 2008/0052985.

[0459] The preparation of quaternary ammonium salt additives in which the nitrogen-containing species includes component (z) is described for example in US 2008/0113890.

[0460] To form the quaternary ammonium salt additive (i) the nitrogen-containing species having a tertiary amine group is reacted with a quaternising agent.

[0461] The quaternising agent may suitably be selected from esters and non-esters.

[0462] Preferred quaternising agents for use herein include dimethyl oxalate, methyl 2-nitrobenzoate, methyl salicylate and styrene oxide or propylene oxide optionally in combination with an additional acid.

[0463] An especially preferred additional quaternary ammonium salt for use herein is formed by reacting methyl salicylate or dimethyl oxalate with the reaction product of a polyisobutylene-substituted succinic anhydride having a PIB number average molecular weight of 700 to 1300 and dimethylaminopropylamine.

[0464] Other suitable quaternary ammonium salts include quaternised terpolymers, for example as described in US2011/0258917; quaternised copolymers, for example as described in US2011/0315107; and the acid-free quaternised nitrogen compounds disclosed in US2012/0010112.

[0465] Further suitable quaternary ammonium compounds for use in the present invention include the quaternary ammonium compounds described in the applicants copending applications WO2011095819, WO2013/017889, WO2015/011506, WO2015/011507, WO2016/016641 and PCT/GB2016/052312.

[0466] In some embodiments the diesel fuel composition used in the present invention comprises from 1 to 500 ppm, preferably 50 to 250 ppm of the quaternary ammonium additive compound of the present invention and from 1 to 500 ppm, preferably 50 to 250ppm of a further quaternary ammonium additive (i).

[0467] In some embodiments the diesel fuel composition comprises further (ii) the product of a Mannich reaction between an aldehyde, an amine and an optionally substituted phenol. This Mannich reaction product is suitably not a quaternary ammonium salt.

[0468] Preferably the aldehyde component used to prepare the Mannich additive is an aliphatic aldehyde. Preferably the aldehyde has 1 to 10 carbon atoms. Most preferably the aldehyde is formaldehyde.

[0469] Suitable amines for use in preparing the Mannich additive include monoamines and polyamines. One suitable monoamine is butylamine.

[0470] The amine used to prepare the Mannich additive is preferably a polyamine. This may be selected from any compound including two or more amine groups. Preferably the polyamine is a polyalkylene polyamine, preferably a polyethylene polyamine. Most preferably the polyamine comprises tetraethylenepentamine or ethylenediamine.

[0471] The optionally substituted phenol component used to prepare the Mannich additive may be substituted with 0 to 4 groups on the aromatic ring (in addition to the phenol OH). For example it may be a hydrocarbyl-substituted cresol. Most preferably the phenol component is a monosubstituted phenol. Preferably it is a hydrocarbyl substituted phenol. Preferred hydrocarbyl substituents are alkyl substituents having 4 to 28 carbon atoms, especially 10 to 14 carbon atoms. Other preferred hydrocarbyl substituents are polyalkenyl substituents. Such polyisobutenyl substituents having a number average molecular weight of from 400 to 2500, for example from 500 to 1500.

[0472] In some embodiments the diesel fuel composition of the present invention comprises from 1 to 500 ppm, preferably 50 to 250ppm of a quaternary ammonium compound of as defined herein and from 1 to 500 ppm, preferably 50 to 250ppm of a Mannich additive (ii).

[0473] In some embodiments the diesel fuel composition further comprises (iii) the reaction product of a carboxylic acid-derived acylating agent and an amine.

[0474] These may also be referred to herein in general as acylated nitrogen-containing compounds.

[0475] Suitable acylated nitrogen-containing compounds may be made by reacting a carboxylic acid acylating agent with an amine and are known to those skilled in the art.

[0476] Preferred hydrocarbyl substituted acylating agents are polyisobutenyl succinic anhydrides. These compounds are commonly referred to as "PIBSAs" and are known to the person skilled in the art.

[0477] Conventional polyisobutenes and so-called "highly-reactive" polyisobutenes are suitable for use in the invention.

[0478] Especially preferred PIBSAs are those having a PIB molecular weight (Mn) of from 300 to 2800, preferably from 450 to 2300, more preferably from 500 to 1300.

[0479] In preferred embodiments the reaction product of the carboxylic acid derived acylating agent and an amine includes at least one primary or secondary amine group.

[0480] A preferred acylated nitrogen-containing compound for use herein is prepared by reacting a poly(isobutene)-substituted succinic acid-derived acylating agent (e.g., anhydride, acid, ester, etc.) wherein the poly(isobutene) substituent has a number average molecular weight (Mn) of between 170 to 2800 with a mixture of ethylene polyamines having 2 to about 9 amino nitrogen atoms, preferably about 2 to about 8 nitrogen atoms, per ethylene polyamine and about 1 to about 8 ethylene groups. These acylated nitrogen compounds are suitably formed by the reaction of a molar ratio of acylating agent:amino compound of from 10:1 to 1:10, preferably from 5:1 to 1:5, more preferably from 2:1 to 1:2 and most preferably from 2:1 to 1:1. In especially preferred embodiments, the acylated nitrogen compounds are formed by the reaction of acylating agent to amino compound in a molar ratio of from 1.8:1 to 1:1.2, preferably from 1.6:1 to 1:1.2, more preferably from 1.4:1 to 1:1.1 and most preferably from 1.2:1 to 1:1. Acylated amino compounds of this type and their preparation are well known to those skilled in the art and are described in for example EP0565285 and US5925151.

[0481] In some preferred embodiments the composition comprises a detergent of the type formed by the reaction of a polyisobutene-substituted succinic acid-derived acylating agent and a polyethylene polyamine. Suitable compounds are, for example, described in WO2009/040583.

[0482] In some embodiments the diesel fuel composition of the present invention comprises from 1 to 500 ppm, preferably 50 to 250ppm of a quaternary ammonium compound as defined herein and from 1 to 500 ppm, preferably 50 to 250ppm of an additive which is the reaction product of an acylating agents and an amine (iii).

[0483] In some embodiments the diesel fuel composition comprises (iv) the reaction product of a carboxylic acid-derived acylating agent and hydrazine.

[0484] Suitably the additive comprises the reaction product between a hydrocarbyl-substituted succinic acid or anhydride and hydrazine.

[0485] Preferably, the hydrocarbyl group of the hydrocarbyl-substituted succinic acid or anhydride comprises a C₈-C₃₆ group, preferably a C₈-C₁₈ group. Alternatively, the hydrocarbyl group may be a polyisobutylene group with a number average molecular weight of between 200 and 2500, preferably between 800 and 1200.

[0486] Hydrazine has the formula NH₂-NH₂. Hydrazine may be hydrated or non-hydrated. Hydrazine monohydrate is preferred.

[0487] The reaction between the hydrocarbyl-substituted succinic acid or anhydride and hydrazine produces a variety of products, such as is disclosed in US 2008/0060259.

[0488] In some embodiments the diesel fuel composition further comprises (v) a salt formed by the reaction of a carboxylic acid with di-n-butylamine or tri-n-butylamine. Exemplary compounds of this type are described in US 2008/0060608.

[0489] Such additives may suitably be the di-n-butylamine or tri-n-butylamine salt of a fatty acid of the formula [R'(COOH)_x]_y, where each R' is a independently a hydrocarbon group of between 2 and 45 carbon atoms, and x is an integer between 1 and 4.

[0490] In a preferred embodiment, the carboxylic acid comprises tall oil fatty acid (TOFA).

[0491] Further preferred features of additives of this type are described in EP1900795.

[0492] In some embodiments the diesel fuel composition further comprises (vi) the reaction product of a hydrocarbyl-substituted dicarboxylic acid or anhydride and an amine compound or salt which product comprises at least one amino triazole group.

[0493] Further preferred features of additive compounds of this type are as defined in US2009/0282731.

[0494] In some embodiments the diesel fuel composition further comprises (vii) a substituted polyaromatic detergent additive.

[0495] One preferred compound of this type is the reaction product of an ethoxylated naphthol and paraformaldehyde which is then reacted with a hydrocarbyl substituted acylating agent.

[0496] Further preferred features of these detergents are described in EP1884556.

[0497] Any feature of the invention may be combined with any other feature as appropriate.

[0498] The invention will now be further described with reference to the following non-limiting examples. In the examples which follow the values given in parts per million (ppm) for treat rates denote active agent amount, not the amount of a formulation as added, and containing an active agent. All parts per million are by weight.

Example 1

[0499] Additive A1, a quaternary ammonium salt additive compound of the invention was prepared as follows:

(a) A mixture of alkenes having 20 to 24 carbon atoms was heated with 1.2 molar equivalents of maleic anhydride. On completion of the reaction excess maleic anhydride was removed by distillation. The anhydride value of the substituted succinic anhydride product was measured as 2.591 mmol·g⁻¹.

This product was then heated with 0.5 molar equivalents of polypropylene glycol having a number average molecular weight of 425, and the reaction was monitored by FTIR to provide the bis ester product.

(b) 1 molar equivalent of diethyl ethanolamine was reacted with 1.5 molar equivalents of butylene oxide and 6 molar equivalents of water at 60°C in toluene for 10 hours in the presence of the bis ester provided in step (a) to form a quaternary ammonium compound. Volatiles were removed *in vacuo*.

[0500] In some embodiments one molar equivalent of amine per bis ester was used. In some embodiments two moles of amine were used per equivalent of bis ester.

[0501] Compounds A2 to A28, A30 and A31 detailed in table 1 were prepared by an analogous method.

[0502] Compounds A1 to A15 and A21 to A31 were prepared using one molar equivalent of amine per bis ester. This results in a quaternary ammonium salt including one ammonium cation and one proton per bis ester anion.

EP 3 853 327 B1

[0503] Compounds A16 to A20 were prepared using two molar equivalents of amine per bis ester. This results in a quaternary ammonium salt including two ammonium cations per bis ester anion.

Table 1

Compound	R	H-(OR ⁴) _n -OH	Amine	Epoxide
A1	C20-24	polypropylene glycol Mn425	Diethyl ethanolamine	Butylene oxide
A2	C20-24	polypropylene glycol Mn425	Dimethyl ethanolamine	Butylene oxide
A3	C20-24	polypropylene glycol Mn425	Dimethyl benzylamine	Butylene oxide
A4	C20-24	polypropylene glycol Mn425	Dimethyl octadecylamine	Butylene oxide
A5	C20-24	polypropylene glycol Mn425	Dimethyl benzylamine	Styrene oxide
A6	C20-24	polypropylene glycol Mn425	Dimethyl octadecylamine	Styrene oxide
A7	C20-24	polypropylene glycol Mn425	Dimethyl aminoethoxyethanol	Styrene oxide
A8	C20-24	polypropylene glycol Mn425	Diethyl ethanolamine	2-ethylhexyl glycidyl ether
A9	C20-24	polypropylene glycol Mn425	Dimethyl ethanolamine	2-ethylhexyl glycidyl ether
A10	C20-24	polypropylene glycol Mn425	Dimethyl benzylamine	2-ethylhexyl glycidyl ether
A11	C20-24	polypropylene glycol Mn425	Dimethyl octadecylamine	2-ethylhexyl glycidyl ether
A12	C20-24	polypropylene glycol Mn425	Dimethyl aminoethoxyethanol	2-ethylhexyl glycidyl ether
A13	C20-24	polypropylene glycol Mn425	Dimethyl ethanolamine	dodecylepoxyde
A14	C20-24	polypropylene glycol Mn425	Dimethyl benzylamine	dodecylepoxyde
A15	C20-24	polypropylene glycol Mn425	Dimethyl octadecylamine	dodecylepoxyde
A16	C20-24	polypropylene glycol Mn425	Dimethyl octadecylamine	Butylene oxide
A17	C20-24	polypropylene glycol Mn425	Dimethyl benzylamine	Styrene oxide
A18	C20-24	polypropylene glycol Mn425	Dimethyl octadecylamine	Styrene oxide
A19	C20-24	polypropylene glycol Mn425	Dimethyl ethanolamine	2-ethylhexyl glycidyl ether
A20	C20-24	polypropylene glycol Mn425	Dimethyl octadecylamine	2-ethylhexyl glycidyl ether
A21	C20-24	polypropylene glycol Mn425	Dimethyl aminoethoxyethanol	Butylene oxide
A22	C20-24	polypropylene glycol Mn425	Diethyl ethanolamine	Styrene oxide
A23	C20-24	polypropylene glycol Mn425	Diethyl ethanolamine	dodecylepoxyde
A24	C20-24	tripropylene glycol	Dimethyl benzylamine	2-ethylhexyl glycidyl ether
A25	C20-24	1,3-butanediol	Dimethyl ethanolamine	Styrene oxide
A26	C20-24	1,3-butanediol	Dimethyl ethanolamine	2-ethylhexyl glycidyl ether
A27	C20-24	1,6-hexanediol	Dimethyl ethanolamine	2-ethylhexyl glycidyl ether
A28	C20-24	ethylene glycol	Dimethyl ethanolamine	2-ethylhexyl glycidyl ether
A29	C20-24/ H*	tripropylene glycol	Dimethyl ethanolamine	2-ethylhexyl glycidyl ether
A30	C20-24	1,3-butanediol	Dimethyl ethanolamine	Butylene oxide
A31	C20-24	tripropylene glycol	Dimethyl ethanolamine	Butylene oxide

* Compound A29 is prepared by the following method:

(a) A mixture of alkenes having 20 to 24 carbon atoms was heated with 1.2 molar equivalents of maleic anhydride. On completion of the reaction excess maleic anhydride was removed by distillation. This product was then heated with 1 molar equivalent of tripropylene glycol, which was calculated based on the charge weight and mean molecular weight of the alkenyl succinic anhydride as prepared above. The reaction was monitored by FTIR to provide the half ester product. The half ester product was then heated with one equivalent of

EP 3 853 327 B1

succinic anhydride to form a bis ester product.

(b) 1 molar equivalent of dimethyl ethanolamine was reacted with 1 molar equivalent of 2-ethylhexylglycidyl ether and 6 molar equivalents of water at 95°C in toluene for 10 hours in the presence of the bis ester provided in step (a) to form a quaternary ammonium compound. Volatiles were removed *in vacuo*.

Example 2

[0504] Diesel fuel compositions were prepared by dosing additives to aliquots all drawn from a common batch of RF06 base fuel.

[0505] The compositions were tested in a screening test which correlates with performance at combatting IDIDs as measured in the DW10C test.

[0506] In this test a fuel composition is tested using a Jet Fuel Thermal Oxidation Test equipment. In this modified test 800ml of fuel is flowed over a heated tube at pressures of approximately 540psi. The test duration is 2.5 hours. At the end of the test the amount of deposit obtained on the tube is compared to a reference value.

[0507] The value shown in Table 2 is the percentage reduction in deposit thickness compared to base fuel.

Table 2

Compound	ppm active	Average thickness (% reduction)
A1 (inventive)	120	88
A2 (inventive)	120	84
A3 (inventive)	120	87
A4 (inventive)	120	89
A5 (inventive)	120	89
A6 (inventive)	120	97
A7 (inventive)	120	92
A8 (inventive)	120	80
A9 (inventive)	120	95
A10 (inventive)	120	94
A11 (inventive)	120	93
A12 (inventive)	120	96
A13 (inventive)	120	82
A14 (inventive)	120	98
A15 (inventive)	120	92
A16 (inventive)	120	86
A17 (inventive)	120	83
A18 (inventive)	120	86
A19 (inventive)	120	86
A20 (inventive)	120	89
A21 (inventive)	120	90
A22 (inventive)	120	64
A23 (inventive)	120	58
A24 (inventive)	120	73
A25 (inventive)	120	73
A26 (inventive)	120	74

EP 3 853 327 B1

(continued)

Compound	ppm active	Average thickness (% reduction)
A27 (inventive)	120	74
A28 (inventive)	60	72
A29 (inventive)	60	53
A30 (inventive)	60	72
A31 (inventive)	60	74
C1 (comparative)	120	0
C2 (comparative)	120	2

[0508] Comparative additive C1 is dodecanyl substituted succinic acid.

[0509] Comparative additive C2 is a polyisobutenyl (PIB) substituted succinic acid where the PIB has a number average molecular weight of 1000.

[0510] Table 3 below shows the specification for RF06 base fuel.

Table 3

Property	Units	Limits		Method
		Min	Max	
Cetane Number		52.0	54.0	EN ISO 5165
Density at 15°C	kg/m ³	833	837	EN ISO 3675
Distillation	50% v/v Point	°C	245	-
	95% v/v Point	°C	345	350
	FBP	°C	-	370
Flash Point	°C	55	-	EN 22719
Cold Filter Plugging Point	°C	-	-5	EN 116
Viscosity at 40°C	mm ² /sec	2.3	3.3	EN ISO 3104
Polycyclic Aromatic Hydrocarbons	% m/m	3.0	6.0	IP 391
Sulphur Content	mg/kg	-	10	ASTM D 5453
Copper Corrosion		-	1	EN ISO 2160
Conradson Carbon Residue on 10% Dist. Residue	% m/m	-	0.2	EN ISO 10370
Ash Content	% m/m	-	0.01	EN ISO 6245
Water Content	% m/m	-	0.02	EN ISO 12937
Neutralisation (Strong Acid) Number	mg KOH/g	-	0.02	ASTM D 974
Oxidation Stability	mg/mL	-	0.025	EN ISO 12205
HFRR (WSD1,4)	µm	-	400	CEC F-06-A-96
Fatty Acid Methyl Ester			prohibited	

Example 3

[0511] The performance of fuel compositions of example 2 in modern diesel engines having a high pressure fuel system may be tested according to the CECF-98-08 DW 10 method. This is referred to herein as the DW10B test.

[0512] The engine of the injector fouling test is the PSA DW10BTED4. In summary, the engine characteristics are:

Design: Four cylinders in line, overhead camshaft, turbocharged with EGR
Capacity: 1998 cm³

EP 3 853 327 B1

Combustion chamber: Four valves, bowl in piston, wall guided direct injection

Power: 100 kW at 4000 rpm

Torque: 320 Nm at 2000 rpm

Injection system: Common rail with piezo electronically controlled 6-hole injectors.

Max. pressure: 1600 bar (1.6×10^8 Pa). Proprietary design by SIEMENS VDO

Emissions control: Conforms with Euro IV limit values when combined with exhaust gas post-treatment system (DPF)

[0513] This engine was chosen as a design representative of the modern European high-speed direct injection diesel engine capable of conforming to present and future European emissions requirements. The common rail injection system uses a highly efficient nozzle design with rounded inlet edges and conical spray holes for optimal hydraulic flow. This type of nozzle, when combined with high fuel pressure has allowed advances to be achieved in combustion efficiency, reduced noise and reduced fuel consumption, but are sensitive to influences that can disturb the fuel flow, such as deposit formation in the spray holes. The presence of these deposits causes a significant loss of engine power and increased raw emissions.

[0514] The test is run with a future injector design representative of anticipated Euro V injector technology.

[0515] It is considered necessary to establish a reliable baseline of injector condition before beginning fouling tests, so a sixteen hour running-in schedule for the test injectors is specified, using non-fouling reference fuel.

[0516] Full details of the CEC F-98-08 test method can be obtained from the CEC. The coking cycle is summarised below.

1. A warm up cycle (12 minutes) according to the following regime:

Step	Duration (minutes)	Engine Speed (rpm)	Torque (Nm)
1	2	idle	<5
2	3	2000	50
3	4	3500	75
4	3	4000	100

2. 8 hrs of engine operation consisting of 8 repeats of the following cycle

Step	Duration (minutes)	Engine Speed (rpm)	Load (%)	Torque (Nm)	Boost Air After IC (°C)
1	2	1750	(20)	62	45
2	7	3000	(60)	173	50
3	2	1750	(20)	62	45
4	7	3500	(80)	212	50
5	2	1750	(20)	62	45
6	10	4000	100	*	50
7	2	1250	(10)	20	43
8	7	3000	100	*	50
9	2	1250	(10)	20	43
10	10	2000	100	*	50
11	2	1250	(10)	20	43
12	7	4000	100	*	50

* for expected range see CEC method CEC-F-98-08

3. Cool down to idle in 60 seconds and idle for 10 seconds

4. 4 hrs soak period

[0517] The standard CEC F-98-08 test method consists of 32 hours engine operation corresponding to 4 repeats of steps 1-3 above, and 3 repeats of step 4. ie 56 hours total test time excluding warm ups and cool downs.

Example 4

[0518] A diesel fuel composition comprising additive A26 (100 ppm active) was tested according to the CECF-98-08 DW10B test method described in example 3, modified to measure clean up performance as outlined below.

[0519] A first 32 hour cycle was run using new injectors and RF-06 base fuel having added thereto 1ppm Zn (as neodecanoate). This resulted in a level of power loss due to fouling of the injectors.

[0520] A second 32 hour cycle was then run as a 'clean up' phase. The dirty injectors from the first phase were kept in the engine and the fuel changed to RF-06 base fuel having added thereto 1ppm Zn (as neodecanoate) and the test additive.

[0521] Figure 1 shows the power output of the engine when running the fuel composition comprising additive A26 over the test period.

Example 5

[0522] The ability of additives of the invention to remove 'Internal Diesel Injector Deposits' (IDIDs) may be measured according to the test method CEC F-110-16, available from the Co-ordinating European Council. The test uses the PSA DW10C engine.

[0523] The engine characteristics as follows:

Design:	Four cylinders in line, overhead camshaft, variable geometry turbocharger with EGR
Capacity:	1997 cm ³
Combustion chamber:	Four valves, bowl in piston, direct injection
Power:	120 kW @ 3750 rpm
Torque:	340 Nm @ 2000 rpm
Injection system:	Common rail with solenoid type injectors Delphi Injection System
Emissions control :	Conforms to Euro V limit values when combined with exhaust gas post-treatment system


[0524] The test fuel (RF06) is dosed with 0.5mg/kg Na in the form of Sodium Naphthenate + 10mg/kg Dodecyl Succinic Acid (DDSA).

[0525] The test procedure consists of main run cycles followed by soak periods, before cold starts are carried out.

[0526] The main running cycle consist of two speed and load set points, repeated for 6hrs, as seen below.


Step	Speed (rpm)	Torque (N.m)	Duration (s)
1	3750	280	1470
1 -Ramp → 2	-	-	30
2	1000	10	270
2 -Ramp → 1	-	-	30

[0527] The ramp times of 30 seconds are included in the duration of each step.

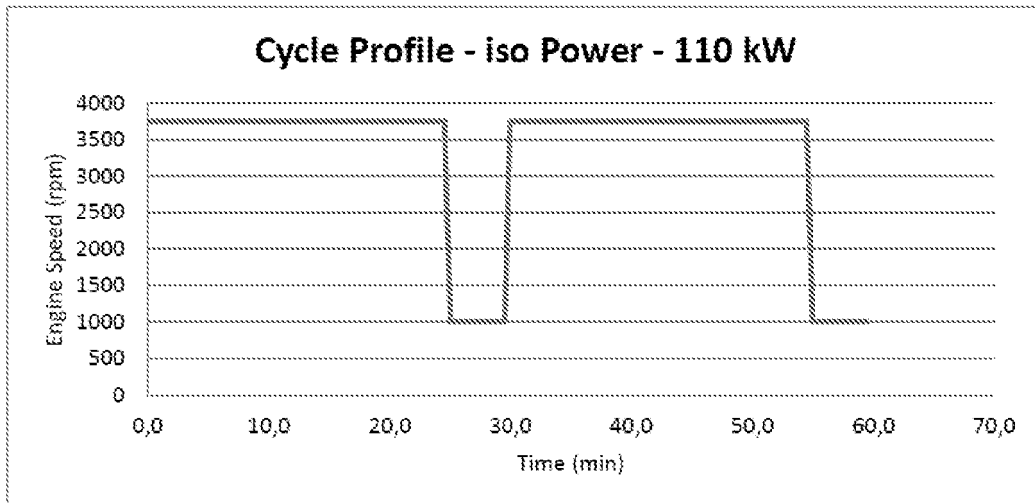

Each Cycle is repeated 6 times so the complete main run phase lasts 6 hours.

- 20 **[0528]** During the main run, parameters including, Throttle pedal position, ECU fault codes, Injector balance coefficient and Engine stalls are observed and recorded.
- [0529]** The engine is then left to soak at ambient temperature for 8hrs.
- [0530]** After the soak period the engine is re-started. The starter is operated for 5 seconds; if the engine fails to start the engine is left for 60 seconds before a further attempt. A maximum of 5 attempts are allowed.
- 25 **[0531]** If the engine starts the engine is allowed to idle for 5 minutes. Individual exhaust temperatures are monitored and the maximum Temperature Delta is recorded. An increased variation in Cylinder-to-Cylinder exhaust temperatures is a good indication that injectors are suffering from IDID. Causing them to either open slowly or stay open to long.
- [0532]** An example below of all exhaust temperatures with <math><30^{\circ}\text{C}</math> deviation, indicating no sticking caused by IDID.

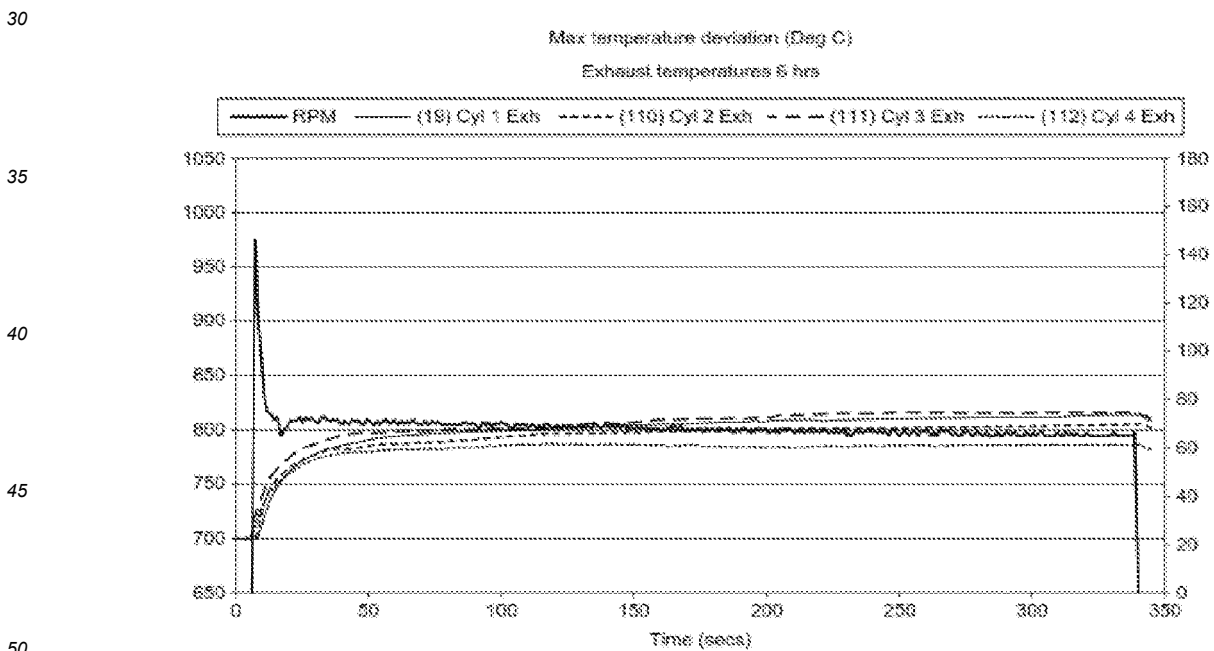

- 30 **[0533]** The complete test comprises of 6x Cold Starts, although the Zero hour Cold Start does not form part of the Merit Rating and 5x 6hr Main run cycles, giving a total of 30hrs engine running time.
- [0534]** The recorded data is inputted into the Merit Rating Chart. This allows a Rating to be produced for the test.
- 35 **[0535]** An example below:
- 40
- 45
- 50
- 55

5
10
15
20
25
30
35
40
45
50
55

Cold Start											
Cold Start	Start Y/N	Starting			Exhaust temperature consistency					Merits	
		Maximum Merits	Number of Attempts (1 = first start)	Deduction	Merits	Maximum Merits	Exhaust Temperature Max Cyl. Deviation (°c)	Deduction			
#0		not rated									
#1	Y	5	1	0	5	5	21.8	0	5		
#2	Y	5	1	0	5	5	18.1	0	5		
#3	Y	5	1	0	5	5	15.5	0	5		
#4	Y	5	1	0	5	5	20.2	0	5		
#5	Y	5	1	0	5	5	22.6	0	5		
<u>Total Merits</u>					25						25
Main Run											
Operability											
Main Run	Maximum Merits	Number of EDU Fault resets	Deduction	Stall (Y/N)	Deduction	Max Pedal Position at 1000 rpm / 10 N.m (%)	Deduction	Max Inject . Balancing Coeff. (rpm)	Deduction	Merits	
#1	5	0	0	N	5	15.4	0	15	0	5	
#2	5	0	0	N	5	13.5	0	15	0	5	
#3	5	0	0	N	5	13.6	0	15	0	5	
#4	5	0	0	N	5	13.8	0	15	0	5	
#5	5	0	0	N	5	14.5	0	15	0	5	
<u>Global Rating - Summary (Merit / 10)</u>					10						25

Example 6

[0536] The effectiveness of the additives of the invention in older traditional diesel engine types was assessed using a standard industry test - CEC test method No. CEC F-23-A-01.

[0537] This test measures injector nozzle coking using a Peugeot XUD9 A/L Engine and provides a means of discriminating between fuels of different injector nozzle coking propensity. Nozzle coking is the result of carbon deposits forming between the injector needle and the needle seat. Deposition of the carbon deposit is due to exposure of the injector needle and seat to combustion gases, potentially causing undesirable variations in engine performance.

[0538] The Peugeot XUD9 A/L engine is a 4 cylinder indirect injection Diesel engine of 1.9 litre swept volume, obtained from Peugeot Citroen Motors specifically for the CEC PF023 method.


[0539] The test engine is fitted with cleaned injectors utilising unflatted injector needles. The airflow at various needle lift positions have been measured on a flow rig prior to test. The engine is operated for a period of 10 hours under cyclic conditions.

Stage	Time (secs)	Speed (rpm)	Torque (Nm)
1	30	1200 ± 30	10 ± 2
2	60	3000 ± 30	50 ± 2
3	60	1300 ± 30	35 ± 2
4	120	1850 ± 30	50 ± 2

[0540] The propensity of the fuel to promote deposit formation on the fuel injectors is determined by measuring the injector nozzle airflow again at the end of test, and comparing these values to those before test. The results are expressed in terms of percentage airflow reduction at various needle lift positions for all nozzles. The average value of the airflow reduction at 0.1 mm needle lift of all four nozzles is deemed the level of injector coking for a given fuel.


Claims

1. A method of preparing a quaternary ammonium compound, the method comprising reacting (a) a tertiary amine of formula $R^1R^2R^3N$ with (b) an epoxide; in the presence of (c) a compound of formula (IIB):

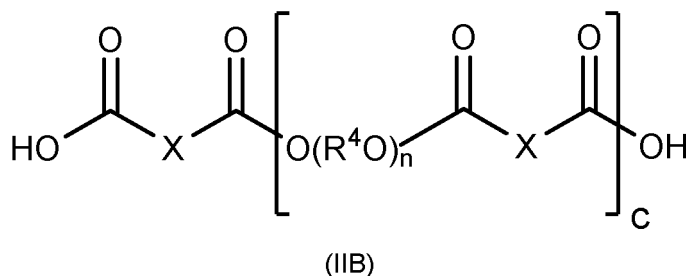


wherein R^4 is an optionally substituted alkylene group; n is 0 or a positive integer; C is at least 1; R^1 , R^2 , R^3 is each independently an optionally substituted alkyl, alkenyl or aryl group; X is a linking group.

2. A fuel or lubricating oil composition comprising a quaternary ammonium compound of formula (I):

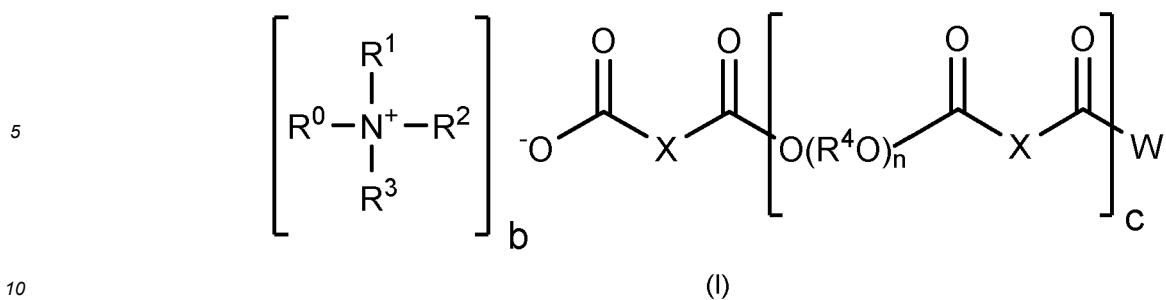

15 wherein R^0 , R^1 , R^2 and R^3 is each independently an optionally substituted hydrocarbyl group; X is a linking group; R^4 is an optionally substituted alkylene group; n is a positive integer; c is at least 1; W is O^- or OH; b is 1 when W is OH, and b is 2 when W is O.


- 20 3. An additive composition for a fuel or lubricating oil comprising a quaternary ammonium compound of formula (I):

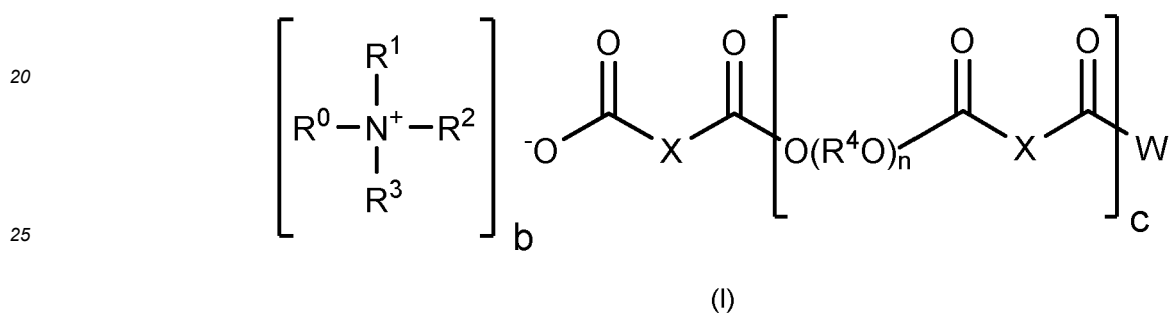

35 wherein R^0 , R^1 , R^2 and R^3 is each independently an optionally substituted hydrocarbyl group; X is a linking group; R^4 is an optionally substituted alkylene group; n is a positive integer; c is at least 1; W is O^- or OH; b is 1 when W is OH, and b is 2 when W is O^- .


- 40 4. A composition according to claim 2 wherein the composition is a diesel fuel composition.

- 45 5. Use of a quaternary ammonium compound of formula (I):

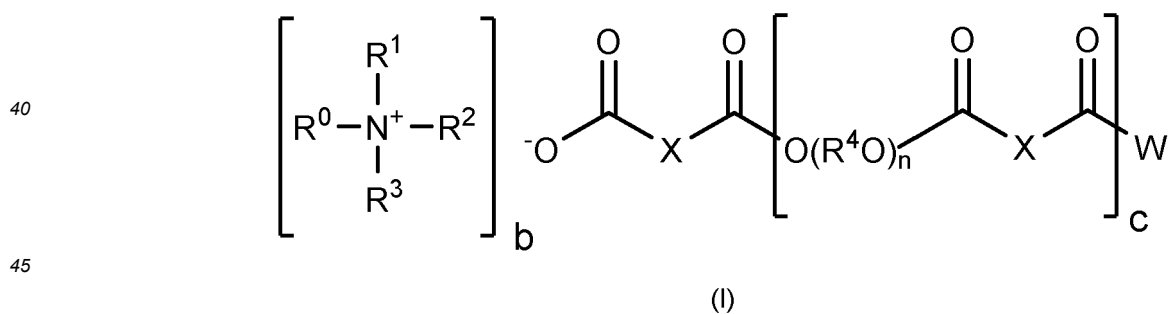

as an additive for a fuel or lubricating oil wherein R^0 , R^1 , R^2 and R^3 is each individually an optionally substituted alkyl, alkenyl or aryl group; X is a linking group; R^4 is an optionally substituted alkylene group; n is a positive integer; c is at least 1; W is O^- or OH; b is 1 when W is OH, and b is 2 when W is O.

6. A method of improving the performance of an engine, the method comprising combusting in the engine a fuel composition comprising as an additive a quaternary ammonium compound of formula (I):

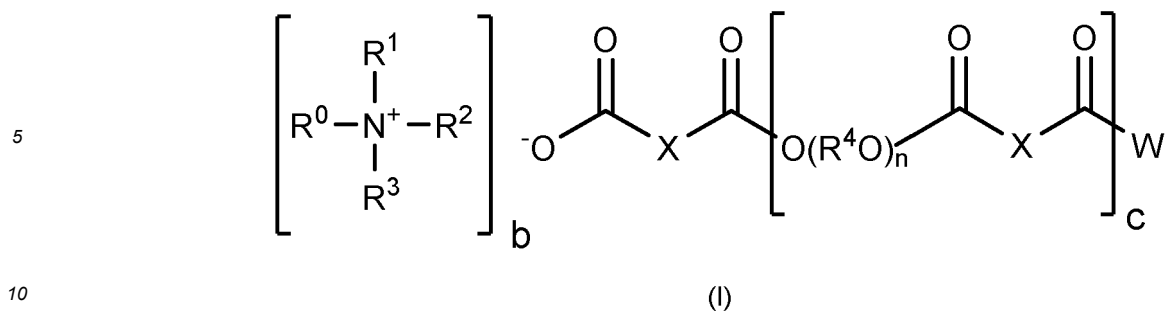


wherein R^0 , R^1 , R^2 and R^3 is each independently an optionally substituted hydrocarbonyl group; X is a linking group; R^4 is an optionally substituted alkylene group; n is a positive integer; c is at least 1; W is O^- or OH; b is 1 when W is OH, and b is 2 when W is O^- .

- 15
7. A composition, method or use according to any preceding claim wherein each X is a moiety CH_2CHR or $CRHCH_2$ in which R is an optionally substituted hydrocarbonyl group, preferably an alkyl or alkenyl group having 6 to 36 carbon atoms.
- 20
8. A composition, method or use according to any preceding claim wherein each R^4 is ethylene or propylene, preferably $-CH_2CH_2-$ or $-CH(CH_3)CH_2-$, more preferably $-CH(CH_3)CH_2-$; and/or wherein n is from 1 to 20.
- 25
9. A composition, method or use according to any preceding claim wherein each of R^1 and R^2 is independently an optionally substituted alkyl group having from 1 to 12 carbon atoms.
- 30
10. A composition, method or use according to any preceding claim wherein R^3 is an alkyl group having 1 to 24 carbon atoms; or wherein R^3 is selected from benzyl, or a hydroxyalkyl or hydroxyalkoxyalkyl group having 2 to 20 carbon atoms; or wherein R^3 is selected from:
- (1) a polyisobutenyl group having a number average molecular weight of from 100 to 5000, preferably from 450 to 2500;
- (2) an optionally substituted alkylene phenol moiety of formula (A) or (B)




(A)

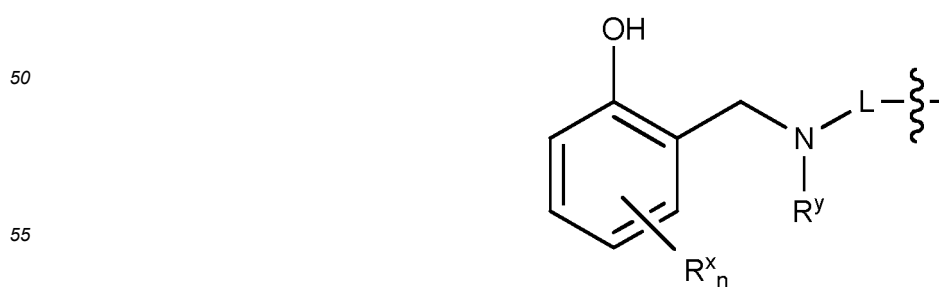


(B)

wherein n is 0 to 4, preferably 1, R^x is an optionally substituted hydrocarbyl group, R^y is an optionally substituted alkyl, alkenyl or aryl group; and L is a linking group; and
 (3) a succinimide moiety of formula:

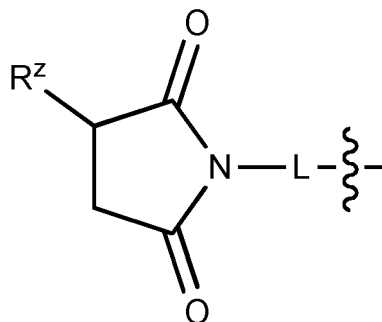

wherein R^z is an optionally substituted hydrocarbyl group and L is a linking group.

11. A composition, method or use according to any preceding claim wherein R⁰ as is a group of formula:

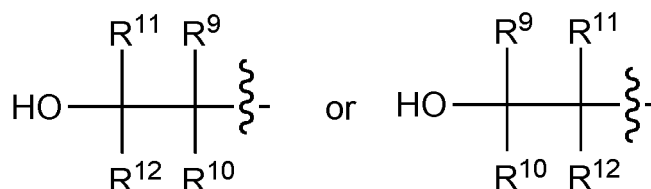

30 wherein each of R⁹, R¹⁰, R¹¹, R¹² is independently selected from hydrogen or an optionally substituted alkyl, alkenyl or aryl group.

12. A composition, method or use according to of claims 2 or 4 to 11 wherein the composition is a diesel fuel composition; optionally wherein the diesel fuel composition comprises one or more further detergents selected from:

- 35
40
- (i) a quaternary ammonium salt additive;
 - (ii) the product of a Mannich reaction between an aldehyde, an amine and an optionally substituted phenol;
 - (iii) the reaction product of a carboxylic acid-derived acylating agent and an amine;
 - (iv) the reaction product of a carboxylic acid-derived acylating agent and hydrazine;
 - (v) a salt formed by the reaction of a carboxylic acid with di-n-butylamine or tri-n-butylamine;
 - (vi) the reaction product of a hydrocarbyl-substituted dicarboxylic acid or anhydride and an amine compound or salt which product comprises at least one amino triazole group; and
 - (vii) a substituted polyaromatic detergent additive;

45 and/or wherein the diesel fuel composition comprises a mixture of two or more quaternary ammonium compounds.

13. A method or use as defined in any of claims 6 to 12 wherein the additive is used as a detergent to combat deposits in a diesel fuel composition in a diesel engine; suitably wherein the method is carried out in a modern diesel engine having a high pressure fuel system.

50 14. A method or use according to any of claims 5 to 13 which achieves "keep clean" performance; and/or which achieves "clean up" performance.

55 15. A method or use according to any of claims 13 or 14 wherein the deposits are injector deposits; suitably wherein the deposits are internal diesel injector deposits.

16. A method or use according to any of claims 5 to 15 which achieves an improvement in performance selected from one or more of:

- a reduction in power loss of the engine;
- a reduction in external diesel injector deposits;
- a reduction in internal diesel injector deposits;
- an improvement in fuel economy;
- a reduction in fuel filter deposits;
- a reduction in emissions; and
- an increase in maintenance intervals;

preferably wherein the method or use provides an improvement in performance in modern diesel engines having a high pressure fuel system and provides an improvement in performance in traditional diesel engines.


17. Use according to any of claims 5 or 7 to 16 which provides one or more further benefits selected from lubricity benefits, corrosion inhibition and cold flow improvement.

18. A composition according to any of claims 2 to 4 or 7 to 12 which further comprises one or more further additives selected from lubricity improvers, corrosion inhibitors and cold flow improvers.

19. Use of a quaternary ammonium compound of formula (I) as defined in any preceding claim as an additive to reduce the treat rate of one or more further additives selected from lubricity improvers, corrosion inhibitors and cold flow improvers whilst maintaining performance.


Patentansprüche

1. Verfahren zur Herstellung einer quaternären Ammoniumverbindung, wobei das Verfahren das Umsetzen von (a) einem tertiären Amin der Formel $R^1R^2R^3N$ mit (b) einem Epoxid in Gegenwart von (c) einer Verbindung der Formel (IIB):

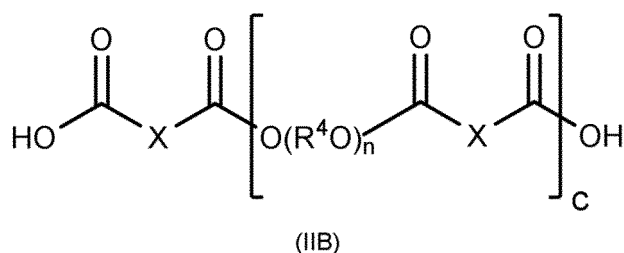


umfasst, wobei R^4 für eine gegebenenfalls substituierte Alkylengruppe steht; n für 0 oder eine positive ganze Zahl steht; c für mindestens 1 steht; R^1 , R^2 , R^3 jeweils unabhängig für eine gegebenenfalls substituierte Alkyl-, Alkenyl- oder Arylgruppe stehen; X für eine Verknüpfungsgruppe steht.

2. Kraftstoff- oder Schmierölzusammensetzung, umfassend eine quaternäre Ammoniumverbindung der Formel (I):

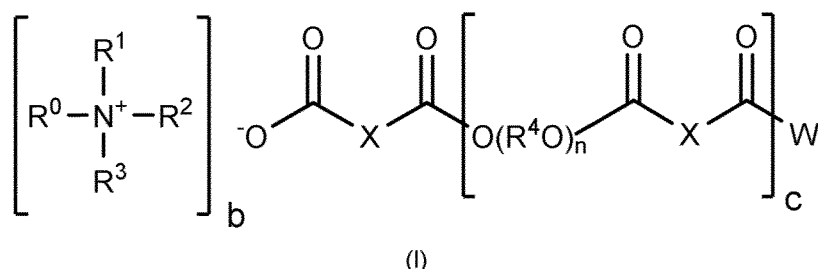

wobei R^0 , R^1 , R^2 und R^3 jeweils unabhängig für eine gegebenenfalls substituierte Hydrocarbylgruppe stehen; X für eine Verknüpfungsgruppe steht; R^4 für eine gegebenenfalls substituierte Alkylengruppe steht; n für eine positive ganze Zahl steht; c für mindestens 1 steht; W für O^- oder OH steht; b für 1 steht, wenn W für OH steht, und b für 2 steht, wenn W für O steht.


3. Additivzusammensetzung für einen Kraftstoff oder ein Schmieröl, umfassend eine quaternäre Ammoniumverbindung der Formel (I):

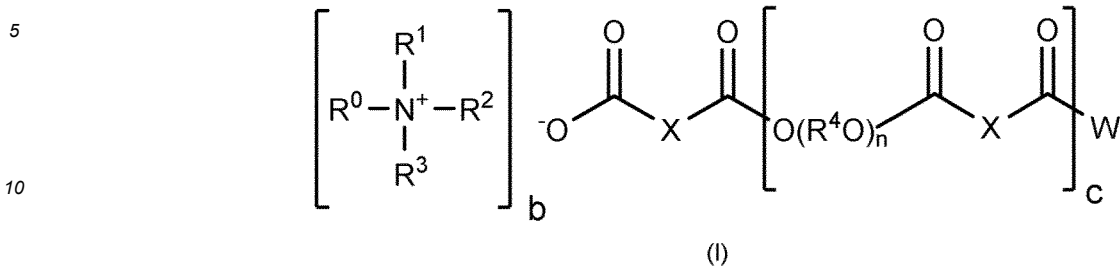

15 wobei R^0 , R^1 , R^2 und R^3 jeweils unabhängig für eine gegebenenfalls substituierte Hydrocarbylgruppe stehen; X für eine Verknüpfungsgruppe steht; R^4 für eine gegebenenfalls substituierte Alkylengruppe steht; n für eine positive ganze Zahl steht; c für mindestens 1 steht; W für O^- oder OH steht; b für 1 steht, wenn B für OH steht, und b für 2 steht, wenn W für O steht.


- 20 4. Zusammensetzung nach Anspruch 2, wobei es sich bei der Zusammensetzung um eine Dieselmotorkraftstoffzusammensetzung handelt.

- 25 5. Verwendung einer quaternären Ammoniumverbindung der Formel (I):

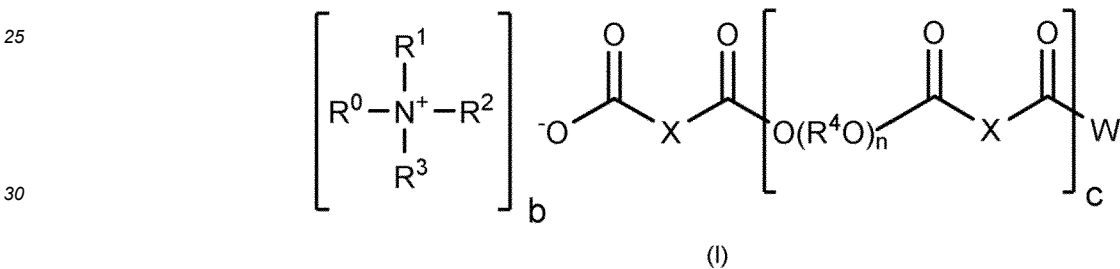

35 als Additiv für einen Kraftstoff oder ein Schmieröl, wobei R^0 , R^1 , R^2 und R^3 jeweils unabhängig für eine gegebenenfalls substituierte Alkyl-, Alkenyl- oder Arylgruppe stehen; X für eine Verknüpfungsgruppe steht; R^4 für eine gegebenenfalls substituierte Alkylengruppe steht; n für eine positive ganze Zahl steht; c für mindestens 1 steht; W für O^- oder OH steht; b für 1 steht, wenn W für OH steht, und b für 2 steht, wenn W für O steht.

- 40 6. Verfahren zur Verbesserung der Leistung eines Motors, wobei das Verfahren das Verbrennen einer Kraftstoffzusammensetzung, die als ein Additiv eine quaternäre Ammoniumverbindung der Formel (I):

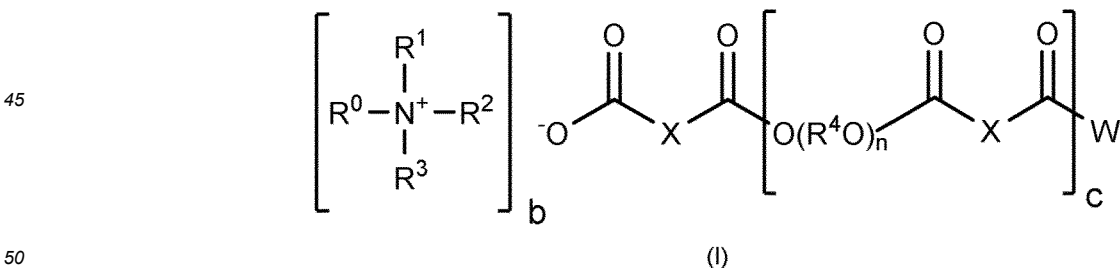

55 umfasst, in dem Motor umfasst, wobei R^0 , R^1 , R^2 und R^3 jeweils unabhängig für eine gegebenenfalls substituierte Hydrocarbylgruppe stehen; X für eine Verknüpfungsgruppe steht; R^4 für eine gegebenenfalls substituierte Alkylengruppe steht; n für eine positive ganze Zahl steht; c für mindestens 1 steht; W für O^- oder OH steht; b für 1 steht, wenn W für OH steht, und b für 2 steht, wenn W für O steht.

7. Zusammensetzung, Verfahren oder Verwendung nach einem der vorhergehenden Ansprüche, wobei X jeweils für eine Gruppierung CH_2CHR oder $CRHCH_2$ steht, wobei R für eine gegebenenfalls substituierte Hydrocarbylgruppe,

EP 3 853 327 B1

vorzugsweise eine Alkyl- oder Alkenylgruppe mit 6 bis 36 Kohlenstoffatomen, steht.


8. Zusammensetzung, Verfahren oder Verwendung nach einem der vorhergehenden Ansprüche, wobei R^4 jeweils für Ethylen oder Propylen, vorzugsweise $-CH_2CH_2-$ oder $-CH(CH_3)CH_2-$, weiter bevorzugt $-CH(CH_3)CH_2-$, steht und/oder wobei n für 1 bis 20 steht.

9. Zusammensetzung, Verfahren oder Verwendung nach einem der vorhergehenden Ansprüche, wobei R^1 und R^2 jeweils unabhängig für eine gegebenenfalls substituierte Alkylgruppe mit 1 bis 12 Kohlenstoffatomen stehen.


10. Zusammensetzung, Verfahren oder Verwendung nach einem der vorhergehenden Ansprüche, wobei R^3 für eine Alkylgruppe mit 1 bis 24 Kohlenstoffatomen steht oder wobei R^3 aus Benzyl oder einer Hydroxyalkyl- oder Hydroxyalkoxyalkylgruppe mit 2 bis 20 Kohlenstoffatomen ausgewählt ist oder wobei R^3 aus

(1) einer Polyisobutenylgruppe mit einem zahlenmittleren Molekulargewicht von 100 bis 5000, vorzugsweise von 450 bis 2500;

(2) einer gegebenenfalls substituierten Alkylenphenolgruppierung der Formel (A) oder (B)




(A)

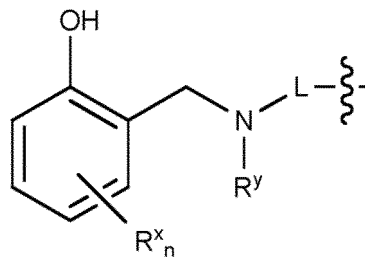

(B)

wobei n für 0 bis 4, vorzugsweise 1, steht, R^x für eine gegebenenfalls substituierte Hydrocarbylgruppe steht, R^y für eine gegebenenfalls substituierte Alkyl-, Alkenyl- oder Arylgruppe steht und L für eine Verknüpfungsgruppe steht; und


(3) einer Succinimidgruppierung der Formel:




wobei R^z für eine gegebenenfalls substituierte Hydrocarbylgruppe steht und L für eine Verknüpfungsgruppe

steht;
ausgewählt ist.

- 5 11. Zusammensetzung, Verfahren oder Verwendung nach einem der vorhergehenden Ansprüche, wobei R° für eine Gruppe der Formel:



15 oder



steht, wobei R⁹, R¹⁰, R¹¹, R¹² jeweils unabhängig aus Wasserstoff oder einer gegebenenfalls substituierten Alkyl-, Alkenyl- oder Arylgruppe ausgewählt sind.

- 25 12. Zusammensetzung, Verfahren oder Verwendung nach einem der Ansprüche 2 oder 4 bis 11, wobei es sich bei der Zusammensetzung um eine Dieselmotorkraftstoffzusammensetzung handelt; gegebenenfalls wobei die Dieselmotorkraftstoffzusammensetzung ein oder mehrere Detergentien umfasst, die aus

- 30 (i) einem quaternären Ammoniumsalz-Additiv;
 (ii) dem Produkt einer Mannich-Reaktion zwischen einem Aldehyd, einem Amin und einem gegebenenfalls substituierten Phenol;
 (iii) dem Reaktionsprodukt von einem von einer Carbonsäure abgeleiteten Acylierungsmittel und einem Amin;
 (iv) dem Reaktionsprodukt von einem von einer Carbonsäure abgeleiteten Acylierungsmittel und Hydrazin;
 35 (v) einem durch die Reaktion einer Carbonsäure mit Di-n-butylamin oder Tri-n-butylamin gebildeten Salz;
 (vi) dem Reaktionsprodukt von einer hydrocarbylsubstituierten Dicarbonsäure oder einem hydrocarbylsubstituierten Dicarbonsäureanhydrid und einer Aminverbindung oder einem Aminsalz, wobei das Produkt mindestens eine Aminotriazolgruppe umfasst; und
 (vii) einem substituierten polyaromatischen Detergens-Additiv

40 ausgewählt sind und/oder wobei die Dieselmotorkraftstoffzusammensetzung eine Mischung von zwei oder mehr quaternären Ammoniumverbindungen umfasst.

- 45 13. Verfahren oder Verwendung gemäß einem der Ansprüche 6 bis 12, wobei das Additiv als Detergens zur Bekämpfung von Ablagerungen in einer Dieselmotorkraftstoffzusammensetzung in einem Dieselmotor verwendet wird; geeigneterweise wobei das Verfahren in einem modernen Dieselmotor mit einem Hochdruck-Kraftstoffsystem durchgeführt wird.

- 50 14. Verfahren oder Verwendung nach einem der Ansprüche 5 bis 13, wobei Reinhaltungsleistung ("Keep-Clean"-Leistung) und/oder Reinigungsleistung ("Clean-Up"-Leistung) erzielt wird.

15. Verfahren oder Verwendung nach Anspruch 13 oder 14, wobei es sich bei den Ablagerungen um Injektorablagerungen handelt; geeigneterweise wobei es sich bei den Ablagerungen um innere Dieselinjektorablagerungen handelt.

- 55 16. Verfahren oder Verwendung nach einem der Ansprüche 5 bis 15, wobei eine Verbesserung der Leistung erzielt wird, die aus einem oder mehreren von

- einer Verringerung des Leistungsverlusts des Motors;
- einer Verringerung von äußeren Dieselinjektorablagerungen;

EP 3 853 327 B1

- einer Verringerung von inneren Dieselinjektorablagerungen;
- einer Verbesserung der Kraftstoffökonomie;
- einer Verringerung der Kraftstofffilterablagerungen;
- einer Verringerung von Emissionen und
- einer Verlängerung von Wartungsintervallen ausgewählt ist;

vorzugsweise wobei das Verfahren bzw. die Verwendung eine Verbesserung der Leistung moderner Dieselmotoren mit einem Hochdruck-Kraftstoffsystem liefert und eine Verbesserung der Leistungsfähigkeit traditioneller Dieselmotoren liefert.


17. Verwendung nach einem der Ansprüche 5 oder 7 bis 16, die ein oder mehrere weitere Vorteile bereitstellt, die aus Schmierfähigkeitsvorteilen, Korrosionsinhibierung und Kaltfließverbesserung ausgewählt sind.

18. Zusammensetzung nach einem der Ansprüche 2 bis 4 oder 7 bis 12, die ferner ein oder mehrere Additive umfasst, die aus Schmierfähigkeitsverbesserern, Korrosionsinhibitoren und Kaltfließverbesserern ausgewählt sind.

19. Verwendung einer quaternären Ammoniumverbindung der Formel (I) gemäß einem der vorhergehenden Ansprüche als Additiv zur Verringerung der Behandlungsrate eines oder mehrerer weiterer Additive, die aus Schmierfähigkeitsverbesserern, Korrosionsinhibitoren und Kaltfließverbesserern ausgewählt sind, unter Beibehaltung der Leistung.


Revendications

1. Procédé de préparation d'un composé d'ammonium quaternaire, le procédé comprenant la mise en réaction (a) d'une amine tertiaire de formule $R^1R^2R^3N$ avec (b) un époxyde ; en la présence de (c) d'un composé de formule (IIB) :

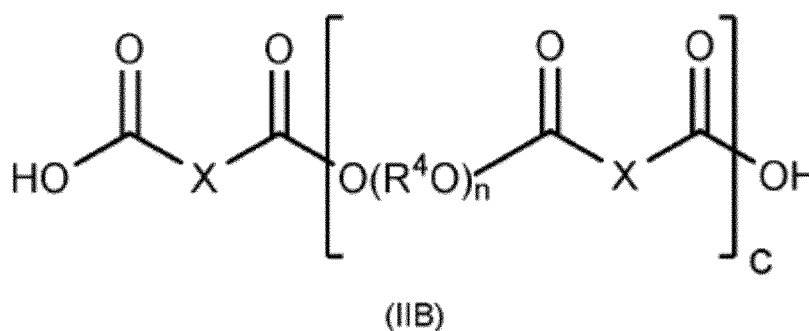


R^4 étant groupe alkylène éventuellement substitué ; n étant 0 ou un entier positif ; C étant au moins 1 ; R^1, R^2, R^3 étant chacun indépendamment un groupe alkyle, alcényle ou aryle éventuellement substitué ; X étant un groupe lieur.

2. Composition de carburant ou d'huile lubrifiante comprenant un composé d'ammonium quaternaire de formule (I) :

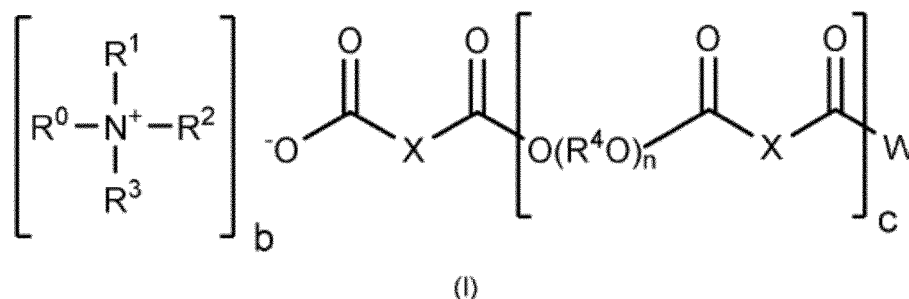

R^0, R^1, R^2, R^3 étant chacun indépendamment un groupe hydrocarbyle éventuellement substitué ; X étant un groupe lieur ; R^4 étant un groupe alkylène éventuellement substitué ; n étant un entier positif ; c étant au moins 1 ; W étant O^- ou OH ; b étant 1 lorsque W est OH , et b étant 2 lorsque W est O .


3. Composition d'additif pour un carburant ou une huile lubrifiante comprenant un composé d'ammonium quaternaire de formule (I) :

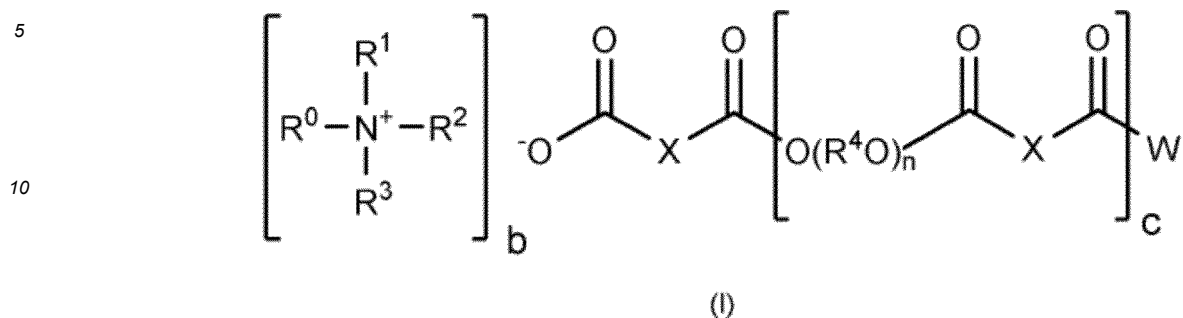

15 R^0, R^1, R^2, R^3 étant chacun indépendamment un groupe hydrocarbyle éventuellement substitué ; X étant un groupe lieur ; R^4 étant un groupe alkylène éventuellement substitué ; n étant un entier positif ; c étant au moins 1 ; W étant O^- ou OH ; b étant 1 lorsque W est OH, et b étant 2 lorsque W est O^- .


- 20 4. Composition selon la revendication 2, la composition étant une composition de carburant diesel.

5. Utilisation d'un composé d'ammonium quaternaire de formule (I) :

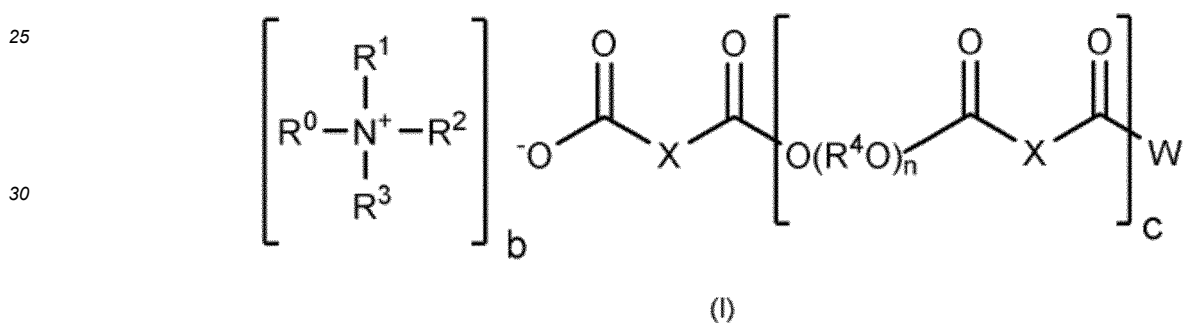

35 comme un additif pour un carburant ou une huile lubrifiante, R^0, R^1, R^2, R^3 étant chacun indépendamment un groupe alkyle, alcényle ou aryle éventuellement substitué ; X étant un groupe lieur ; R^4 étant un groupe alkylène éventuellement substitué ; n étant un entier positif ; c étant au moins 1 ; W étant O^- ou OH ; b étant 1 lorsque W est OH, et b étant 2 lorsque W est O.

- 40 6. Procédé d'amélioration de la performance d'un moteur, le procédé comprenant la combustion, dans le moteur, d'une composition de carburant comprenant un composé d'ammonium quaternaire de formule (I) en tant qu'additif :

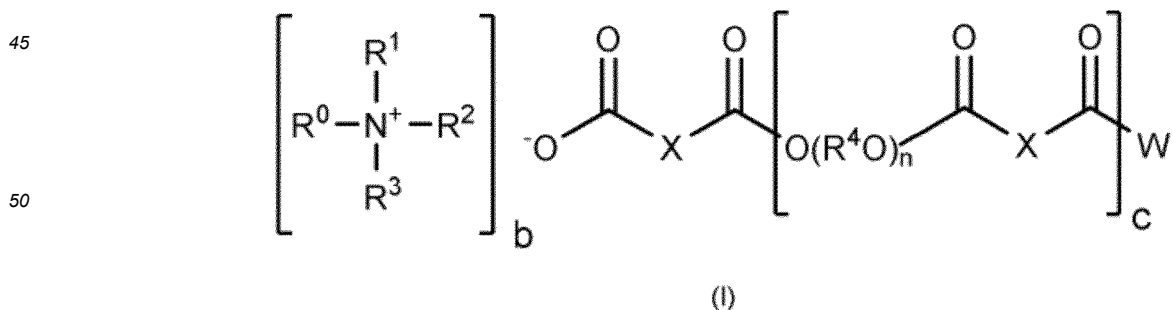

55 R^0, R^1, R^2, R^3 étant chacun indépendamment un groupe hydrocarbyle éventuellement substitué ; X étant un groupe lieur ; R^4 étant un groupe alkylène éventuellement substitué ; n étant un entier positif ; c étant au moins 1 ; W étant O^- ou OH ; b étant 1 lorsque W est OH, et b étant 2 lorsque W est O^- .

7. Composition, procédé ou utilisation selon une quelconque revendication précédente, chaque X étant un groupement CH_2CHR ou CRHCH_2 dans lequel R est groupe hydrocarbyle éventuellement substitué, préférablement un groupe alkyle ou alcényle ayant 6 à 36 atomes de carbone.


5 8. Composition, procédé ou utilisation selon une quelconque revendication précédente, chaque R^4 étant éthylène ou propylène, préférablement $-\text{CH}_2\text{CH}_2-$ ou $-\text{CH}(\text{CH}_3)\text{CH}_2-$, plus préférablement $-\text{CH}(\text{CH}_3)\text{CH}_2-$; et/ou n étant de 1 à 20.

9. Composition, procédé ou utilisation selon une quelconque revendication précédente, chacun parmi R^1 et R^2 étant indépendamment un groupe alkyle éventuellement substitué ayant de 1 à 12 atomes de carbone.


10 10. Composition, procédé ou utilisation selon une quelconque revendication précédente, R^3 étant un groupe alkyle ayant 1 à 24 atomes de carbone; ou R^3 étant choisi parmi benzyle, ou un groupe hydroxyalkyle ou hydroxyalcoxyalkyle ayant 2 à 20 atomes de carbone; ou R^3 étant choisi parmi :

15 (1) un groupe polyisobutényle ayant un poids moléculaire moyen en nombre allant de 100 à 5 000, préférablement de 450 à 2 500;

(2) un groupement alkylène phénol éventuellement substitué de formule (A) ou (B)

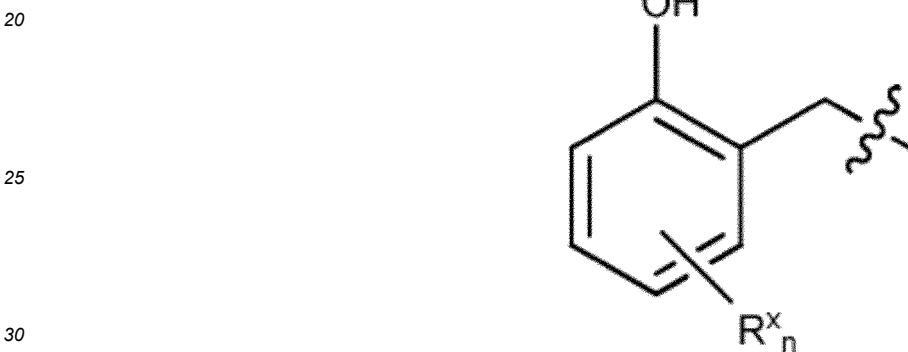

(A)

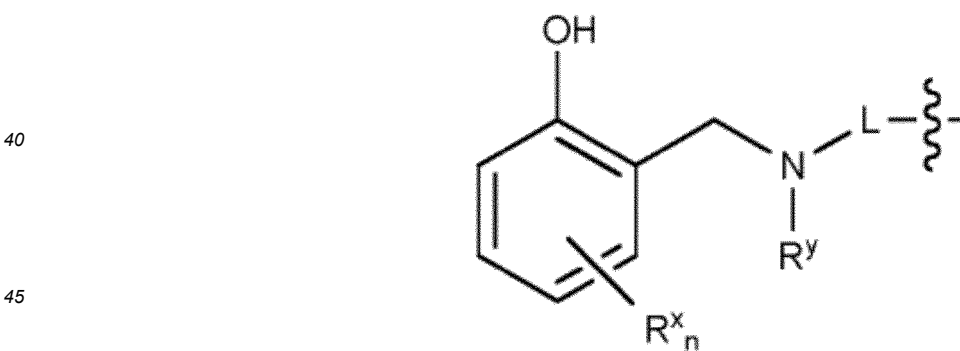


(B)

50 n étant 0 à 4, préférablement 1, R^x étant un groupe hydrocarbyle éventuellement substitué, R^y étant un groupe alkyle, alcényle ou aryle éventuellement substitué; et L étant un groupe lieur; et


(3) un groupement succinimide de formule :

55

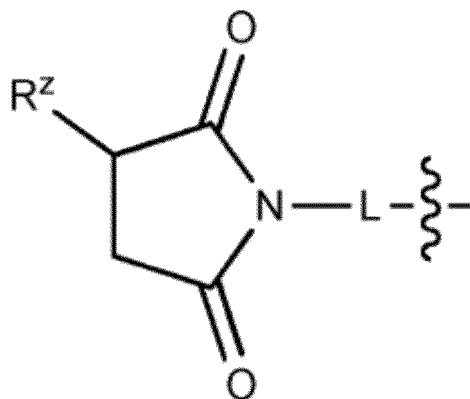

15 R^Z étant un groupe hydrocarbyle éventuellement substitué et L étant un groupe lieur.

20 11. Composition, procédé ou utilisation selon une quelconque revendication précédente, R^0 étant un groupe de formule :

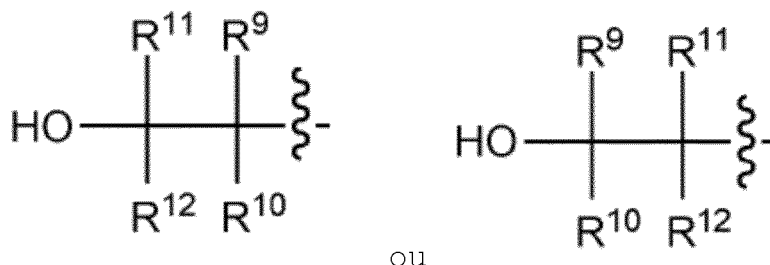

35 chacun parmi R^9 , R^{10} , R^{11} , R^{12} étant indépendamment choisi parmi hydrogène ou un groupe alkyle, alcényle ou aryle éventuellement substitué.

40 12. Composition, procédé ou utilisation selon les revendications 2 ou 4 à 11, la composition étant une composition de carburant diesel ; éventuellement, la composition de carburant diesel comprenant un ou plusieurs détergents supplémentaires choisis parmi :

- 45
- (i) un additif de type sel d'ammonium quaternaire ;
 - (ii) le produit d'une réaction de Mannich entre un aldéhyde, une amine et un phénol éventuellement substitué ;
 - (iii) le produit de réaction d'un agent d'acylation issu d'un acide carboxylique, et d'une amine ;
 - (iv) le produit de réaction d'un agent d'acylation issu d'un acide carboxylique, et d'une hydrazine ;
 - (v) un sel formé par la réaction d'un acide carboxylique avec la di-n-butylamine ou la tri-n-butylamine ;
 - (vi) le produit de réaction d'un acide ou anhydride dicarboxylique substitué par hydrocarbyle et d'un composé de type amine ou d'un sel, lequel produit comprenant au moins un groupe amino triazole ; et
 - (vii) un additif de type détergent polyaromatique substitué ;

et/ou la composition de carburant diesel comprenant un mélange de deux composés d'ammonium quaternaire ou plus.

50 13. Procédé ou utilisation tel(le) que défini(e) dans l'une quelconque des revendications 6 à 12, l'additif étant utilisé comme un détergent pour la lutte contre des dépôts dans une composition de carburant diesel dans un moteur diesel ; de manière appropriée, le procédé étant mis en oeuvre dans un moteur diesel moderne ayant un système de carburant à haute pression.

55 14. Procédé ou utilisation selon l'une quelconque des revendications 5 à 13 qui atteint une performance « maintien propre » ; et/ou qui atteint une performance « nettoyage ».

15. Procédé ou utilisation selon l'une quelconque des revendications 13 ou 14, les dépôts étant des dépôts d'injecteur ; de manière appropriée, les dépôts étant des dépôts d'injecteur diesel interne.

EP 3 853 327 B1

16. Procédé ou utilisation selon l'une quelconque des revendications 5 à 15 qui atteint une amélioration de performance choisie parmi l'une ou plusieurs parmi :

5

- une réduction de perte de puissance du moteur ;
- une réduction de dépôts d'injecteur diesel externe ;
- une réduction de dépôts d'injecteur diesel interne ;
- une amélioration de l'économie de carburant ;
- une réduction de dépôts de filtre à carburant ;
- une réduction des émissions ; et

10

- une augmentation des intervalles de maintenance ; préférablement, le procédé ou l'utilisation fournissant une amélioration de performance dans des moteurs diesels modernes ayant un système de carburant à haute pression et fournissant une amélioration de performance dans des moteurs diesels traditionnels.

15

17. Utilisation selon l'une quelconque des revendications 5 ou 7 à 16 qui fournit un ou plusieurs bénéfices supplémentaires choisis parmi des bénéfices de lubrification, une inhibition de la corrosion et une amélioration d'écoulement à froid.

20

18. Composition selon l'une quelconque des revendications 2 à 4 ou 7 à 12 qui comprend en outre un ou plusieurs additifs supplémentaires choisis parmi des agents d'amélioration de la lubrification, des inhibiteurs de corrosion et des agents d'amélioration d'écoulement à froid.

25

19. Utilisation d'un composé d'ammonium quaternaire de formule (I) tel que défini dans l'une quelconque revendication précédente en tant qu'additif pour réduire le débit de traitement d'un ou plusieurs additifs supplémentaires choisis parmi des agents d'amélioration de la lubrification, des inhibiteurs de corrosion et des agents d'amélioration d'écoulement à froid tout en maintenant la performance.

30

35


40

45

50

55

Figure 1

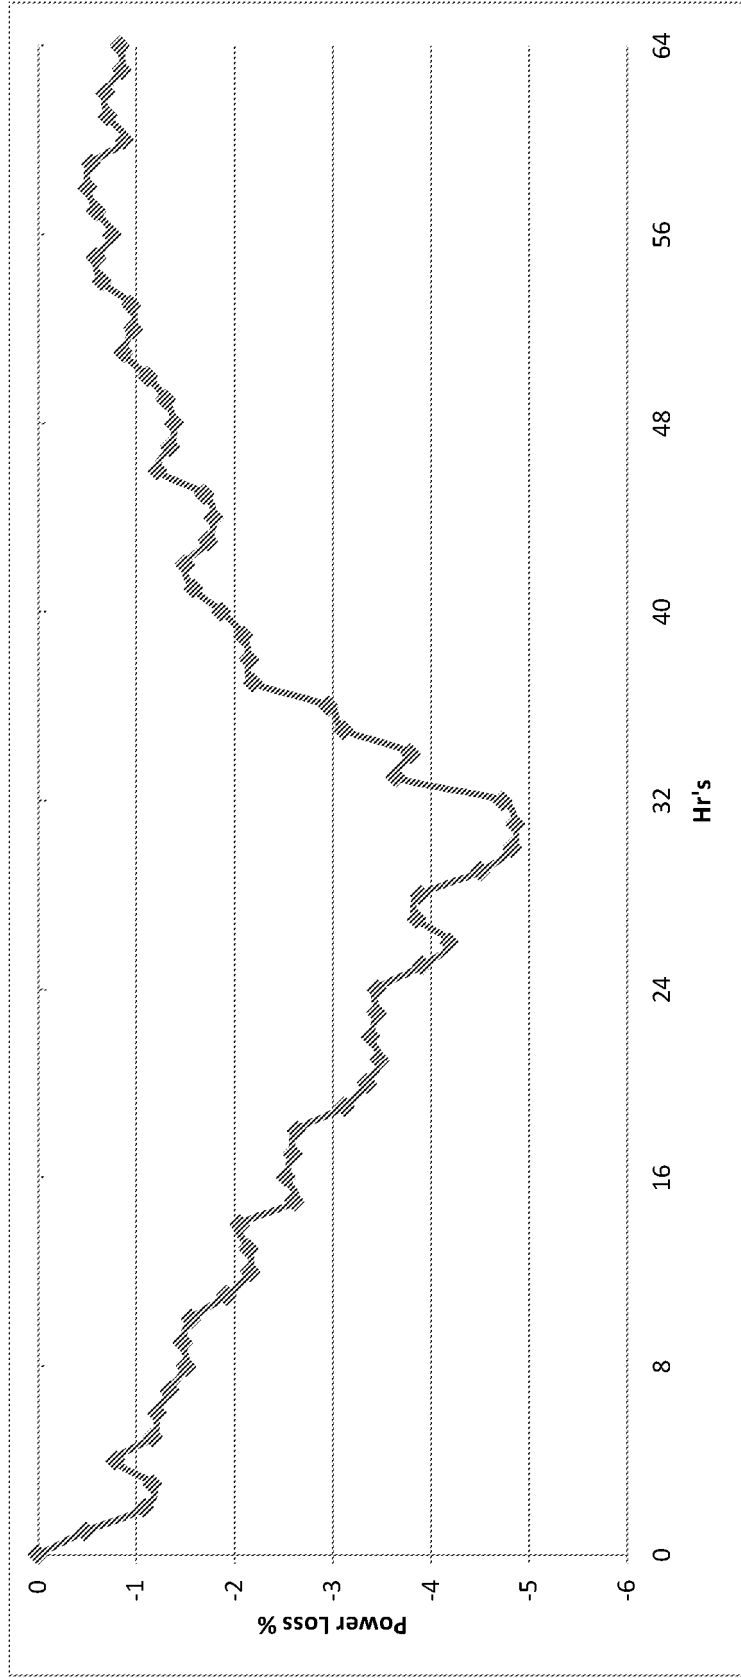

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2016016641 A [0024] [0465]
- US 20080113890 A [0105] [0456] [0459]
- US 20080052985 A [0111] [0456] [0458]
- WO 2017017454 A [0152]
- US 20080307698 A [0456]
- US 2013031827 A [0456]
- WO 2006135881 A [0457]
- WO 2011095819 A [0457] [0465]
- US 20110258917 A [0464]
- US 20110315107 A [0464]
- US 20120010112 A [0464]
- WO 2013017889 A [0465]
- WO 2015011506 A [0465]
- WO 2015011507 A [0465]
- GB 2016052312 W [0465]
- EP 0565285 A [0480]
- US 5925151 A [0480]
- WO 2009040583 A [0481]
- US 20080060259 A [0487]
- US 20080060608 A [0488]
- EP 1900795 A [0491]
- US 20090282731 A [0493]
- EP 1884556 A [0496]