



US011719312B2

(12) **United States Patent**
Kai et al.

(10) **Patent No.:** **US 11,719,312 B2**

(45) **Date of Patent:** **Aug. 8, 2023**

(54) **DRIVING FORCE TRANSMITTING APPARATUS, SHEET CONVEYANCE APPARATUS, AND IMAGE FORMING APPARATUS**

(71) Applicant: **CANON KABUSHIKI KAISHA**, Tokyo (JP)

(72) Inventors: **Yusuke Kai**, Kanagawa (JP); **Masaaki Takeuchi**, Tokyo (JP)

(73) Assignee: **Canon Kabushiki Kaisha**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 14 days.

(21) Appl. No.: **17/382,925**

(22) Filed: **Jul. 22, 2021**

(65) **Prior Publication Data**

US 2022/0034384 A1 Feb. 3, 2022

(30) **Foreign Application Priority Data**

Jul. 30, 2020 (JP) 2020-129318

(51) **Int. Cl.**

F16H 3/44 (2006.01)

B65H 5/06 (2006.01)

(52) **U.S. Cl.**

CPC **F16H 3/44** (2013.01); **B65H 5/062** (2013.01); **B65H 2403/481** (2013.01); **B65H 2403/92** (2013.01); **B65H 2404/166** (2013.01); **B65H 2801/06** (2013.01); **F16H 2003/442** (2013.01); **F16H 2312/09** (2013.01)

(58) **Field of Classification Search**

CPC F16H 3/44; B65H 5/062; B65H 85/00
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

8,646,776 B2 * 2/2014 Agata B65H 5/34
271/902
9,013,768 B2 * 4/2015 Ino H04N 1/0058
358/496
9,284,138 B2 * 3/2016 Hino B65H 3/0669
9,857,749 B2 * 1/2018 Ochi B65H 5/06

FOREIGN PATENT DOCUMENTS

JP 2015215090 A 12/2015

* cited by examiner

Primary Examiner — Derek D Knight

(74) *Attorney, Agent, or Firm* — Canon U.S.A., Inc. I.P. Division

(57) **ABSTRACT**

A driving force transmitting apparatus includes first and second planetary gear units and switching and urging members. The first planetary gear unit includes a first mesh gear and a first locked gear provided with first locked portions. The second planetary gear unit includes a second locked gear provided with second locked portions, and a second mesh gear meshing with the first mesh gear. The switching member includes first and second locking portions and can move to (i) a first stop position at which the first locking portion stop the first locked gear, and, urged by the urging member, (ii) a second stop position at which the second locking portion stops the second locked gear. An interval between the second locked portions in a rotational direction of the second locked gear is larger than an interval between the first locked portions in a rotational direction of the first locked gear.

20 Claims, 11 Drawing Sheets

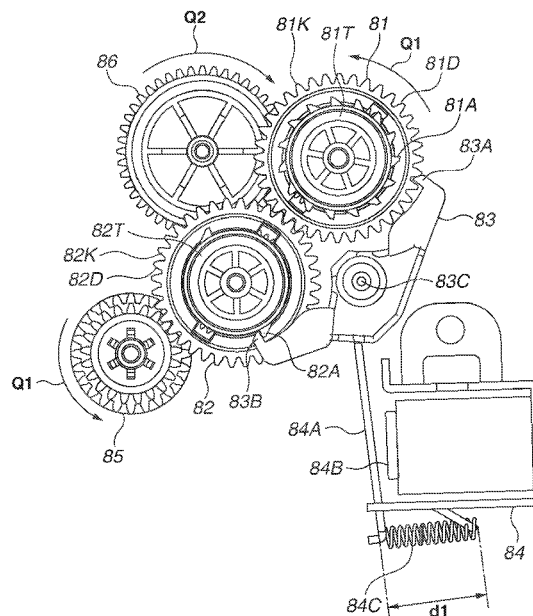


FIG. 1

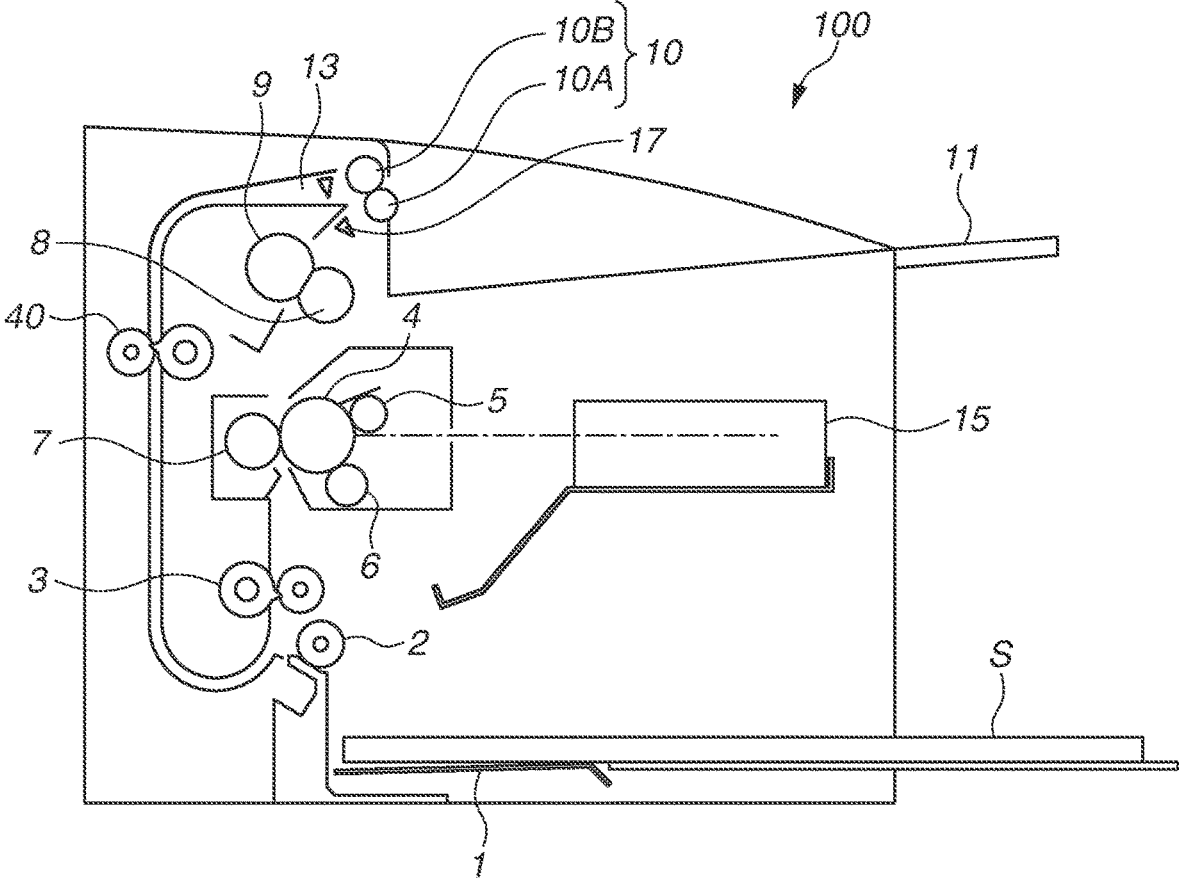


FIG. 2

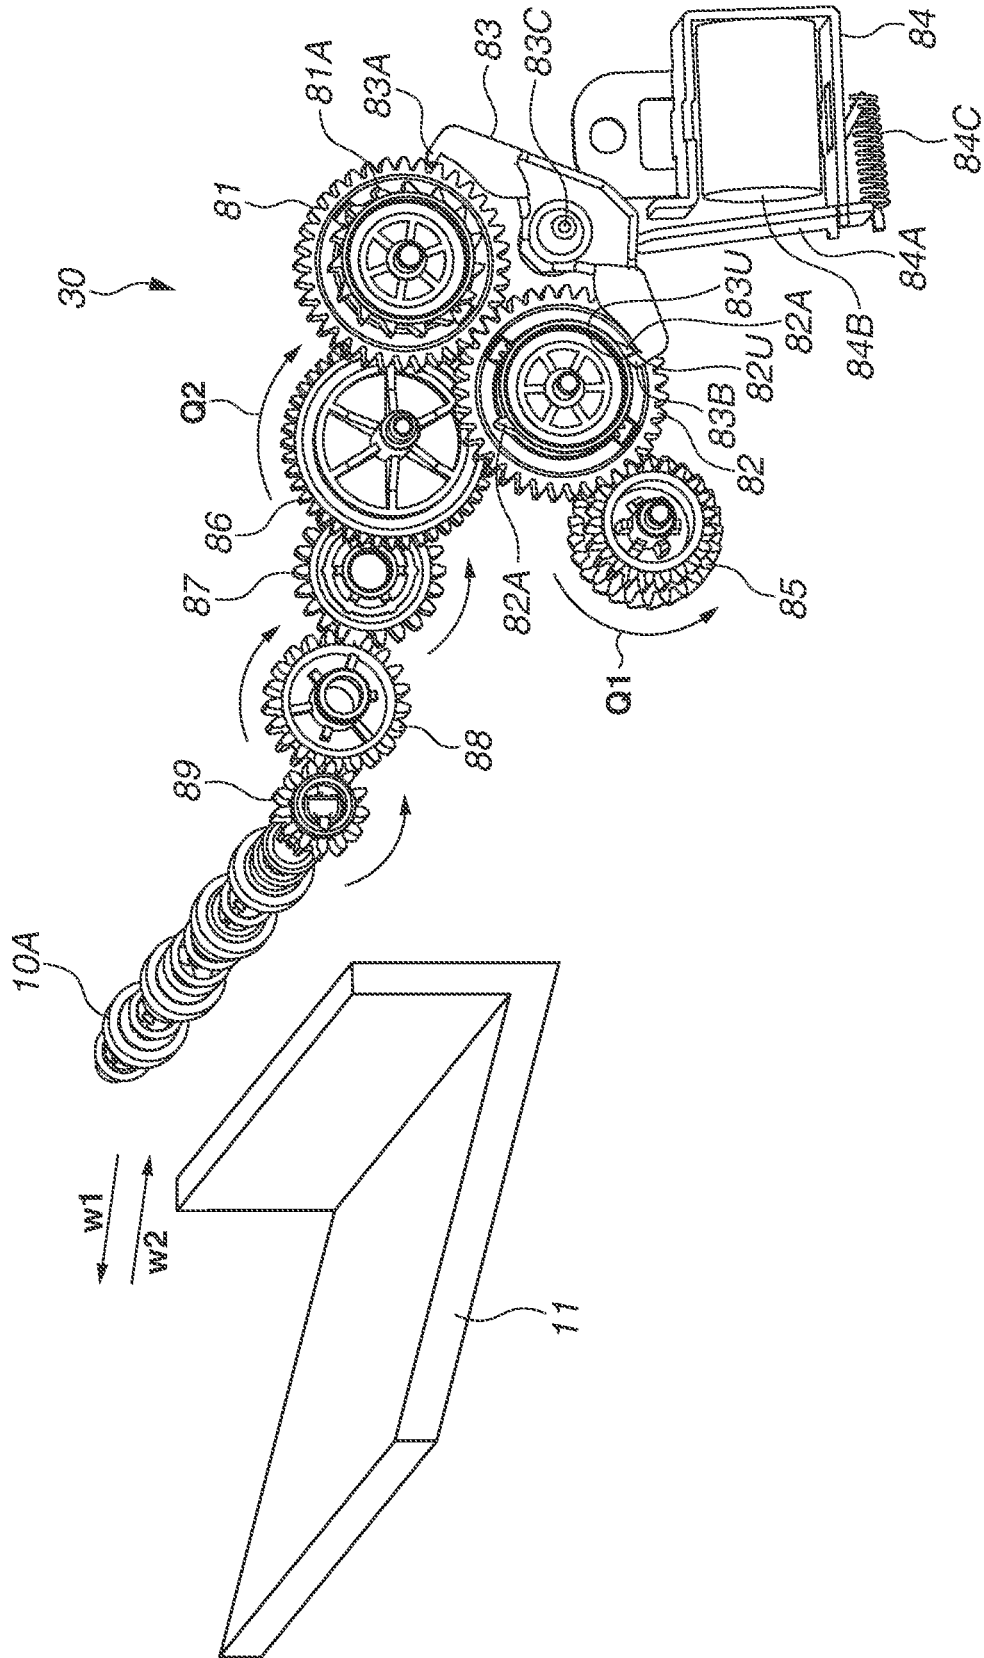


FIG.3B

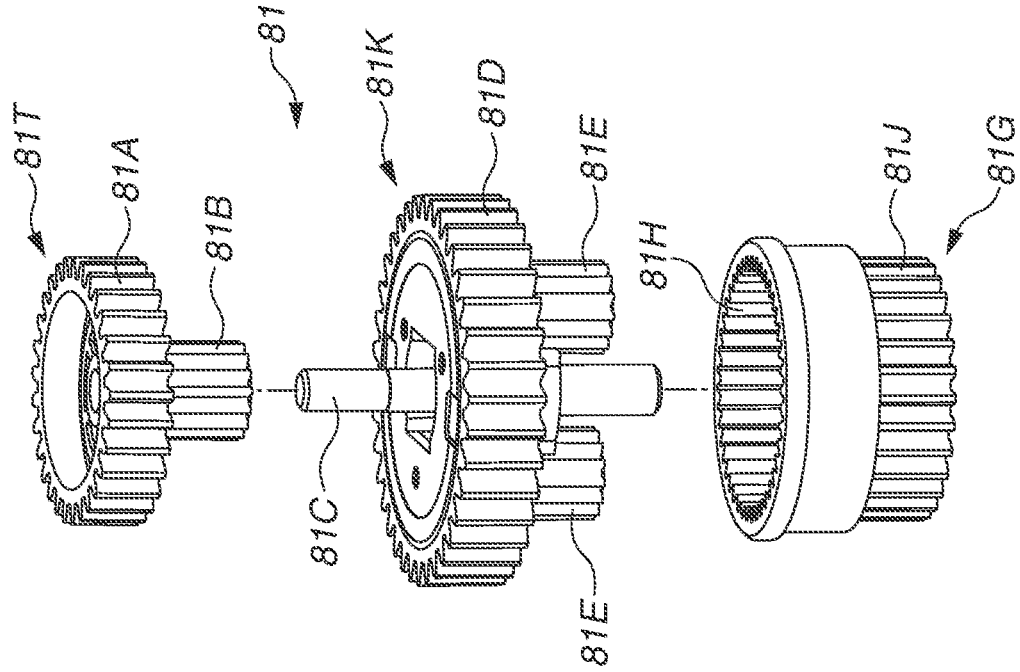


FIG.3A

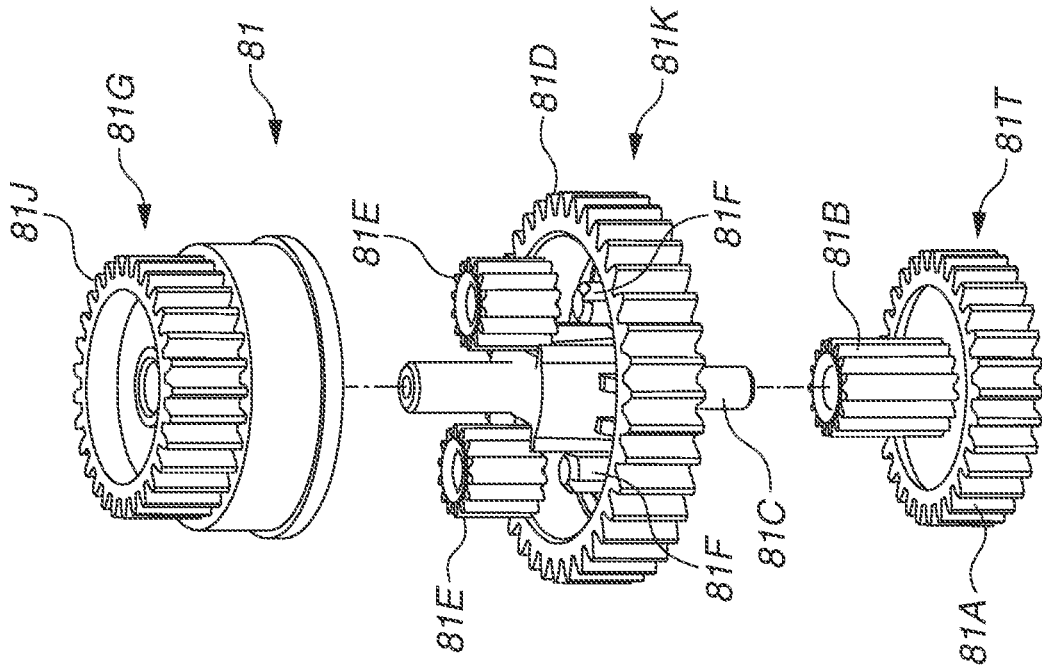


FIG. 4B

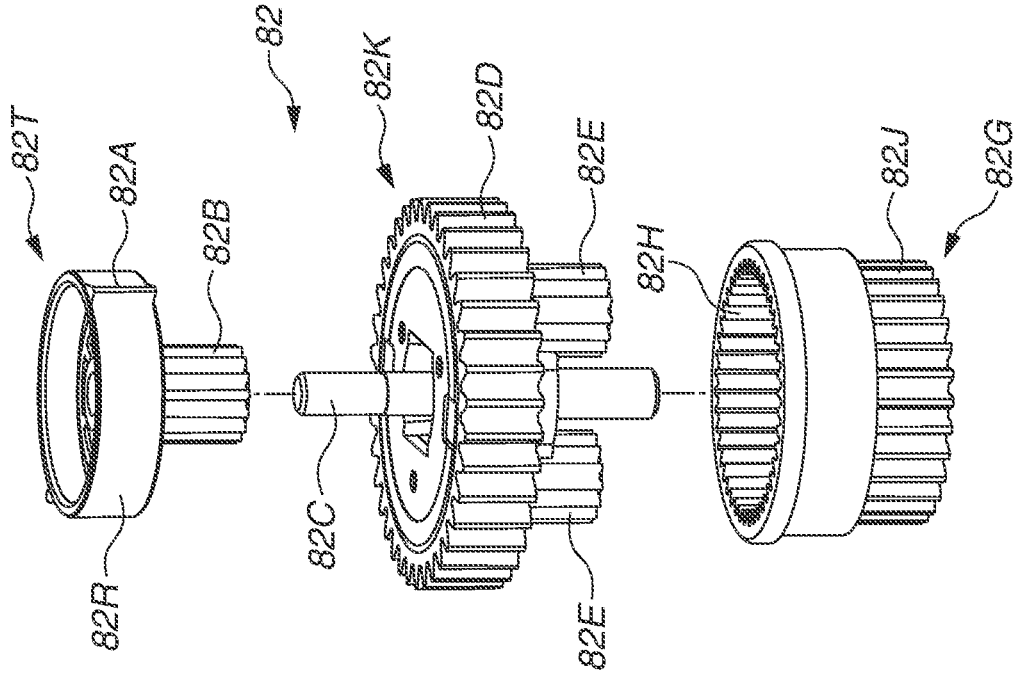


FIG. 4A

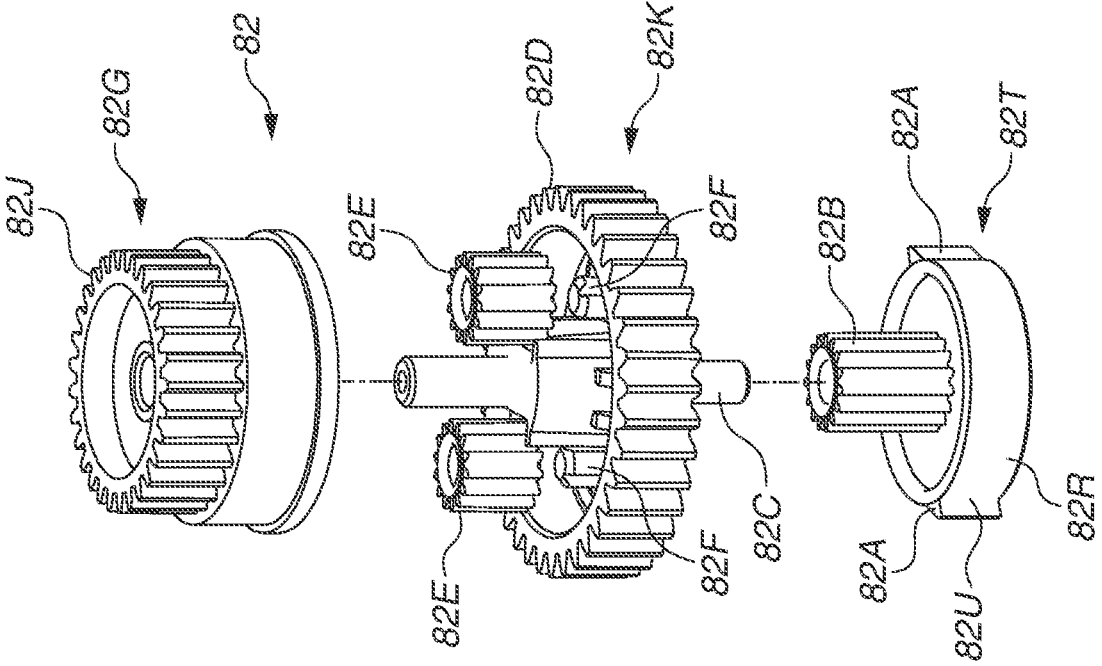


FIG. 5A

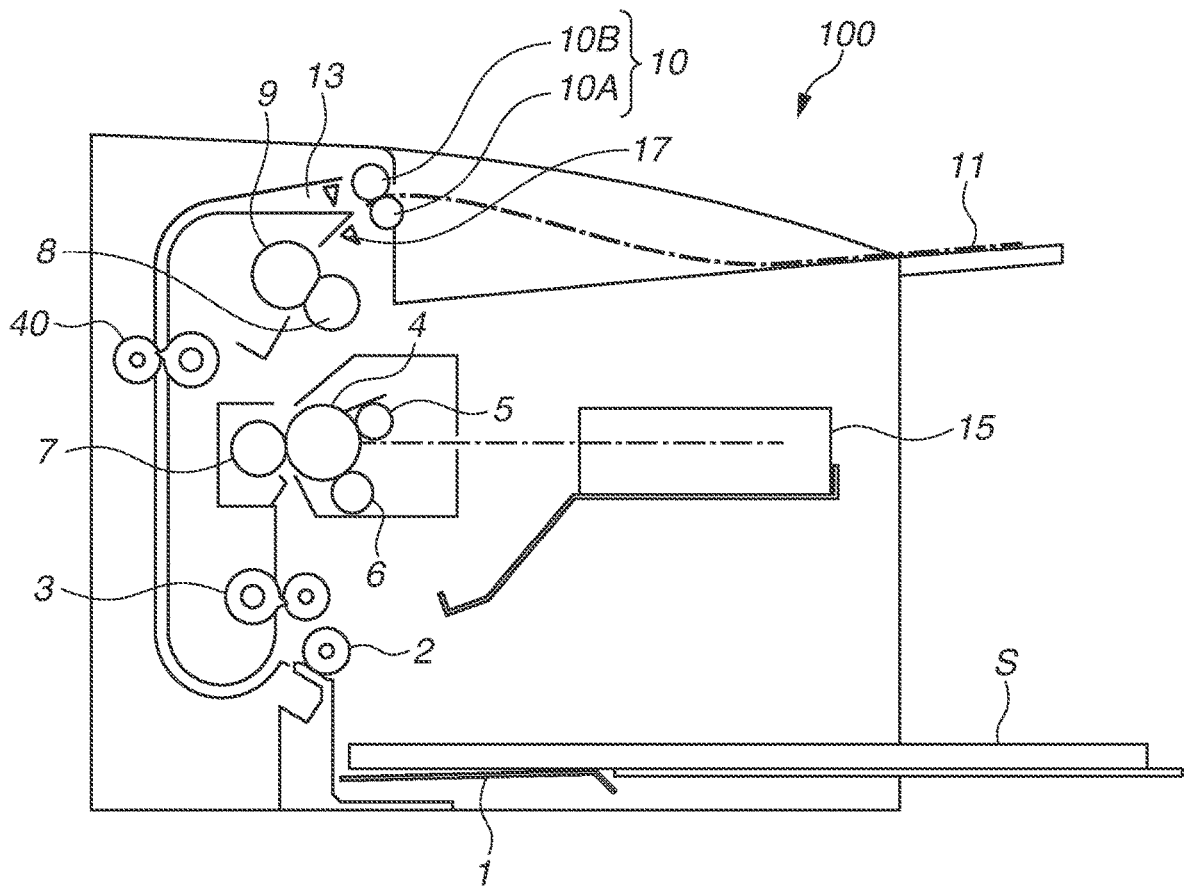


FIG.5B

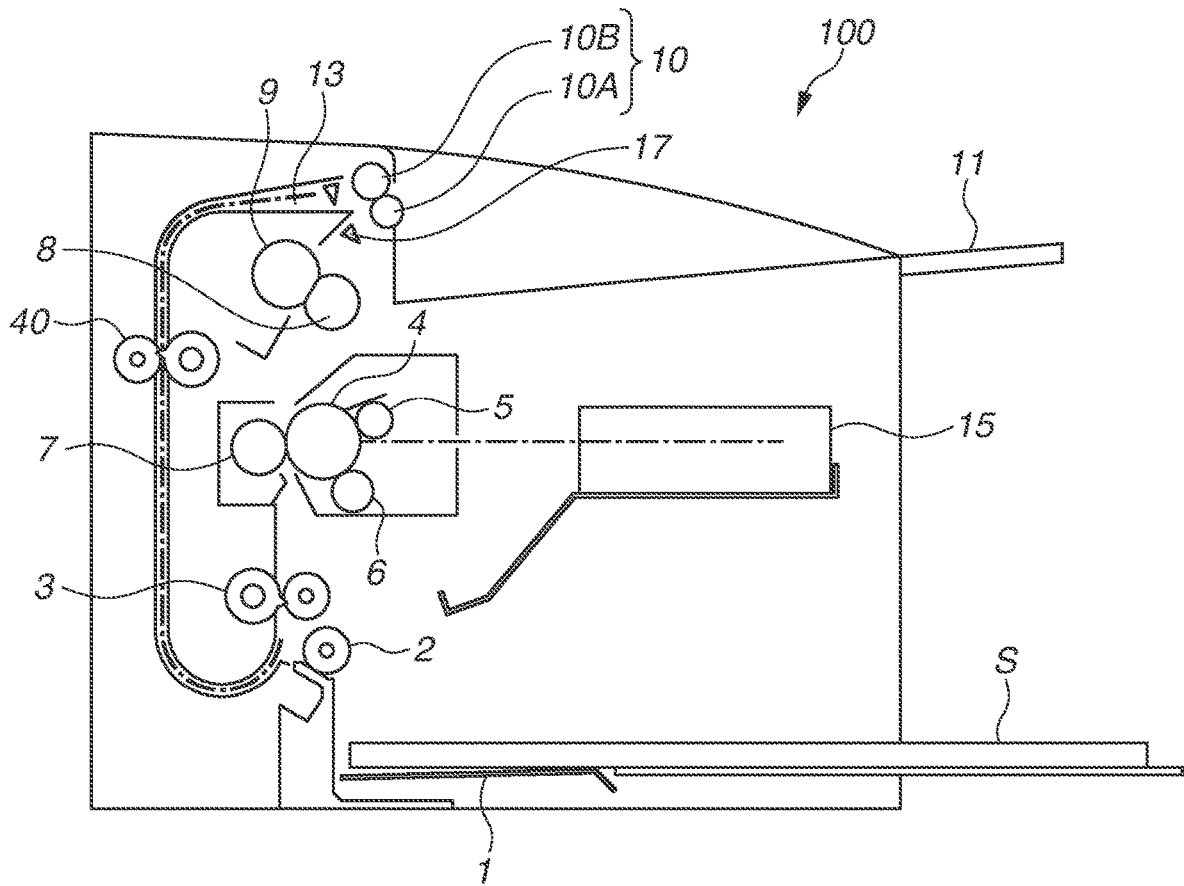


FIG. 6

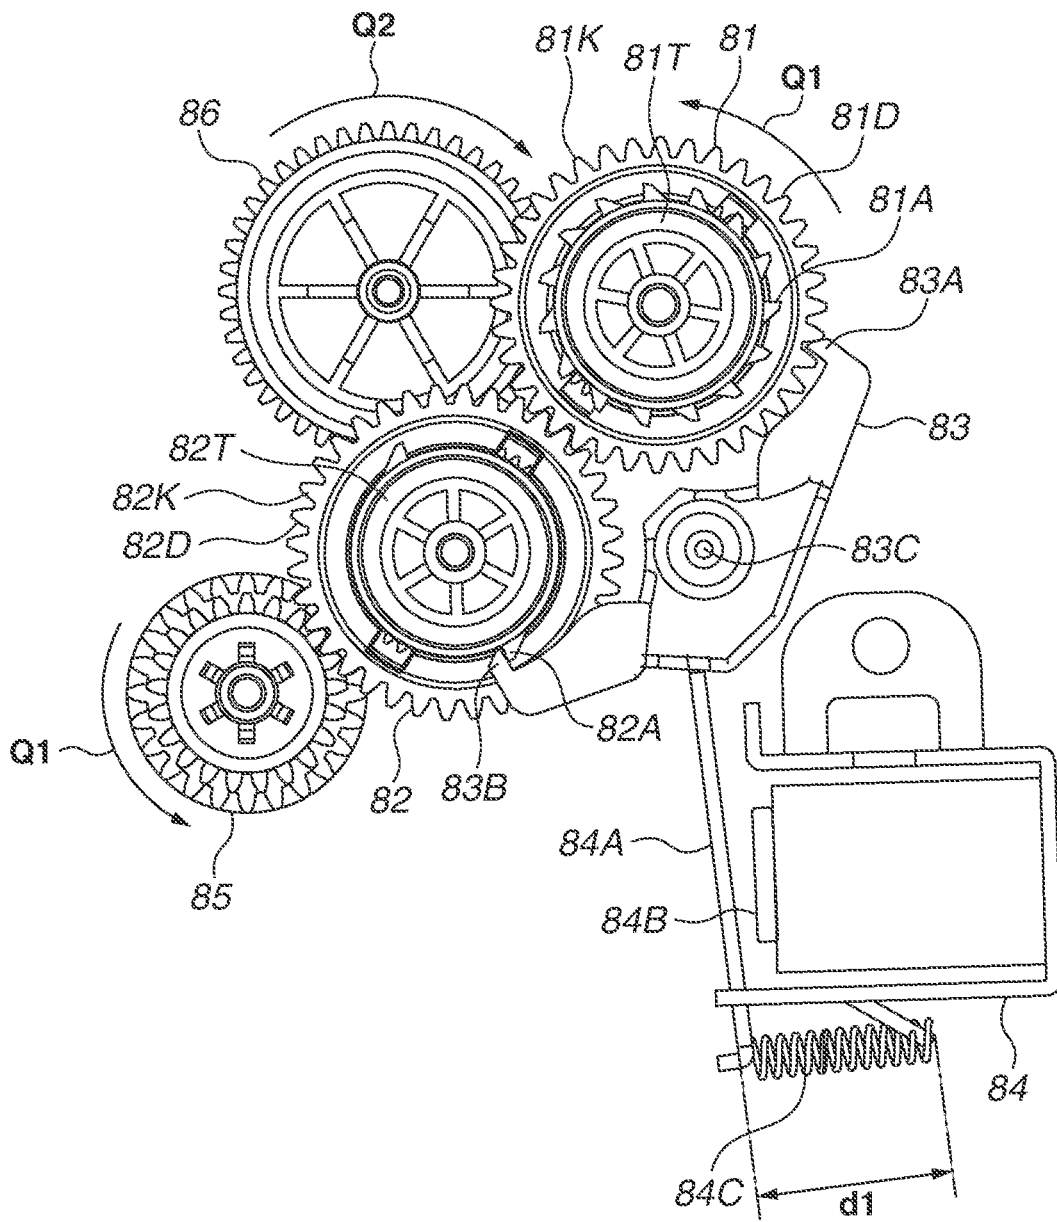


FIG.7

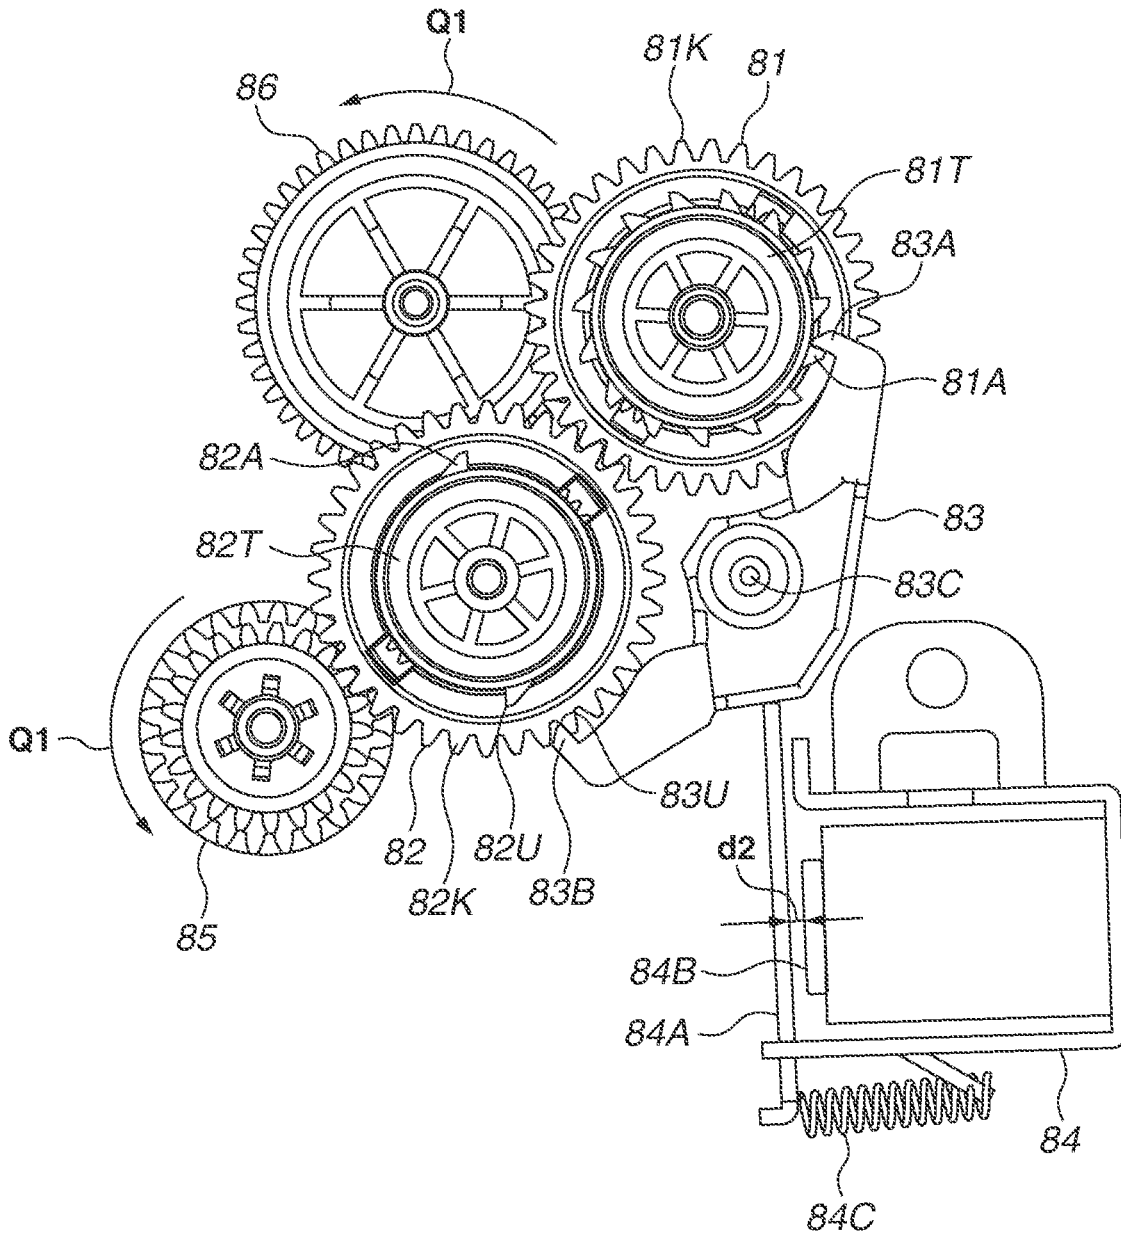


FIG. 8A

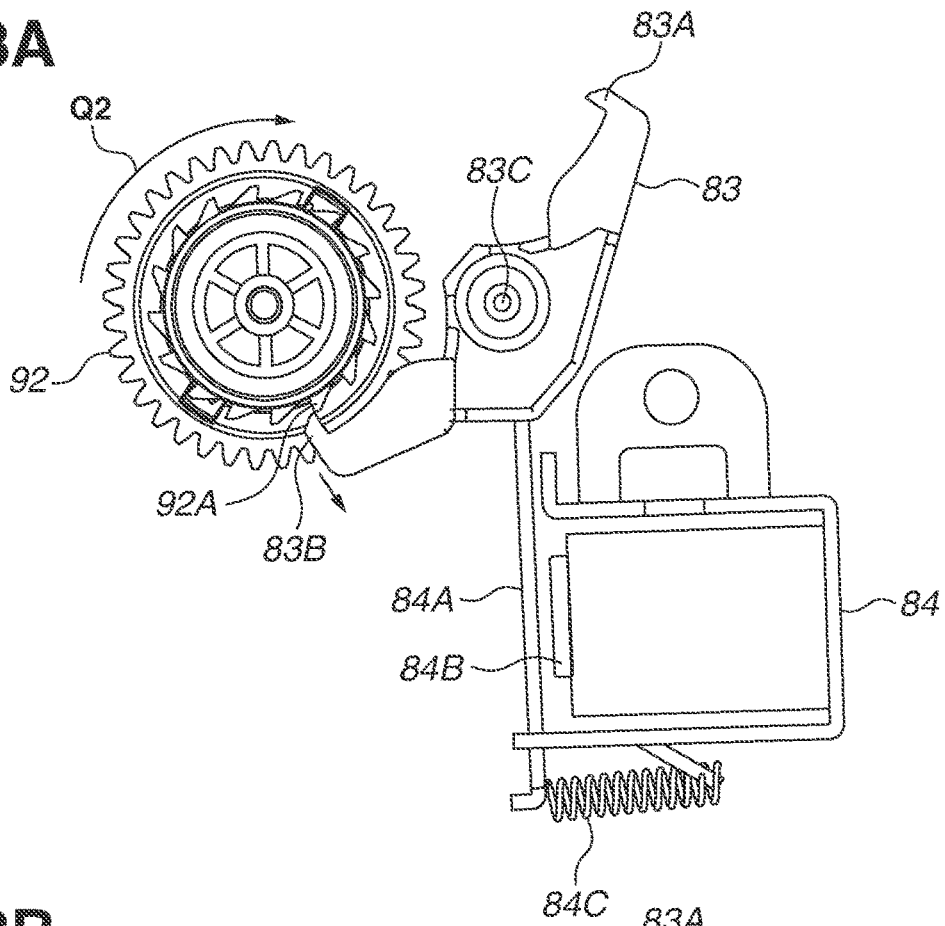


FIG. 8B

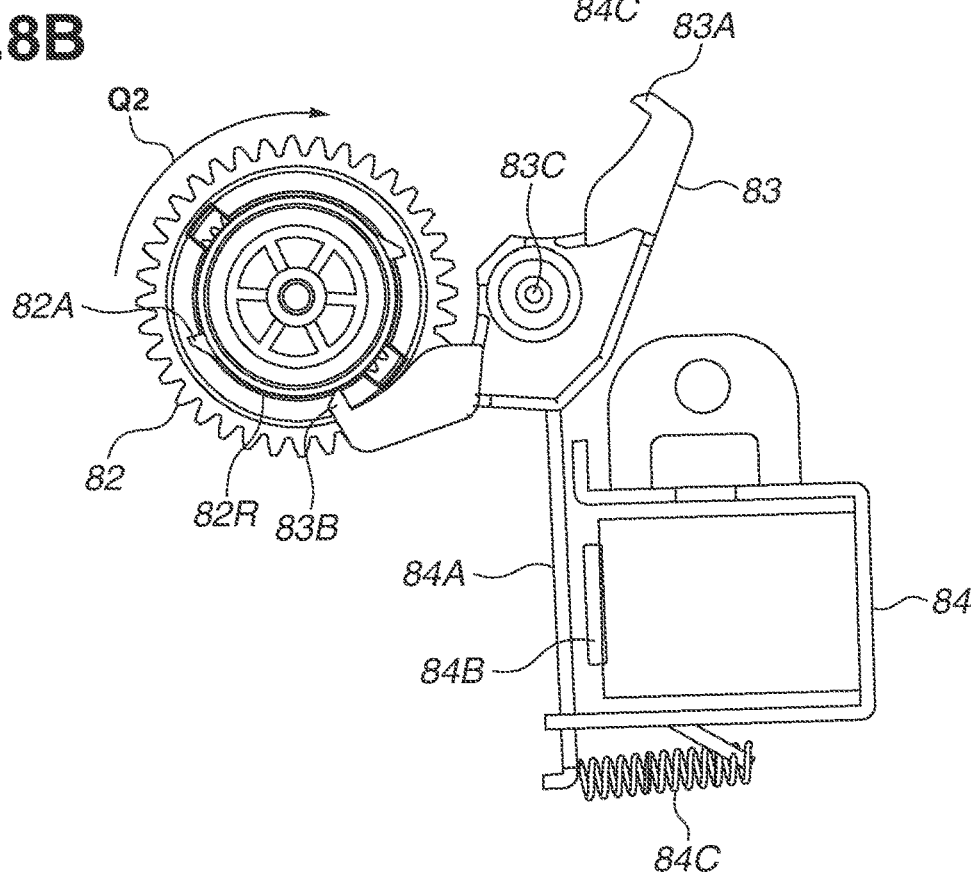


FIG. 9

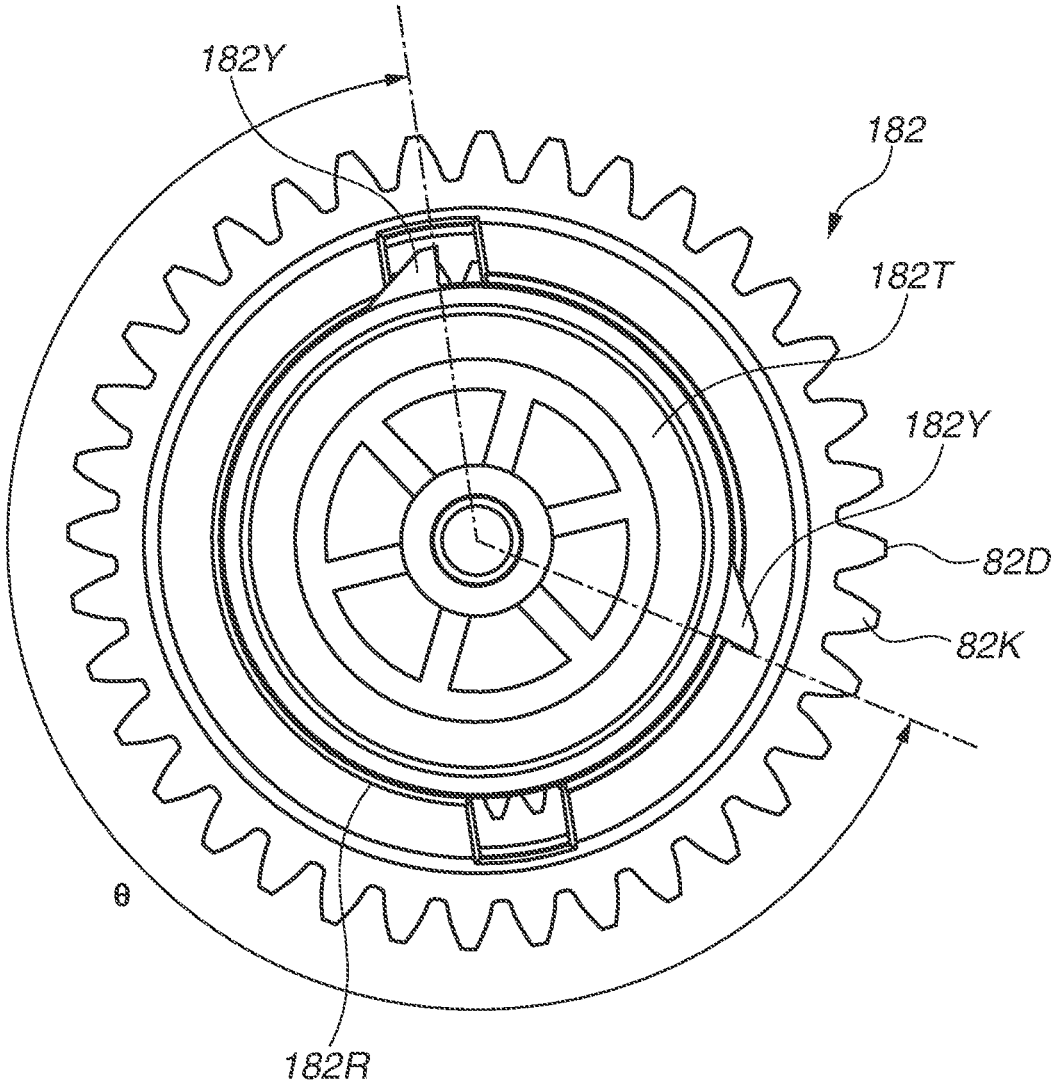


FIG.10A


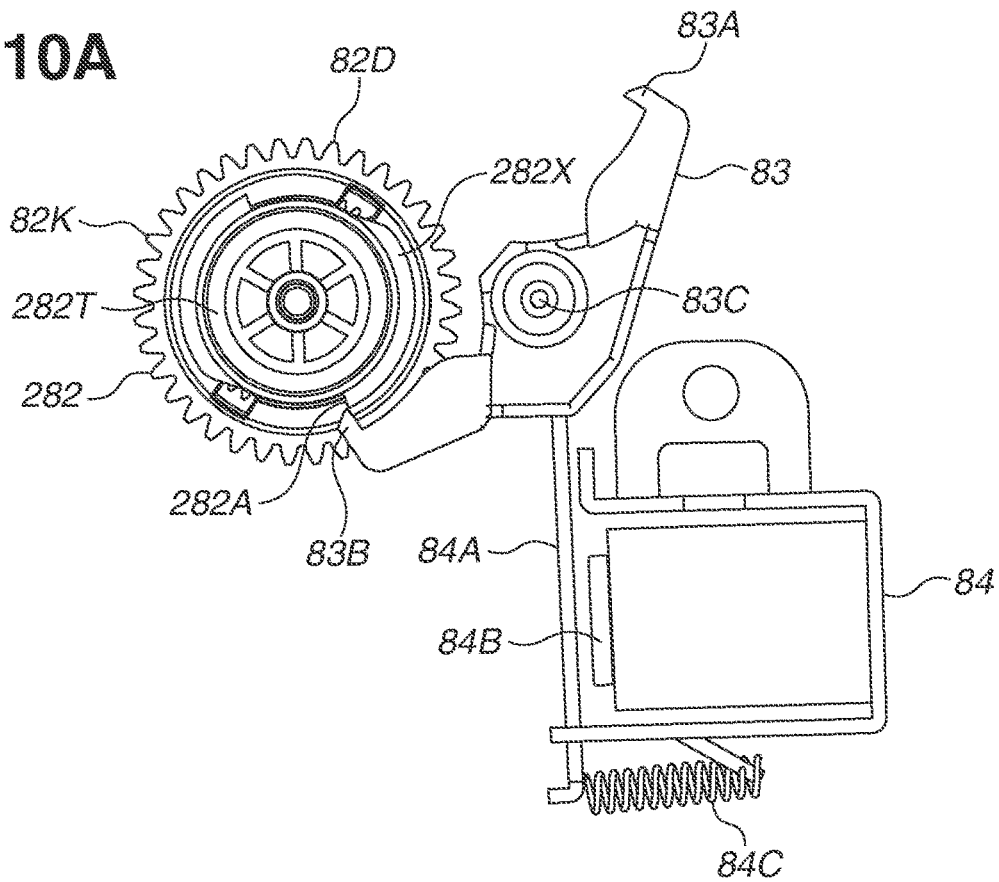


FIG.10B

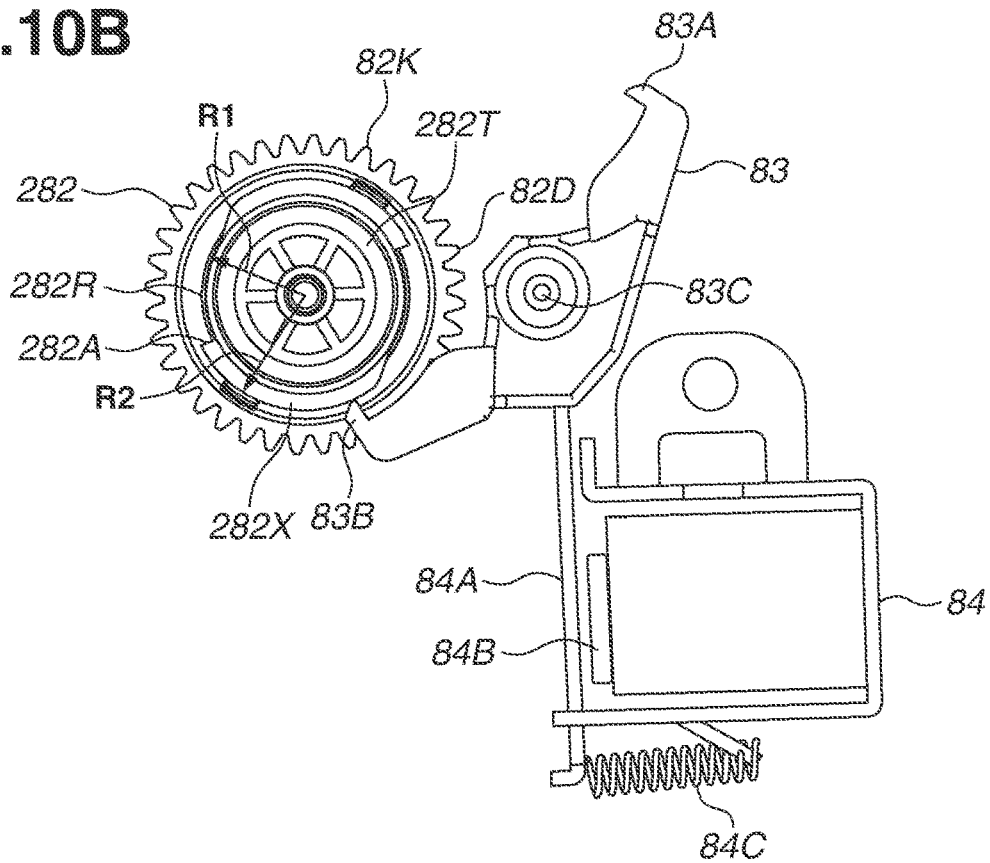

1

**DRIVING FORCE TRANSMITTING
APPARATUS, SHEET CONVEYANCE
APPARATUS, AND IMAGE FORMING
APPARATUS**

BACKGROUND

Field

The present disclosure relates to a driving force transmitting apparatus, a sheet conveyance apparatus including the driving force transmitting apparatus, and an image forming apparatus including the driving force transmitting apparatus.

Description of the Related Art

A plurality of conveyance rollers for conveying a sheet and a conveyance roller driving mechanism for driving the conveyance rollers are arranged inside an image forming apparatus. With the use of these conveyance rollers, the sheet is conveyed from a sheet storage cassette or a sheet stacking tray sequentially to an image forming unit that forms an image and to a sheet discharge tray.

There is also an image forming apparatus that includes a conveyance unit that changes the front and back sides of a sheet and then conveys the sheet, as a standard or an option, in order to perform double-sided printing in which images are formed on both the front and back sides of the sheet. Many models of such an image forming apparatus internally perform operations of switching back a sheet whose front side is already printed by switching a rotational direction of a sheet discharge roller and sending the sheet to the image forming unit again to print on the back side of the sheet.

Examples of a method of switching the rotational direction of the sheet discharge roller include a method of controlling switching of a rotational direction of a motor that drives the sheet discharge roller, and a method of switching the rotational direction of the sheet discharge roller using a reverse driving mechanism including two sets of planetary gear units as discussed in Japanese Patent Application Laid-Open No. 2015-215090. The method discussed in Japanese Patent Application Laid-Open No. 2015-215090 eliminates the need of using a dedicated motor for switching the rotational direction of the sheet discharge roller, and thus the image forming apparatus can be manufactured at a relatively low cost.

In recent years, an image forming apparatus has been required to have a reduced distance between a pressure roller of a fixing unit and the sheet discharge roller to downsize a main body of the image forming apparatus.

However, to enable the double-sided printing while having the reduced distance between the pressure roller and the sheet discharge roller, the technique described in Japanese Patent Application Laid-Open No. 2015-215090 requires reduction of time needed to switch the rotational direction of the sheet discharge roller in performing the double-sided printing by increasing attraction force of a solenoid. At this time, in the technique of Japanese Patent Application Laid-Open No. 2015-215090, there is a case where reduction of spring force of the solenoid to increase the attraction force of the solenoid causes a claw of a stopper member to be repelled by a claw of the planetary gear unit when the stopper member is returned by the spring force. The technique of Japanese Patent Application Laid-Open No. 2015-

2

215090 discloses that a switching operation is unstable and time needed to perform switching is increased.

SUMMARY

According to an aspect of the present disclosure, a driving force transmitting apparatus includes a first planetary gear unit including a first locked gear provided with a plurality of first locked portions, and including a first mesh gear, a second planetary gear unit including a second locked gear provided with a plurality of second locked portions, and including a second mesh gear configured to mesh with the first mesh gear, a rotation switching member including a first locking portion and a second locking portion, wherein the rotation switching member is capable of moving to (i) a first stop position at which the first locking portion locks one of the plurality of first locked portions to stop the first locked gear, and (ii) a second stop position at which the second locking portion locks one of the plurality of second locked portions to stop the second locked gear, and an urging member configured to urge the rotation switching member to the second stop position, wherein an interval between the plurality of second locked portions in a rotational direction of the second locked gear is larger than an interval between the plurality of first locked portions in a rotational direction of the first locked gear.

Further features of the present disclosure will become apparent from the following description of exemplary embodiments with reference to the attached drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic diagram illustrating an image forming apparatus according to a first exemplary embodiment of the present disclosure.

FIG. 2 is a perspective view illustrating a driving force transmitting apparatus according to the first exemplary embodiment of the present disclosure.

FIGS. 3A and 3B are exploded perspective views each illustrating a first planetary gear unit of the driving force transmitting apparatus according to the first exemplary embodiment of the present disclosure.

FIGS. 4A and 4B are exploded perspective views each illustrating a second planetary gear unit of the driving force transmitting apparatus according to the first exemplary embodiment of the present disclosure.

FIGS. 5A and 5B are schematic diagrams each illustrating operations of the image forming apparatus according to the first exemplary embodiment of the present disclosure.

FIG. 6 is a front view illustrating a non-energized state of a solenoid in the driving force transmitting apparatus according to the first exemplary embodiment of the present disclosure.

FIG. 7 is a front view illustrating an energized state of the solenoid in the driving force transmitting apparatus according to the first exemplary embodiment of the present disclosure.

FIGS. 8A and 8B are front views each illustrating operations of the driving force transmitting apparatus according to the first exemplary embodiment of the present disclosure.

FIG. 9 is a modification of part of a planetary gear unit of the driving force transmitting apparatus according to the first exemplary embodiment of the present disclosure.

FIGS. 10A and 10B are front views each illustrating part of a driving force transmitting apparatus according to a second exemplary embodiment of the present disclosure.

DESCRIPTION OF THE EMBODIMENTS

The present disclosure is directed to providing a driving force transmitting apparatus, a sheet conveyance apparatus, and an image forming apparatus that are capable of stabilizing a switching operation of a rotational direction, and also capable of preventing an increase in time required to switch the rotational direction.

Exemplary embodiments will be described in detail below with reference to the accompanying drawings.

<Configuration of Image Forming Apparatus>

A configuration of an image forming apparatus **100** according to a first exemplary embodiment of the present disclosure is described in detail with reference to FIG. **1**.

The image forming apparatus **100** includes a sheet feeding device **1**, a sheet feeding roller **2**, a registration unit **3**, a photoconductive drum **4**, a charging roller **5**, a development roller **6**, and a transfer roller **7**. In addition, the image forming apparatus **100** includes a heating unit **8**, a pressure roller **9**, a sheet discharge roller pair **10**, a laser scanner **15**, a sheet discharge sensor **17**, and a double-sided registration unit **40**. Furthermore, the image forming apparatus **100** includes a driving force transmitting apparatus **30** that transmits driving force to the sheet discharge roller pair **10**. The driving force transmitting apparatus **30** is not illustrated in FIG. **1** and will be described below.

The registration unit **3**, the driving force transmitting apparatus **30**, and the double-sided registration unit **40** constitute a sheet conveyance apparatus. The photoconductive drum **4**, the transfer roller **7**, the heating unit **8**, the pressure roller **9**, and the laser scanner **15** constitute an image forming unit that forms an image on a sheet **S** conveyed by the sheet conveyance apparatus by an electrophotographic method. In addition, the transfer roller **7** and the heating unit **8** constitute a fixing unit. A laser beam printer is used here as an example of the image forming apparatus **100**.

The sheet feeding device **1** stores the sheet **S**, and feeds the stored sheet **S** to the image forming unit sheet by sheet.

The sheet feeding roller **2** is controlled to rotate clockwise in FIG. **1** only at the time of feeding a sheet, and makes pressure-contact with the sheet **S** stored in the sheet feeding device **1** to feed the sheet **S** to the registration unit **3** by frictional force.

The registration unit **3** performs skew correction on the sheet **S** fed by the sheet feeding roller **2** or the sheet **S** conveyed by the double-sided registration unit **40**, and conveys the sheet **S**, on which the skew correction has been performed, between the photoconductive drum **4** and the transfer roller **7** at a predetermined timing.

The photoconductive drum **4** rotates clockwise in FIG. **1**, and is uniformly charged by the charging roller **5**. The uniformly charged photoconductive drum **4** is exposed to light by the laser scanner **15**, and an electrostatic latent image is formed thereon. The electrostatic latent image formed on the photoconductive drum **4** is developed by the development roller **6**, and then a toner image (developer image) is formed on the photoconductive drum **4**.

The charging roller **5** uniformly charges a surface of the photoconductive drum **4**.

The development roller **6** supplies toner as a developer to the photoconductive drum **4**, on which the electrostatic latent image has been formed, and develops the electrostatic latent image to form the toner image on the photoconductive drum **4**.

The transfer roller **7** makes pressure-contact with the sheet **S** to nip the sheet **S** between the transfer roller **7** and

the photoconductive drum **4**, electrically attracts the toner image formed on the photoconductive drum **4**, and transfers the toner image on the sheet **S**. The transfer roller **7** conveys the sheet **S**, to which the toner image has been transferred, to the fixing unit including the heating unit **8** and the pressure roller **9**.

The heating unit **8** and the pressure roller **9** heat and apply pressure to the sheet **S** conveyed by the transfer roller **7** to fix the toner image, which has been transferred to the sheet **S**, to the sheet **S**. The heating unit **8** and the pressure roller **9** convey the sheet **S**, to which the toner image has been fixed, to the driving force transmitting apparatus **30**.

The sheet discharge roller pair **10** as a conveyance member includes sheet discharge rollers **10A** and **10B**. The sheet discharge roller **10A** rotates by driving force being transmitted thereto from the driving force transmitting apparatus **30**. The sheet discharge roller **10B** rotates following the rotation of the sheet discharge roller **10A**. The sheet discharge roller **10A** is a conveyance member that rotates forward and conveys the sheet **S**, which has been conveyed from the fixing unit, in one direction to discharge the sheet **S** to a sheet discharge tray **11**, or that rotates backward and conveys the sheet **S**, which has been conveyed from the fixing unit, in another direction to a reversing path **13**.

The laser scanner **15** irradiates the photoconductive drum **4**, the surface of which is uniformly charged by the charging roller **5** in advance, with laser light and exposes the photoconductive drum **4** to light, based on an image signal from a host computer (not illustrated). As a result, the laser scanner **15** forms the electrostatic latent image on the photoconductive drum **4**.

The sheet discharge sensor **17** detects the conveyed sheet **S**, and outputs a detection result to a control unit (not illustrated) that includes a central processing unit (CPU), a memory, and the like.

The double-sided registration unit **40** performs skew correction on the sheet **S** conveyed to the reversing path **13** by the driving force transmitting apparatus **30**, and conveys the sheet **S**, on which the skew correction has been performed, to the registration unit **3** at a predetermined timing.

<Configuration of Driving Force Transmitting Apparatus>

A configuration of the driving force transmitting apparatus **30** according to the first exemplary embodiment of the present disclosure is described in detail with reference to FIGS. **2** to **4B**. FIG. **2** is a perspective view illustrating the driving force transmitting apparatus **30**. FIGS. **3A** and **3B** are diagrams each illustrating a first planetary gear unit **81**. FIG. **3A** is the diagram viewed from an output gear portion **81J** side, and FIG. **3B** is the diagram viewed from a sun gear **81T** side. FIGS. **4A** and **4B** are diagrams each illustrating a second planetary gear unit **82**. FIG. **4A** is the diagram viewed from an output gear portion **82J** side, and FIG. **4B** is the diagram viewed from a sun gear **82T** side.

The driving force transmitting apparatus **30** transmits driving force from a driving source that generates the driving force by control of the control unit (not illustrated), to the sheet discharge roller **10A** (see FIG. **2**). Specifically, the driving force transmitting apparatus **30** includes the first planetary gear unit **81**, the second planetary gear unit **82**, a rotation switching member **83**, a solenoid **84**, a driving force input gear **85**, and driving force output gears **86** to **89**.

In the configuration according to the present exemplary embodiment, in a case where the solenoid **84** is in a non-energized state, a second locking portion **83B** of the rotation switching member **83** locks a second locked portion **82A** of the second planetary gear unit **82**, and the sheet discharge roller **10A** conveys the sheet **S** in a forward

direction (a w1 direction illustrated in FIG. 2). On the other hand, in a case where the solenoid **84** is in an energized state, a first locking portion **83A** of the rotation switching member **83** locks a first locked portion **81A** of the first planetary gear unit **81**, and the sheet discharge roller **10A** conveys the sheet S in a backward direction (a w2 direction illustrated in FIG. 2).

The driving force input gear **85** meshes with an input gear portion **82D** of a carrier **82K** of the second planetary gear unit **82** (see FIG. 6). Rotation of the driving force input gear **85** by driving force being transmitted thereto from the driving source (not illustrated), rotates the input gear portion **82D**.

The driving force output gear **86** meshes with the output gear portion **81J** of an output gear **81G** of the first planetary gear unit **81** and the output gear portion **82J** of an output gear **82G** of the second planetary gear unit **82**. Rotation of the output gear portion **81J** or rotation of the output gear portion **82J** rotates the driving force output gear **86**, thereby rotating the driving force output gear **87**.

The driving force output gear **87** meshes with the driving force output gear **86**. Rotation of the driving force output gear **86** rotates the driving force output gear **87**, thereby rotating the driving force output gear **88**.

The driving force output gear **88** meshes with the driving force output gear **87**. Rotation of the driving force output gear **87** rotates the driving force output gear **88**, thereby rotating the driving force output gear **89**.

The driving force output gear **89** meshes with the driving force output gear **88**. Rotation of the driving force output gear **88** rotates the driving force output gear **89**, thereby rotating the sheet discharge roller **10A**.

The driving force transmitting apparatus **30** includes a reversing unit including the first planetary gear unit **81**, the second planetary gear unit **82**, the rotation switching member **83**, and the solenoid **84**. Each constituent element of the reversing unit is described below.

The first planetary gear unit **81** includes planetary gears **81E**, the output gear **81G**, a carrier **81K**, and the sun gear **81T**, as illustrated in FIGS. 3A and 3B.

The planetary gears **81E** are rotatably held by the carrier **81K**, and revolve around a sun gear portion **81B** held by a central shaft **81C** of the carrier **81K** with the rotation of the carrier **81K**. The number of planetary gears **81E** is not limited to two, and may be one or a freely-selected number of three or more.

The output gear **81G** includes an internal tooth gear portion **81H** and the output gear portion **81J**, which are formed integrally and coaxially. The internal tooth gear portion **81H** meshes with the external side of each of the planetary gears **81E**. The output gear portion **81J** meshes with the driving force output gear **86** to output driving force.

The carrier **81K** as a first mesh gear includes the central shaft **81C**, an input gear portion **81D**, and shafts **81F**, which are integrally formed. The central shaft **81C** holds the sun gear portion **81B**. The input gear portion **81D** meshes with the carrier **82K** of the second planetary gear unit **82**. The shafts **81F** supports the respective planetary gears **81E** so that the planetary gears **81E** can revolve around the sun gear portion **81B**.

The sun gear **81T** as a first locked gear includes the sun gear portion **81B** and a plurality of first locked portions **81A**, which are integrally formed. The sun gear portion **81B** meshes with the planetary gears **81E**. The plurality of first locked portions **81A** meshes with the rotation switching member **83**. The first locked portions **81A** are arranged at an equal interval in a rotational direction of the sun gear **81T**.

The second planetary gear unit **82** has a configuration similar to that of the first planetary gear unit **81**, and includes planetary gears **82E**, the output gear **82G**, the carrier **82K**, and the sun gear **82T**, as illustrated in FIGS. 4A and 4B.

The planetary gears **82E** are rotatably held by the carrier **82K**, and revolves around a sun gear portion **82B** held by a central shaft **82C** of the carrier **82K** with the rotation of the carrier **82K**. The number of planetary gears **82E** is not limited to two, and may be one or a freely-selected number of three or more.

The output gear **82G** includes an internal tooth gear portion **82H** and the output gear portion **82J**, which are formed integrally and coaxially. The internal tooth gear portion **82H** meshes with the external side of each of the planetary gears **82E**. The output gear portion **82J** meshes with the driving force output gear **86** to output driving force.

The carrier **82K** as a second mesh gear includes the central shaft **82C**, the input gear portion **82D**, and shafts **82F**, which are integrally formed. The central shaft **82C** holds the sun gear portion **82B**. The input gear portion **82D** meshes with the carrier **81K** of the first planetary gear unit **81**. The shafts **82F** supports the respective planetary gears **82E** so that the planetary gears **82E** can revolve around the sun gear portion **82B**.

The sun gear **82T** as a second locked gear includes the sun gear portion **82B** and a plurality of second locked portions **82A**, which are integrally formed. The sun gear portion **82B** meshes with the planetary gears **82E**. The plurality of second locked portions **82A** locks the second locking portion **83B** of the rotation switching member **83**.

The second locked portions **82A** are arranged at an equal interval in the rotational direction of the sun gear **82T**. The interval between the second locked portions **82A** in the rotational direction of the sun gear **82T** is larger than the interval between the first locked portions **81A** in the rotational direction of the sun gear **81T**. The number of second locked portions **82A** is smaller than the number of first locked portions **81A**.

It is preferable that a leading end **82U** of the second locked portion **82A** and a leading end **83U** of the second locking portion **83B** each have a shape with the smallest possible curvature radius. The number of second locked portions **82A** is exemplified here as two.

The rotation switching member **83** includes the first locking portion **83A** and the second locking portion **83B**, which are integrally formed (see FIG. 2). The first locking portion **83A** is capable of locking the first locked portion **81A** of the first planetary gear unit **81**. The second locking portion **83B** is capable of locking the second locked portion **82A** of the second planetary gear unit **82**. The rotation switching member **83** is capable of pivoting about a shaft **83C** supported by a main body of the image forming apparatus **100** (not illustrated), and is connected to the solenoid **84**.

The rotation switching member **83** controls the rotation of the first planetary gear unit **81** and the rotation of the second planetary gear unit **82**. Specifically, in a case of being at a first stop position at which the first locking portion **83A** locks the first locked portion **81A**, the rotation switching member **83** restrains the rotation of the sun gear **81T** of the first planetary gear unit **81**, while not restraining the rotation of the sun gear **82T** of the second planetary gear unit **82**. In a case of being at a second stop position at which the second locking portion **83B** locks the second locked portion **82A**, the rotation switching member **83** restrains the rotation of

the sun gear **82T** of the second planetary gear unit **82**, while not restraining the rotation of the sun gear **81T** of the first planetary gear unit **81**.

The solenoid **84** is an actuator that is electrically controlled, and includes a solenoid flapper **84A**, a solenoid main body **84B**, and a solenoid spring **84C**.

The solenoid flapper **84A** is movable by magnetic force of a coil portion (not illustrated) in the solenoid main body **84B**, or urging force of the solenoid spring **84C**.

The solenoid main body **84B** includes the coil portion (not illustrated) that generates magnetic force in a case where the solenoid **84** is in the energized state.

The solenoid spring **84C** as an urging member urges the solenoid flapper **84A**, thereby the rotation switching member **83** is urged in a direction in which the second locking portion **83B** thereof locks the second locked portion **82A**.

<Operations of Sheet Conveyance Apparatus>

Operations of the sheet conveyance apparatus according to the first exemplary embodiment of the present disclosure are described in detail with reference to FIGS. **2** to **8B**.

FIG. **5A** illustrates a state immediately after a rear end of the sheet **S** in a conveying direction passes through the sheet discharge sensor **17** and before the rear end passes through the sheet discharge roller pair **10**. FIG. **5B** illustrates a state where the sheet **S** is conveyed to the reversing path **13**.

First, a description is given of an operation of the sheet conveyance apparatus when a sheet discharge operation is performed (operation in the non-energized state).

When an operation of discharging the sheet **S** or double-sided printing is performed, the sheet discharge roller pair **10** conveys the sheet **S** in the w1 direction illustrated in FIG. **2** until a state immediately after the rear end in the conveying direction of the sheet **S** whose front side is already printed passes through the sheet discharge sensor **17** (FIG. **5A**).

At this time, the solenoid **84** is in a non-energized state in which the solenoid flapper **84A** is not attracted to the solenoid main body **84B**. The second locking portion **83B** of the rotation switching member **83** locks the second locked portion **82A** of the second planetary gear unit **82** (the sun gear **82T**) by urging force of the solenoid spring **84C** (FIGS. **2** and **6**).

With this configuration, the second locking portion **83B** locks the second locked portion **82A** to restrain the rotation of the sun gear **82T**. Meanwhile, the first locking portion **83A** does not lock the first locked portion **81A**, and the rotation of the sun gear **81T** is allowed.

In a case where the driving force is input from the driving force input gear **85** to the input gear portion **82D** of the carrier **82K**, the planetary gears **82E** revolve around the sun gear portion **82B**, as bearings, between the sun gear portion **82B** of the sun gear **82T** and the internal tooth gear portion **82H** of the output gear **82G**. This configuration prevents the driving force input to the input gear portion **82D** of the carrier **82K** from being transmitted to the output gear **82G**, and furthermore, enables the output gear **82G** to rotate without being interlocked with the carrier **82K**.

On the other hand, the first planetary gear unit **81** has a configuration in which the first locking portion **83A** of the rotation switching member **83** does not lock the first locked portion **81A** of the sun gear **81T** and the sun gear **81T** is rotatable. As a result, the sun gear **81T** rotates with the carrier **81K** by frictional force on a contact surface of the sun gear **81T** with the carrier **81K**. In other words, the sun gear **81T** and the two planetary gears **81E** are integrally rotatable without a change in positions relative to the carrier **81K**.

With this configuration, the driving force input from the driving force input gear **85** is input to the input gear portion

81D of the carrier **81K** via the input gear portion **82D**, and transmitted to the output gear **81G** by the planetary gears **81E**, which integrally rotate with the carrier **81K**, meshing with the internal tooth gear portion **81H**. In other words, the sun gear **81T**, the two planetary gears **81E**, the carrier **81K**, and the output gear **81G** rotate integrally without a change in positions of meshing between corresponding members, and furthermore, without a change in relative positions.

In this state (the state illustrated in FIG. **6**), the driving force input gear **85** that rotates counterclockwise (in a Q1 direction) rotates the carrier **82K** of the second planetary gear unit **82** clockwise (in a Q2 direction). With this rotation, the planetary gears **82E** revolve around the sun gear portion **82B** of the sun gear **82T**, the rotation of which is restrained, as bearings, and the output gear portion **82J**, to which driving force is not transmitted, is rotatable independently of the carrier **82K**.

The carrier **82K** that rotates clockwise (in the Q2 direction) rotates the carrier **81K** of the first planetary gear unit **81** counterclockwise (in the Q1 direction). The first planetary gear unit **81** integrally rotates without a change in positions of meshing between corresponding members that constitute the first planetary gear unit **81**, and furthermore, the output gear portion **81J** rotates counterclockwise (in the Q1 direction).

The driving force output gear **86**, which meshes with the output gear portion **81J**, rotates clockwise, and the driving force output gear **87**, which meshes with the driving force output gear **86**, rotates counterclockwise. The driving force output gear **88**, which meshes with the driving force output gear **87**, rotates clockwise, and the driving force output gear **89**, which meshes with the driving force output gear **88**, rotates counterclockwise.

With this configuration, the sheet discharge roller **10A** rotates in a direction to discharge the sheet **S** to the sheet discharge tray **11**, and the sheet **S** is conveyed in the w1 direction in FIG. **2** to be discharged to the sheet discharge tray **11**.

Next, a description is given of an operation of the sheet conveyance apparatus during an inverting operation (operation in the energized state).

At the time of double-sided printing, immediately after the rear end of the sheet **S** whose front side is already printed passes through the sheet discharge sensor **17** and before the rear end thereof passes through the sheet discharge roller pair **10**, the sheet conveyance apparatus conveys the sheet **S** in the w2 direction illustrated in FIG. **2** to the reversing path **13**.

At this time, the solenoid **84** is in the energized state in which the solenoid flapper **84A** is attracted to the solenoid main body **84B**. The first locking portion **83A** of the rotation switching member **83** locks the first locked portion **81A** of the first planetary gear unit **81** (the sun gear **81T**) (FIG. **7**).

With this configuration, the first locking portion **83A** meshes with the first locked portion **81A** to restrain the rotation of the sun gear **81T**. On the other hand, the second planetary gear unit **82** has a configuration in which the second locking portion **83B** of the rotation switching member **83** does not lock the second locked portion **82A** of the sun gear **82T** and the sun gear **82T** is rotatable. As a result, the sun gear **82T** rotates with the carrier **82K** by frictional force on a contact surface of the sun gear **82T** with the carrier **82K**. In other words, the sun gear **82T** and the two planetary gears **82E** are integrally rotatable without a change in positions relative to the carrier **82K**.

With this configuration, the driving force input from the driving force input gear **85** is input to the input gear portion

82D of the carrier 82K, and transmitted to the output gear 82G by the planetary gears 82E, which integrally rotate with the carrier 82K, meshing with the internal tooth gear portion 82H. In other words, the sun gear 82T, the two planetary gears 82E, the carrier 82K, and the output gear 82G rotate integrally without a change in positions of meshing between corresponding members, and furthermore, without a change in relative positions.

In the case where the driving force is input from the driving force input gear 85 to the input gear portion 81D of the carrier 81K via the carrier 82K, the planetary gears 81E revolve around the sun gear portion 81B, as bearings, between the sun gear portion 81B and the internal tooth gear portion 81H. This configuration prevents the driving force input to the input gear portion 81D of the carrier 81K from being transmitted to the output gear 81G, and furthermore, enables the output gear 81G to rotate without being interlocked with the carrier 81K.

In this state (the state illustrated in FIG. 7), the driving force input gear 85 that rotates counterclockwise (in the Q1 direction) rotates the carrier 82K of the second planetary gear unit 82 clockwise. With this rotation, the second planetary gear unit 82 integrally rotates without a change in positions of meshing between corresponding members that constitute the second planetary gear unit 82, and furthermore, the output gear portion 82J rotates clockwise (in the Q2 direction).

On the other hand, the carrier 82K, which rotates clockwise (in the Q2 direction), rotates the carrier 81K of the first planetary gear unit 81 and the driving force output gear 86 counterclockwise (in the Q1 direction). At this time, the planetary gears 81E revolve around the sun gear portion 81B of the sun gear 81T, the rotation of which is restrained, as bearings, and the output gear portion 81J, to which driving force is not transmitted, is rotatable independently of the carrier 81K.

The driving force output gear 86, which meshes with the output gear portion 82J, rotates counterclockwise, and the driving force output gear 87, which meshes with the driving force output gear 86, rotates clockwise. The driving force output gear 88, which meshes with the driving force output gear 87, rotates counterclockwise, and the driving force output gear 89, which meshes with the driving force output gear 88, rotates clockwise.

With this configuration, the sheet discharge roller 10A rotates in a direction to pull back the sheet S from the sheet discharge tray 11, and the sheet S is conveyed in the w2 direction in FIG. 2 to the reversing path 13.

Then, operations of feature portions of the configuration according to the present exemplary embodiment are described. FIG. 8A illustrates a configuration using a second planetary gear unit 92 according to a comparative example including second locked portions 92A, the number of which is greater than that of the second locked portions 82A according to the present exemplary embodiment. FIG. 8B illustrates a configuration of using the second locked portions 82A according to the present exemplary embodiment.

The solenoid 84, when being switched from the non-energized state to the energized state, attracts the solenoid flapper 84A with magnetic force of the coil portion (not illustrated) of the solenoid main body 84B, while resisting urging force of the solenoid spring 84C, to cause the rotation switching member 83 to pivot. In the rotation switching member 83, which is caused to pivot by the solenoid flapper 84A, the first locking portion 83A locks the first locked

portion 81A after the second locking portion 83B passes through the second locked portion 82A, as illustrated in FIG. 7.

At this time, since a distance d2 (see FIG. 7) between the solenoid flapper 84A and the solenoid main body 84B of the solenoid 84 is short, the magnetic force of the solenoid 84 attracting the solenoid flapper 84A is large. Hence, force generated by the solenoid 84 to cause the rotation switching member 83 to pivot is large at a moment when the first locking portion 83A locks the first locked portion 81A, and the solenoid 84 thereby allows the first locking portion 83A to lock the rotating first locked portion 81A without the first locking portion 83A being repelled by the first locked portion 81A.

With this configuration, an interval between the first locked portions 81A can be made as small as possible to be an interval that allows the first locking portion 83A to lock the first locked portion 81A. Since the interval between the first locked portions 81A can be made as small as possible, time to switch the rotational direction of the sheet discharge roller 10A to a counterclockwise direction in FIG. 5A and FIG. 5B can be made as short as possible.

When being switched from the energized state to the non-energized state, the solenoid 84 causes the solenoid flapper 84A to pivot by urging force of the solenoid spring 84C, thereby causing the rotation switching member 83 to pivot. In the rotation switching member 83, the second locking portion 83B locks the second locked portion 82A after the first locking portion 83A passes through the first locked portion 81A, as illustrated in FIG. 6.

At this time, force generated by the solenoid 84 to cause the rotation switching member 83 to pivot is small at a moment when the second locking portion 83B locks the second locked portion 82A, and force to cause the second locking portion 83B to lock the second locked portion 82A is weak. The following points are given as the reasons for the weak force. The first point is that spring force of the solenoid spring 84C, serving as reaction force, is reduced to increase attraction force of the solenoid 84. The second point is that an action length d1 (see FIG. 6) of the solenoid spring 84C is large at a moment when the second locking portion 83B locks the second locked portion 82A.

Consequently, the second locking portion 83B is repelled by the rotating second locked portion 82A when the leading end of the second locking portion 83B hits the second locked portion 82A, and thus cannot lock the second locked portion 82A.

For example, in a case where the number of second locked portions 92A is large as illustrated in FIG. 8A, the second locking portion 83B is repelled by one of the second locked portions 92A, pushed back by urging force of the solenoid spring 84C, and then tries to lock the second locked portion 92A again. At this time, there is a case where the second locking portion 83B is repelled by another second locked portion 92A when the leading end thereof hits the second locked portion 92A. In a case where such a situation repeatedly occurs, the second locking portion 83B cannot lock the second locked portion 92A even after the second planetary gear unit 92 rotates several times, and thus the leading end of the sheet S in the conveying direction may reach the sheet discharge roller pair 10 during this period of time. In this case, the sheet S cannot be discharged to the sheet discharge tray 11, resulting in occurrence of a paper jam that cannot be cleared by a user.

To address such a case, the present exemplary embodiment has a configuration in which the interval between the second locked portions 82A in the rotational direction of the

11

sun gear **82T** is increased. With this configuration, even if the second locking portion **83B** is repelled by the second locked portion **82A**, the second locking portion **83B** subsequently hits an outer peripheral surface **82R** (see FIG. **8B**) between the second locked portions **82A** when pushed back by spring force of the solenoid spring **84C**, and thus is not repelled by the other second locked portion **82A**.

Specifically, it is effective to arrange the two second locked portions **82A** at an interval of 180 degrees, as illustrated in FIG. **8B**. In this case, the configuration can make time required for the second locking portion **83B** to lock the second locked portion **82A** shorter than time required for the second planetary gear unit **82** to rotate one-half turn. This enables switching of the rotational direction of the sheet discharge roller **10A** before the leading end of the sheet **S** in the conveying direction reaches the sheet discharge roller pair **10**.

To reduce time to switch the rotational direction of the sheet discharge roller **10A** using the solenoid **84** having small magnetic force, reaction force of the solenoid spring **84C** needs to be made as small as possible. Also in this case, even if the second locking portion **83B** is repelled by the second locked portion **82A**, increasing the interval between the second locked portions **82A** causes the second locking portion **83B** to subsequently hit the outer peripheral surface **82R** between the second locked portions **82A**, and thus is not repelled by the other second locked portion **82A**.

In this manner, in the present exemplary embodiment, the time to switch the rotational direction of the sheet discharge roller **10A** can be minimized using the solenoid **84** that is inexpensive and compact in size and that generates small magnetic force. The configuration can prevent occurrence of a paper jam that cannot be cleared by a user as a result of failure to discharge the sheet **S** to the sheet discharge tray **11**. In addition, use of the solenoid **84** that generates weak magnetic force can reduce power consumption and also reduce a switching sound at the time of switching the rotational direction of the sheet discharge roller **10A**.

The number of second locked portions **82A** is not limited to two. It is possible to set the number of second locked portions **82A** to a number that allows the second locking portion **83B**, which is repelled once by the second locked portion **82A**, to subsequently hit the outer peripheral surface **82R** of the sun gear **82T**.

Specifically, in a case where the number of second locked portions **82A** is n , maximum time required to switch the rotational direction of the sheet discharge roller **10A** is $1/n$ times a rotational period of the second planetary gear unit **82**. At this time, in a case where the second locking portion **83B** is repelled once by the second locked portion **82A** and then returns after the second planetary gear unit **82** rotates one-quarter turn, the number of second locked portions **82A** can be set to four; however, the number of second locked portions **82A** can be set to two in consideration of variation or the like.

The number of second locked portions **82A** may be one as long as the time required to switch the rotational direction of the sheet discharge roller **10A** allows for time corresponding to one turn of the rotation of the second planetary gear unit **82**. In this case, the second locked portion **82A** is arranged at an interval corresponding to substantially the entire circumference of the sun gear **82T**.

Additionally, in the present exemplary embodiment, it is preferable that the leading end **82U** of the second locked portion **82A** and the leading end **83U** of the second locking portion **83B** each have a shape with the smallest possible curvature radius. This configuration can lower a probability

12

that the leading end **82U** of the second locked portion **82A** hits the leading end **83U** of the second locking portion **83B** at the time of switching the rotational direction of the sheet discharge roller **10A** and can make the second locking portion **83B** unlikely to be repelled by the second locked portion **82A**.

In the above description of the operations of the driving force transmitting apparatus **30**, the sheet **S** is conveyed in the $w1$ direction to be discharged to the sheet discharge tray **11** in the case where the second locking portion **83B** locks the second locked portion **82A**, but the configuration is not limited thereto. The sheet **S** may be conveyed to the reversing path **13** (in the $w2$ direction). In this case, for example, the driving force transmitting apparatus **30** has a configuration in which the driving force output gear **89** is removed and in which the rotational direction of the sheet discharge roller **10A** is the same as the rotational direction of the driving force output gear **88**. Alternatively, the driving force transmitting apparatus **30** has a configuration in which the position of the sheet discharge roller **10A** and the position of the sheet discharge roller **10B** are exchanged with each other.

In the case where the leading end of the second locking portion **83B** hits the second locked portion **82A** and the second locking portion **83B** is repelled by the second locked portion **82A**, this configuration can prevent an error of not conveying the sheet **S** to the reversing path **13** and thus performing only single-sided printing from occurring.

While the second locked portions **82A** are arranged at an equal interval in the present exemplary embodiment described above, second locked portions **182Y** may be arranged at an unequal interval in the rotational direction of the sun gear **82T** as in a modification illustrated in FIG. **9**. In this case, as the interval between the second locked portions **182Y**, at least the largest interval θ that enables the second locking portion **83B** to hit an outer peripheral surface **182R** of a sun gear **182T** after being repelled once by one of the second locked portions **182Y**.

With this configuration, if the second locking portion **83B** is repelled by one of the second locked portions **182Y**, the second locking portion **83B** hits the outer peripheral surface **182R** in the interval θ , and then locks the other of the second locked portions **182Y**. As a result, the second locking portion **83B** can lock the second locked portion **182Y** in time shorter than time corresponding to one turn of the rotation of a second planetary gear unit **182**. The interval θ can be determined depending on rotation speed of the second planetary gear unit **182** or spring force of the solenoid spring **84C**.

In the present exemplary embodiment, the driving force transmitting apparatus **30** includes the rotation switching member **83** that can move to the first stop position and the second stop position. At the first stop position, the first locking portion **83A** locks the first locked portion **81A** to stop the sun gear **81T**. At the second stop position, the second locking portion **83B** locks the second locked portion **82A** to stop the sun gear **82T**. In addition, the driving force transmitting apparatus **30** includes the solenoid spring **84C** that urges the rotation switching member **83** to the second stop position. Furthermore, the interval between the second locked portions **82A** in the rotational direction of the sun gear **82T** is larger than the interval between the first locked portions **81A** in the rotational direction of the sun gear **81T**. This configuration can stabilize the switching operation of the rotational direction and can prevent an increase in time required to switch the rotational direction.

A configuration of an image forming apparatus according to a second exemplary embodiment of the present disclosure is identical to that of the image forming apparatus 100 illustrated in FIG. 1, and thus a description thereof is omitted.

<Configuration of Driving Force Transmitting Apparatus>

A configuration of a driving force transmitting apparatus 130 according to the second exemplary embodiment of the present disclosure is described in detail with reference to FIGS. 10A and 10B. FIG. 10A illustrates a state where the second locking portion 83B is in contact with a second locked portion 282A. FIG. 10B illustrates a state where the second locking portion 83B is repelled by the second locked portion 282A and then returned by spring force of the solenoid spring 84C.

In FIGS. 10A and 10B, a constituent element identical to that illustrated in FIGS. 8A and 8B is denoted by the same reference sign as in FIGS. 8A and 8B, and a description thereof is omitted.

The driving force transmitting apparatus 130 includes the first planetary gear unit 81, the rotation switching member 83, the solenoid 84, the driving force input gear 85, the driving force output gears 86 to 89, and a second planetary gear unit 282.

The second planetary gear unit 282 includes the planetary gears 82E, the output gear 82G, the carrier 82K, and a sun gear 282T.

The sun gear 282T includes the sun gear portion 82B (not illustrated in FIGS. 10A and 10B), the second locked portion 282A, and a protruded portion 282X, which are integrally formed. The sun gear portion 82B meshes with the planetary gears 82E. The second locked portion 282A is locked by the second locking portion 83B of the rotation switching member 83.

The second locked portion 282A is arranged at an end portion of the protruded portion 282X in the rotational direction of the sun gear 282T. The interval between second locked portions 282A in the rotational direction of the sun gear 282T is larger than the interval between the first locked portions 81A in the rotational direction of the sun gear 81T. It is preferable that the leading end of the second locked portion 282A and the leading end of the second locking portion 83B each have a shape having a corner with the smallest possible curvature radius. The number of second locked portions 282A is two, for example.

The protruded portion 282X protrudes in a radial direction from an outer peripheral surface 282R that comes in contact with the second locking portion 83B of the rotation switching member 83.

The rotation switching member 83 includes the first locking portion 83A and the second locking portion 83B, which are integrally formed. The first locking portion 83A is capable of locking the first locked portion 81A of the first planetary gear unit 81. The second locking portion 83B is capable of locking the second locked portion 282A of the second planetary gear unit 282.

The rotation switching member 83 controls rotation of the first planetary gear unit 81 and rotation of the second planetary gear unit 282. Specifically, in a case where the first locking portion 83A locks the first locked portion 81A, the rotation switching member 83 restrains the rotation of the sun gear 81T of the first planetary gear unit 81, while not restraining the rotation of the sun gear 282T of the second planetary gear unit 282. In a case where the second locking portion 83B locks the second locked portion 282A, the rotation switching member 83 restrains the rotation of the

sun gear 282T of the second planetary gear unit 282, while not restraining the rotation of the sun gear 81T of the first planetary gear unit 81.

In a case where the solenoid 84 is in the non-energized state in which the solenoid flapper 84A is not attracted to the solenoid main body 84B, the second locking portion 83B of the rotation switching member 83 locks the second locked portion 282A of the second planetary gear unit 282.

The driving force input gear 85 meshes with the input gear portion 82D of the carrier 82K of the second planetary gear unit 282.

The driving force output gear 86 meshes with the output gear portion 81J of the output gear 81G of the first planetary gear unit 81 and the output gear portion 82J of the output gear 82G of the second planetary gear unit 282.

Operations of the sheet conveyance apparatus according to the present exemplary embodiment are identical to the operations of the sheet conveyance apparatus according to the first exemplary embodiment described above, and thus a description thereof is omitted.

<Operations of Driving Force Transmitting Apparatus>

Operations of the driving force transmitting apparatus 130 according to the second exemplary embodiment are described in detail with reference to FIGS. 10A and 10B.

When being switched from the energized state to the non-energized state, the solenoid 84 causes the solenoid flapper 84A to pivot by urging force of the solenoid spring 84C, thereby causing the rotation switching member 83 to pivot. In the rotation switching member 83, which is caused to pivot by the solenoid flapper 84A, the second locking portion 83B locks the second locked portion 282A after the first locking portion 83A passes through the first locked portion 81A.

At this time, force generated by the solenoid 84 to cause the rotation switching member 83 to pivot is small at a moment when the second locking portion 83B locks the second locked portion 282A, and thus force to cause the second locking portion 83B to lock the second locked portion 282A is weak.

Consequently, the second locking portion 83B is repelled by the rotating second locked portion 282A when the leading end of the second locking portion 83B hits the second locked portion 282A as illustrated in FIG. 10A, and thus cannot lock the second locked portion 282A.

To address such a case, the present exemplary embodiment has a configuration in which the interval between the second locked portions 282A in the rotational direction of the sun gear 282T is increased. Increasing the interval between the second locked portions 282A allows the second locking portion 83B to hit the outer peripheral surface 282R between the second locked portions 282A when the second locking portion 83B is returned by spring force of the solenoid spring 84C after the second locking portion 83B is repelled by the second locked portion 282A, and thus prevents the second locking portion 83B from being repelled again.

After being repelled by the second locked portion 282A, the second locking portion 83B hits the protruded portion 282X when being returned by the solenoid spring 84C, as illustrated in FIG. 10B, and subsequently locks the second locked portion 282A. At this time, a pivoting amount of the rotation switching member 83 is smaller than that according to the first exemplary embodiment described above by (R2-R1), where R1 represents a distance between the rotational center of the sun gear 282T and the outer peripheral surface 282R, and R2 represents a distance between the

15

rotational center of the sun gear **282T** and an end portion in a protruding direction of the protruded portion **282X**.

In this manner, reducing the pivoting amount of the rotation switching member **83** can reduce impact of the second locking portion **83B** hitting the protruded portion **282X**, and can thereby reduce impact sound and also reduce abrasion loss of the leading end of the second locking portion **83B** to increase durability.

The present disclosure is not limited to the exemplary embodiments described above, and it is needless to say that various modifications can be made without departing from the gist of the present disclosure.

Specifically, the two second locked portions are arranged in the first and second exemplary embodiments, but the present disclosure is not limited thereto. Arranging the second locked portions at an interval that is larger than that of the first locked portions can achieve effects similar to those in the case of arranging the two second locked portions.

While the solenoid **84** is used in the first and second exemplary embodiments described above, the present disclosure is not limited thereto, and a mechanical actuator or other types of actuators other than the solenoid **84** may be used.

The present disclosure can stabilize the switching operation of the rotational direction, and can prevent an increase in time required to switch the rotational direction.

While the present disclosure has been described with reference to exemplary embodiments, it is to be understood that the disclosure is not limited to the disclosed exemplary embodiments. The scope of the following claims is to be accorded the broadest interpretation so as to encompass all such modifications and equivalent structures and functions.

This application claims the benefit of Japanese Patent Application No. 2020-129318, filed Jul. 30, 2020, which is hereby incorporated by reference herein in its entirety.

What is claimed is:

1. A driving force transmitting apparatus comprising:
 - a first planetary gear unit including a first locked gear provided with a plurality of first locked portions, and including a first mesh gear;
 - a second planetary gear unit including a second locked gear provided with a plurality of second locked portions, and including a second mesh gear configured to mesh with the first mesh gear;
 - a rotation switching member including a first locking portion and a second locking portion, wherein the rotation switching member is capable of moving to (i) a first stop position at which the first locking portion locks one of the plurality of first locked portions to stop the first locked gear, and (ii) a second stop position at which the second locking portion locks one of the plurality of second locked portions to stop the second locked gear; and
 - an urging member configured to urge the rotation switching member to the second stop position, wherein an interval between the plurality of second locked portions in a rotational direction of the second locked gear is larger than an interval between the plurality of first locked portions in a rotational direction of the first locked gear.
2. The driving force transmitting apparatus according to claim 1, wherein the plurality of first locked portions is arranged at an equal interval in the rotational direction of the first locked gear, and

16

wherein the plurality of second locked portions is arranged at an equal interval in the rotational direction of the second locked gear.

3. The driving force transmitting apparatus according to claim 1, wherein the plurality of second locked portions is arranged at an unequal interval in the rotational direction of the second locked gear.

4. The driving force transmitting apparatus according to claim 1, wherein a number of the plurality of first locked portions is larger than a number of the plurality of second locked portions.

5. The driving force transmitting apparatus according to claim 1, further comprising an actuator including the urging member and a solenoid main body,

wherein the solenoid main body is configured to move the rotation switching member to the first stop position and the second stop position.

6. The driving force transmitting apparatus according to claim 5,

wherein, in a case where the solenoid main body is in a non-energized state, the rotation switching member is moved to the second stop position by urging force of the urging member, and

wherein, in a case where the solenoid main body is in an energized state, the rotation switching member is moved to the first stop position by magnetic force of the solenoid main body against the urging force of the urging member.

7. The driving force transmitting apparatus according to claim 5, wherein (i) force generated by the actuator and applied to the rotation switching member at a moment when the first locking portion locks one of the plurality of first locked portions is larger than (ii) force generated by the actuator and applied to the rotation switching member at a moment when the second locking portion locks one of the plurality of second locked portions.

8. The driving force transmitting apparatus according to claim 1,

wherein the second locked gear includes a protruded portion that protrudes in a radial direction on an outer peripheral surface that comes in contact with the rotation switching member, and

wherein each of the plurality of second locked portions is arranged at an end portion of the protruded portion in the rotational direction of the second locked gear.

9. The driving force transmitting apparatus according to claim 1, further comprising a driving force output gear,

wherein the first planetary gear unit includes a first output gear configured to mesh with the driving force output gear, and

wherein the second planetary gear unit includes a second output gear configured to mesh with the driving force output gear.

10. The driving force transmitting apparatus according to claim 9,

wherein, in a case where the rotation switching member is at the first stop position, the second output gear is configured to rotate the driving force output gear in a first direction, and

wherein, in a case where the rotation switching member is at the second stop position, the first output gear is configured to rotate the driving force output gear in a second direction opposite to the first direction.

11. The driving force transmitting apparatus according to claim 9,

17

wherein the first planetary gear unit includes a first planetary gear that is supported by the first mesh gear and is configured to mesh with the first locked gear and the first output gear, and

wherein the second planetary gear unit includes a second planetary gear that is supported by the second mesh gear and is configured to mesh with the second locked gear and the second output gear.

12. The driving force transmitting apparatus according to claim 11,

wherein, in a case where the rotation switching member is at the first stop position, the second output gear is configured to rotate the driving force output gear in a first direction, and

wherein, in a case where the rotation switching member is at the second stop position, the first output gear is configured to rotate the driving force output gear in a second direction opposite to the first direction.

13. The driving force transmitting apparatus according to claim 1, further comprising an input gear configured to mesh with the second mesh gear and transmit driving force to the second mesh gear.

14. A sheet conveyance apparatus comprising:
the driving force transmitting apparatus according to claim 1; and

a conveyance member configured to rotate forward or backward to convey a sheet in one direction or another direction,

wherein the conveyance member is configured to convey the sheet in the one direction or the other direction by being driven by driving force transmitted from a driving source via the driving force transmitting apparatus.

15. An image forming apparatus comprising:
the driving force transmitting apparatus according to claim 1;

a conveyance member configured to rotate forward or backward to convey a sheet in one direction or another direction; and

18

an image forming unit configured to form an image on the sheet conveyed by the conveyance member,

wherein the conveyance member is configured to convey the sheet in the one direction or the other direction by being driven by driving force transmitted from a driving source via the driving force transmitting apparatus.

16. The driving force transmitting apparatus according to claim 1, wherein the rotation switching member is capable of moving to the second stop position in a state where the second locked gear rotates.

17. The driving force transmitting apparatus according to claim 16, wherein the rotation switching member is capable of moving to the first stop position in a state where the first locked gear rotates.

18. The driving force transmitting apparatus according to claim 1, wherein the number of second locked portions of the plurality of second locked portions is two.

19. The driving force transmitting apparatus according to claim 1,

wherein the first locked gear is a first sun gear and the first mesh gear is a first carrier supporting a first planetary gear, and

wherein the second locked gear is a second sun gear and the second mesh gear is a second carrier supporting a second planetary gear.

20. The driving force transmitting apparatus according to claim 1, further comprising a driving force input gear and a driving force output gear,

wherein the first planetary gear unit includes a first output gear and the second planetary gear unit includes a second output gear, and

wherein the driving force input gear meshes with the second mesh gear, and the driving force output gear meshes with the first output gear and the second output gear.

* * * * *