



(51) International Patent Classification:

H01H 3/60 (2006.01) H01H 1/50 (2006.01)  
F16F 15/067 (2006.01)

(21) International Application Number:

PCT/EP2021/064404

(22) International Filing Date:

28 May 2021 (28.05.2021)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20179976.4 15 June 2020 (15.06.2020) EP

(71) Applicant: HITACHI ENERGY SWITZERLAND AG  
[CH/CH]; Bruggerstrasse 72, 5400 Baden (CH).

(72) Inventor: KRAINER, Per; Vallagatan 3 D, 771 53 Ludvika (SE).

(74) Agent: VALEA AB; Box 7086, 103 87 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

(54) Title: CONTACT BOUNCE REDUCTION SYSTEM

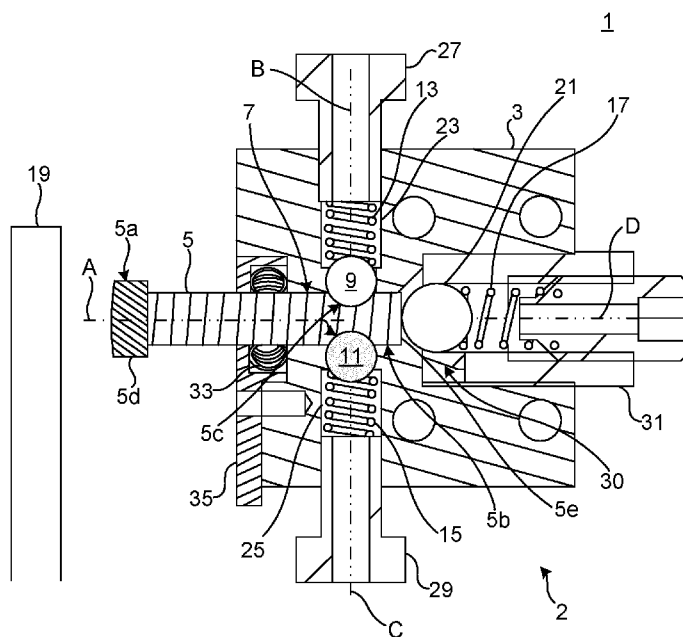


Fig. 1

(57) Abstract: A contact bounce reduction system (1) comprising: a movable member (19), and a contact bounce damping device (2) comprising: a body (3), a first ball (9) and a second ball (11) arranged in the body (3), a first resilient member (13) and a second resilient member (15), a piston (5) partly arranged in and extending from the body (3), the piston (5) being configured to be moved linearly between a default extended position and a retracted position relative to the body (3), and wherein the piston (5) has a radial seat (5c) configured to partly receive the first ball (9) and the second ball (11), wherein the first resilient member (13) is configured to act with a radial force onto the first ball (9) to hold the first ball (9) in the seat (5c) when the piston (5) is in the default extended position, wherein the second resilient member (15) is configured to act with a radial force onto the second ball (11) to hold the second ball (11) in the seat (5c) when the piston (5) is in the default extended position, and a third resilient member (17) configured to bias the piston (5)



GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *of inventorship (Rule 4.17(iv))*

**Published:**

- *with international search report (Art. 21(3))*

---

towards the default extended position; wherein the movable member (19) is configured to move from a non-contact position relative to the piston (5) to contact the piston (5) and actuate the piston (5) from the default extended position towards the retracted position with a force greater than a threshold value, causing the first ball (9) and the second ball (11) to move radially out from the seat (5c), and the third resilient member (17) to accumulate energy. The contact bounce reduction system further comprises a contact ring slidably arranged around the piston, and a fixed contact member electrically connected to the contact ring.

## **CONTACT BOUNCE REDUCTION SYSTEM**

### **TECHNICAL FIELD**

The present disclosure generally relates to contact devices or switches such as  
5 electrical switches.

### **BACKGROUND**

Electrical switches such as contactors or the spring-loaded actuator of tap  
changer mechanisms may comprise a movable contact and a second contact.  
The movable contact may be actuated from a first non-contact position  
10 relative to the second contact to achieve contact with the second contact. The  
second contact may be fixed or movable. In the latter case the movable  
contact may actuate the second contact when placed in contact with the  
second contact to reduce the risk of contact bounce.

The movable contact is usually configured to impact the second contact with  
15 great force. There is therefore a risk of contact bounce even if the second  
contact is movable.

### **SUMMARY**

In view of the above, a general object of the present disclosure is to provide a  
contact bounce reduction system that solves or at least mitigates the  
20 problems of the prior art.

There is hence according to a first aspect of the present disclosure provided a  
contact bounce reduction system comprising: a movable member, and a  
contact bounce damping device comprising: a body, a first ball and a second  
ball arranged in the body, a first resilient member and a second resilient  
25 member, a piston partly arranged in and extending from the body, the piston  
being configured to be moved linearly between a default extended position  
and a retracted position relative to the body, and wherein the piston has a  
radial seat configured to partly receive the first ball and the second ball,  
wherein the first resilient member is configured to act with a radial force onto

the first ball to hold the first ball in the seat when the piston is in the default extended position, wherein the second resilient member is configured to act with a radial force onto the second ball to hold the second ball in the seat when the piston is in the default extended position, and a third resilient  
5 member configured to bias the piston towards the default extended position; wherein the movable member is configured to move from a non-contact position relative to the piston to contact the piston and actuate the piston from the default extended position towards the retracted position with a force greater than a threshold value, causing the first ball and the second ball to  
10 move radially out from the seat, and the third resilient member to accumulate energy. The contact bounce reduction system further comprises a contact ring slidably arranged around the piston, and a fixed contact member electrically connected to the contact ring.

A high initial force is thereby required to overcome the force of the first and  
15 second resilient member pressing a respective one of the first and second ball into the seat. The risk of contact bounce is thereby reduced. The initial speed of the piston when the movable member contacts the piston can also be increased.

In case the contact bounce reduction system forms part of an electrical device  
20 and is configured for carrying currents, fewer contact bounces results in fewer arcs and thus reduces the wear on the piston. Furthermore, high initial speed reduces the time that an arc is lit. The electrical energy that erodes the material of the piston may thereby be reduced.

After the first ball and the second ball have moved out from the seat the force  
25 required to linearly move the piston is reduced, as it is mainly the third resilient member that determines the resistance of the piston at this point.

The movable member may be a movable contact.

The contact ring and the fixed contact member provides a large number of contact points between the piston and the contact ring. The large number of contact points

leads to a smaller voltage drop over the contact, which in turn results in lesser generation of heat and reduced material degradation over time.

According to one embodiment the first ball and the second ball are arranged on opposite sides of the piston with respect to a longitudinal axis of the  
5 piston.

The first ball and the second ball may be arranged opposite to each other with respect to the longitudinal axis of the piston.

According to one embodiment the first resilient member and the second resilient member have longitudinal axes that are perpendicular to a  
10 longitudinal axis of the piston. The longitudinal axis of the first resilient member may thus be perpendicular to the longitudinal axis of the piston and the longitudinal axis of the second resilient member may thus be perpendicular to the longitudinal axis of the piston.

The longitudinal axis of the first resilient member may coincide with the  
15 longitudinal axis of the second resilient member.

According to one embodiment the first resilient member is a first spring and the second resilient member is a second spring.

The first spring may for example be a coil spring. The second spring may for example be a coil spring.

20 One embodiment comprises a third ball arranged axially between the third resilient member and the piston, wherein the third resilient member is configured to act with an axial force onto the third ball. The third ball bears against an inner end face of the piston. The third ball absorbs energy when the movable member impacts the piston, and the first ball and the second ball  
25 move out from the seat. This may further reduce the risk of contact bounce as the third ball will operate under the principles of Newton's cradle with respect to the movable member.

One embodiment comprises a first holding member configured, and wherein the body has a first channel in which the first resilient member is arranged, wherein the first holding member is removably arranged in the first channel to hold the first resilient member in position to act on the first ball.

- 5 One embodiment comprises a second holding member, and wherein the body has a second channel in which the second resilient member is arranged, wherein the second holding member is removably arranged in the second channel to hold the second resilient member in position to act on the second ball.
- 10 One embodiment comprises a third holding member, and wherein the body has a third channel in which the third resilient member is arranged, wherein the third holding member is removably arranged in the third channel to hold the third resilient member in position to act on the piston.

According to one embodiment the seat has a curved shape configured to bear  
15 against at least  $1/8^{\text{th}}$  of the circumference of each of the first ball and the second ball.

There is according to a second aspect of the present disclosure provided an electrical device comprising the system according to the first aspect.

According to one embodiment the electrical device is a contactor or a tap  
20 changer for a transformer.

The transformer may for example a distribution transformer or a power transformer.

Generally, all terms used in the claims are to be interpreted according to their ordinary meaning in the technical field, unless explicitly defined otherwise  
25 herein. All references to "a/an/the element, apparatus, component, means, etc. are to be interpreted openly as referring to at least one instance of the element, apparatus, component, means, etc., unless explicitly stated otherwise.

## BRIEF DESCRIPTION OF THE DRAWINGS

The specific embodiments of the inventive concept will now be described, by way of example, with reference to the accompanying drawings, in which:

Fig. 1 schematically shows a cross-section of an example of a contact bounce  
5 reduction system;

Fig. 2 shows the operation of the contact bounce reduction system in Fig. 1;

Fig. 3a is a graph showing force magnitude of the movable member in  
operation; and

Fig. 3b is a graph showing the linear speed of the piston in operation.

## 10 DETAILED DESCRIPTION

The inventive concept will now be described more fully hereinafter with  
reference to the accompanying drawings, in which exemplifying  
embodiments are shown. The inventive concept may, however, be embodied  
in many different forms and should not be construed as limited to the  
15 embodiments set forth herein; rather, these embodiments are provided by  
way of example so that this disclosure will be thorough and complete, and  
will fully convey the scope of the inventive concept to those skilled in the art.  
Like numbers refer to like elements throughout the description.

Fig. 1 shows an example of a contact bounce reduction system 1. The contact  
20 bounce reduction system 1 may be for an electrical device such as a contactor  
or a tap changer.

The contact bounce reduction system comprises a contact bounce damping  
device 2.

The contact bounce damping device 2 comprises a body 3 and a piston 5. The  
25 body 3 has a piston channel 7 in which the piston 5 is arranged. The body 3  
has an opening that forms the mouth of the piston channel 7. The piston 5  
extends from the piston channel 7 and the body 3.

The piston 5 may be electrically conductive. The piston 5 may for example be made of metal such as copper or aluminium.

The piston 5 is configured to be linearly movable relative to the body 3. The piston 5 is configured to be moved linearly in the piston channel 7. The piston 5 is configured to be moved linearly between a default extended position relative to the body 3, shown in Fig. 1, and a retracted position. The piston 5 extends further from the body 3 in the default extended position than in the retracted position.

The piston 5 has an external end portion 5a arranged outside the body 3 both in the default extended position and in the retracted position of the piston 5. The piston 5 has an internal end portion 5b arranged inside the body 3 both in the default extended position and in the retracted position of the piston 5.

The piston 5 is provided with a radial seat 5c. The internal end portion 5b of the piston 5 is provided with the seat 5c. The seat 5c extends radially inwards. The seat 5c may be formed by a single recess extending circumferentially around the piston 5 or it may comprise two individual recesses.

The seat 5c may have a curved shape in a longitudinal section of the piston 5. The curved shape may for example be a circular arc.

The contact bounce damping device 2 comprises a first ball 9 and a second ball 11. The first ball 9 and the second ball 11 are arranged in the body 3. The first ball 9 may for example be made of metal. The second ball 11 may for example be made of metal.

The seat 5c is configured to partly receive the first ball 9. The seat 5c is configured to partly receive the second ball 11. The curved shape of the seat 5c may be configured to bear against at least  $1/8^{\text{th}}$  of the circumference of the first ball 9 and of the second ball 11 when the first ball 9 and the second ball 11 are arranged in the seat 5c, in a longitudinal section of the piston 5.

The first ball 9 and the second ball 11 are aligned in the radial direction of the piston 5. The first ball 9 and the second ball 11 are arranged opposite to each



other relative to the longitudinal axis A of the piston 5. The first ball 9 is thus arranged on one side of the longitudinal axis A and the second ball 11 is arranged on another side of the longitudinal axis A, opposite to each other.

The contact bounce damping device 2 comprises a first resilient member 13.

5 The first resilient member 13 may be a spring such as a coil spring. The contact bounce reduction system 1 comprises a second resilient member 15. The second resilient member 15 may be a spring such as a coil spring.

The first resilient member 13 has a longitudinal axis B which is transversal to the longitudinal axis A of the piston 5. The longitudinal axis B may be  
10 perpendicular to the longitudinal axis A of the piston 5.

The second resilient member 15 has a longitudinal axis C which is transversal to the longitudinal axis A of the piston 5. The longitudinal axis C may be perpendicular to the longitudinal axis A of the piston 5.

The longitudinal axis B of the first resilient member 13 may be parallel with  
15 the longitudinal axis C of the second resilient member 15. The longitudinal axis B of the first resilient member 13 may coincide with the longitudinal axis C of the second resilient member 15.

The first resilient member 13 is configured to act with a radial force onto the first ball 9. With the term “radial” is meant a direction that is perpendicular  
20 to the longitudinal axis A of the piston 5. When the piston 5 is in the default extended position the first resilient member 13 is configured to force the first ball 9 into the seat 5c.

The second resilient member 15 is configured to act with a radial force onto the second ball 11. When the piston 5 is in the default extended position the  
25 second resilient member 15 is configured to force the second ball 11 into the seat 5c.

The contact bounce damping device 2 comprises a third resilient member 17. The third resilient member 17 is configured to bias the piston 5 towards the default extended position. The third resilient member 17 is configured to

accumulate energy when the piston 5 is moved from the default extended position towards the retracted position.

The third resilient member 17 has a longitudinal axis D which is parallel with the longitudinal axis A of the piston 5. The longitudinal axis D of the third  
5 resilient member 17 may coincide with the longitudinal axis A of the piston 5.

The first ball 9 and the second ball 11 maintain the piston 5 in the default extended position until a force greater than a threshold value acts on the piston 5 in a direction from the default extended position towards the retracted position.

10 The contact bounce reduction system 1 comprises a movable member 19. The movable member 19 will in the following be exemplified by a movable contact but could alternatively be a movable member that forms part of a damper. The movable contact 19 is configured to actuate the piston 5 from the default extended position to the retracted position. The movable contact 19 is  
15 configured to be moved relative to the body 3 and the piston 5. The movable contact 19 is configured to move from a non-contact position, shown in Fig. 1 relative to the piston 5 to a position in which it is in contact with the piston 5. The piston 5 has a head 5d and the movable contact 19 is configured to move from the non-contact position to a position in which it contacts the head 5d.  
20 The movable contact 19 is configured to actuate the piston 5 when in contact with the head 5d. The movable contact 19 is configured to actuate the piston 5 from the default extended position to the retracted position. The movable contact 19 is configured to apply a force onto the head 5d greater than the required threshold value to move the piston 5 from the default extended  
25 position to the retracted position.

The head 5d may comprise a material with a high resistance to erosion from arcing. The head 5d may for example comprise a copper tungsten alloy.

The contact bounce damping device 2 may comprise a third ball 21 arranged in the body 3. The third ball 21 is arranged between the inner end face 5e of  
30 the piston 5 and the third resilient member 17. The third resilient member 17

is configured to bias the third ball 21 towards the inner end face 5e of the piston 5. Thus, when the piston 5 is impacted by the movable member 19 and moved towards the retracted position the third ball 21 at impact with the piston 5 absorbs energy and is subsequently moved together with the piston 5  
5 as the third resilient member 17 is compressed and accumulates energy.

The body 3 has a first channel 23 in which the first resilient member 13 is arranged. The body 3 has a second channel 25 in which the second resilient member 15 is arranged. The first channel 23 and the second channel 25 may be arranged perpendicular to the longitudinal axis A of the piston 5 and  
10 opposite to each other.

The first resilient member 13 has a proximal end which bears against the first ball 9.

The contact bounce damping device 2 may comprise a first holding member 27 configured to be arranged in the first channel 23 and configured to bear  
15 against a distal end of the first resilient member 13. The first resilient member 13 is thereby set in compression to act with a predetermined force on the first ball 9, determined by the spring constant and the size of the first holding member 27. The first holding member 27 may be threadedly engaged with the body 3 to facilitate removal of the first holding member 27 from the  
20 body 3. The first holding member 27 may for example be a bolt.

The second resilient member 15 has a proximal end which bears against the second ball 11.

The contact bounce damping device 2 may comprise a second holding member 29 configured to be arranged in the second channel 25 and  
25 configured to bear against a distal end of the second resilient member 15. The second resilient member 15 is thereby set in compression to act with a predetermined force on the second ball 11, determined by the spring constant and the size of the second holding member 29. The second holding member 29 may be threadedly engaged with the body 3 to facilitate removal of the

second holding member 29 from the body 3. The second holding member 29 may for example be a bolt.

The body 3 has a third channel 23 in which the third resilient member 17 is arranged. The third channel 23 and the third resilient member 17 share the  
5 same longitudinal axis D.

The contact bounce damping device 2 may comprise a third holding member 31 configured to be arranged in the third channel 30 and configured to bear against a distal end of the third resilient member 17. The third resilient member 17 is thereby set in compression to act with a predetermined force  
10 directly on the piston 5 or via the third ball 21, determined by the spring constant and the size of the third holding member 31. The third holding member 31 may be threadedly engaged with the body 3 to facilitate removal of the third holding member 31 from the body 3. The third holding member 31 may for example be a bolt or a sleeve.

15 As an alternative to the first holding member 27, the second holding member 29 and the third holding member 31, the first resilient member 13, the second resilient member 15 and the third resilient member 17 could be arranged in a respective closed inner chamber in the body. In this case, no holding members would be required. The holding members 27, 29 and 31 however  
20 facilitate assembly of the contact bounce damping device 2.

The contact bounce damping device 2 may comprise a contact ring 33 slidably arranged around and in electrical contact with the piston 5. The contact ring 33 may be electrically conducting. The contact ring 33 may be made of metal such as copper or aluminium. The contact ring 33 may be  
25 arranged in the piston channel 7.

The contact bounce damping device 2 may comprise a fixed contact member 35 electrically connected to the contact ring 33.

The movable contact 19 may be configured to carry a current. When the movable contact 19 contacts the piston 5 a closed circuit may be achieved,

and the current may flow from the movable contact 19 to the piston and further to the fixed contact member 35 via the contact ring 33.

The operation of the contact bounce reduction system 1 will now be described with reference to Fig. 2 and Figs 3a-3b.

5 In Fig. 1 the movable contact 19 is arranged in the non-contact position. The first ball 9 and the second ball 11 are resting in the seat 5c.

In Fig. 2 the movable contact 19 is moved from the non-contact position to a position in which is in contact with the piston 5. The actuation of the movable contact 19 may be electrical or mechanical, as is known to the skilled person.

10 The piston 5 is thus moved from the default extended position shown in Fig. 1 to the retracted position shown in Fig. 2. The force applied by the movable contact 19 is greater than a threshold value, which is determined by the design of the first, second and third resilient members and their state of compression in the body 3 in the default extended position of the piston 5.

15 As the piston 5 is being subjected to the force applied by the movable contact, the first ball 9 and the second ball 11 will eventually move out from the seat 5c. This initial high force required to move the piston 5 is illustrated in Fig. 3a, where the x-axis shows the time and the y-axis shows the force magnitude. When the first ball 9 and the second ball 9 has moved out from  
20 the seat 5c, the piston 5 is moved axially. The piston 5 compresses the third resilient member 17 and causes the third ball 21, if present, to move in the same direction as the piston 5. The speed of the piston 5 is shown in Fig. 3b during this process. The acceleration is very fast and occurs at the same time as the large force is applied as shown in Fig. 3a. While the force applied by  
25 the movable contact 19 is reduced after the first ball 9 and the second ball 11 has been moved out from the seat 5c the speed remains substantially constant as the piston is moved to the retracted position.

The contact bounce reduction system may according to some embodiments comprise more than two balls configured to act radially on the piston. The  
30 contact bounce reduction system may for example comprise  $2*N$ ,  $N=2, 3, 4$ ,

5... k balls and N seats configured to receive pairs of balls. The contact bounce reduction system may comprise  $2*N$  resilient members, each configured to act with a radial force onto the corresponding ball to hold the ball in the corresponding seat when the piston is in the default extended position.

In this manner, sequential radial pairwise movement of balls out from the corresponding seats may for example be achieved. This may provide further control on the initial force to move the piston and the speed of the piston.

The contact bounce reduction system 1 may form part of an electrical device such as a contactor or a tap changer for a transformer such as a distribution transformer or a power transformer.

The inventive concept has mainly been described above with reference to a few examples. However, as is readily appreciated by a person skilled in the art, other embodiments than the ones disclosed above are equally possible within the scope of the inventive concept, as defined by the appended claims.

**CLAIMS**

1. A contact bounce reduction system (1) comprising:

- a movable member (19), and

- a contact bounce damping device (2) comprising:

5 a body (3),

a first ball (9) and a second ball (11) arranged in the body (3),

a first resilient member (13) and a second resilient member (15),

10 a piston (5) partly arranged in and extending from the body (3), the piston (5) being configured to be moved linearly between a default extended position and a retracted position relative to the body (3), and wherein the piston (5) has a radial seat (5c) configured to partly receive the first ball (9) and the second ball (11),

15 wherein the first resilient member (13) is configured to act with a radial force onto the first ball (9) to hold the first ball (9) in the seat (5c) when the piston (5) is in the default extended position,

20 wherein the second resilient member (15) is configured to act with a radial force onto the second ball (11) to hold the second ball (11) in the seat (5c) when the piston (5) is in the default extended position, and

a third resilient member (17) configured to bias the piston (5) towards the default extended position;

25 wherein the movable member (19) is configured to move from a non-contact position relative to the piston (5) to contact the piston (5) and actuate the piston (5) from the default extended position towards the retracted position with a force greater than a threshold value, causing the first ball (9)

and the second ball (11) to move radially out from the seat (5c), and the third resilient member (17) to accumulate energy, and

the contact bounce reduction system (1) further comprising a contact ring (33) slidably arranged around the piston (5), and a fixed contact member  
5 (35) electrically connected to the contact ring (33).

2. The contact bounce reduction system (1) as claimed in claim 1, wherein the first ball (9) and the second ball (11) are arranged on opposite sides of the piston (5) with respect to a longitudinal axis (A) of the piston (5).

3. The contact bounce reduction system (1) as claimed in claim 1 or 2,  
10 where the first ball (9) and the second ball (11) are arranged opposite to each other with respect to the longitudinal axis (A) of the piston (5).

4. The contact bounce reduction system (1) as claimed in any of the preceding claims, wherein the first resilient member (13) and the second resilient member (15) have longitudinal axes (B, C) that are perpendicular to  
15 a longitudinal axis (A) of the piston (5).

5. The contact bounce reduction system (1) as claimed in any of the preceding claims, wherein the first resilient member (13) is a first spring and the second resilient member (15) is a second spring.

6. The contact bounce reduction system (1) as claimed in any of the preceding claims, comprising a third ball (21) arranged axially between the  
20 third resilient member (17) and the piston (5), wherein the third resilient member (17) is configured to act with an axial force onto the third ball (21).

7. The contact bounce reduction system (1) as claimed in any of the preceding claims, comprising a first holding member (27), and wherein the  
25 body (3) has a first channel (23) in which the first resilient member (13) is arranged, wherein the first holding member (27) is removably arranged in the first channel (23) to hold the first resilient member (13) in position to act on the first ball (9).



8. The contact bounce reduction system (1) as claimed in any of the preceding claims, comprising a second holding member (29), and wherein the body (3) has a second channel (25) in which the second resilient member (15) is arranged, wherein the second holding member (29) is removably  
5 arranged in the second channel (25) to hold the second resilient member (15) in position to act on the second ball (11).

9. The contact bounce reduction system (1) as claimed in any of the preceding claims, comprising a third holding member (31), and wherein the body (3) has a third channel (30) in which the third resilient member (17) is  
10 arranged, wherein the third holding member (31) is removably arranged in the third channel (30) to hold the third resilient member (17) in position to act on the piston (5).

10. The contact bounce reduction system (1) as claimed in any of the preceding claims, wherein the seat (5c) has a curved shape configured to bear  
15 against at least  $1/8^{\text{th}}$  of the circumference of each of the first ball (9) and the second ball (11).

11. An electrical device comprising the contact bounce reduction system (1) as claimed in any of the preceding claims.

12. The electrical device as claimed in claim 11, wherein the electrical device  
20 is a contactor or a tap changer for a transformer.

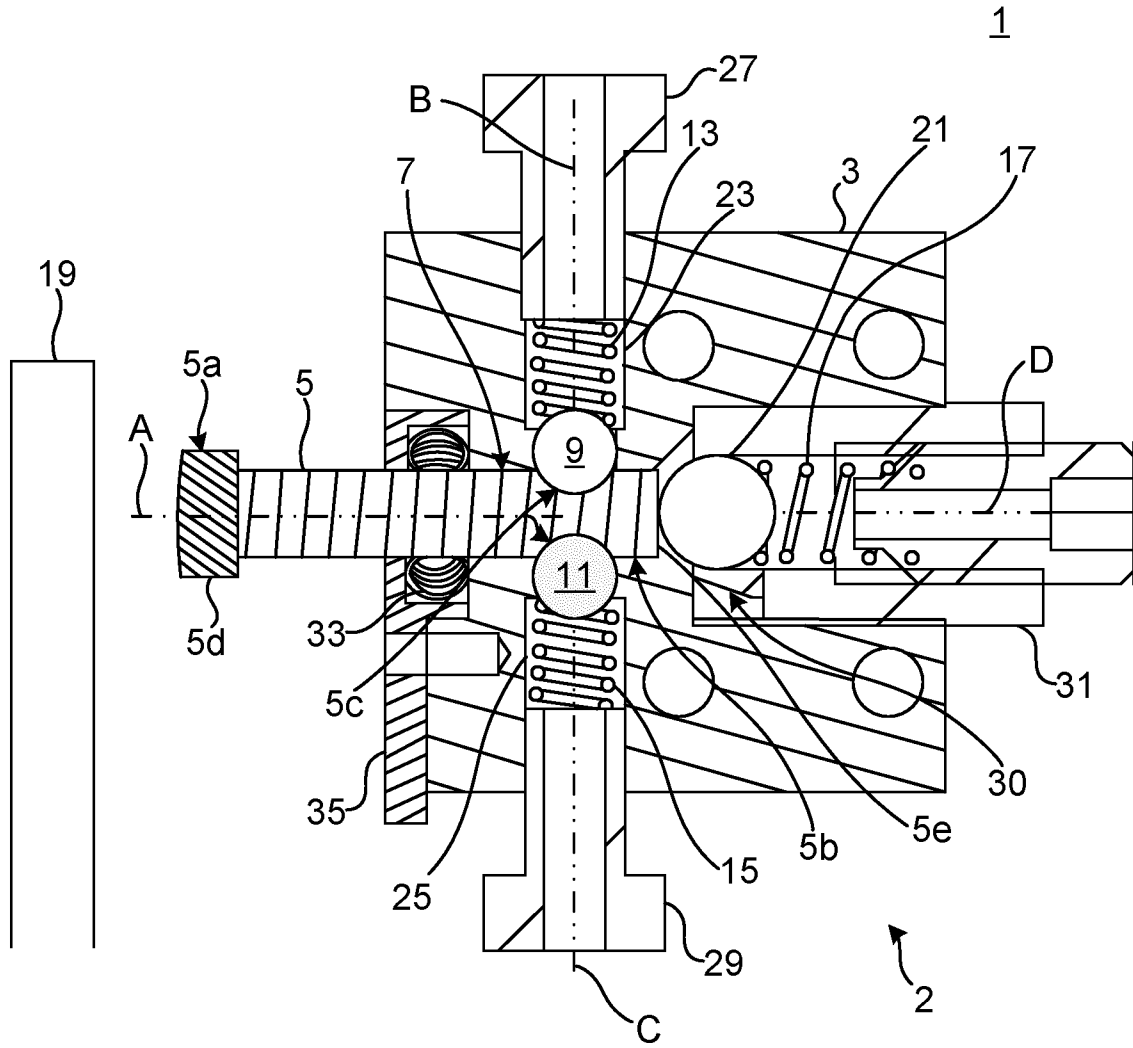


Fig. 1

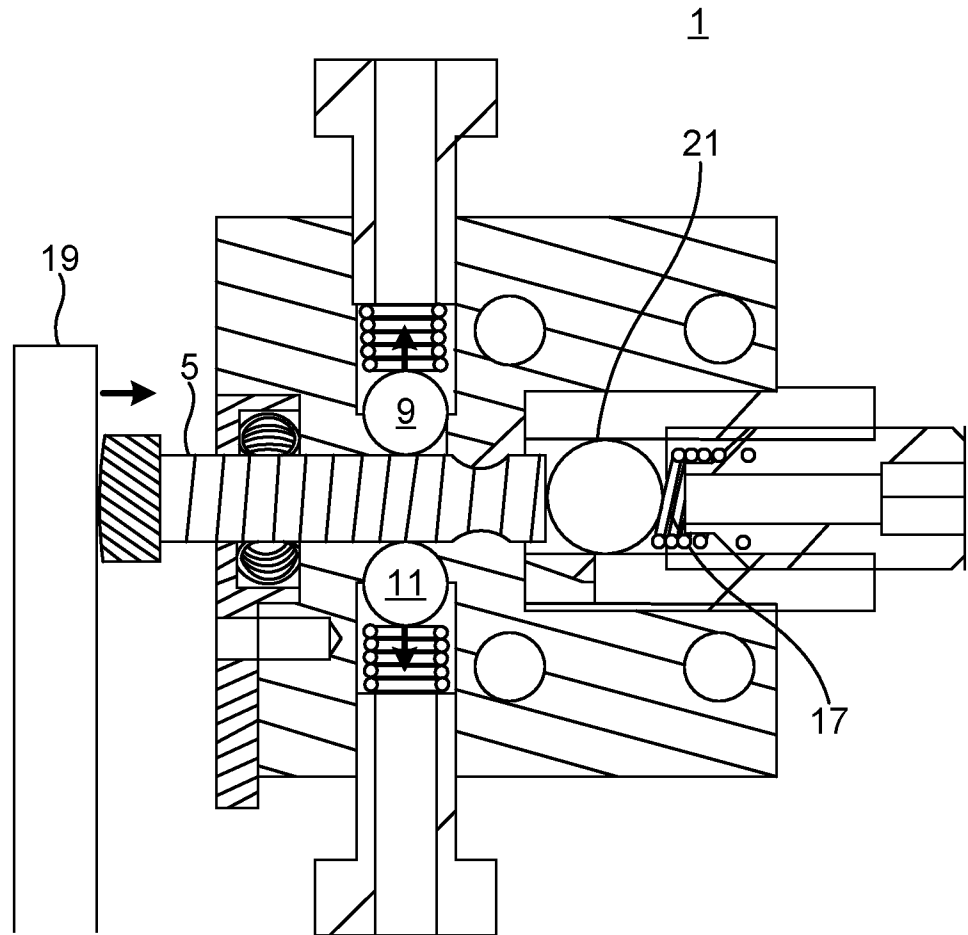


Fig. 2

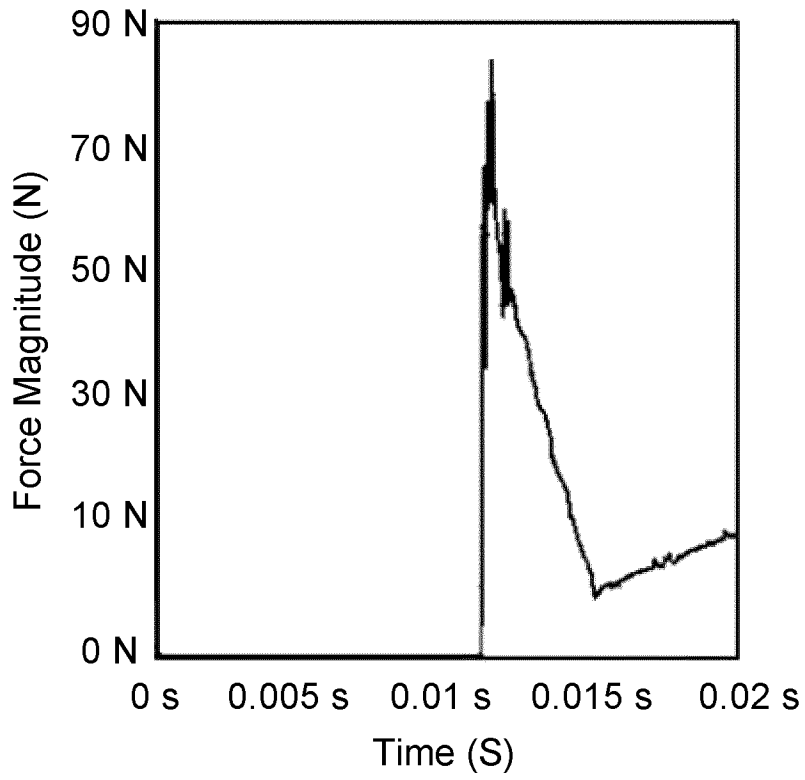


Fig. 3a

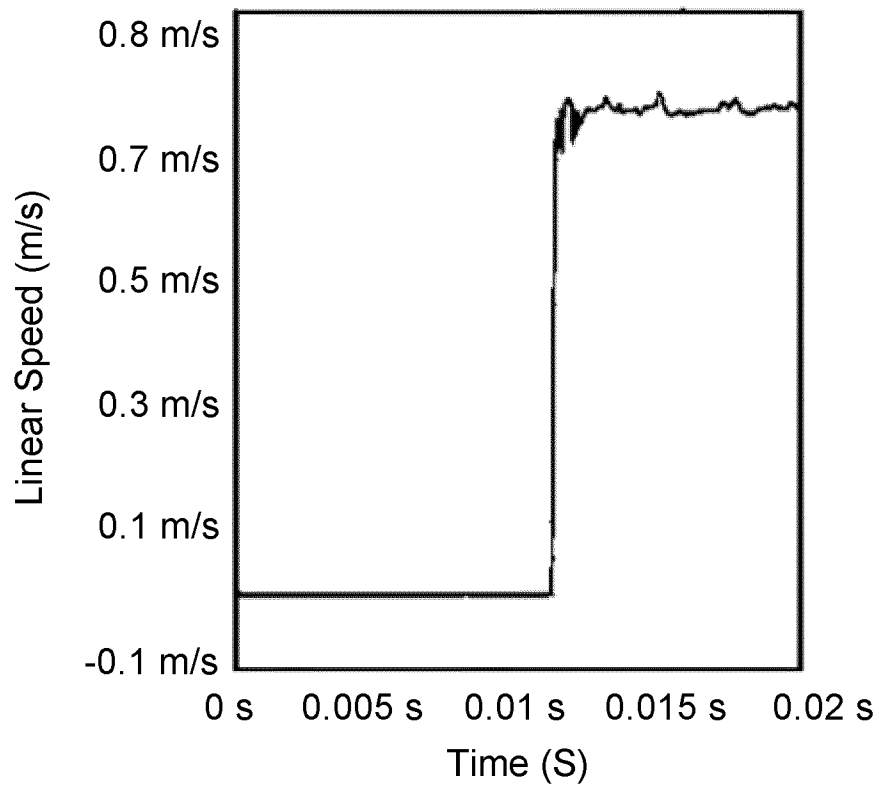


Fig. 3b

INTERNATIONAL SEARCH REPORT

International application No  
PCT/EP2021/064404

A. CLASSIFICATION OF SUBJECT MATTER  
INV. H01H3/60 F16F15/067 H01H1/50  
ADD.  
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED  
Minimum documentation searched (classification system followed by classification symbols)  
H01H F16F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 180 960 A (PHILIP BARKAN ET AL) 27 April 1965 (1965-04-27) column 1, lines 9-69 column 3, line 28 - column 5, line 72; figures 4,5 -----	1-12
A	EP 0 641 002 A1 (GEC ALSTHOM T & D SA [FR]) 1 March 1995 (1995-03-01) columns 1-3; figure 1 -----	1-12
A	DE 10 45 511 B (LICENTIA GMBH) 4 December 1958 (1958-12-04) paragraphs [0001], [0011]; figure 1 -----	1-12
A	DE 10 2017 113416 B3 (FIXTEST PRUEFMITTELBAU GMBH [DE]; DRAEXLMAIER LISA GMBH [DE]) 7 June 2018 (2018-06-07) paragraph [0017]; figure 2 -----	1,6,9

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search  6 September 2021	Date of mailing of the international search report  21/09/2021
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Blazquez Lainez, R
--	--

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/EP2021/064404
---

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3180960	A	27-04-1965	NONE
-----			
EP 0641002	A1	01-03-1995	AT 153173 T 15-05-1997
			DE 69403157 T2 28-08-1997
			EP 0641002 A1 01-03-1995
			FR 2709597 A1 10-03-1995
-----			
DE 1045511	B	04-12-1958	NONE
-----			
DE 102017113416 B3		07-06-2018	CN 109148193 A 04-01-2019
			DE 102017113416 B3 07-06-2018
			EP 3419034 A1 26-12-2018
-----			