



US008685301B2

(12) **United States Patent**  
**Swanson et al.**

(10) **Patent No.:** **US 8,685,301 B2**  
(45) **Date of Patent:** **\*Apr. 1, 2014**

- (54) **FLUTED FILTER WITH AXIAL SEAL**
- (71) Applicants: **Kyle Swanson**, Lincoln, NE (US); **Chad Banzhaf**, Streamwood, IL (US); **Steven J. Merritt**, Kearney, NE (US)
- (72) Inventors: **Kyle Swanson**, Lincoln, NE (US); **Chad Banzhaf**, Streamwood, IL (US); **Steven J. Merritt**, Kearney, NE (US)
- (73) Assignee: **Baldwin Filters, Inc.**, Kearney, NE (US)
- (\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.  
  
This patent is subject to a terminal disclaimer.

- (21) Appl. No.: **13/936,646**
- (22) Filed: **Jul. 8, 2013**

- (65) **Prior Publication Data**  
US 2013/0292875 A1 Nov. 7, 2013

- Related U.S. Application Data**
- (62) Division of application No. 12/414,090, filed on Mar. 30, 2009, now Pat. No. 8,506,668.

- (51) **Int. Cl.**  
**B29C 45/14** (2006.01)  
**B01D 46/00** (2006.01)
- (52) **U.S. Cl.**  
USPC ..... **264/254**; 55/502; 55/521; 55/DIG. 5;  
264/259; 264/260; 264/271.1; 264/275; 264/278;  
264/279

- (58) **Field of Classification Search**  
USPC ..... 55/498, 502, 521, DIG. 5; 264/254, 259,  
264/260, 271.1, 275, 278, 279  
See application file for complete search history.

- (56) **References Cited**
- U.S. PATENT DOCUMENTS

4,498,989 A	2/1985	Miyakawa et al.
5,043,000 A	8/1991	Kadoya
5,554,205 A	9/1996	Ernst et al.
5,820,646 A	10/1998	Gillingham et al.
5,902,364 A	5/1999	Tokar et al.
6,179,890 B1	1/2001	Ramos et al.
6,189,890 B1	2/2001	Moulin et al.
6,210,469 B1	4/2001	Tokar
6,221,122 B1	4/2001	Gieseke et al.
6,235,195 B1	5/2001	Tokar
6,348,084 B1	2/2002	Gieseke et al.
D455,483 S	4/2002	Gieseke et al.
6,517,598 B2	2/2003	Anderson et al.

- (Continued)
- FOREIGN PATENT DOCUMENTS


DE	3328218 A1	2/1984
DE	102006028161 A1	12/2007

- (Continued)
- OTHER PUBLICATIONS
- U.S. Appl. No. 11/634,647, filed Dec. 6, 2006, Merritt.
- (Continued)

*Primary Examiner* — Robert Clemente  
(74) *Attorney, Agent, or Firm* — Reinhart Boerner Van Deuren P.C.

- (57) **ABSTRACT**
- A filter element includes a filter media pack and an axial seal member configured to axially seal against a filter housing. The axial seal member may be supported by and attached to the filter media pack by a media pack seal member. Alternatively, the axial seal member may be carried by a frame, which is attached to the filter media pack by the media pack seal member.

**13 Claims, 6 Drawing Sheets**

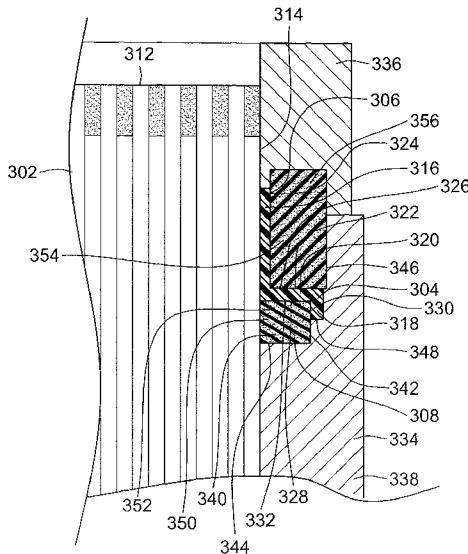

(56)

References Cited

U.S. PATENT DOCUMENTS

6,610,117 B2 8/2003 Gieseke et al.  
 6,610,126 B2\* 8/2003 Xu et al. .... 95/273  
 D484,584 S 12/2003 Anderson et al.  
 6,878,190 B1\* 4/2005 Xu et al. .... 95/273  
 D506,539 S 6/2005 Bishop et al.  
 6,966,940 B2\* 11/2006 Krisko et al. .... 55/497  
 6,994,744 B2 2/2006 Tokar et al.  
 6,997,968 B2\* 2/2006 Xu et al. .... 55/495  
 7,001,450 B2 2/2006 Gieseke et al.  
 7,004,986 B2 2/2006 Kopec et al.  
 7,008,467 B2 3/2006 Krisko et al.  
 7,211,124 B2 5/2007 Gieseke et al.  
 7,255,300 B2 8/2007 Johnston  
 7,318,851 B2\* 1/2008 Brown et al. .... 55/498  
 7,396,377 B2\* 7/2008 Lampert et al. .... 55/502  
 7,658,777 B2\* 2/2010 Kopec et al. .... 55/502  
 7,753,982 B2 7/2010 Merritt  
 7,931,725 B2\* 4/2011 Wydeven et al. .... 55/498  
 7,959,703 B2\* 6/2011 Merritt et al. .... 55/521  
 8,048,187 B2\* 11/2011 Merritt et al. .... 55/502  
 8,177,877 B2\* 5/2012 Merritt et al. .... 55/502  
 8,206,483 B2\* 6/2012 Rieger ..... 55/498  
 8,206,625 B2\* 6/2012 Brown et al. .... 264/46.6  
 2004/0060861 A1 4/2004 Winter et al.  
 2005/0022484 A1 2/2005 Krisko et al.  
 2005/0022669 A1\* 2/2005 Xu et al. .... 95/273  
 2006/0081528 A1 4/2006 Oelpke et al.  
 2006/0090434 A1\* 5/2006 Brown et al. .... 55/498  
 2006/0091061 A1\* 5/2006 Brown ..... 210/440  
 2006/0091064 A1\* 5/2006 Brown et al. .... 210/450  
 2006/0091066 A1\* 5/2006 Driml et al. .... 210/493.1  
 2006/0091084 A1\* 5/2006 Merritt et al. .... 210/767  
 2006/0101795 A1 5/2006 Krisko et al.  
 2006/0101999 A1 5/2006 Steins  
 2006/0123754 A1 6/2006 Oelpke et al.  
 2006/0151655 A1 7/2006 Johnston  
 2007/0006560 A1 1/2007 Ruhland et al.  
 2007/0017517 A1 1/2007 Hallback et al.  
 2007/0039296 A1 2/2007 Schrage et al.  
 2007/0169449 A1 7/2007 Merritt  
 2007/0175187 A1\* 8/2007 Kopec et al. .... 55/385.3  
 2007/0175194 A1 8/2007 Nepsund et al.  
 2007/0186528 A1\* 8/2007 Wydeven et al. .... 55/498  
 2007/0193236 A1 8/2007 Merritt  
 2007/0271885 A1 11/2007 Rieger et al.  
 2007/0271886 A1\* 11/2007 Rieger et al. .... 55/486  
 2007/0289265 A1 12/2007 Coulonvaux et al.  
 2008/0011896 A1 1/2008 Johnston et al.

2008/0016832 A1\* 1/2008 Krisko et al. .... 55/342  
 2008/0060329 A1\* 3/2008 Brown et al. .... 55/498  
 2008/0135470 A1 6/2008 Merritt et al.  
 2008/0135471 A1 6/2008 Merritt et al.  
 2009/0114590 A1 5/2009 Merritt et al.  
 2009/0205302 A1\* 8/2009 Rieger ..... 55/498  
 2009/0320423 A1\* 12/2009 Merritt et al. .... 55/498  
 2009/0320424 A1\* 12/2009 Merritt et al. .... 55/502  
 2010/0000934 A1 1/2010 Brown  
 2010/0115897 A1\* 5/2010 Krisko et al. .... 55/443  
 2010/0192530 A1\* 8/2010 Wydeven et al. .... 55/488  
 2010/0242425 A1 9/2010 Swanson et al.  
 2012/0205305 A1\* 8/2012 Brown et al. .... 210/450  
 2012/0311983 A1\* 12/2012 Swanson et al. .... 55/502  
 2013/0000267 A1\* 1/2013 Merritt ..... 55/490  
 2013/0207304 A1\* 8/2013 Brown et al. .... 264/259

FOREIGN PATENT DOCUMENTS

EP 0639474 A1 2/1995  
 EP 1350550 A1 10/2003  
 GB 1 296 051 11/1972  
 JP S54143981 A 11/1979  
 JP 55-159822 A 12/1980  
 JP 56-129749 A 10/1981  
 JP S57140554 A 8/1982  
 JP S58074122 A 5/1983  
 JP 58146865 U 10/1983  
 JP S5919518 A 2/1984  
 JP S60-112320 U 7/1985  
 JP S60-124622 U 8/1985  
 JP 63-122617 U 6/1988  
 JP S63-302915 A 12/1988  
 JP 2000516850 A 12/2000  
 JP 2007530259 A 11/2007  
 WO WO 2005/058461 A1 6/2005  
 WO WO 2005/107924 A2 11/2005  
 WO WO 2005/123214 A1 12/2005  
 WO WO 2006/012386 A2 2/2006  
 WO WO 2006/014941 A2 2/2006  
 WO WO 2006/093960 A2 9/2006  
 WO WO 2007/009039 A1 1/2007  
 WO WO 2007/056589 A2 5/2007  
 WO WO 2007/095270 A2 8/2007  
 WO WO 2007/144405 A1 12/2007  
 WO WO 2007/149561 A2 12/2007

OTHER PUBLICATIONS

U.S. Appl. No. 12/164,987, filed Jun. 30, 2008, Merritt.

\* cited by examiner

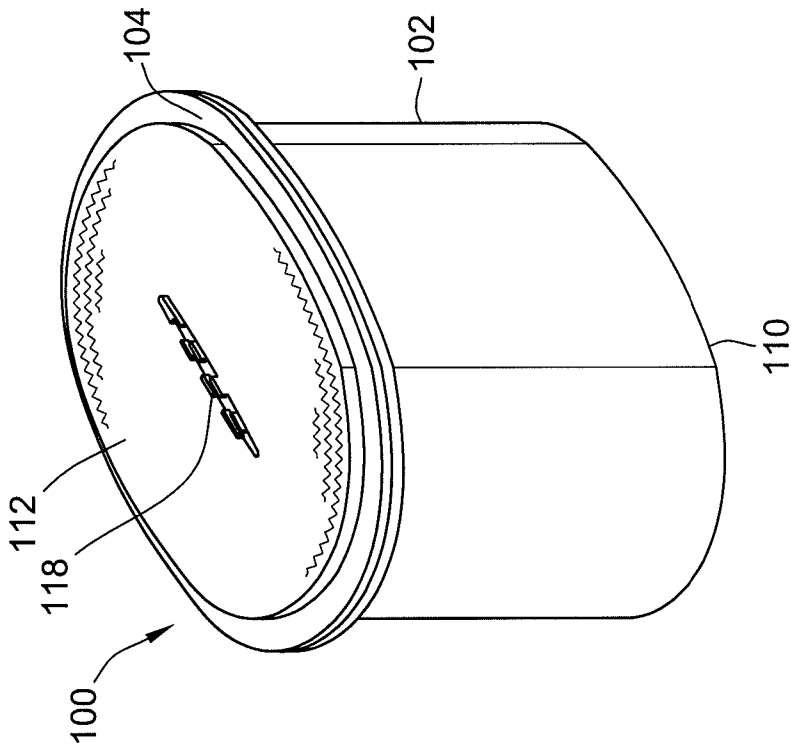


FIG. 1

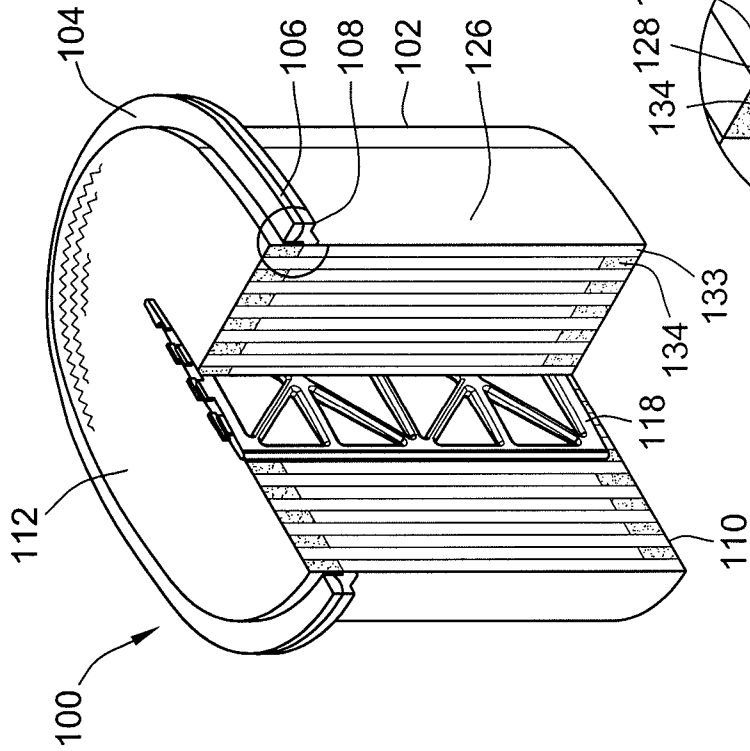


FIG. 2

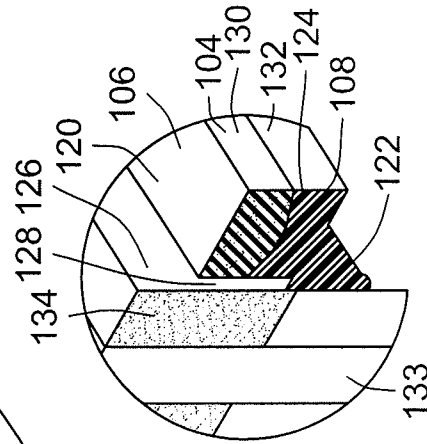


FIG. 2A

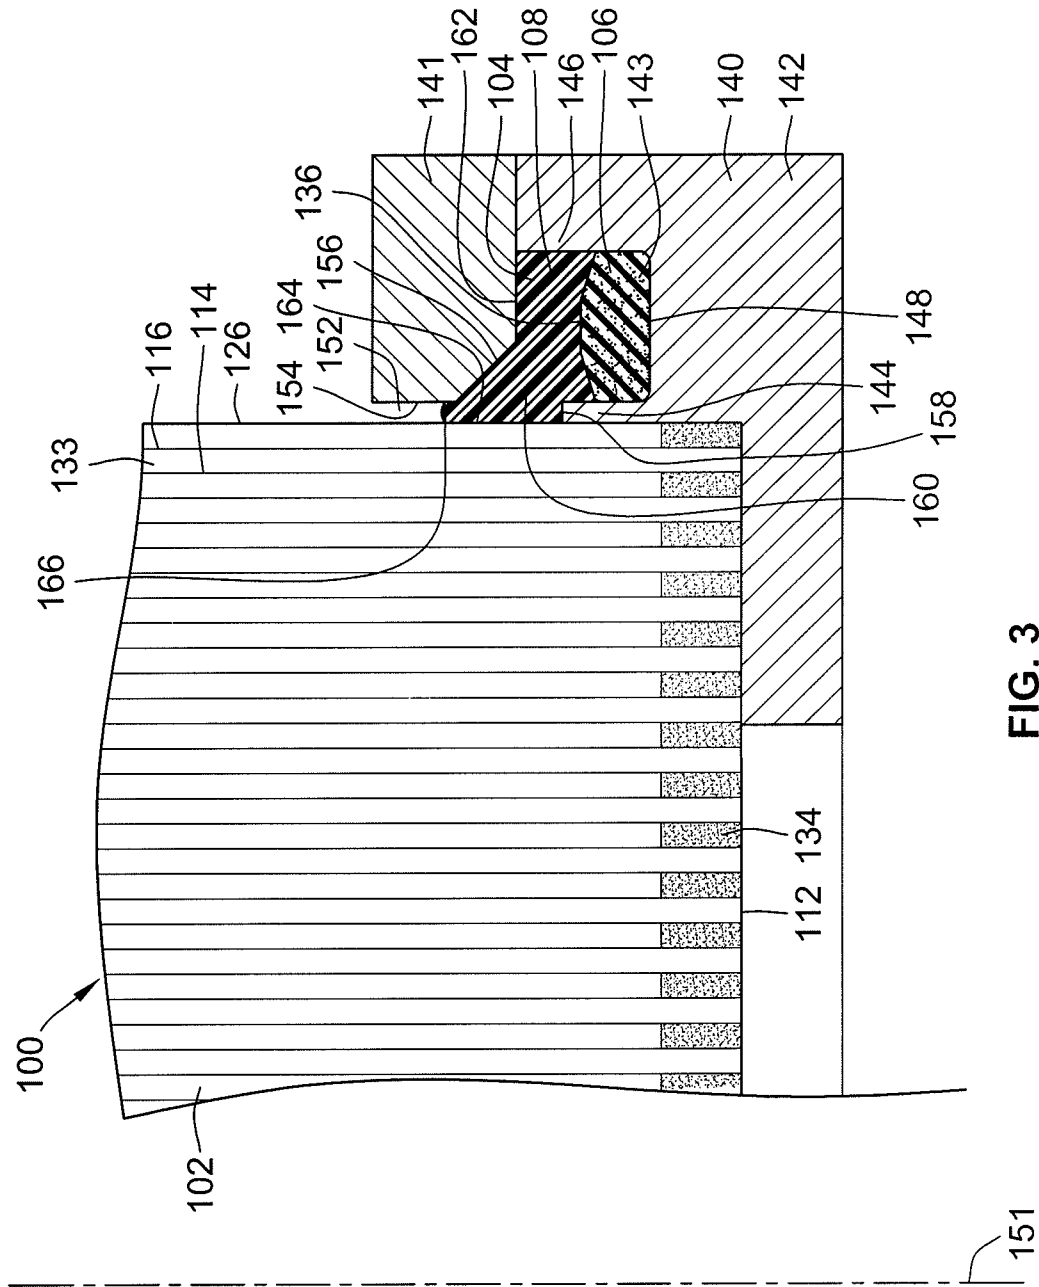
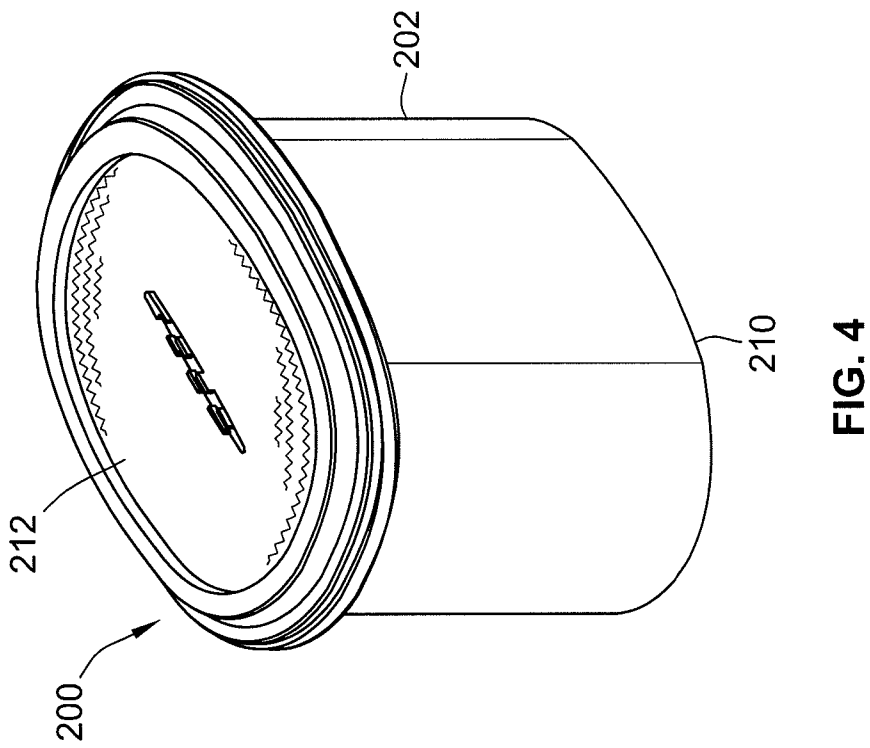
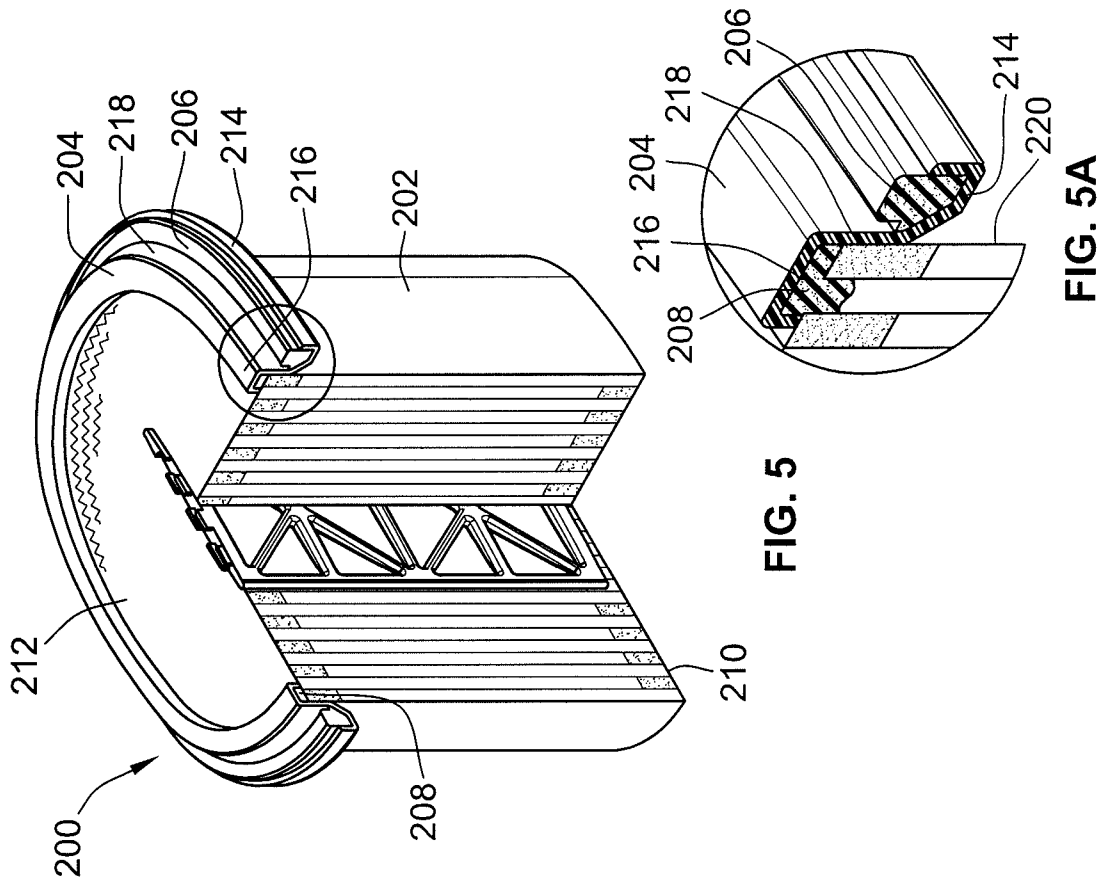


FIG. 3



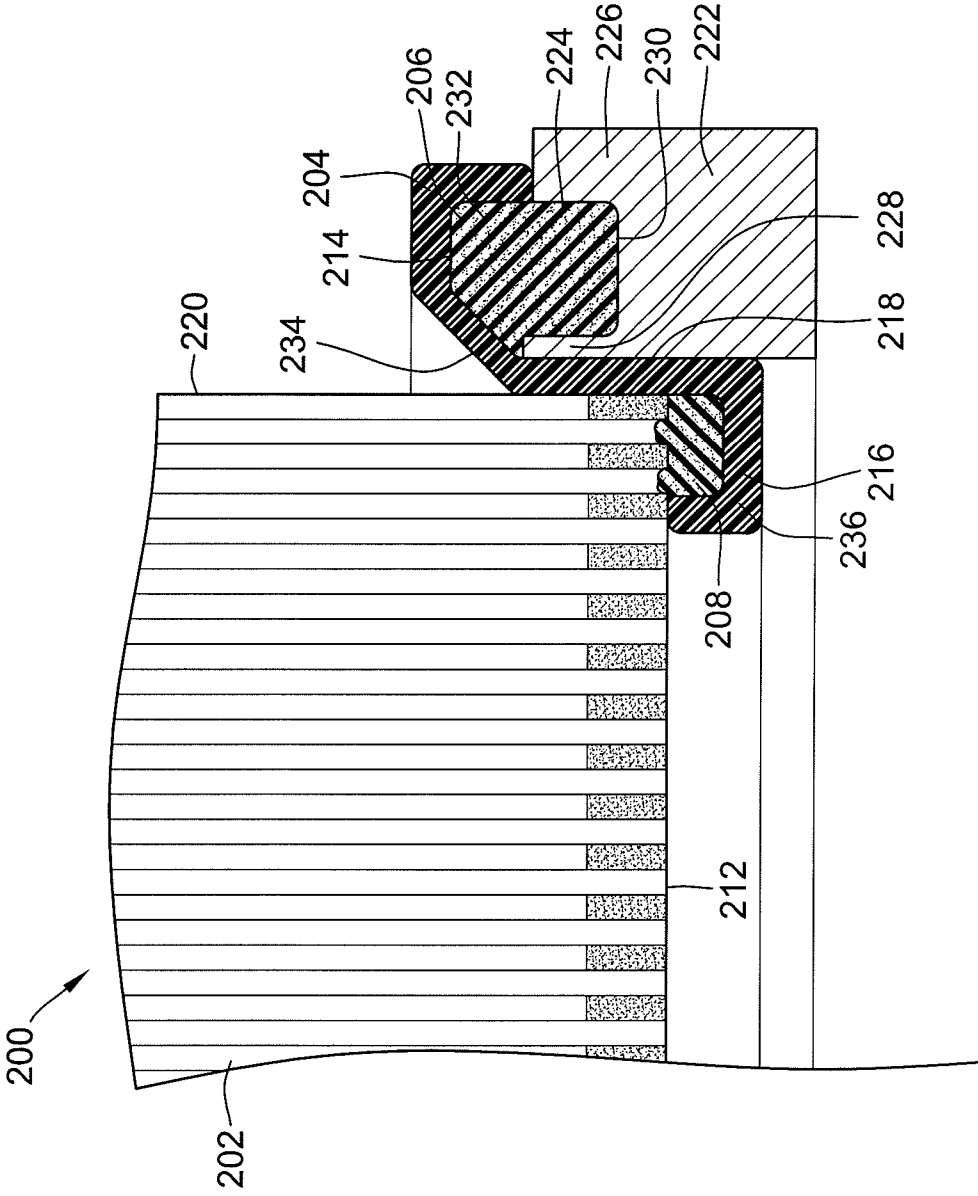


FIG. 6

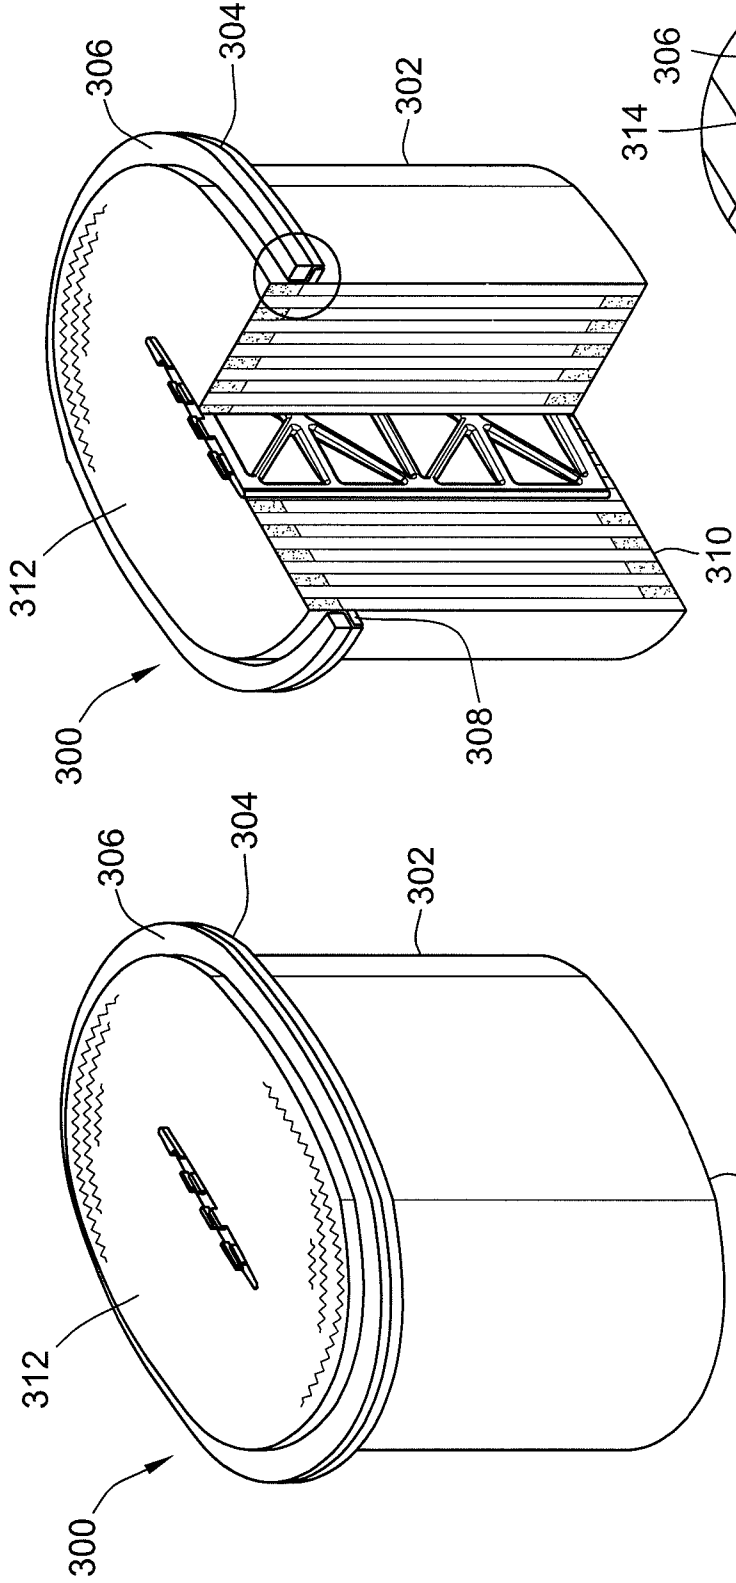


FIG. 8

FIG. 7

FIG. 8A

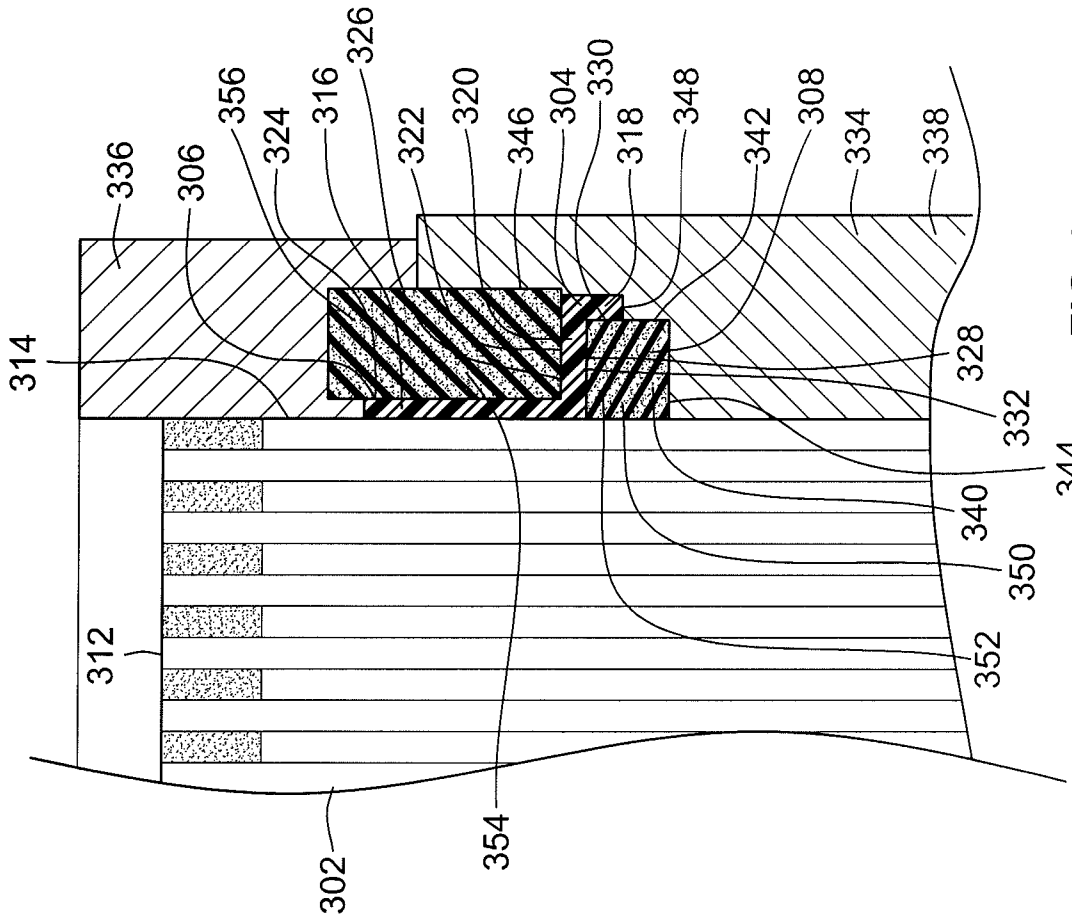


FIG. 9



**FLUTED FILTER WITH AXIAL SEAL****CROSS-REFERENCE TO RELATED PATENT APPLICATIONS**

This patent application is a divisional of co-pending U.S. patent application Ser. No. 12/414,090, filed Mar. 30, 2009, which is now pending, the entire teachings and disclosure of which are incorporated herein by reference thereto.

**FIELD OF THE INVENTION**

This invention generally relates to fluid filters, and more particularly to fluted filter elements having an axial seal member and a media pack seal member, and a method of making the same.

Filtration devices and systems are employed in a wide range of applications for filtering contaminants from various fluids. For example, it is known to pass air or similar gases through filter assemblies that enclose filtration media such as filter paper to remove dust and other contaminants. The filtration media is typically enclosed within a housing that is a permanent part of a larger overall process system (e.g. an engine) that utilizes the filtered fluids. Desirably, to prevent clogging of the filter, the filter assembly is constructed to facilitate the removal and replacement of the filtration media from the permanent housing. For this reason, the filtration media is typically configured into removable filter elements, also referred to herein as filter cartridges.

One commonly used filter media in construction of filter elements is fluted filter media. Fluted filter media is typically formed by winding a fluted sheet and a face sheet about an axis to form a plurality of contiguous adjacent flutes. In one common form of such fluted filter media, alternating ends of adjacent flutes are blocked to cause fluid entering one open end of "inlet" flutes to flow through the porous filter media into adjacent "outlet" flutes prior to exiting the filter media at an opposite end of the flutes.

To enable removal of a filter element from the filter housing (not shown), typically, a clearance gap is provided between the two components. To cause process fluids to pass through the filtration media rather than short circuit around the filter element, the filter element is often provided with a seal that abuts against the filter housing. Prior such filter elements are disclosed in U.S. Pat. No. 6,610,117 (Gieseke), U.S. Patent Application Publication No. 2006/0091061 (Brown), U.S. Patent Application Publication No. 2006/0090434 (Brown, et al.), and U.S. patent application Ser. No. 12/164,987 (Merritt, et al.) herein incorporated by reference in their entireties.

The present invention pertains to improvements in frames, seal support structures and how they are attached to a filter, such as a fluted filter.

**BRIEF SUMMARY OF THE INVENTION**

One inventive aspect pertains to an axial gasket assembly configured to provide sealing between a filter element and a filter housing. According to this aspect, the invention provides a filter element including a fluted filter media pack and an axial seal gasket assembly attached to the fluted filter media. The fluted filter media includes a face sheet and a fluted sheet secured together to provide a plurality of flutes, wherein first flutes are closed proximate an inlet face and second flutes are closed proximate an outlet face. The axial seal gasket assembly includes an axial seal member and a media pack seal member, wherein the axial seal member is formed of a first polymeric material and the media pack seal

member is formed of a second polymeric material, wherein the first polymeric material is softer than the second polymeric material.

In another aspect, the invention provides a filter element including a fluted filter media pack and an axial seal member carried by a frame, which is attached to the fluted filter media pack by a media pack seal member. The fluted filter media includes a face sheet and a fluted sheet secured together to provide a plurality of flutes, wherein first flutes are closed proximate an inlet face and second flutes are closed proximate an outlet face. The frame is secured to the fluted filter media pack by a media pack seal member and includes an axial seal support portion. The axial seal member is carried by the axial seal support portion of the frame, wherein the axial seal member is molded independent of the media pack seal member. Further, the axial seal member is formed of a first polymeric material and the media pack seal member is formed of a second polymeric material, wherein the first polymeric material is softer than the second polymeric material.

The present invention also provides for various methods of making a filter element for use with a filter housing having a filter housing sealing surface. In one aspect, the invention provides a method of making a filter element including steps of forming a fluted filter media pack having a plurality of flutes, wherein first flutes are closed proximate an outlet face and second flutes are closed proximate an inlet face, molding a media pack seal member, and separately molding an axial seal member configured for axially sealing against the filter housing sealing surface. The step of molding a media pack seal member may be performed before or after the step of molding an axial seal member. Further, the media pack seal member and the axial seal member may be molded in a single mold cavity to form an axial seal gasket. Alternatively, the method may further include a step of providing a frame wherein the media pack seal member and the axial seal member can be molded and attached.

Other aspects, objectives and advantages of the invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings.

**BRIEF DESCRIPTION OF THE DRAWINGS**

The accompanying drawings incorporated in and forming a part of the specification illustrate several aspects of the present invention and, together with the description, serve to explain the principles of the invention. In the drawings:

FIG. 1 is a perspective view of a filter element including an axial seal gasket assembly according to a first embodiment of the invention, adapted for insertion into a filter housing;

FIG. 2 is a perspective partial cross-sectional view of the filter element of FIG. 1 including a fluted filter media pack, a winding core and the axial seal gasket;

FIG. 2A is an enlarged cross-sectional view of FIG. 2 showing an enlarged cross-section of the axial seal gasket assembly attached to the fluted filter media pack;

FIG. 3 is an enlarged fragmentary and cross-sectional view of the filter element of FIG. 1 showing the axial seal gasket formed in a mold;

FIG. 4 is a perspective view of a filter element including a frame carrying an axial seal member according to a second embodiment of the invention;

FIG. 5 is a perspective partial cross-sectional view of the filter element of FIG. 4 including a fluted filter media pack, a winding core and the frame, which is attached to the fluted filter media pack by a media pack seal member, carrying the axial seal member;

FIG. 5A is an enlarged cross-sectional view of FIG. 5 showing an enlarged cross section of the axial seal member, the media pack seal member and the frame attached to the fluted filter media pack;

FIG. 6 is a fragmentary and cross-sectional view of the filter element of FIG. 4 showing the media pack seal member and the axial seal member in a mold;

FIG. 7 is a perspective view of a filter element including a frame carrying an axial seal member according to a third embodiment of the invention;

FIG. 8 is a perspective partial cross-sectional view of the filter element of FIG. 7 including a fluted filter media pack, winding core and a frame, which is attached to the fluted filter media pack by a media pack seal member, carrying the axial seal member;

FIG. 8A is an enlarged cross-sectional view of FIG. 8 showing an enlarged cross section of the axial seal member, the media pack seal member and the frame attached to the fluted filter media pack; and

FIG. 9 is a fragmentary and cross-sectional view of the filter element of FIG. 7 showing the media pack seal member and the axial seal member in a mold.

While the invention will be described in connection with certain preferred embodiments, there is no intent to limit it to those embodiments. On the contrary, the intent is to cover all alternatives, modifications and equivalents as included within the spirit and scope of the invention as defined by the appended claims.

#### DETAILED DESCRIPTION OF THE INVENTION

FIGS. 1-3 show a first embodiment of the present invention in the form of a filter element 100, adapted for insertion into a filter housing for removing particulate matter from a flow of fluid passing through the filter housing. The term fluid as used herein is intended to include fluids in either liquid or gaseous forms; however, the embodiments shown herein illustrate an air filter of the type used for filtering intake air for engine and air compressors. It is understood that inventive features may also be applicable to liquid applications.

The filter element 100 of the first embodiment is generally shown in FIGS. 1-2 as an annular shape with a race-track-like cross section. The term "annular" is used herein in accordance with the common dictionary definition to describe a variety of ring-like shapes disposed about an axis or centerline. Annular shapes, as contemplated by the inventors, may include, but are not limited to, shapes that are round, rectangular, oval, or race-track-like with two generally straight and parallel sides joined by rounded ends.

To generally introduce different components, the filter element 100, as shown in FIGS. 1-2, includes a filter media pack 102, an axial seal gasket 104 comprising an axial seal member 106 and a media pack seal member 108. The filter media pack 102 of the first embodiment is a fluted filter media having an inlet face 110 and an outlet face 112. The fluted filter media pack 102 includes a face sheet 114 and a fluted sheet 116 secured together and wound about a winding core 118 to define a plurality of flutes. The first set of the plurality of flutes are closed proximate the inlet face 110 and the second set of the plurality of flutes are closed proximate the outlet face 112, such that fluids entering the flutes, which are open at the inlet face 110, flow through the porous filter media into other flutes prior to exiting the filter media at the outlet face 112 of the flutes. The winding core 118 can take various shapes and dimensions. One example of the winding core 118 is disclosed in U.S. patent application Ser. No. 11/634,647, entitled "Fluid Filter Apparatus Having Filter Media Wound About a

Winding Frame," assigned to the Assignee of the present invention, and incorporated herein by reference. In alternative embodiments, the fluted filter media pack 102 may be formed without using a winding core.

The axial seal gasket 104 is provided proximate the outlet face 112 of the filter media pack 102. The axial seal gasket 104 includes the axial seal member 106 for engaging a housing having a sealing surface (not shown.) The axial seal member 106 has a sealing surface 120 configured to seal against the sealing surface of the filter housing to form an axial seal between the filter housing and the filter element 100. When the filter element 100 is placed in the filter housing, the axial seal member 106 is compressed against the sealing surface of the filter housing such that the sealing surface 120 of the axial seal member 106 and the sealing surface of the filter housing provide a seal between the filter element 100 and the housing to prevent any unfiltered air from bypassing the filter media pack 102 while flowing through the filter housing. The axial seal member 106 may be formed of any suitable sealing materials including but not limited to polymeric materials and polymer foams, preferably, urethane foam. Expandable materials such as urethane are particularly advantageous because they are resilient to provide a sealing function and can be molded on the media pack seal member 108 or on a frame as will be discussed below.

In this embodiment, as shown in FIGS. 1-3, the axial seal member 106 is carried by the media pack seal member 108. The media pack seal member 108 has a media pack seal portion 122 and an axial seal support portion 124. The media pack seal member 108 is attached to the filter media pack 102, wherein the media pack seal portion 122 is radially sealed against a circumferential wall 126 of the filter media pack 102. The media pack seal portion 122 is attached to the circumferential wall 126 proximate the outlet face 112, axially spaced from the outlet face 112. The axial seal support portion 124 is integrally formed with the media pack seal portion 122. The axial seal support portion 124 carries the axial seal member 106 radially spaced from the circumferential wall 126 of the filter media pack 102, such that a space 128 is formed between the axial seal member 106 and the circumferential wall 126.

The media pack seal member 108 may be formed of any suitable materials including but not limited to polymeric materials and polymer foams, preferably, a rigid urethane. The axial seal member 106 and the media pack seal member 108 may be formed using the same material or different materials. Preferably, the axial seal member 106 is formed of a softer polymeric material than that of the media pack seal member 108, such that the axial seal member 106 may be compressed to seal against the filter housing while media pack seal member 108 formed of a more rigid polymer supports the filter element 100 when placed in the filter housing. The media pack seal member 108 may also provide a sealing function.

In such an embodiment, the media pack seal member 108 is formed of a rigid urethane having a durometer reading greater than 60 A (all durometer readings herein are in ASTM D2240 type A scale using Shore Durometer Type A testing equipment), and preferably between 90 A and 95 A; while the axial seal member 106 is formed of a softer urethane foam having a durometer reading less than 25 A, and preferably between 5 A and 8 A. The rigid urethane used for the media pack seal member 108 is a urethane material that expands less than 40% in volume during curing, and the softer urethane foam used for the axial seal member 106 is a urethane material that expands more than 40% of volume during curing. Typically, the rigid urethane and the softer urethane foam materials are

formulated differently, each including a different polyol. In this manner, the media pack seal member **108** is molded with a much more controlled process while the axial seal member **106** is less controlled, but more resilient and forgiving for its use with an external housing surface. In one embodiment, the media pack seal member **108** has a durometer reading of about 92 A which is formed of a rigid urethane that foams about 25% in volume during curing, and the axial seal member **106** has a durometer reading of about 7 A and is formed of a softer urethane that foams about 60% in volume during curing. In such embodiments, the media pack seal member **108** formed of a rigid urethane provides a structural support, while the axial seal member **106** formed of a softer urethane foam, which is more resilient than the rigid urethane, provides a sealing function between the filter element **100** and the filter housing (not shown.)

As it will be explained in detail below, the axial seal gasket **104** is preferably molded in a mold. Therefore, in such embodiments, each of the axial seal member **106** and the media pack seal member includes a free rise surface **136** and **166** which takes an irregular shape during a foaming, expanding and curing process. In one embodiment, a radial width of the axial seal gasket **104** proximate the free rise surface **136** is at least 0.5 inches. In some embodiments, the axial seal gasket **104** may provide an additional radial sealing surface between the filter element **100** and the filter housing via an outer circumferential wall **130** of the axial seal member **106** and an outer circumferential wall **132** of the media pack seal member **108**, wherein the outer circumferential walls **130**, **132** seal against an inner wall of the filter housing, while the sealing surface **120** of the axial seal member provides an axial seal against the sealing surface of the filter housing.

In one embodiment, the filter element **100** is formed by first forming the filter media pack **102**, then attaching the axial seal gasket **104** on the filter media pack **102** by molding the axial seal gasket **104**. The filter media pack **102** may be constructed from the fluted sheet of porous filter media **116** secured together with the face sheet **114** of porous filter media. The fluted sheet **116** may be formed by any appropriate process, such as corrugating or pleating, but preferably by gathering as described in U.S. Patent Publication No. 2006/0091066, entitled "Gathered Filter Media for an Air Filter and Method of Making Same," assigned to the Assignee of the present invention, and incorporated herein by reference.

The term "face sheet", as used herein, is intended to encompass any form of sheet or strip of generally flat, porous or non-porous, material attached to the fluted sheet of porous filter material. In most embodiments of the invention, the face sheet would preferably be formed of a porous filter material.

The fluted sheet of porous filter material **116** forms a plurality of contiguous adjacent convolutions, commonly known in the industry as flutes **133**. Selected ends of the flutes may be blocked, with a bead of adhesive **134**, for example, to cause fluid entering one end of some of the flutes to flow through the porous filter media into other flutes prior to exiting the filter media at an opposite end of the flutes, in the manner known in the art.

The filter media pack **102** in FIGS. 1-3 is formed by winding and coiling the filter media to form a generally annular shape, such as a race-track-like cross section, that is proportioned for insertion into a filter housing having a generally same inner surface shape with a larger perimeter than the filter element **100** to provide a sliding clearance fit. The filter media pack **102** may be constructed with the winding core **118** as disclosed in U.S. Patent Publication No. 2008/0135471, entitled "Method and Apparatus for Winding a Filter Element," assigned to the Assignee of the present invention, and

incorporated herein by reference. In other embodiments of the invention, the filter media pack **102** having other cross-sectional shapes, such as circular, square, rectangular, or polygonal, for example, may be utilized by coiling or bonding together successive wraps of the filter media. It is also understood that the invention is not limited to a filter media pack of fluted media. Those having skill in the art will readily recognize that the invention may also be practiced with efficacy, using other types of filter media.

After the filter media pack **102** is formed, the axial seal gasket **104** is formed and attached to the filter media pack **102**. In one embodiment, the axial seal gasket **104** is formed in a mold **140** as shown in FIG. 3. The mold **140** is made up of at least one part, but in this embodiment has two parts including a cope **141** and a drag **142**. However, contrary to a typical cope/drag mold, this is a "free rise" molding technique, wherein uncured fluid materials for the axial seal gasket **104** free rise and expand during curing. The drag **142** includes an annular cavity **143**, which is defined by an inner wall **144**, an outer wall **146** and a bottom wall **148**. The outer wall **146** extends axially upward, in the opposite direction of the bottom wall **148**, and intersects with a top wall **150** of the drag **142**. The cope **141** seats on top of the top wall **150**. As shown in FIG. 3, the cope **141** extends radially toward a center **151** of the mold **140** and stops short of the circumferential wall **126** of the filter media pack **102**, such that a free rise gap **152** to accommodate expansion is formed between the circumferential wall **126** and an inner peripheral surface **154** of the cope **141**. In this embodiment, the lower portion of the inner peripheral surface **154** tapers toward the outer wall **146**, forming a tapered region **156**, which intersects with an inner lower surface of the cope **141**.

In this embodiment, the axial seal member **106** is first molded in the mold **140**, then the media pack seal member **108** is subsequently molded in the mold **140**. In this molding process, an uncured fluid sealing material for the axial seal member **106** is poured into the annular cavity **143** of the drag **150**. In the annular cavity **143**, the uncured fluid seal material is allowed to foam, expand and cure. During this expansion and curing process, the irregular free rise surface **136** is formed. An amount of the uncured fluid seal material used is adjusted such that when it has fully cured and expanded, the free rise surface **136** of the axial seal member **106** is lower than an top end **158** of the inner wall **144**.

Once the uncured fluid seal material has cured or solidified to form the axial seal member **106** in the annular cavity **143**, the filter media pack **102** is placed in the mold **140**. The filter media pack **102** is inserted with the outlet face **112** facing the mold **140** and guided by the inner wall **144** as it is placed into the drag **150**. When the filter media pack **102** is placed in the drag **150**, a portion of the circumferential wall **126** proximate the outlet face **112** abuts the inner wall **144**. As shown in FIG. 3, the inner wall **144** separates the circumferential wall **126** from the axial seal member **106**, thereby forming the space **128** (FIG. 2) between the circumferential wall **126** and the axial seal member **106**.

After placing the filter media pack **102** in the drag **150**, the cope **141** is placed over the drag **150**. As shown in FIG. 3, once the filter media pack **102** is inserted and the cope **141** is assembled, a molding receptacle region **160** for the media pack seal member **108** is formed. The molding receptacle region **160** is defined by the free rise surface **136** of the axial seal member **106**, the outer wall **146** and the inner wall **144** of the drag **150**, the circumferential wall **126** of the filter media pack **102**, and the tapered region **156** and the inner lower surface **162** of the cope **141**. In a molding process of the media pack seal member **108**, an uncured fluid polymeric material is

poured into the molding receptacle region **160** via the free rise gap **152** between the circumferential wall **126** and the inner peripheral surface **154** of the cope **141**. Alternatively, the uncured fluid polymeric material may be poured over the axial seal member **106** in the annular cavity **143** before the cope **141** is placed over the drag **150**. In the molding receptacle region **160**, the uncured fluid polymeric material expands and cures. The expansion of the uncured fluid polymeric material is guided by the tapered region **156** and some uncured fluid polymeric material may expand into the free rise gap **152**, forming the free rise surface **166** of the media pack seal member **108**. During the curing process, the uncured fluid polymeric material expands to seal against the circumferential wall **126**, such that an inner side **164** of the media pack seal member **106** is securely attached to the circumferential wall **126**. Further, the axial seal member **106** and the media pack seal member **108** are securely attached to each other as the uncured fluid polymeric material for the media pack seal member **108** cures.

In another embodiment, the axial seal gasket **104** may be formed separately and subsequently attached to the filter media pack **102**, for example, by a suitable adhesive. In yet a different embodiment, the axial seal member **106** and the media pack seal member **108** may be formed and provided separately, then subsequently bonded together, for example, by a suitable adhesive to form the axial seal gasket **104**, which is then secured to the filter media pack **102**.

FIGS. 4-6 illustrate a second embodiment of the present invention. Components of the filter element **200** of this embodiment are similar to those described in the first embodiment, and includes a filter media pack **202**, an axial seal member **206** and a media pack seal member **208**. However, unlike the axial seal gasket **104** of the filter element **100**, wherein the axial seal member **106** and the media pack seal member **108** are directly attached to each other, the axial seal member **206** and the media pack seal member **208** of this embodiment are separated by a preformed frame **204**.

In this embodiment, the frame **204** carries the axial seal member **206** and provides enhanced structural support than that provided by the media pack seal member **108** of the filter element **100**. Additionally, the frame **204** protects the outer periphery of an outlet face **212** of the filter media pack **202** by enclosing the outer periphery. The frame **204** includes an axial seal support portion **214** and a media pack seal support portion **216**, wherein the axial seal support portion **214** and the media pack seal support portion **216** are formed on the opposite side of a middle wall **218**. The frame **204** is attached to the filter media pack **202** via the media pack seal member **208**, wherein the media pack seal member **208** seals an interface between the outlet face **212** and frame **204**. When the frame **204** is attached to the filter media pack **202**, according to this embodiment, the middle wall **218** of the frame **204** abuts the circumferential wall **220** proximate the outlet face **212**, such that the periphery of the outlet face **212** and a portion of a circumferential wall **220** proximate the outlet face **212** is enclosed by the media pack seal support portion **216** and the middle wall **218** of the frame **204**. As shown in FIGS. 4-6, the axial seal support portion **214** projects radially, canted from the middle wall **218** and away from the circumferential wall **220**.

The axial seal member **206** and the media pack seal member **208** can be formed of suitable polymeric materials as described above with regard to the axial seal member **106** and the media pack seal member **108**. In one embodiment, the axial seal member **206** and the media pack member **208** are formed of a same material. For example, the axial seal member **206** and the media pack seal member **208** can both be

formed of a softer urethane foam that expands more than 40% of volume during curing. In a different embodiment, the axial seal member **206** is formed of a softer urethane foam, while the media pack seal member **208** is formed of a rigid urethane. The frame **204** may be formed with any suitable materials including, but not limited to, urethane materials, other polymers, metal and the like.

As it was with the first embodiment, a method of making the filter element **200** starts with forming the filter media pack **202**. The process of forming the filter media pack **202** remains the same as described above for the filter media pack **102**. The frame **204** can be formed of any suitable materials; a rigid preformed injection molded (not free rise) plastic member such as a nylon or nylon filled glass is preferred for providing the structural support.

Once the filter media pack **202** and the frame **204** are formed, the axial seal member **206** and the media pack seal member **208** are molded. In this embodiment, both the axial seal member **206** and the media pack seal member **208** are molded into a mold **222** as shown in FIG. 6, wherein the axial seal member **206** is molded first, and the media pack seal member **208** is molded subsequently.

The mold **222** includes an annular mold cavity **224**, which is defined by an outer wall **226**, an inner wall **228** and a bottom wall **230**. In this molding process, an uncured fluid sealing material for the axial seal member **206** is poured into the annular mold cavity **224**. Then, the frame **204** is inserted into the mold **222**, such that the middle wall **218** of the frame **204** abuts the inner wall **228** of the mold **222**, and the axial seal support portion **214** is placed over the annular mold cavity **224**. When the frame **204** is inserted accordingly, an axial seal molding region **232** is formed, defined by the annular mold cavity **224** and the axial seal support portion **214**. In the axial seal molding region **232**, the uncured fluid seal material is allowed to foam and rise up to fill up the axial seal molding region **232**, forming the axial seal member **206**. The amount of the uncured fluid sealing material used is calculated to ensure that, when fully expanded and cured, the axial seal member **206** is sealed against and securely attached to inner walls of the axial seal support portion **214**.

As the axial seal member **206** is forming in the axial seal molding region **232**, an uncured fluid seal material for the media pack seal member **208** is poured in the media pack seal support portion **216**. The filter media pack **202** is then inserted into the mold **222**, with the outlet face **212** facing the media pack seal support portion **216**. As the filter media pack **202** is placed into the mold **222**, the filter media pack **202** may slide down a canted outer surface **234** of the frame **204** and guided down to the media pack seal support portion **216** by the middle wall **218**, such that the filter media pack is placed over the media pack seal support portion **216** and supported by an outer wall **236** of the media pack seal support portion **216**. As shown in FIG. 6, the circumferential wall **220** of the filter media pack **202** abuts the middle wall **218** of the frame **204**, when placed in the mold **222**.

In the media pack seal support portion **216**, the uncured fluid sealing material is allowed to foam, filling up the media pack seal support portion **216**, and extending into openings formed by some flutes along the outer wraps of the filter media pack **202**, and sealing the interface between the frame **204** and the outlet face **212**, thereby securely attaching the frame **204** to the filter media pack **202**. Further, some uncured fluid sealing material may expand around the outer periphery of the filter media pack **202** and extend into a space between the middle wall **218** of the frame **204** and the circumferential wall **220** of the filter media pack **202**, thereby further sealing the interface between the filter media pack **202**

and the frame 204. In another embodiment, the axial seal member 206 and the media pack seal member 208 may be molded in two different molds in two different molding processes. Yet in another embodiment, the axial seal member 206 and the media pack seal member 208 are formed and attached to the frame 204 separate from the filter media pack 202, then the media pack seal member 208 and the frame 204 may be attached to the filter media pack 202 via an adhesive or the like.

FIGS. 7-9 illustrate a third embodiment of the present invention. A filter element 300 includes similar components as the filter element 200: a filter media pack 302, a frame 304, an axial seal member 306 and a media pack seal member 308. As it was with the filter element 200, the frame 304 carries the axial seal member 306 and is attached to the filter media pack 302 via the media pack seal member. However, unlike the frame 204, the frame 304 does not enclose the outer periphery of an outlet face 312. Instead, the frame 304 carrying the axial seal member 306 is attached on a circumferential wall 314 proximate the outlet face 312, axially spaced from the outlet face 312, similar to the filter element 100.

The frame 304 includes an inner vertical wall 316 and an outer vertical wall 318 formed on the opposite ends of a horizontal wall 320. The inner vertical wall 316 abuts the circumferential wall 314 and extends axially from the horizontal wall 320 toward the outlet face 312. The outer vertical wall 318 extends from the horizontal wall 320 toward an inlet face 310. The frame 304 has an axial seal support portion 322 and a media pack seal support portion 328 formed on the opposite sides of the horizontal wall 320. The axial seal support portion 322 is defined by an inner surface 324 of the inner vertical wall 316 and an upper surface 326 of the horizontal wall 320. Similarly, the media pack seal support portion 328 is defined by an inner surface 330 of the outer vertical wall 318 and a lower surface 332 of the horizontal wall 320.

The axial seal member 306 is formed in the axial support portion 322, while the media pack seal member 308 is formed in the media pack seal support portion 328, securely attaching the frame 304 to the filter media pack 302. The axial seal member 306 and the media pack seal member 308 can be formed of suitable polymeric materials as described above with regard to the axial seal members 106 and the media pack seal member 108. The axial seal member 306 and the media pack seal member 308 can be formed of a same material or different materials. In one embodiment, the axial seal member 306 and the media pack seal member 308 are both formed of a softer urethane foam. In a different embodiment, the axial seal member 306 is formed of a softer urethane foam, while the media pack seal member 308 is formed of a rigid urethane. The frame 304 may be formed with any suitable materials including, but not limited to, urethane materials, other polymers, metal and the like.

As it was with the first and second embodiments, a method of making the filter element 300 starts with forming the filter media pack 302. The process of forming the filter media pack 302 remains the same as described above for the filter media pack 102. The frame 304 can be formed of any suitable materials; preferably, a rigid polymer suitable for providing the structural support.

Once the filter media pack 302 and the frame 304 are formed, the axial seal member 306 and the media pack seal member 308 are molded into a mold 334. The mold 334 is made up of a cope 336 and a drag 338. The drag 338 includes an annular cavity 340, which is defined by a lower inner wall 342 and a bottom wall 344. An upper inner wall 346 of the drag 338 is stepped up from the inner wall 342, connected by

a frame mount 348. In this embodiment, the media pack seal member 308 is molded first, and the axial seal member 306 is molded subsequently.

In this molding process, the filter media pack 302 is placed in the drag 338 with the inlet face 310 facing toward the bottom of the drag 338. Once in the drag 338, a mold cavity 350 is formed, defined by the circumferential wall 314, the bottom wall 344 and the lower inner wall 342. An uncured fluid sealing material for the media pack seal member 308 is poured into the mold cavity 350. Then, the frame 304 is inserted into the drag 338, such that the outer vertical wall 318 of the frame 304 seats on the frame mount 348 of the drag 338 and the inner vertical wall 316 abuts the circumferential wall 314. When the frame 304 is mounted on the frame mount 348, a media pack seal molding region 352 is formed, defined by the mold cavity 350 and the media pack seal support portion 328. In the media pack seal molding region 352, the uncured fluid seal material is allowed to foam and rise up to fill up the media pack seal molding region 352 and securely attaching the frame 304 to the filter media pack 302. The amount of the uncured fluid sealing material used is calculated to ensure that, when fully expanded and cured, the media pack seal member 306 is sealed against and securely attached to the circumferential wall 314 of the filter media pack 302, and the inner surface 330 of the outer vertical wall 318 and lower surface 320 of the horizontal wall 320 of the frame 304.

After the media pack seal member 308 is formed in the media pack seal molding region 352, the axial seal member 306 is formed in the mold 334. On the opposite side of the horizontal wall 300 of the frame 304, an annular mold cavity 354 is defined by the upper surface 326 of the horizontal wall 320, inner surface 324 of the inner vertical wall 316 and a portion of the upper inner wall 346 of the drag 338 that axially extends beyond the horizontal wall 320. An uncured fluid seal material for the axial seal member 306 is poured in the annular mold cavity 354. The cope 336 is then placed over the drag 338, wherein an axial seal molding region 356 is defined by the inner surfaces of the cope 336 and the annular mold cavity 354. In the axial seal molding region 356, the uncured cured fluid sealing material is allowed to foam, filling up the axial seal molding region 356, thereby forming the axial seal member 306 securely attached to the axial seal support portion 322 of the frame 304. In another embodiment, the axial seal member 306 and the media pack seal member 308 may be molded in a mold designed to form the axial seal member 306 before the media pack seal member 308. In a different embodiment, the axial seal member 306 and the media pack seal member 308 may be formed in two different molds in two different molding processes. Yet in another embodiment, the axial seal member 306 and the media pack seal member 308 are formed and attached to the frame 304 separate from the filter media pack 302, then the media pack seal member 308 and the frame 304 may be attached to the filter media pack 302 via an adhesive or the like.

All references, including publications, patent applications, and patents cited herein are hereby incorporated by reference to the same extent as if each reference were individually and specifically indicated to be incorporated by reference and were set forth in its entirety herein.

The use of the terms “a” and “an” and “the” and similar referents in the context of describing the invention (especially in the context of the following claims) is to be construed to cover both the singular and the plural, unless otherwise indicated herein or clearly contradicted by context. The terms “comprising,” “having,” “including,” and “containing” are to be construed as open-ended terms (i.e., meaning “including, but not limited to,”) unless otherwise noted. Recitation of

ranges of values herein are merely intended to serve as a shorthand method of referring individually to each separate value falling within the range, unless otherwise indicated herein, and each separate value is incorporated into the specification as if it were individually recited herein. All methods described herein can be performed in any suitable order unless otherwise indicated herein or otherwise clearly contradicted by context. The use of any and all examples, or exemplary language (e.g., "such as") provided herein, is intended merely to better illuminate the invention and does not pose a limitation on the scope of the invention unless otherwise claimed. No language in the specification should be construed as indicating any non-claimed element as essential to the practice of the invention.

Preferred embodiments of this invention are described herein, including the best mode known to the inventors for carrying out the invention. Variations of those preferred embodiments may become apparent to those of ordinary skill in the art upon reading the foregoing description. The inventors expect skilled artisans to employ such variations as appropriate, and the inventors intend for the invention to be practiced otherwise than as specifically described herein. Accordingly, this invention includes all modifications and equivalents of the subject matter recited in the claims appended hereto as permitted by applicable law. Moreover, any combination of the above-described elements in all possible variations thereof is encompassed by the invention unless otherwise indicated herein or otherwise clearly contradicted by context.

What is claimed is:

1. A method of making a filter element for use with a filter housing a filter housing sealing surface, the method comprising steps of:

forming a fluted filter media pack having a plurality of flutes, wherein first flutes of the plurality of flutes are closed proximate an outlet face and second flutes of the plurality of flutes are closed proximate an inlet face, molding a media pack seal member,

separately molding an axial seal member configured for axially sealing against the filter housing sealing surface; providing a frame having an axial seal support portion and a media pack seal support portion;

wherein the step of molding a media pack seal member includes securing the frame to the fluted filter media pack with the media pack seal member;

wherein the step of separately molding an axial seal member includes molding the axial seal member in an axial seal support portion of the frame, such that the axial seal member on the frame is in a spaced relation to the fluted filter media pack;

wherein the axial seal member is molded using a first polymeric material and the media pack seal member is molded using a second polymeric material; and

wherein the axial seal member and the media pack seal member are molded in a mold including an annular mold cavity, wherein the axial seal member is molded before the media pack seal member, wherein the step of molding an axial seal member includes pouring the first polymeric material in its uncured form and inserting the frame in the mold such that the axial seal support portion is placed over the annular mold cavity, wherein an axial seal molding region defined by the axial seal support portion and the annular mold cavity is formed, wherein the first polymeric material foams and cures in the axial seal molding region.

2. The method of claim 1, wherein the step of molding a media pack member includes pouring a second polymeric

material in its uncured form into the media pack seal support portion and inserting the fluted filter media pack into the mold such that an outer periphery of the outlet face of the fluted filter media pack is placed on the media pack seal support portion containing the uncured first polymeric material, wherein the uncured first polymeric material expands in the media pack seal support portion and extends into openings formed by some flutes along outer wraps of the fluted filter media pack, thereby sealing an outer wrap of the fluted filter media pack and an annular interface between the fluted filter media pack and the frame.

3. The method of claim 2, wherein some uncured first polymeric material further expands around the outer periphery of the fluted filter media pack and extends into a space between a wall of the frame connecting the media pack seal support portion and the axial seal support portion and the outer most wrap of the fluted filter media, thereby further sealing the interface between the fluted filter media pack and the frame.

4. The method of claim 1, wherein the axial seal member and the media pack seal member are molded in a mold including a cope and a drag, wherein the media pack seal member is molded before the axial seal member, wherein the step of molding the media pack seal member includes inserting the fluted filter media pack into the drag with the inlet face facing the drag, pouring a second polymeric material in its uncured form in an annular cavity defined by the lower inner surfaces of the drag and a circumferential wall of the fluted filter media pack, and inserting the frame such that the media pack seal support portion is placed over the lower inner surfaces of the drag, wherein a media pack seal molding region is formed, defined by the circumferential wall of the fluted filter media pack, the lower inner surfaces of the drag and the media pack seal support portion of the frame, wherein the second polymeric material foams to fill up the media pack seal member molding region, thereby forming the media pack seal member securely attached to the fluted filter media pack and the frame.

5. The method of claim 4, wherein the step of molding the axial seal member includes pouring a first polymeric material in its uncured form in an annular mold cavity defined by the annular seal support portion of the frame and an upper inner surface of the drag, and placing the cope over the annular mold cavity, wherein an axial seal molding region is formed, defined by the cope and the annular mold cavity, wherein the first polymeric material foams to fill up the axial seal molding region, thereby forming the axial seal member securely attached and carried by the axial seal support portion of the frame.

6. The method of claim 1, wherein the axial seal member and the media pack seal member are molded in a single mold cavity of a mold including a cope and a drag, wherein the axial seal member is molded before the media pack seal member, wherein the step of molding axial seal member includes pouring a first polymeric material in its uncured form into the mold cavity in the drag, wherein the first polymeric material foams and expands to fill up a bottom portion of the mold cavity, wherein the step of forming the media pack seal member includes inserting the fluted filter media pack into the drag with the outlet face facing the drag, pouring a second polymeric material in its uncured form into the mold cavity, and placing the cope over the mold cavity, wherein the second polymeric material foams and expands to form the media pack seal member on top of the axial seal member, wherein the media pack seal member is securely attached to a circumferential wall of the filter media pack and the axial seal member.

## 13

7. The method of claim 1, wherein the first polymeric material is softer than the second polymer material and expands more in volume during curing.

8. The method of claim 1, wherein the first polymeric material and the second polymeric material are a same urethane foam material.

9. A method of making a filter element for use with a filter housing having a filter housing sealing surface, the method comprising steps of:

forming a fluted filter media pack having a plurality of flutes, wherein first flutes of the plurality of flutes are closed proximate an outlet face and second flutes of the plurality of flutes are closed proximate an inlet face;

forming a seal gasket assembly comprising a seal member of a first polymeric material and a media pack seal member of a second polymeric material different than the first polymeric material, each situated on a frame, the frame including a seal support portion, wherein the seal member is molded onto the seal support portion such that it is in spaced relation to the media pack seal member; and molding the media pack seal member directly onto the outlet face of the fluted filter media pack such that it extends into openings of some of the second flutes at radially outer wraps of the fluted filter media.

## 14

10. The method of claim 9, wherein the step of forming the seal gasket assembly includes utilizing a urethane foam having a durometer reading of less than 25 A for the first polymeric material and utilizing a urethane foam having a durometer reading of greater than 60 A for the second polymeric material.

11. The method of claim 9, wherein the step of forming the seal gasket assembly includes utilizing a urethane foam having a durometer reading between 5 A for the first polymeric material and utilizing a urethane foam having a durometer reading of between 90 A and 95 A for the second polymeric material.

12. The method of claim 9, wherein the step of forming the seal gasket assembly includes utilizing a urethane foam that expands more than 40% in volume during curing for the first polymeric material and utilizing a urethane foam that expands less than 40% during curing for the second polymeric material.

13. The method of claim 9, wherein the step of forming the gasket assembly includes forming the frame member with a divider portion which situates the seal support portion such that the seal member and media pack seal member are axially non-overlapping and axially spaced relative to the fluted media pack.

\* \* \* \* \*

UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 8,685,301 B2  
APPLICATION NO. : 13/936646  
DATED : April 1, 2014  
INVENTOR(S) : Kyle Swanson et al.


Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

In the Claims

Claim 1, Column 11 Line 32 after the first word "housing" insert the word --having--

Signed and Sealed this  
Sixteenth Day of September, 2014



Michelle K. Lee  
*Deputy Director of the United States Patent and Trademark Office*