

(12) **United States Patent**
Gealy et al.

(10) **Patent No.:** **US 12,083,669 B2**
(45) **Date of Patent:** **Sep. 10, 2024**

(54) **END EFFECTOR DEVICE AND SYSTEM FOR SUCTION-BASED GRASPING OF BAGGED OBJECTS**

(71) Applicant: **Ambi Robotics, Inc.**, Emeryville, CA (US)

(72) Inventors: **David Gealy**, Berkeley, CA (US);
Stephen McKinley, Berkeley, CA (US);
Jeffrey Mahler, Berkeley, CA (US)

(73) Assignee: **Ambi Robotics, Inc.**, Emeryville, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **17/220,679**

(22) Filed: **Apr. 1, 2021**

(65) **Prior Publication Data**
US 2021/0308874 A1 Oct. 7, 2021

Related U.S. Application Data

(60) Provisional application No. 63/003,728, filed on Apr. 1, 2020.

(51) **Int. Cl.**
B25J 15/06 (2006.01)
B25J 15/00 (2006.01)

(52) **U.S. Cl.**
CPC **B25J 15/0683** (2013.01); **B25J 15/0052** (2013.01)

(58) **Field of Classification Search**
CPC B25J 15/0683; B25J 15/0033; B25J 15/0052; B66C 1/0206; B66C 1/0231; B66C 1/0243

(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,702,038 A * 2/1955 Uddenberg et al. . A61B 17/442 606/123

2,916,059 A * 12/1959 Wong B65B 31/047 53/512

(Continued)

FOREIGN PATENT DOCUMENTS

EP 3520973 A1 8/2019

WO WO 2021/202894 10/2021

OTHER PUBLICATIONS


U.S. Appl. No. 62/962,391, filed Jun. 17, 2020, David Gealy.
(Continued)

Primary Examiner — Dean J Kramer
(74) *Attorney, Agent, or Firm* — Vista IP Law Group, LLP

(57) **ABSTRACT**

An end effector device and system for suction-based grasping of bagged objects that can include a body structure with a vacuum line opening and an object engagement region, the vacuum line opening being configured to couple at least one pressure line of a vacuum pressure system to a defined internal channel of the body structure; the body structure comprising an internal structure that defines a concave inner chamber with a chamber opening at the object engagement region; and the internal structure comprising an array of inlets positioned along at least one wall of the concave inner chamber, wherein each inlet defines an opening in the body to the defined internal channel. The body structure may additionally include a suction cup system that comprises a flexible sealing lip at the object engagement region; wherein the chamber opening being positioned within a grasping region of the sealing lip.

22 Claims, 28 Drawing Sheets

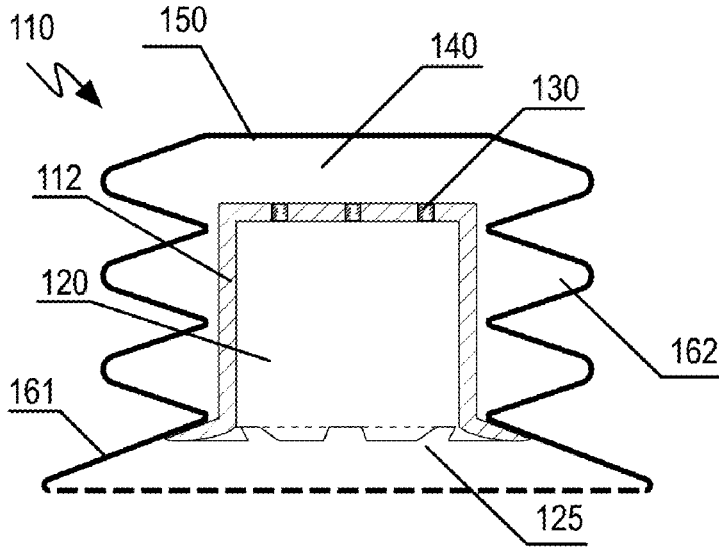

(58) **Field of Classification Search**

USPC 294/188
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,005,652 A * 10/1961 Helm B66C 1/0212
294/189
3,743,340 A * 7/1973 Williamann B66C 1/0212
294/186
3,901,502 A * 8/1975 Vits B65H 3/0883
271/106
4,505,505 A 3/1985 Senaratne
4,917,427 A * 4/1990 Scaglia B65G 47/91
414/627
5,192,070 A * 3/1993 Nagai B25J 15/0683
271/90
5,344,202 A 9/1994 Ramler et al.
5,882,055 A 3/1999 Smith
6,193,291 B1 * 2/2001 Morroney B25B 11/007
294/189
6,517,130 B1 2/2003 Donoso et al.
7,000,964 B1 2/2006 Porras et al.
8,251,415 B2 8/2012 Lomerson
8,560,121 B2 10/2013 Hjørnet
8,960,751 B2 2/2015 Regan et al.
2012/0319416 A1 * 12/2012 Ellis B25J 15/0616
414/800
2019/0061174 A1 2/2019 Robinson et al.
2019/0240847 A1 * 8/2019 Quast B65G 47/91
2020/0047352 A1 * 2/2020 Nakayama B65G 47/91
2020/0048014 A1 * 2/2020 Nakayama B25J 15/0616
2021/0308874 A1 10/2021 Gealy et al.
2021/0308875 A1 10/2021 Gealy et al.

OTHER PUBLICATIONS

Non-Final Office Action for U.S. Appl. No. 17/220,694 dated Jun. 9, 2023.
Final Office Action for U.S. Appl. No. 17/220,694 dated Apr. 5, 2023.
Non-Final Office Action for U.S. Appl. No. 17/220,694 dated Sep. 20, 2022.
Search Report for EP Patent Appln. No. 21778867.8 dated Jul. 14, 2021.
PCT International Search Report for International Appln. No. PCT/US21/25410, Applicant Ambidextrous, Inc., dated Jul. 14, 2021 (23 pages).
Notice of Allowance for U.S. Appl. No. 17/220,694 dated Dec. 1, 2023.
A. Ali, M. Hosseini, and B. Sahari, "A review of constitutive models for rubber-like materials," *American Journal of Engineering and Applied Sciences*, vol. 3, No. 1, pp. 232-239, 2010.
N. Correll, K. E. Bekris, D. Berenson, O. Brock, A. Causo, K. Hauser, K. Okada, A. Rodriguez, J. M. Romano, and P. R. Wurman, "Analysis and observations from the first amazon picking challenge," *IEEE Transactions on Automation Science and Engineering*, 2016.
C. Eppner, S. Hofer, R. Jonschkowski, R. M. Martin, A. Sieverling, V. Wall, and O. Brock, "Lessons from the amazon picking challenge: Four aspects of building robotic systems." in *Robotics: Science and Systems*, 2016.

C. Hernandez, M. Bharatheesha, W. Ko, H. Gaiser, J. Tan, K. van Deurzen, M. de Vries, B. Van Mil, J. van Egmond, R. Burger, et al., "Team delft's robot winner of the amazon picking challenge 2016," arXiv preprint arXiv:1610.05514, 2016.

X. Provot et al., "Deformation constraints in a mass-spring model to describe rigid cloth behaviour," in *Graphics interface*. Canadian Information Processing Society, 1995, pp. 147-14.

H. S. Stuart, M. Bagheri, S. Wang, H. Barnard, A. L. Sheng, M. Jenkins, and M. R. Cutkosky, "Suction helps in a pinch: Improving underwater manipulation with gentle suction flow," in *Intelligent Robots and Systems (IROS), 2015 IEEE/RSJ International Conference on*. IEEE, 2015, pp. 2279-2284.

B. Bahr, Y. Li, and M. Najafi, "Design and suction cup analysis of a wall climbing robot," *Computers & electrical engineering*, vol. 22, No. 3, pp. 193-209, 1996.

N. C. Tsourveloudis, R. Kolluru, K. P. Valavanis, and D. Gracanin, "Suction control of a robotic gripper: A neuro-fuzzy approach," *Journal of Intelligent & Robotic Systems*, vol. 27, No. 3, pp. 215-235, 2000.

A. J. Valencia, R. M. Idrovo, A. D. Sappa, D. P. Guingla, and D. Ochoa, "A 3d vision based approach for optimal grasp of vacuum grippers," in *Electronics, Control, Measurement, Signals and their Application to Mechatronics (ECMSM), 2017 IEEE International Workshop of*. IEEE, 2017, pp. 1-6.

K.-T. Yu, N. Fazell, N. Chavan-Dafle, O. Taylor, E. Donion, G. D. Lankenau, and A. Rodriguez, "A summary of team MIT's approach to the amazon picking challenge 2015," arXiv preprint arXiv:1604.03639, 2016.

A. Zeng, S. Song, K.-T. Yu, E. Donlon, F. R. Hogan, M. Bauzà, D. Ma, O. Taylor, M. Liu, E. Romo, N. Fazeli, F. Alet, N. Chavan-Dafle, R. Holladay, I. Morona, P. Q. Nair, D. Green, I. Taylor, W. Liu, T. A. Funkhouser, A. Rodriguez, "Robotic pick-and-place of novel objects in clutter with multi-affordance grasping and cross-domain image matching", in *IEEE International Conference on Robotics and Automation (ICRA)*.

D. Morrison, A. W. Tow, M. McTaggart, R. Smith, N. Kelly-Boxall, S. Wade-McCue, J. Erskine, R. Grinover, A. Gurman, T. Hunn, D. Lee, A. Milan, T. Pham, G. Rallos, A. Razjigaev, T. Rowntree, K. Vijay, Z. Zhuang, C. Lehnert, I. Reid, P. Corke, J. Leitner, "Cartman: The low-cost cartesian manipulator that won the amazon robotics challenge", in *IEEE International Conference on Robotics and Automation (ICRA) (IEEE, 2018)*, pp. 7757-7764.

R. Kolluru, K. P. Valavanis, and T. M. Herbert, "Modeling, analysis, and performance evaluation of a robotic gripper system for limp material handling," *IEEE Transactions on Systems, Man, and Cybernetics, Part B (Cybernetics)*, vol. 28, No. 3, pp. 480-486, 1998.

G. Mantriota, "Theoretical model of the grasp with vacuum gripper," *Mechanism and machine theory*, vol. 42, No. 1, pp. 2-17, 2007.
Y. Yoshida and S. Ma, "Design of a wall-climbing robot with passive suction cups," in *Robotics and Biomimetics (ROBIO), 2010 IEEE International Conference on*. IEEE, 2010, pp. 1513-1518.

"Vacuum End Effectors VEE," Schmalz, The Indicated Copyright Date On Document is May 2018.

Notice of Allowance for U.S. Appl. No. 17/220,694 dated Apr. 17, 2024.

Extended European Search Report for EP Patent Appln. No. 21778867.8 dated Mar. 20, 2024.

* cited by examiner

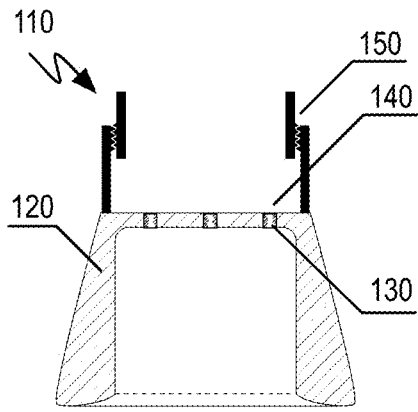


FIGURE 1A

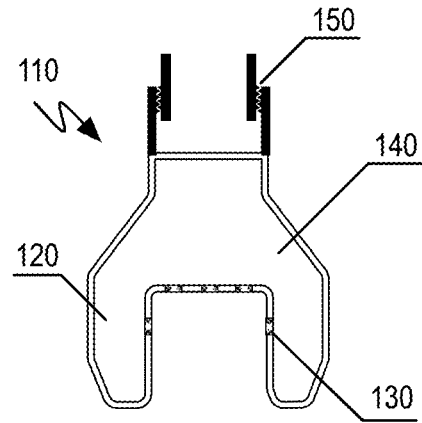


FIGURE 1B

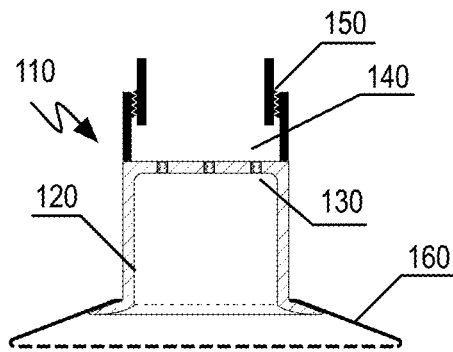


FIGURE 1C

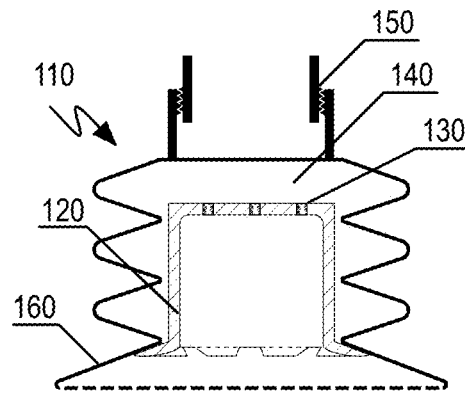


FIGURE 1D

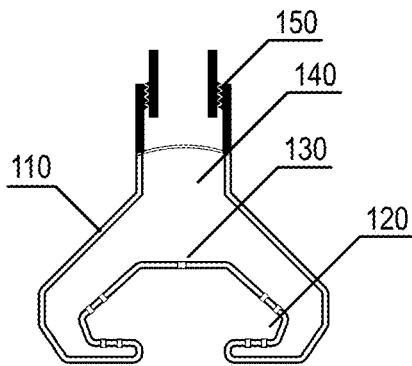


FIGURE 1E

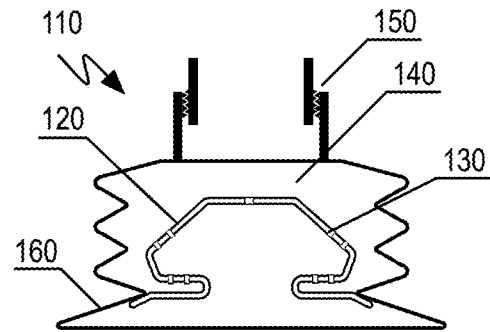


FIGURE 1F

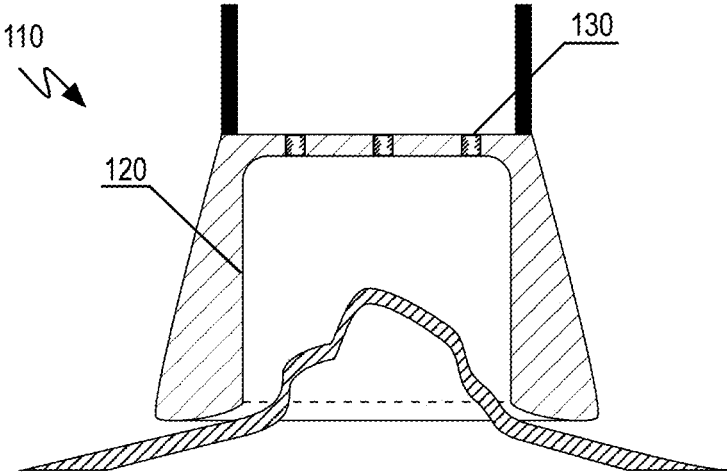


FIGURE 2A

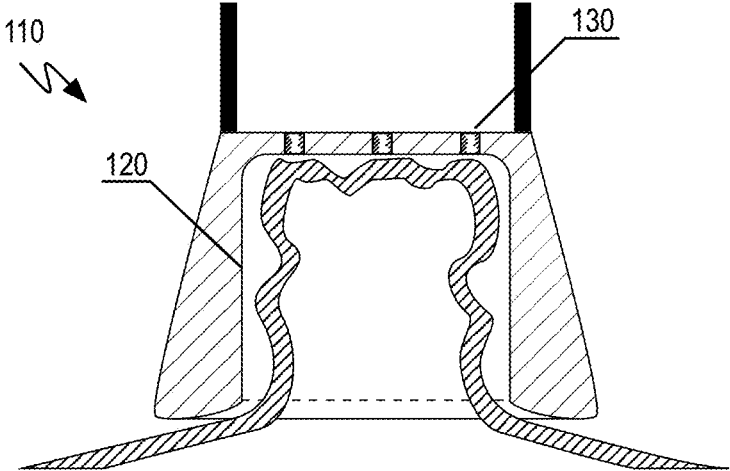


FIGURE 2B

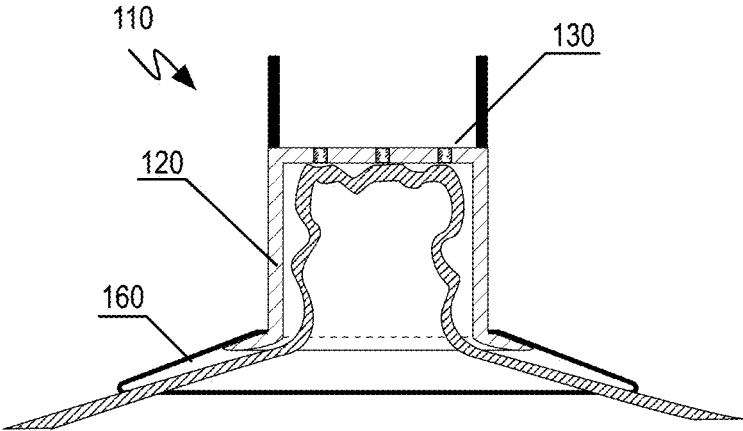


FIGURE 3A

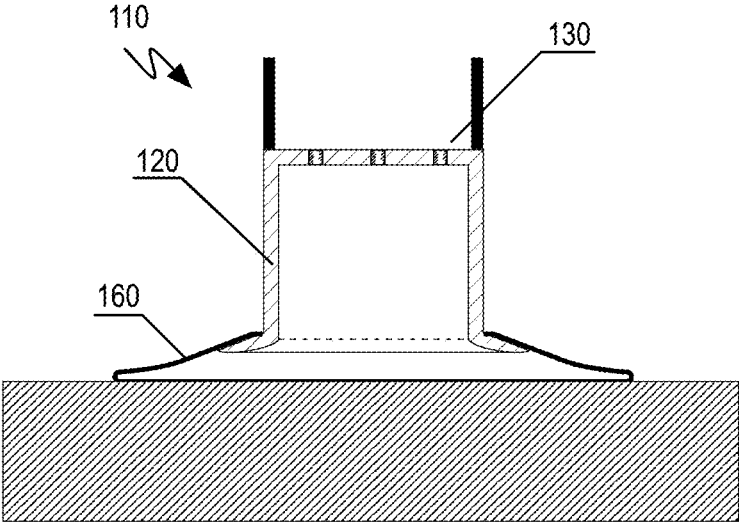


FIGURE 3B

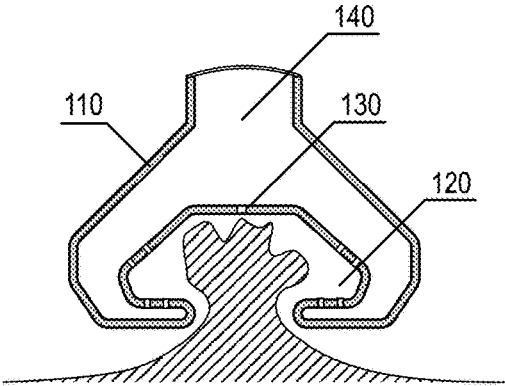


FIGURE 4A

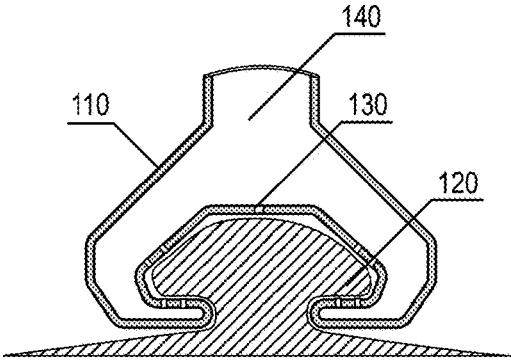


FIGURE 4B

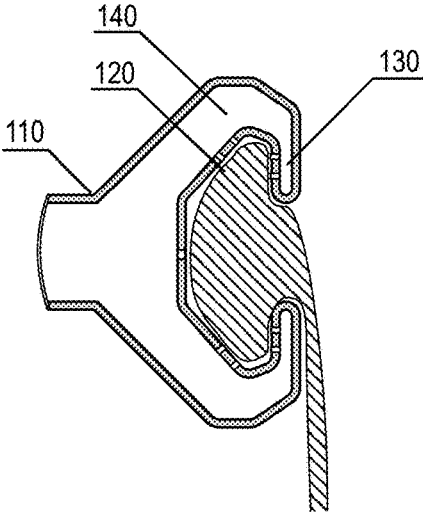


FIGURE 4C

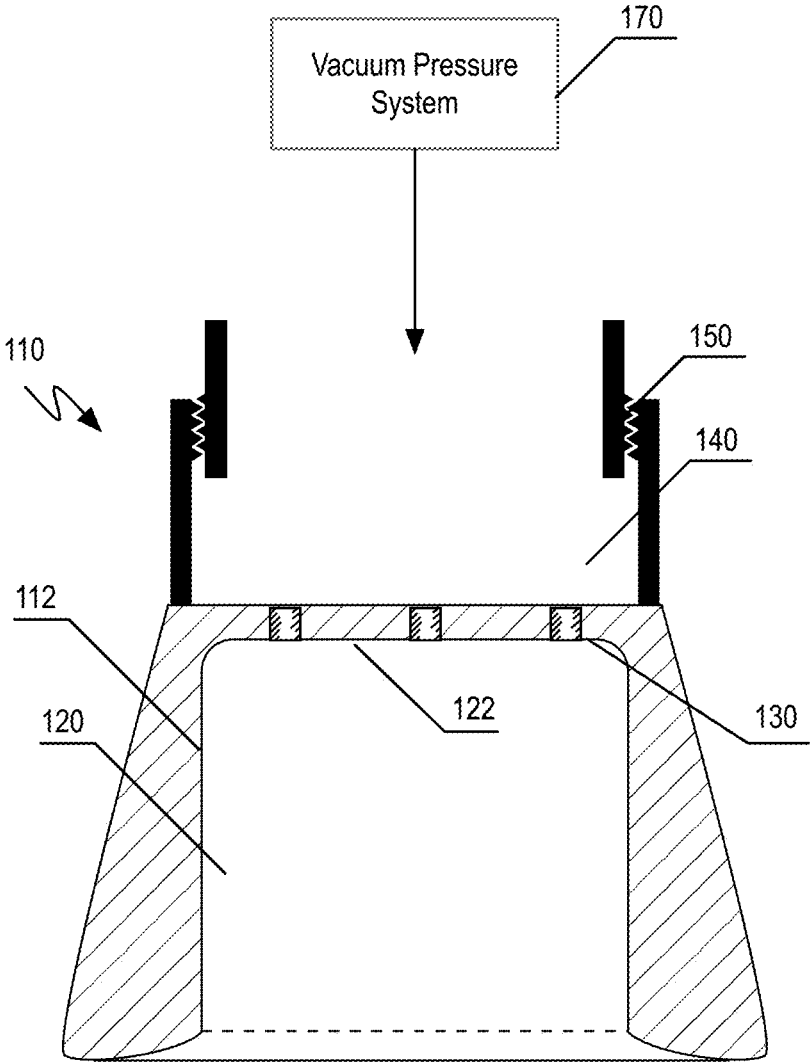


FIGURE 5

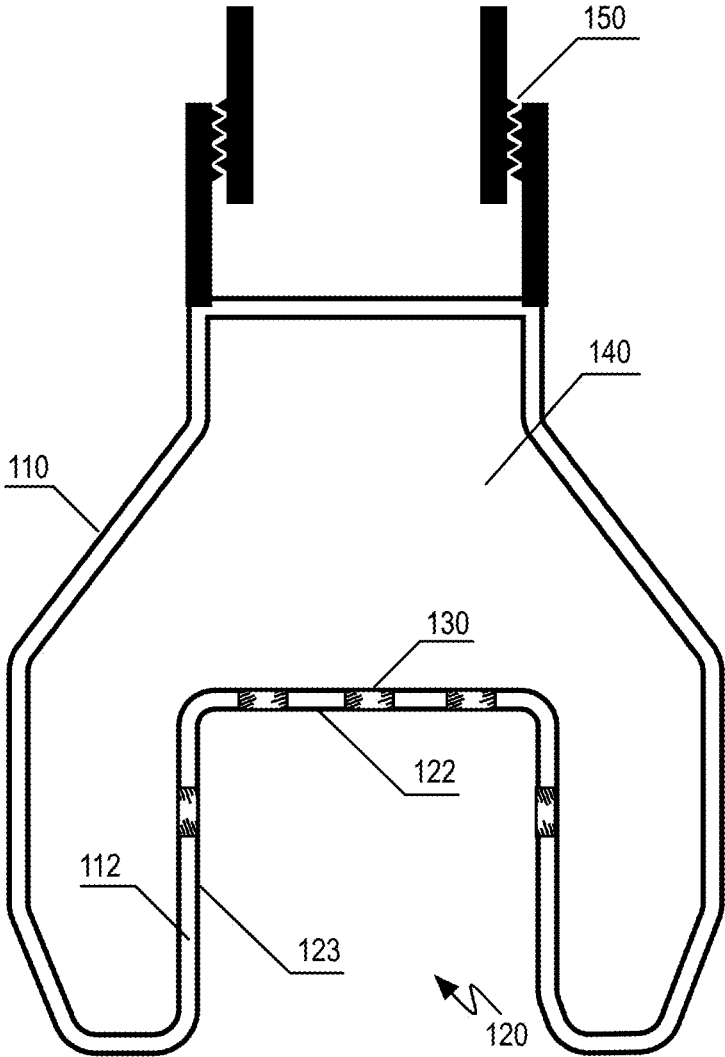


FIGURE 6

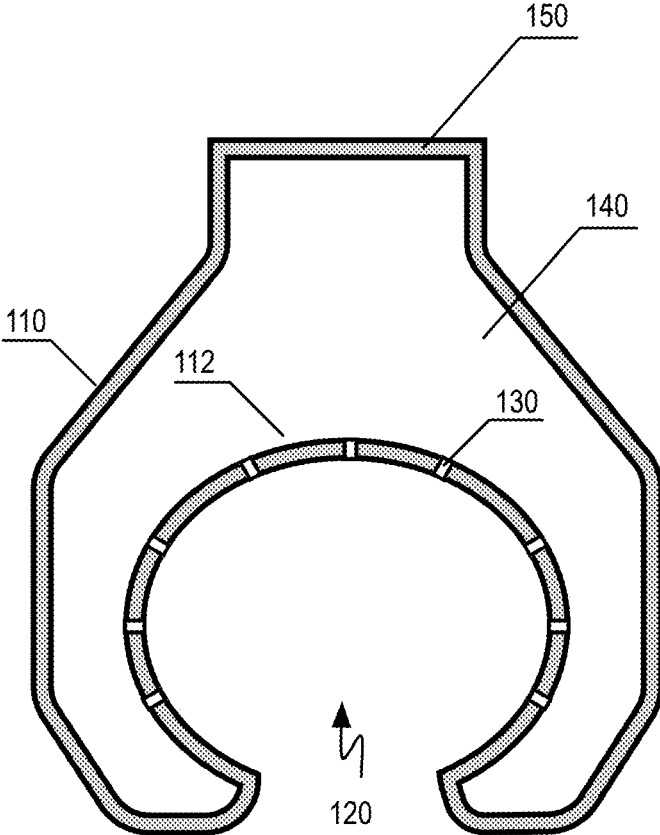


FIGURE 7

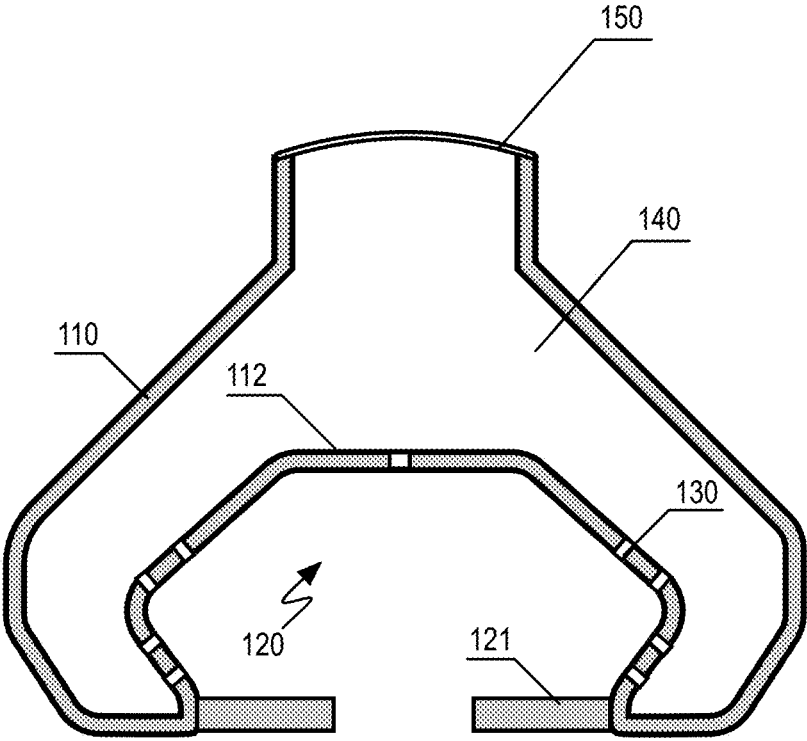


FIGURE 8

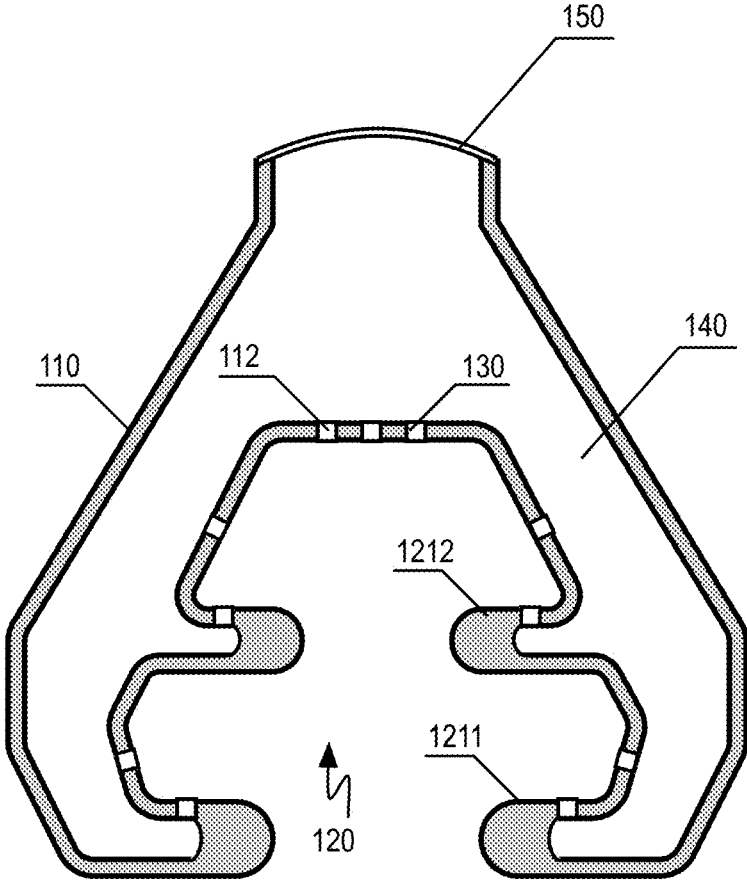


FIGURE 9

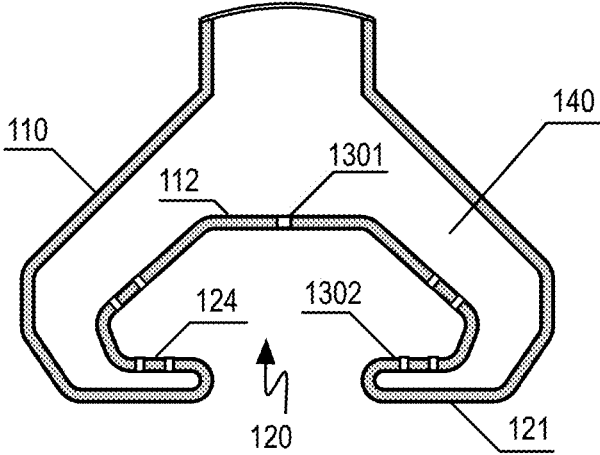


FIGURE 10A

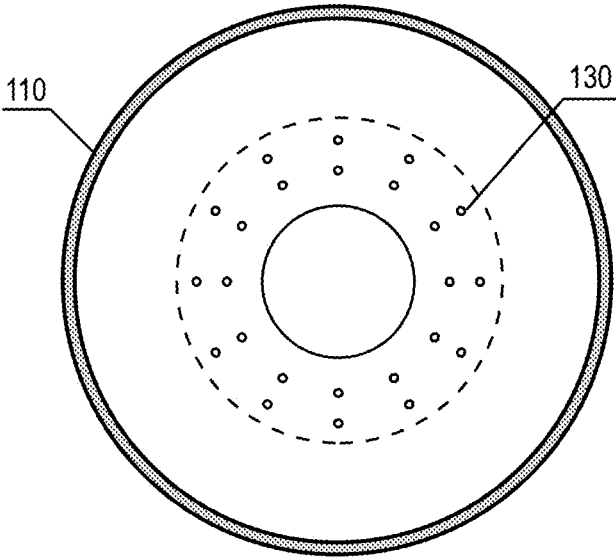


FIGURE 10B

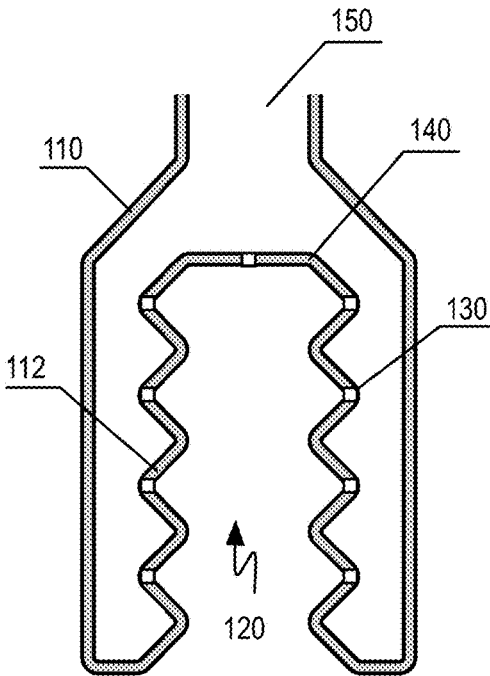


FIGURE 11A

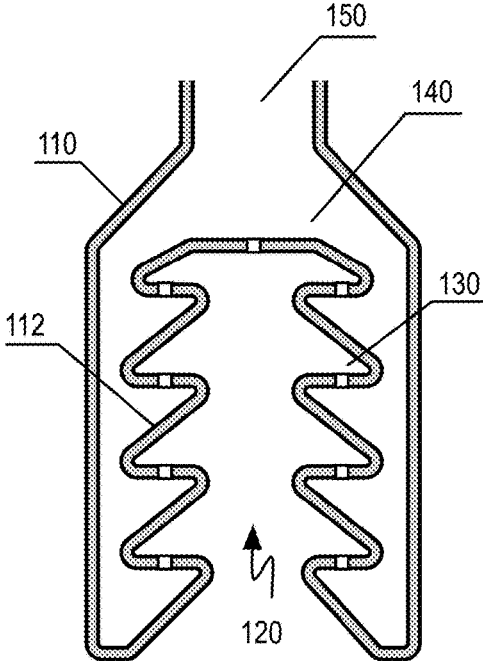


FIGURE 11B

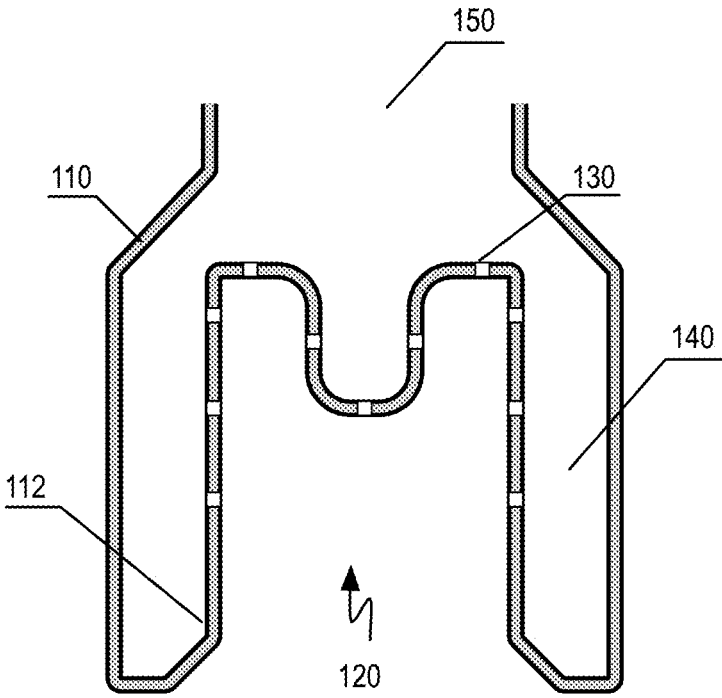


FIGURE 12

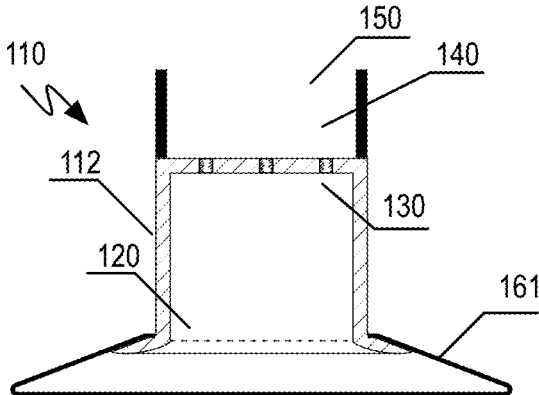


FIGURE 13A

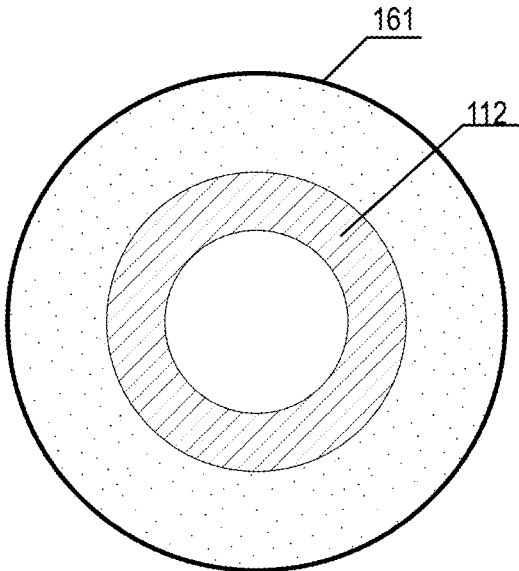


FIGURE 13B

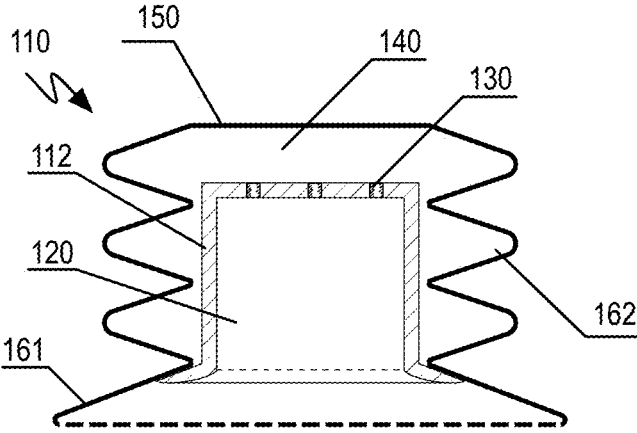


FIGURE 14A

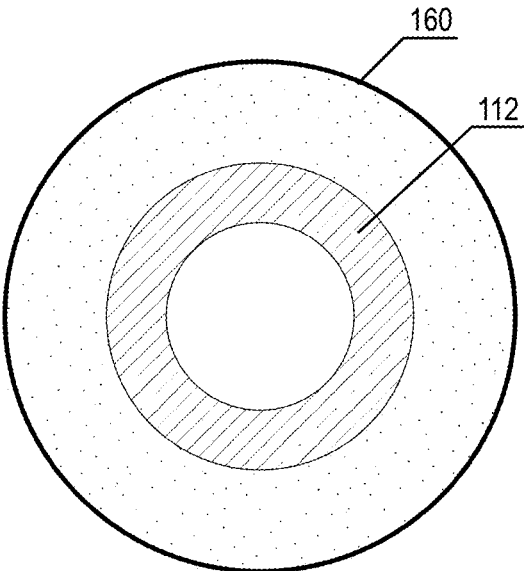


FIGURE 14B

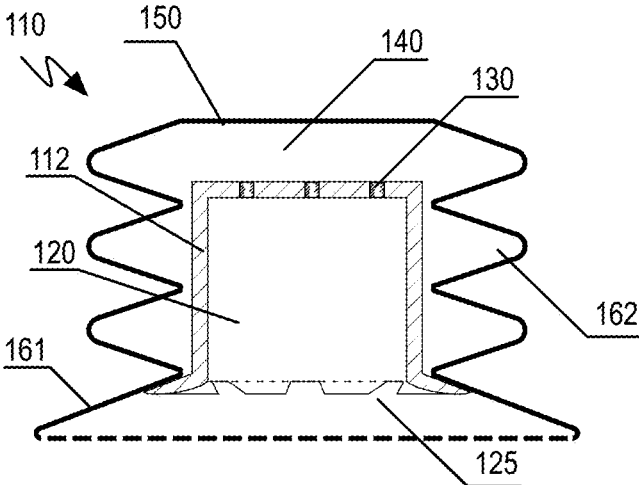


FIGURE 15A

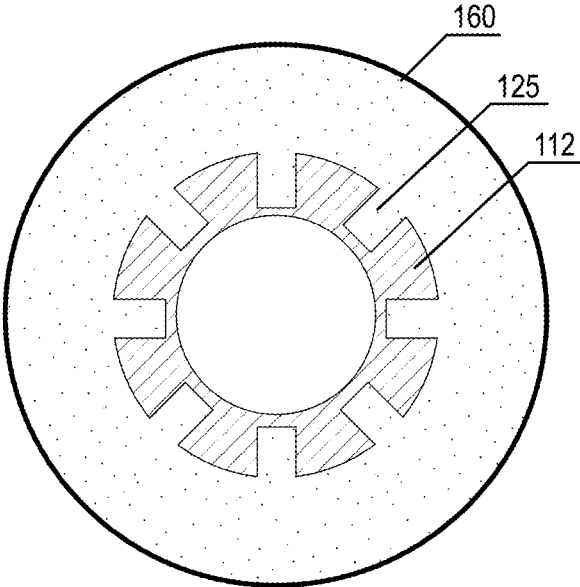


FIGURE 15B

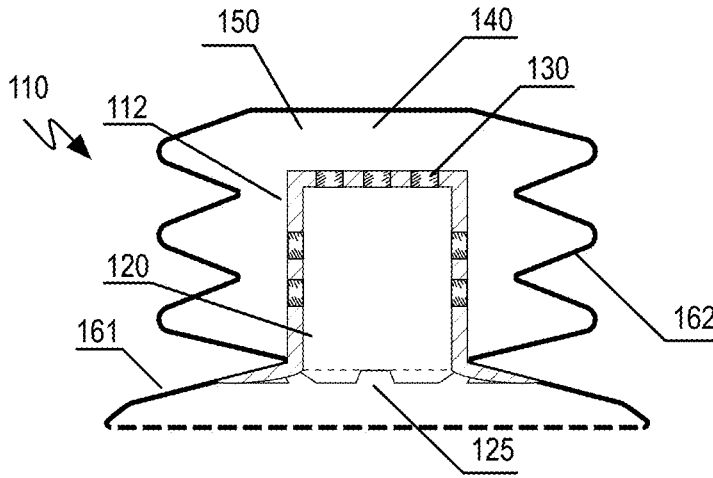


FIGURE 16A

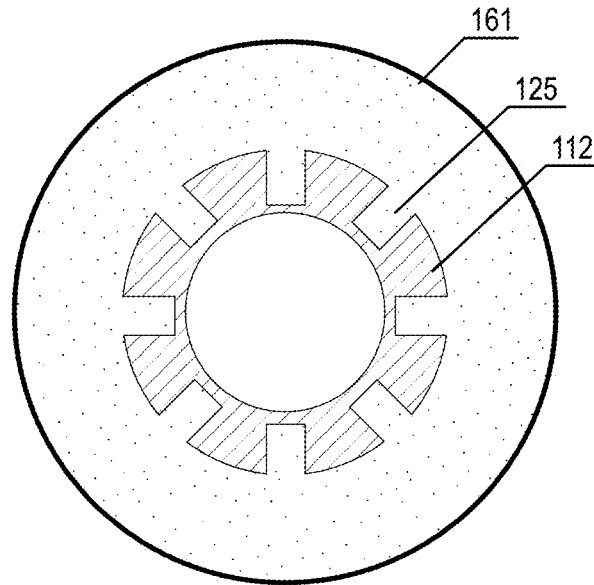


FIGURE 16B

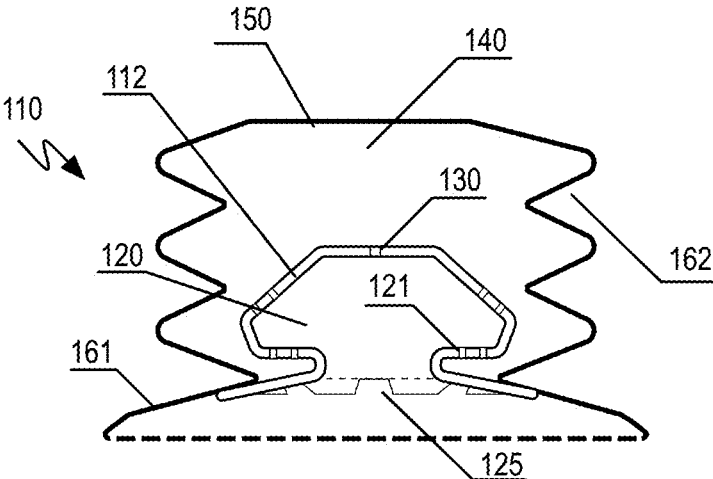


FIGURE 17A

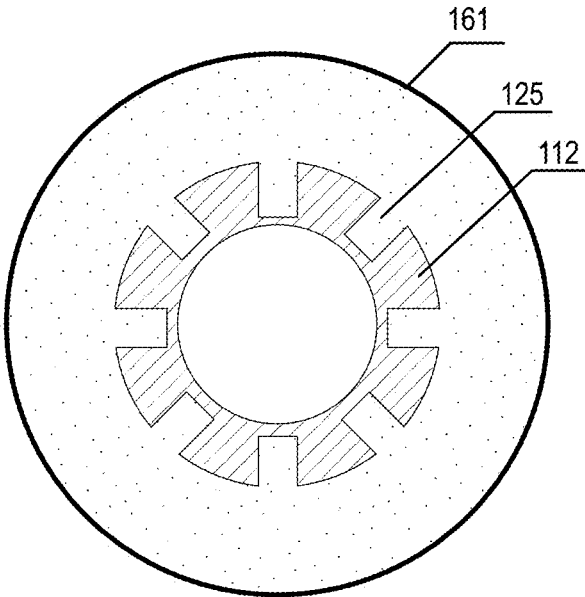
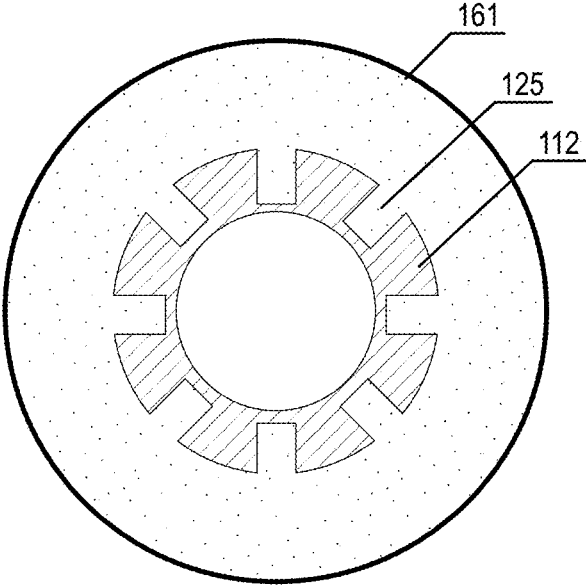
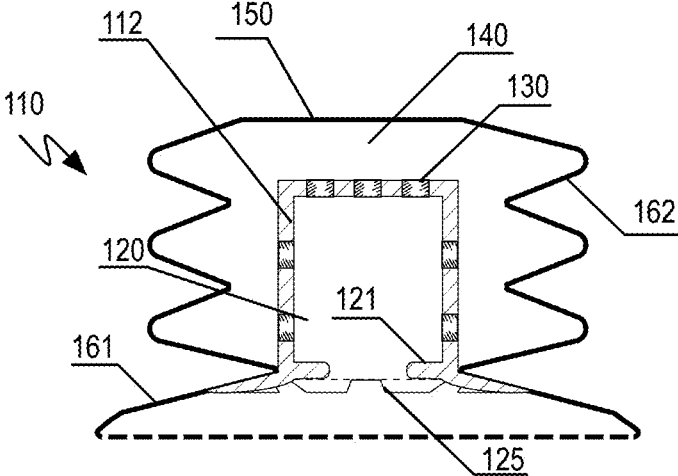


FIGURE 17B



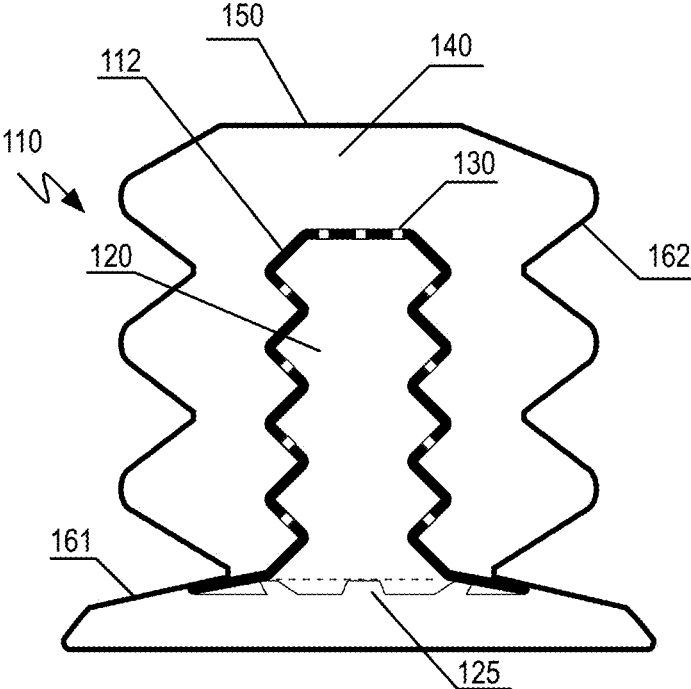


FIGURE 19

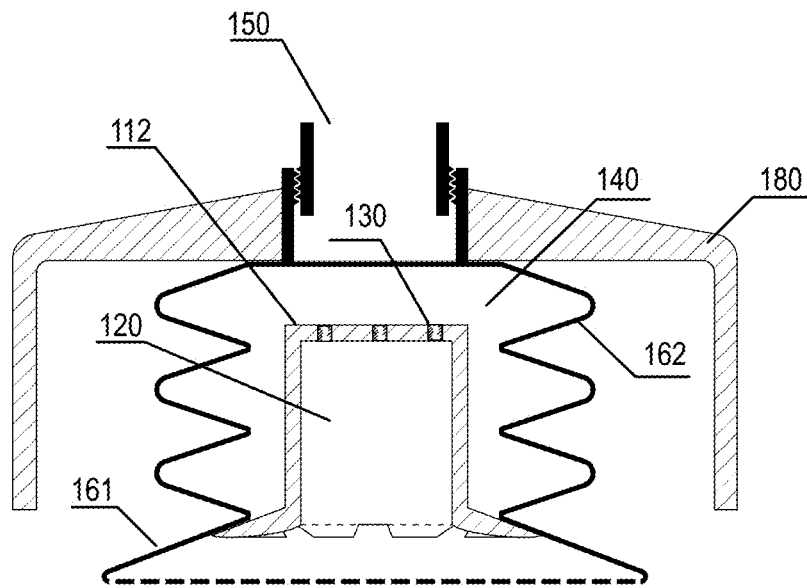


FIGURE 20A

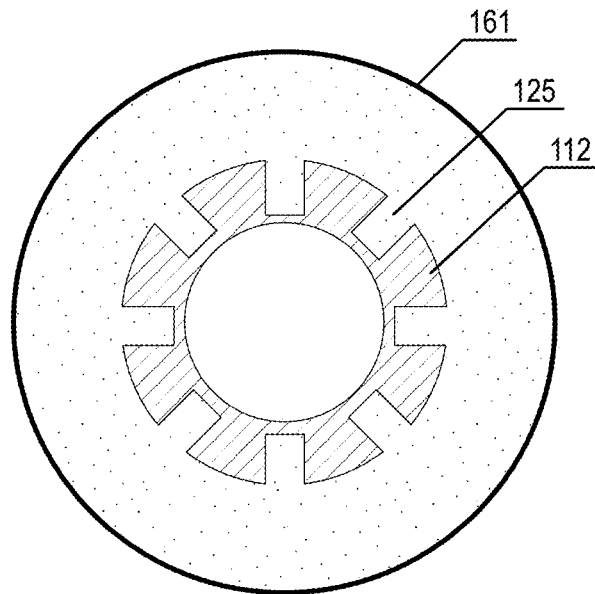


FIGURE 20B

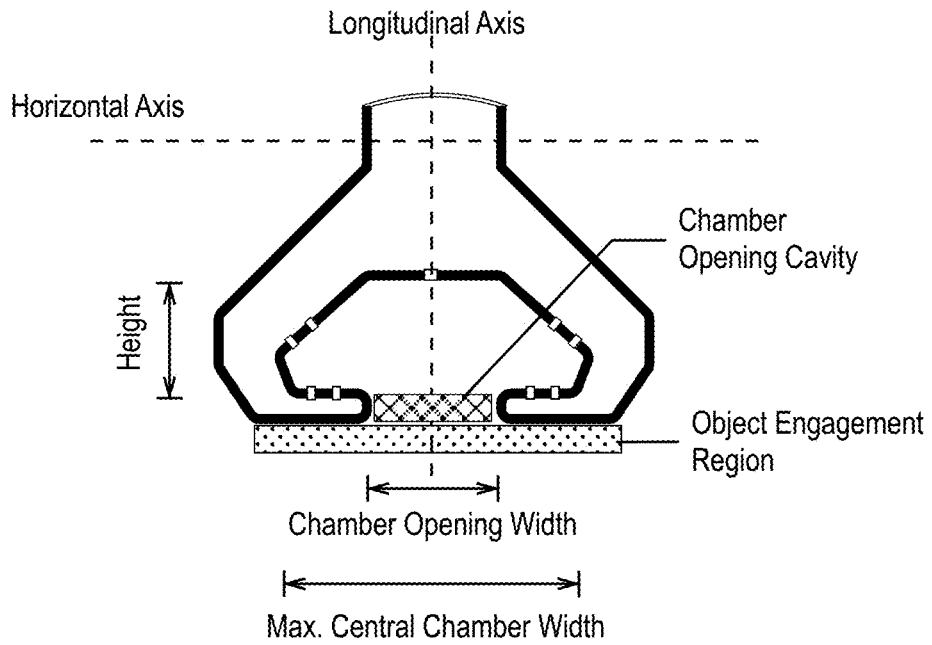


FIGURE 21A

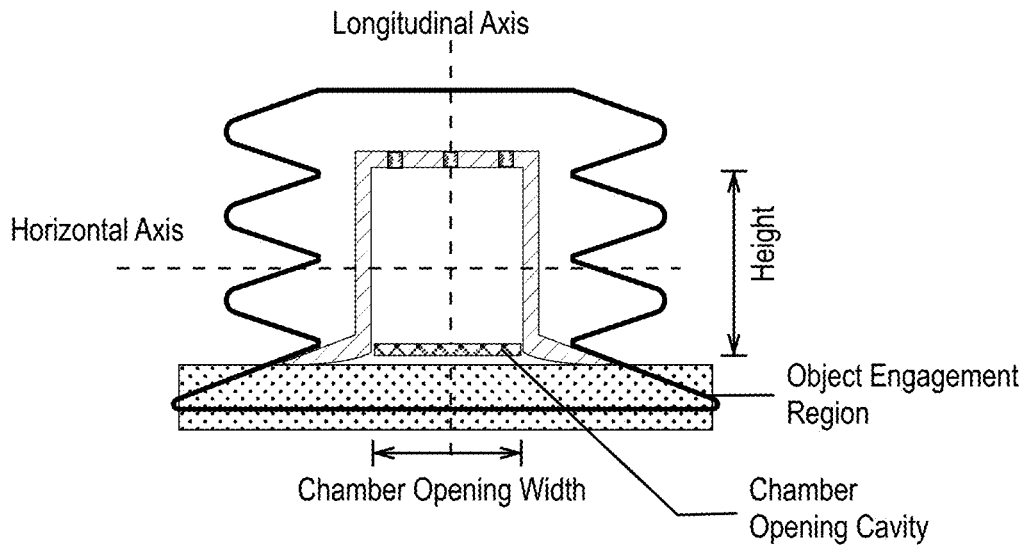


FIGURE 21B

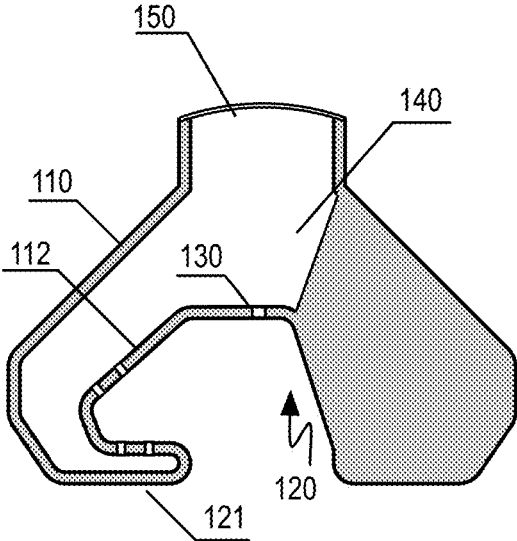


FIGURE 22A

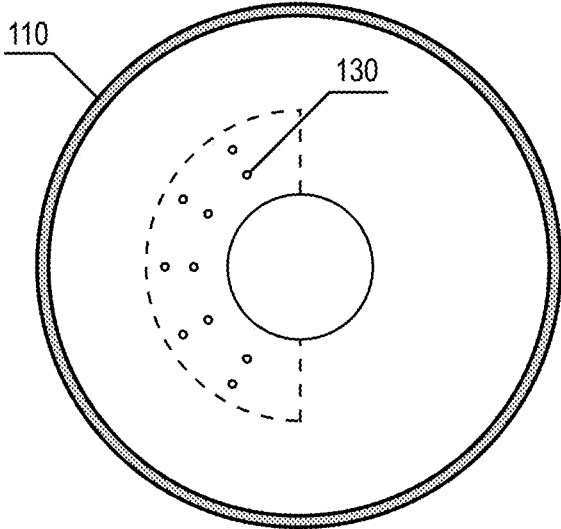


FIGURE 22B

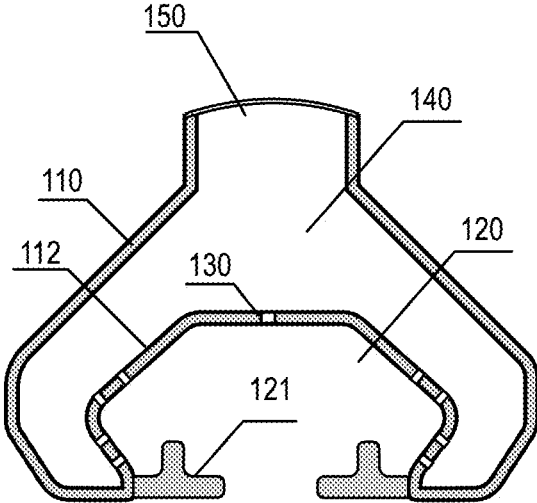


FIGURE 23

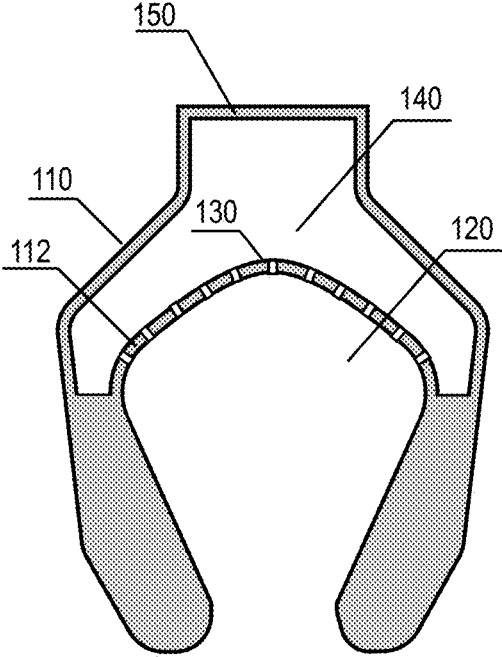


FIGURE 24

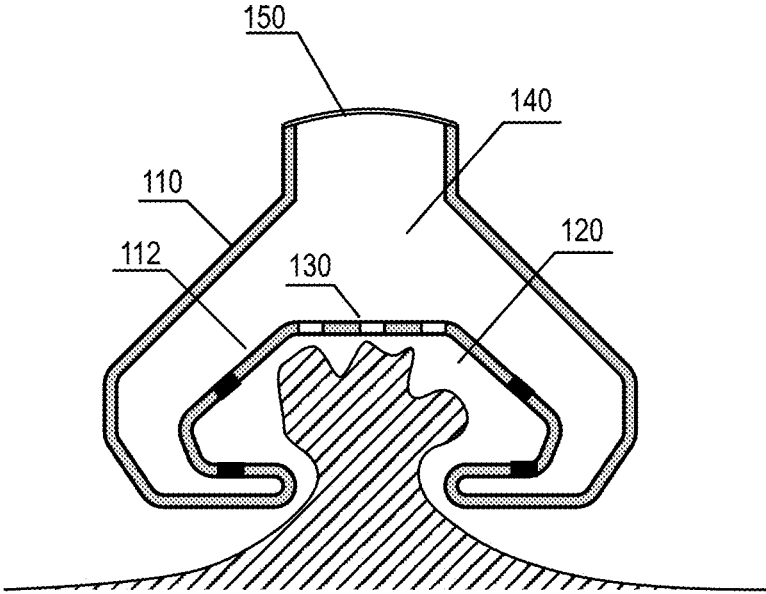


FIGURE 25A

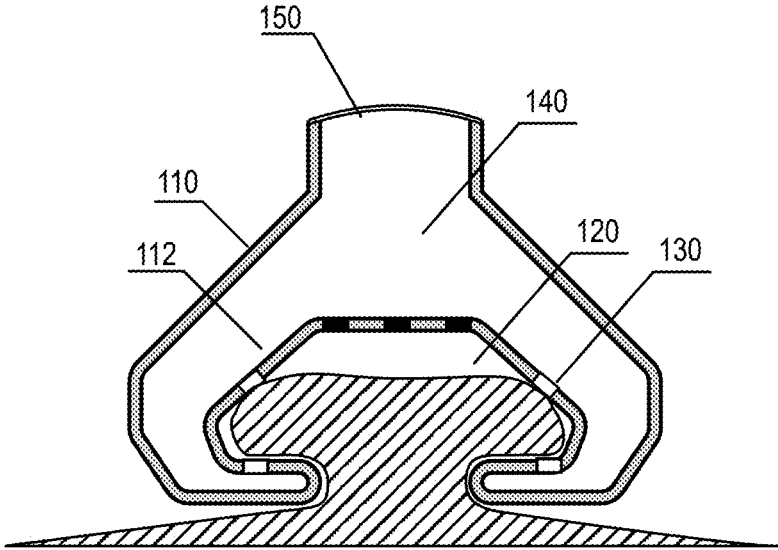


FIGURE 25B

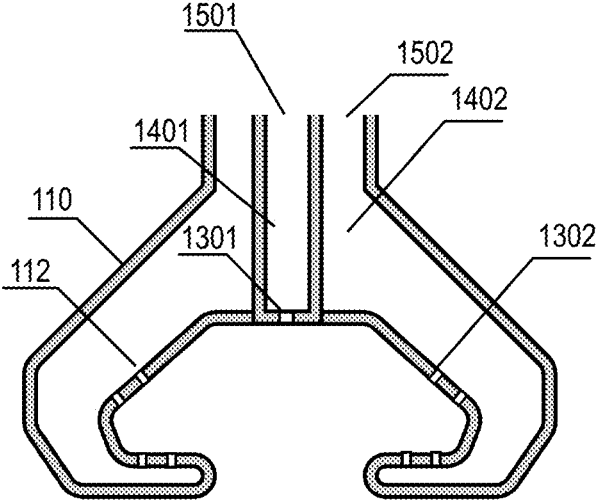


FIGURE 26

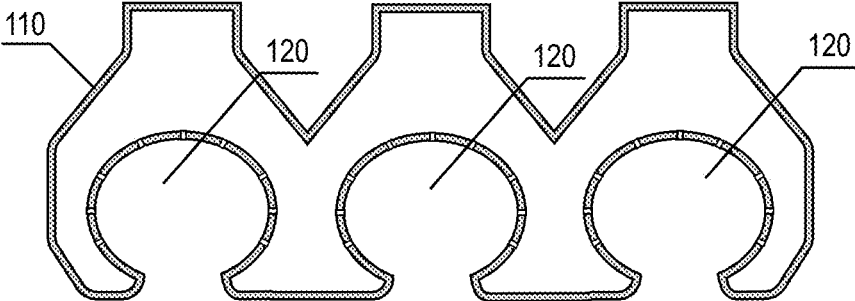


FIGURE 27

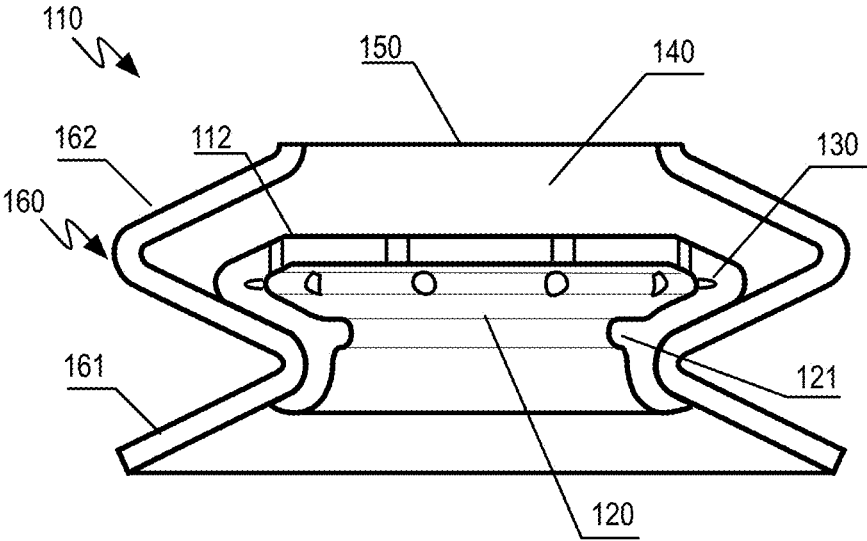


FIGURE 28

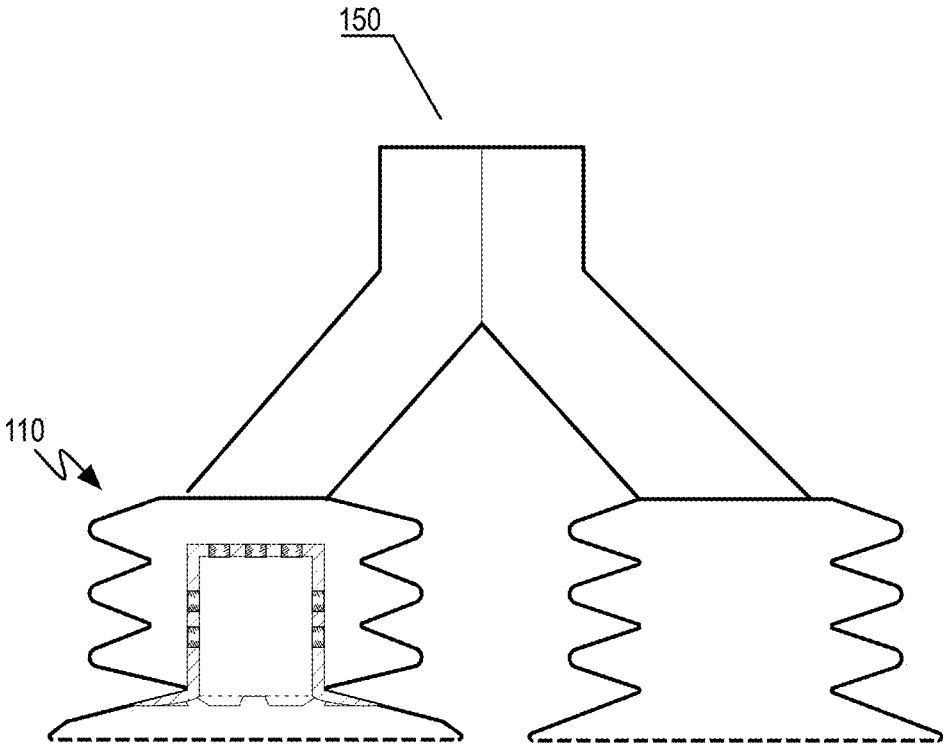


FIGURE 29

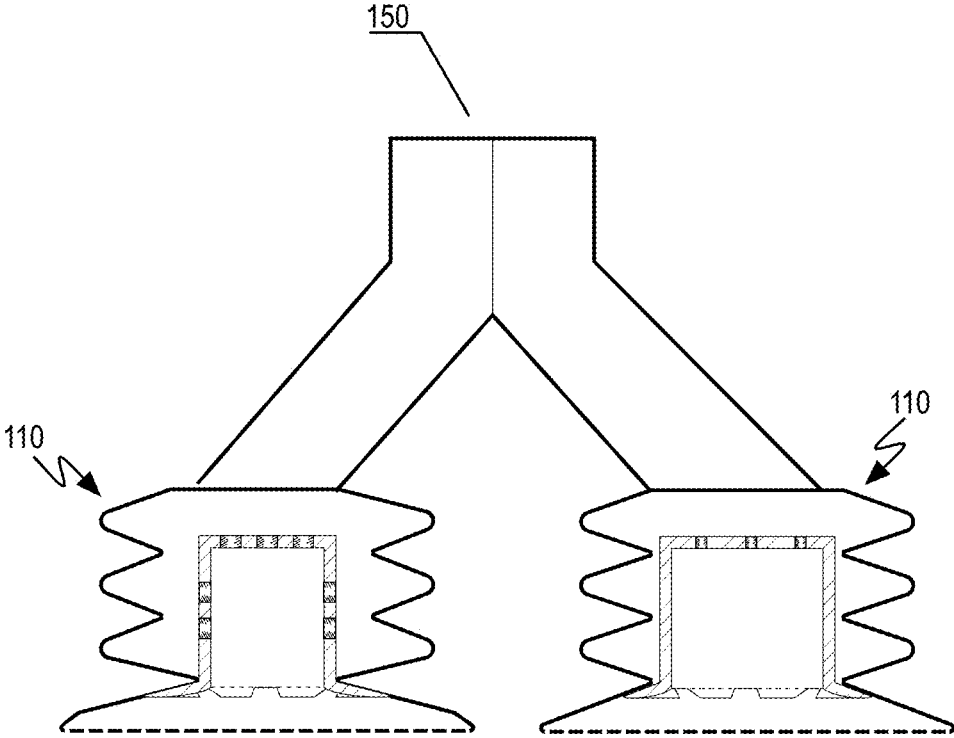


FIGURE 30

1

END EFFECTOR DEVICE AND SYSTEM FOR SUCTION-BASED GRASPING OF BAGGED OBJECTS

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of U.S. Provisional Application No. 63/003,728, filed on 1 Apr. 2020, which is incorporated in its entirety by this reference.

TECHNICAL FIELD

This invention relates generally to the field of pick and place end effectors, and more specifically to a new and useful end effector device and system for suction-based grasping of bag wrapped objects.

BACKGROUND

Pick and place devices frequently use suction cup type end effectors for picking up objects. The suction cup end effectors are used with controlled pressure vacuum systems to establish a pressure-based seal when grasping an object for manipulation. A typical type of end effector is a suction cup device made of flexible material with a series of bellows connected to the engagement side of the end effector. While these end effectors are useful for some materials like rigid objects with flat surfaces, they are not as useful for all types of objects and have low probability of success at gripping items wrapped in deformable membranes such as plastic or silicone bags.

Grasping and manipulation of bagged goods is a common objective. With the rise of e-commerce, there is an increasing demand for automation involving bagged goods. However, grabbing a bagged item using a suction cup end effector has many issues. One primary challenge is that a loose bag membrane can slide or roll when the object is grasped. This can break the pressure-based seal holding the item resulting in a dropped item. Material rolling can be a large issue particularly when holding a bagged object at an angle to gravity. The weight of an object can apply a pulling force on the bag where the bag rolls and peels down the face of the suction cup, breaking the seal.

Additionally, many suction cup designs have thin flexible flanges that traditionally must deform to conform to a flexible surface like a bag. However, these thin and flexible materials are prone to breakdown and have a limited usable lifecycle.

Alternative end effectors like actuated grippers maybe used but they require an additional mechanism and have other challenges in dealing with bagged objects.

Dealing with bagged items presents an even greater challenge when a pick and place device must deal with handling a diversity of types of packaged items such as bagged items and boxed items.

Thus, there is a need in the pick-and-place end effectors field to create a new and useful end effector device and system for suction-based grasping of bag wrapped objects. This invention provides such a new and useful system and method.

BRIEF DESCRIPTION OF THE FIGURES

FIGS. 1A-1F are side cross sectional schematics of exemplary variations of the end effector with a concave inner chamber.

2

FIGS. 2A and 2B are side cross sectional schematics of bag interactions with the end effector.

FIGS. 3A and 3B are side cross sectional schematics of bag interactions of a hybrid end effector variation engaging with a bagged object in FIG. 3A and a solid object in FIG. 3B.

FIGS. 4A-4C are schematic representations of an exemplary sequence of the end effector grasping a bag and holding the bag at different orientations.

FIG. 5 is a detailed side cross sectional schematic representation of one end effector variation with a concave inner chamber.

FIG. 6 is a detailed side cross sectional schematic representation of an alternative end effector variation with a solid body and inlets on different walls.

FIG. 7 is a side cross sectional schematic representation of one variation of the end effector with inlets along the internal surface of an internal structure.

FIG. 8 is a side cross sectional schematic representation showing features of the end effector for one variation of the end effector with a lip structure.

FIG. 9 is a side cross sectional schematic representation of a variation of the end effector with an internal lip feature.

FIG. 10A is a side cross sectional schematic representation of one variation of the end effector with a lip.

FIG. 10B is a horizontal cross sectional schematic representation illustrating the inlet pattern on the lip of one variation of the end effector.

FIGS. 11A and 11B are side cross sectional schematic representations of two different variations where the inner chamber includes side internal walls with a patterned surface.

FIG. 12 is a side cross sectional schematic representation of one variation of the end effector with a downward protruding structure feature.

FIG. 13A is a side cross sectional schematic representation of one variation of a hybrid end effector with a sealing lip.

FIG. 13B is a horizontal cross sectional schematic representation illustrating the sealing lip extending outward from the chamber opening.

FIG. 14A is a side cross sectional schematic representation of one variation of a hybrid end effector with a sealing lip and bellows.

FIG. 14B is a horizontal cross sectional schematic representation illustrating the sealing lip extending outward from the chamber opening.

FIG. 15A is a side cross sectional schematic representation of one variation of a hybrid end effector with a transitional air channels.

FIG. 15B is a horizontal cross sectional schematic representation illustrating an exemplary patterning of transitional air channels.

FIG. 16A is a side cross sectional schematic representation of one variation of a hybrid end effector with inlets on differing walls of the internal structure.

FIG. 16B is a horizontal cross sectional schematic representation of the hybrid end effector with inlets on differing walls of the internal structure.

FIG. 17A is a side cross sectional schematic representation of one variation of a hybrid end effector with an expanded concave inner chamber.

FIG. 17B is a horizontal cross sectional schematic representation of a hybrid end effector with an expanded concave inner chamber.

FIG. 18A is a side cross sectional schematic representation of one variation of a hybrid end effector with a lip structure.

FIG. 18B is a horizontal cross sectional schematic representation of a hybrid end effector with a lip structure.

FIG. 19 is a side cross sectional schematic representation of one variation of a hybrid end effector with structural features in the inner chamber.

FIG. 20A is a side cross sectional schematic representation of one variation of a hybrid end effector with a rigid shroud.

FIG. 20B is a horizontal cross sectional schematic representation of a hybrid end effector with a rigid shroud.

FIGS. 21A and 21B are side cross sectional schematic representations with exemplary dimensional terms.

FIG. 22A is a side cross sectional schematic representation of one variation of the end effector with a lip over a limited portion of the chamber opening.

FIG. 22B is a horizontal cross sectional schematic representation illustrating the inlet pattern on the lip of one variation with a lip over a limited portion of the chamber opening.

FIGS. 23 and 24 are side cross sectional schematic representations of exemplary variations of the end effector.

FIGS. 25A and 25B are side cross sectional schematic representations of actively controlled inlets being activated at different stages of grasping.

FIG. 26 is a side cross sectional schematic representation of a multi-channel variation of the end effector.

FIG. 27 is a side cross sectional schematic representation of a multi-chamber variation of the end effector.

FIG. 28 is a cross sectional schematic representation of a hybrid variation of the end effector showing detail of the internal structure inserted in a suction cup system.

FIG. 29 is a cross sectional schematic representation of a multi-headed end effector system with one bag gripping end effector and one suction cup end effector.

FIG. 30 is a cross sectional schematic representation of a multi-headed end effector system with two types of a bag gripping end effectors.

DESCRIPTION OF THE EMBODIMENTS

The following description of the embodiments of the invention is not intended to limit the invention to these embodiments but rather to enable a person skilled in the art to make and use this invention.

1. Overview

An end effector device and system for suction-based grasping of bag wrapped objects functions to use an internal restorative volume formed by an inner concave chamber. The restorative volume engages with bagged goods by pulling a portion of the bag material into the volume for pressurized grasping.

The end effector may be used with a variety of types of objects but may have enhanced performance for bagged objects and/or other objects with a flexible membranous gripping surface. In some variations, the end effector may be an end effector that can have high performance across a variety item types. For example, a hybrid end effector variation that includes integration of a suction cup flexible sealing lip, which may be suitable for grasping of boxed/solid items and bagged items, with the end effector naturally engaging with the item in a manner appropriate for that type of item.

Herein, “bagged object” is referenced as the general type of object that is gripped and manipulated but any suitable type of object may additionally or alternatively be used with the end effector.

As shown in the exemplary variations of the system in FIGS. 1A-1F, the end effector can leverage a rigid (or at least a semi-rigid) structure that forms a defined concave inner chamber with at least a subset of inlets recessed from an inner chamber opening.

As shown in exemplary variations of FIGS. 1A and 1B, an array of inlets may be positioned in various positions to augment how a bagged item is pulled and grasped within the inner chamber.

As shown in exemplary variations of FIGS. 1C and 1D, a hybrid variation can integrate a suction cup system. In a hybrid variation, the end effector device and system for suction-based grasping may include a surrounding flexible sealing lip, which can enable the end effector device to act as a suction cup end effector against suitable objects such as boxes or items with hard surfaces (or tightly bagged items), but for bagged items to be grasped through interaction with the concave chamber.

In some variations for further enhanced bag grasping, such as those shown in FIGS. 1E and 1F, the end effector device and system for suction-based grasping may employ the use of an array of multi-directional inlets in varying orientations as well as structural variations in the surface of the inner chamber. In some such variations, the concave chamber may further be an expanded concave chamber with a lip. The position of inlets and/or the differing directions of pressurized force may improve the end effector’s grasping of a bag and the end effector’s ability to manipulate bagged goods without the bag deforming and breaking the vacuum seal.

The various end effector design feature described herein may be combined in various combinations, such as shown in the examples of FIGS. 1A-1F. For example, a hybrid end effector can include a concave inner chamber with an array of inlets with varying orientations and structural features like a structural chamber opening lip and a suction cup system as shown in FIG. 1F. This may function to enable a hybrid end effector with enhanced bag grasping and manipulation capabilities. Other suitable feature combinations may alternatively be used.

The end effector is preferably coupled to a vacuum system and attached to a robotic actuation system. The end effector design may additionally be incorporated into a multi-headed end effector where one or multiple instances of the system are used possibly in combination with other types of end effectors.

The end effector can preferably be used for a pick and place robotic system or any suitable object manipulation system that is used to manipulate bagged goods and possibly other suitable goods. However, the end effector may alternatively be used with any suitable system that is designed to grab an object and in particular bagged objects. For example, the end effector may additionally have utility in object manipulation machines used in manufacturing, assembly, food preparation, food packaging, medical kitting, medical processing, and/or object processing systems.

The end effector and system for suction-based grasping may employ a variety of design features that promote improved grasping capabilities.

As one potential principal, the inner chamber provides a restorative volume in which a portion of the bag is pulled into the chamber. The flexible material of a bagged item,

5

when it engages with the system, is pulled within the internal concave chamber, providing a better grasp.

As another potential principal, the chamber expands the surface area of the bagging material onto which the inlets can apply a suction force. By varying the shape profile of the internal concave chamber and/or the depth/size of the chamber different chamber designs may be used for different flexible material grasping capabilities. These may be varied depending on the targeted type of grasped material, diversity of grasped materials/items, types of item manipulation, and/or other performance properties.

As yet another principal, the end effector may diversify the direction(s) of the suction forces. Inlets can be positioned along different defined planes on the internal concave chamber. In some cases, inlets of the internal concave chamber can be positioned so that the suction force is in a direction opposite that of the direction at the chamber opening to increase the friction force between the membrane and the end-effector chamber opening. When coupled with structural features that impede or prevent material peeling or slippage, this can result in a more secure grasp of bagged goods.

The end effector can function in part by leveraging the rigid (or at semi-rigid) structure with a set of inlets recessed from an inner chamber opening. In this way, when a bagged item is engaged by the end effector, the bag material is pulled into the structure of the inner chamber and thereby into the body of the end effector. As an exemplary description of the sequence of grasping interaction, the end effector can work by having a form such that, when de-pressurized, a bag is initially pulled into an inner chamber through a chamber opening as shown in FIG. 2A. Material of the bag is pulled up towards the top wall of the chamber. Bag material will generally be pulled to each or at least a plurality of these inlets establishing a seal as shown in FIG. 2B. With the bag pulled into the restorative volume of the concave inner chamber, the pressurized seal with the bag may be more resilient.

In a hybrid variation, the end effector naturally grasps an object based on the surface properties of the object. As shown FIG. 3A, a bagged object will have a bag grasped as described above. However, as shown in FIG. 3B, a boxed object (or other types of suitable objects) will engage with and be grasped through the suction cup system of the end effector.

In an exemplary system variation shown in FIGS. 4A-4C, the end effector may include other inlet and structural features to further augment how a bag is pulled into the structure of the chamber and grasped. The body of the end effector may work to mitigate occurrences of slippage or material rolling a bag through the design of the profile of the concave chamber and/or other structural features. As shown in FIG. 4A, when de-pressurized, a bag is initially pulled into an inner chamber through a chamber opening. The friction between the bag membrane and the entrance of the end effector can be low during this phase and the bag membrane is allowed to quickly enter into the inner chamber of the end effector. The arrangement of the inlets may be configured such that material of the bag is pulled up towards the top wall of the chamber, but then inlets along the side of the chamber and optionally the bottom edges of the chamber (possibly on a lip structure) then pull the bag material towards those inlets as shown in FIG. 4B. Bag material will generally be pulled to each or at least a plurality of these inlets establishing a seal because as flow to one of the inlets is blocked by the membrane, flow to the other inlets continues. Because of the enclosed shape of the end-effector

6

chamber (as defined by a central cavity), the bag membrane is wrapped around the entry edge of end-effector and a high-friction contact is initiated between the bag membrane and the end-effector. The arrangement of the inlets can include configuration to promote a desired sequence of engagement with a bag membrane during the initial gripping of the object. As one potential benefit of such end effector features, when the end effector is manipulated (e.g., rotated, torqued, or twirled in space), the edges of the chamber opening, and optionally other structural edges, mitigate opportunities for slippage and bag rolling as shown in FIG. 4C.

The system may provide a number of potential benefits. The system is not limited to always providing such benefits, and they are presented only as exemplary representations for how the system may be put to use. The list of benefits is not intended to be exhaustive and other benefits may additionally or alternatively exist.

As one potential benefit, the end effector device and system may enhance a machine's ability to grip bagged objects. In particular, the end effector device and system can enhance a machine's ability to grip weighted or heavier bagged objects and objects that have been packaged in loose membranes. For example, the end effector may be able to reliably grip loosely bagged items such as a coffee mug inside of a 12"x12" polybag.

As another potential benefit, the end effector device and system may, in some variations, be configured to operate as a hybrid end effector that can be used for grasping non-bagged objects, like boxes, as well as bagged objects. In some variations, the end effector device and system include design features such that the interaction can be such that, when a grasping action is performed, the interaction between the end effector and object naturally adapts so that objects are grasped in an appropriate mode. For example, a boxed object and/or a taut bagged object will naturally engage with an outer suction cup element while a bagged item with a loose membrane will have the bag material naturally pulled into the restorative volume. By selectively engaging with objects based on their physical surface properties, this may allow a pick and place robotic system to manipulate a non-heterogenous assortment of objects.

As another related potential benefit, the end effector device and system may enable machines to better manipulate bagged objects in addition to enhanced grasping. With lower occurrences of grip failure at different angles, machines can manipulate bagged goods in a variety of ways. The increased range of manipulation in combination with fewer instances of grasp failure result in increased efficiency for an automated system. For example, the end effector may be used to not only grasp and translate an object from one position to another, but to optionally also reorient the object.

As another potential benefit, the end effector may have a long usage lifetime. Some variations of the end effector can be made from rigid or semi rigid material that would be resistant to failure. Additionally, some end effector variations may be made from a single piece and/or have no moving pieces increasing the robustness of the device.

As yet another potential benefit, the end effector may work as a passive element using its physical design to better grasp objects. As a passive device, the end effector will not need additional actuators, sensors, and/or control systems as some grasping end effector solutions may require.

2. End Effector Details

As shown in FIG. 1A, the end effector for suction-based grasping of bag wrapped objects can include a main body structure **110** with a defined concave inner chamber **120**

including an array of inlets **130**. The body structure **110** can include a defined internal channel **140** coupling a vacuum line interface **150** to the array of inlets **130**. The end effector can be used with bagged objects, wherein the bagged object may be grasped by pulling the bag material into the concave inner chamber **120**, which functions to establish a more resilient grasp of the bagged object.

The end effector is preferably for use with a vacuum pressure system **170**, which may be used in combination with a pick and place robotic system, or any suitable automation system. A system variation may include one or more instances of the end effector, a vacuum pressure system, and/or a pick and place robotic system. A vacuum pressure system **170** and more specifically a pressure line connected a vacuum pressure pump connects to the end effector, wherein the pressure line, the internal channel **140**, and the array of inlets form a fluidically coupled path for gas and/or a liquid.

Variations of the end effector system may incorporate various features and variations as described herein. FIGS. **1A-1F** are exemplary representations of variations of the end effector, but as would be appreciated by one skilled in the art, the end effector is not limited to these exemplary representations. For example, the end effector may incorporate one or more variations described herein.

As described herein, the end effector is most generally described and characterized assuming a substantially horizontally symmetrical and substantially rounded or circular profile unless otherwise noted. However, as would be appreciated by one skilled in the art, the end effector and its variations are not limited to such symmetrical or rounded forms and may be asymmetrical and have other shape profiles.

In one variation of the end effector, such as those shown in FIGS. **1A-1F**, the end effector includes an at least semi-rigid body structure **110**; where the body structure comprises a defined concave inner chamber **120** with a chamber opening at an object engagement side of the end effector; within the inner chamber, the body including an array of inlets **130** defining channel openings in the walls of the body structure **110**. The defined concave inner chamber **120** is recessed beyond the chamber opening, which promotes bag material being pulled into the inner chamber **120** thereby enabling better grasping of a bagged object. In some variations, the body structure further comprises a defined internal channel **140** connecting to the array of inlets **130**; and the body structure **110** further comprising a vacuum line interface **150** defining an opening to the defined internal channel **140**.

The object engagement region is preferably a face or surface(s) on the body structure **110** in which objects are engaged. The object engagement region may be along a substantially planar region. However, the region can conform to any suitable shape or form. The object engagement region will generally be on a side (i.e., an object engagement side) opposite a vacuum line opening and its respective vacuum line interface **150**. However, the vacuum line interface and the object engagement region can have any suitable relative position. For example, some variations may have 45° or 90° angle between the vacuum line interface and the object engagement region.

As described herein, the end effector may be implemented with various shapes of the concave inner chamber **120**, arrangement of the array of inlets **130**, optional inclusion of a structural lip or other structural features of the concave inner chamber **120**, inclusion of a suction cup system **160**, and/or other variations.

A variation of the end effector including a lip, as shown in FIGS. **3A** and **3B**, may be more specifically and alternatively described as including a body structure **110** with a vacuum line interface **150** and an object engagement region, the vacuum line interface **150** being configured to couple at least one pressure line of a vacuum pressure system to a defined internal channel **140** of the body structure; the body structure **110** comprising a defined concave inner chamber **120** with a chamber opening at the object engagement region; a lip structure **121** extending from the body structure **120** and at least partially defining the chamber opening to the inner chamber **120**; an array of inlets **130** positioned along walls of the inner chamber **120** and a lip internal wall **124** of the lip, wherein each inlet defines an opening in the body structure **110** to the defined internal channel **140**.

As a first set of variations, the end effector may apply various arrangements of inlets **130** within the concave inner chamber **120**. The array of inlets may include at least a subset of inlets **1301** positioned along a wall of the internal structure that is opposite the defined chamber opening (e.g., the wall across from the chamber opening) as shown in FIG. **5** may alternatively or additionally be placed along side wall, a lower wall, and/or a structural feature of the concave inner chamber.

The array of inlets may include inlets placed at a variety of orientations along different walls or structures of an internal structure defining the concave inner chamber. Accordingly, the array of inlets may include at least a second subset of inlets along a second wall of the concave inner chamber, wherein the second subset of inlets are defined at an orientation different from an orientation of a first subset of inlets. As shown in the example of FIG. **6**, a first set of inlets can be placed along a top wall and a second set of inlets can be placed along a side wall.

As another set of variations, the end effector may apply incorporate an expanded concave inner chamber **120** to augment the restorative volume used in gripping a bagged object. An expanded concave inner chamber is an inner chamber with a width greater than a width of the chamber opening. In variations with an expanded inner chamber **120**, the inner chamber having an internal width greater than the chamber opening can promote the bag material being pulled into the inner chamber **120** where the chamber opening establishes a rigid barrier forming a folding of the bag material, which may mitigate slippage and bag rolling so as to better grasp the bagged object. In a concave inner chamber with a circular cross section, this may mean the concave inner chamber has a cross section with a diameter greater than a diameter of the chamber opening. The inner chamber and/or the chamber opening are not limited to circular forms, however. In this way, an expanded concave inner chamber **120** may be any with a profile that, in at least one region, recedes beyond the inner chamber opening (e.g., being concave in a horizontal dimension).

As another possible variation, the expanded inner chamber may incorporate a lip structure **121** extending inward from the body structure **110** on the object engagement side to at least partially define the chamber opening as shown in FIG. **8**. In some variations, the lip structure **121** extends inward from the body structure to define a rounded chamber opening. The lip structure **121** may alternatively form any suitably shape profile of a chamber opening. There may additionally be multiple lip structures such as an external lip **1211** and an internal lip **1212** as shown in FIG. **9**.

As another possible variation, a subset of inlets **130** may be positioned on the lip structure **121** and open in a direction away from the chamber opening as shown in FIG. **10**. In one

example, the array of inlets **130** can have at least a first subset of inlets **1301** opening in the direction of the chamber opening and a second subset of inlets **1302** (e.g., inlets on the lip structure) opening in a direction away from the chamber opening as shown in FIG. **10**. In a variation that includes a lip structure **121**, a subset of the inlets **130** may be positioned on the lip structure **121**, and more specifically a lip internal wall wherein the inlets **130** open in a direction away from the chamber opening. The multi-directional positioning of inlets within the inner chamber, combined with a lip extending inward can create a volume with multi-directional pressure forces that can hold a bag in a more secure way. The physical form of the body structure **110** can cooperatively reinforce the grip of an object and mitigate opportunities for bag specific grasp failures.

As another possible variation, the internal structure defining the concave inner chamber **120** may include one or more structural features (e.g., lips protrusions, troughs, etc.). In the examples of FIGS. **11A** and **11B**, crenelated structural features may be patterned on side walls of the sides of the internal structure defining the concave inner chamber **120**. In the example of FIG. **12**, structural features may include a protruding surface from a top wall of the internal structure defining the concave inner chamber **120**. In such variations, a subset of inlets may be positioned on one or more structural features.

As one possible variation, end effector features such as those described herein may be incorporated into an end effector with an expanded concave inner chamber **120** and one with a body structure **110** defining an outer surface. In such variations, the end effector may be a fully rigid (or semi-rigid) structure, which may be made of a single piece or alternatively multiple components attached to form the structures of the end effector. In some variations, this variation may be manufactured using additive manufacturing (e.g., 3D printing) or other manufacturing techniques. In other variations, multiple components may be manufactured, attached, and assembled to form the single solid component. This variation may be used as a bag-focused end effector.

In such bag-focused variation, the end effector can include an at least semi-rigid body structure **110**; where the body structure forms an external surface of the end effector and comprises a defined concave inner chamber **120** with a chamber opening at an object engagement side of the end effector, and wherein the inner chamber **120** has an internal width greater than the chamber opening; within the inner chamber, the body including an array of inlets defining channel openings in the walls of the body structure; the body structure further comprising a defined internal channel connecting to the array of inlets; and the body structure further comprising a vacuum line interface defining an opening to the defined internal channel.

As another possible variation, the end effector may include a body structure **110** that includes or is connected to a suction cup system **160** integrated with an internal structure defining a concave inner chamber **120** such as shown in examples FIGS. **13-17**. Such variations, alternatively referred to as hybrid end effector variations, may function to enable the end effector to act as a suction cup based end effector or as a bag-focused end effector. In a hybrid variation with an integrated suction cup, boxed objects (or other objects with surfaces suitable for suction cup grasping such as loosely bagged items) may be naturally grasped by establishing a vacuum seal between the suction cup system **160** and the surface of the object; and a bagged object will naturally have bag material being pulled into the inner

chamber **120** for grasping of the bagged object. The hybrid end effector variations may optionally include one or more of the feature variations described herein.

In this manner, a hybrid end effector for a pick-and-place system may include: a body structure **110** with a vacuum line opening and an object engagement region, the vacuum line interface **150** (e.g., an opening) being configured to couple at least one pressure line of a vacuum pressure system to a defined internal channel of the body structure **110**; the body structure **110** comprising a suction cup system **160** that comprises a flexible sealing lip **161** at the object engagement region; the body structure **110** additionally comprising an internal structure **112** defining a concave inner chamber **120** with a chamber opening at the object engagement region, the chamber opening being positioned within a grasping region of the sealing lip **161**; and the internal structure **112** comprising an array of inlets **130** positioned along at least one wall of the concave inner chamber **120**, wherein each inlet defines an opening in the body to the defined internal channel.

In some variations, this end effector variation may include a suction cup system forming an external surface of the end effector (e.g., the external surface of the body structure **110**); and a separate rigid internal structure inserted within an opening in the suction cup system **160**. The suction cup system **160** can be made of a flexible material, and the internal structure **112** can be made of a rigid material (or semi-rigid material). The rigid internal structure may be fitted and/or attached within the suction cup system. The rigid internal structure **112** can define the concave inner chamber **120** with a chamber opening at an object engagement side of the end effector. As with other variations, within the inner chamber **120**, the internal structure **112** can include the array of inlets **130** defining channel openings in the walls of the internal structure **112**.

The sealing lip **161** preferably surrounds and extends outward from the chamber opening. The suction cup system **160** of the body structure **110** may additionally include bellows **162** around the internal structure **112** and forming an external surface of the end effector such as shown in FIG. **14**. The bellows **162** may be connected to the sealing lip **161**.

In some hybrid variations, such as those shown in examples FIGS. **13-14**, the array of inlets can include a first subset of inlets positioned along a wall of the internal structure that is opposite the defined chamber opening. In other words, at least a subset of inlets may be along a top wall.

In some hybrid variations, such as the variation shown in FIG. **16**, the array of inlets may additionally include at least a second subset of inlets along a second wall of the concave inner chamber. The second subset of inlets may be defined at an orientation different from an orientation of the first subset of inlets. In such variations, inlets may be defined along different walls that have a defined tangent along non-parallel planes. As shown in the example of FIG. **16**, inlets may be positioned along a top wall and side walls of the concave inner chamber.

In some hybrid variations, such as the variation shown in FIG. **17**, some inlets **130** may be oriented in opposing directions. The inlets **130** may be oriented in directly opposing directions (with the inlets defined along vectors in opposite directions), but the inlets **130** may alternatively be oriented in indirectly opposing directions (with the orientation vectors of two inlets having longitudinal components in opposite directions).

In some hybrid variations, such as the variation shown in FIG. **18**, the internal structure may form an expanded

concave inner chamber **120** with an inner chamber with a width greater than a width of the chamber opening. In some such variations, the internal structure (or other suitable component of the end effector) may include a lip structure **121** at least partially defining the chamber opening.

Additionally, in some hybrid variations, such as the variation shown in FIG. 17, a first subset of inlets **130** may open (i.e., be defined with an orientation) in a direction of the chamber opening and a second subset of inlets are positioned on the lip structure and open in a direction away from the chamber opening (i.e., in opposing directions).

In some hybrid variations, such as the variation shown in FIG. 19, the internal structure **112** defining the concave inner chamber **120** may include one or more structural features (e.g., lips protrusions, troughs, etc.).

In some hybrid variations, such as the variations shown in FIGS. 15-18, the end effector includes transitional air channels **125** between the chamber opening and the suction cup **160**. Each transitional air channel **125** may extend from an inner edge of the chamber outward toward an outer edge of the sealing lip **161**. This functions to provide a fluidic channel improve hybrid operation in either a suction cup gripping mode or a bagged object gripping mode. Other structural arrangements may be used to establish transitional air channels. In one preferred implementation, the internal structure includes a set of flanges extending outward from the chamber opening thereby forming a set of transitional air channels when inserted into the central opening in the suction cup system. The set of flanges preferably extend in an at least partially horizontal direction, and preferably conform to a slope and surface of the sealing lip **161**. Alternatively, the transitional air channels may be defined by the form of the inner surface of the sealing lip **161**.

In some hybrid variations, such as the variation shown in FIGS. 20, the end effector that includes a suction cup system **160** with bellows **162** can include a rigid shroud **180** enclosing the bellows.

Below follows detailed description of various components, features, and variations of the end effector and/or an end effector system.

The body **110** of the end effector, functions as the structural unit with various channel features to enable the end effector described herein. The body **110** may be made of multiple components that are assembled or otherwise connected to form the end effector. The body **110** may alternatively be made of a single manufactured structure.

As described above and show in examples such as FIGS. 5-12, the body **110** can be a rigid or semi-rigid part forming at least a part of an external surface and the internal structure defining the concave inner chamber **120**. In other variations and shown in examples such as FIG. 13-21, the body **110** may include or be integrated with a suction cup system **160** and a rigid or semi-rigid internal structure component. In some hybrid variations, the external surface may be at least partially made of the suction cup system as shown in FIGS. 16-19 for example.

The body **110** preferably includes an internal structure **112** that defines the concave inner chamber **120** and its features as described below. The internal structure may be just a sub-section of a rigid element (e.g., as in FIGS. 5-12). The internal structure may alternatively be a distinct part that is combined with other components to form the body **110** of the end effector. For example, the internal structure **112** could be an insert that is attached within an internal opening of a suction cup system **160**.

The internal structure **112** is preferably at least semi-rigid. In some variations, the body **110** can be fully made from a

rigid or semi-rigid material. As a rigid or semi rigid material, the end effector may have a long lifetime since usage has minimal impact on the structure and functionality of the end effector. The body **110** could be manufactured single piece of material, but could alternatively be a multi-part design. Some variations may implement an end effector with flexible or non-rigid materials and elements into the body. As one exemplary variation, the end effector could include flexible bellows for more flexibility if and when contacting objects, and the flexible region could be integrated into the body **110**.

Various structural body **110** variations for various elements of the end effector are described in more detail herein.

In general, the structural body **110** will include at least some portion or subcomponents that defines a concave inner chamber **120**.

As shown in the examples of FIGS. 13-20, the structural body **110** may include a semi-rigid component forming the inner chamber **120** to promote grasping of bagged objects and an outer suction cup system **160** that promotes grasping of non-bagged objects (e.g., boxed objects) and/or tightly bagged objects.

As shown in FIGS. 5-12, the structural body **110** may alternatively be a fully semi-rigid or rigid structure made of one or more components without a suction cup **160** component. As one example, the body **110** may have a bell-like shape, but the outer-form of the body of the end effector may be customized to any suitable shape. In one preferred implementation, the body **110** is a substantially symmetrical form about a central axis where the vacuum line interface **150** and an inlet into the defined internal channel **140** are on opposing sides. In one implementation, the body **110** has a form compatible for 3D printing such that the end effector can be made from a single piece. However, any suitable manufacturing and assembly technique may alternatively be used.

In some variations, the structural body **110** may include an outer flexible bellow subcomponent **161** to allow the end effector to flex but without including suction cup flanges.

The concave inner chamber **120** functions in cooperation with the array of inlets **130** as a feature facilitating enhanced grasping of a bag. As described above, the concave inner chamber **120** is defined by an internal structure **112** and so features of the inner chamber **120** may alternatively be described as features of the internal structure **112** or defined by the internal structure **112**.

When a pressure force is active, a bag can be pulled into the inner chamber **120** and the defined volume of the chamber **120** is shaped to allow sufficient bag material to enter so that a seal can be established on substantially the entire array of inlets **130**. The plurality of inlets **130** at different positions can establish different points of exerted force. In variations with inlets at different orientations, the bag can be pulled in different directions at distinct locations of the inlets **130**.

As discussed in some instances, the direction of force generated from the pressure force exerted from one or more inlets **130** in a particular region may be in a direction opposing the direction in which the bag entered the chamber opening, thus increasing the friction between the bag membrane and the walls of the chamber opening and resisting slip when moving the object in space while gripping. This functions to make the structure of the end effector act in manner like a folding clasp.

The concave inner chamber **120** is formed by an internal structure **121** of the body structure **110**. In some variations, the internal structure **121** may be just part of the body

structure **110** that forms the end effector, such as in FIG. 6 for example. Alternatively, the internal structure **121** may be a distinct component connected to another component of the body structure **110**. In one example, the internal structure **121** is an insert positioned within the opening of a suction cup system **160**. Reference to the inner chamber **120** can refer to the defined cavity formed by the internal structure **121**.

The inner chamber **120** is preferably concave from the chamber opening. In other words, the inner chamber is a defined cavity that is concave in the longitudinal direction (recessed from the distal chamber opening and toward the proximal end of the end effector). The inner chamber **120** is primarily described herein as having a rounded or circular chamber opening in an object engagement region. The chamber opening however may have alternative shapes.

In some variations, the inner chamber **120** is an expanded concave inner chamber where the inner chamber **120** at its widest region has a width greater than a width of the chamber opening. In a more general characterization, the width of one section of the cavity is greater than at least one section of the cavity that is closer to the opening. The inner chamber **120** can be domed shaped, but may have a variety of internal geometries. The inner chamber **120** may have a defined volume with a non-regular form.

The inner chamber **120** is made up of internal walls, which may include top internal walls **122** and side internal walls **123**. In some variations, the inner chamber **120** may additionally include a lip internal wall **124** when the end effector includes a lip structure **121**. In some variations, the end effector may have no clear distinctions of such internal walls and may be a continuous surface. In other variations, more complex forms may have other internal structural features in the inner chamber **120** where alternative wall descriptors may be used. Reference to the top, side, and lip internal walls is made herein as a convenience for describing various properties and general placement of features, and is not intended to limit the inner chamber to three distinct types of walls.

The top internal wall **122** will generally be characterized as the wall opposite the opening (i.e., chamber opening) in the inner chamber **120**. The side internal walls can be characterized as the walls extending longitudinally from the top internal wall **122** toward the chamber opening. In variations including a lip **121**, the side internal walls **123** will generally taper or expand outward to the base of the lip internal wall **124**.

The inner chamber and its internal walls define a concave cavity that functions to pull in a bag and grip the bag. In an expanded concave variation of the inner chamber **120**, the inner chamber defines a concave cavity that may be characterized as including a chamber opening cavity and a central cavity, wherein the width of the chamber opening cavity is narrower in at least one section than at least one region of the central cavity. A lip **121** extending inward can function to define the chamber opening cavity.

The dimensions of the body and the inner chamber **120**, as shown in FIG. 4, can be customized for different bag materials and/or sizes/weights of objects. The weight of the object, the type of bag material, the amount of slack in the bag material, and/or other factors can enter into the structure of the inner chamber **120**. In one variation, an average width of the chamber opening is greater than the height (i.e., depth) of the concave inner chamber. In the case of a circular chamber opening, this may be alternatively be described as: the ratio of the chamber opening diameter compared to a height of the inner chamber having a ratio greater than one

(i.e., the diameter is greater than the height). Here, height refers to the measurement in the longitudinal direction, where chamber height is the height from the object engagement region to a wall of the concave inner chamber opposing the object engagement region. The height and width of the inner chamber can depend on the membrane, thickness of the bag, and the weight of the object within.

The chamber height as defined from the chamber opening to the top wall is preferably sufficiently high to pull in sufficient amounts of material. The opening width (i.e., the width of the chamber opening) is the defined opening in the horizontal direction. The opening width is preferably sufficiently wide to allow the bag material to be pulled into the chamber without overly filling the chamber opening such that the pressure force stretches the bag material. In general the chamber height is greater than the chamber opening, but it is not limited to that configuration. The chamber width (width within the defined central cavity) may vary in profile at different cross sectional regions along the height of the end effector. In an expanded concave inner chamber **120**, the inner chamber **120** may generally have a maximum width greater than the chamber opening width as discussed. However, there may be variations where the inner chamber is not centered about a central axis where features of an expanded concave inner chamber **120** can be achieved through alternative configuration. Height, width, longitudinal, horizontal, and/or other relative terms used to refer to measurements and directions are based on references shown in FIGS. 21A and 21B. One skilled in the art will appreciate that these relative terms are only for convenience of description and do not limit the end effector any particular form or orientation.

In some variations, the inner chamber **120** may have no defined lip **121**. In one such example, the inner chamber **120** may be a substantially cylindrically shaped defined cavity extending from the chamber opening towards the top wall as shown in FIG. 13.

In some variations, the internal structure **112** may include structural features that function in a similar or complimentary manner to the lip structure **121**. Such structural features may involve the internal structure **112** having structural forms extending inward or outward in the inner chamber **120**. For example, the side internal walls **123** may serve or function in a similar manner to the lip **121**. As shown in FIGS. 11A and 11B, in some alternative variations, the inner chamber **120** may include side internal walls **123** with a patterned surface. The patterned surface can be a sequence of protrusions. The patterned surface structures can be an alternative type of internal lip structure. Inlets may be positioned in valleys between the protrusions.

As another alternative example, the top wall may have an inward protrusion extending downward as shown in FIG. 12. Such structural features can be used to alter the performance of the end effector. For example, the downward protrusion may function expand the surface area of the bag material in which the end effector may grasp.

As discussed, in one preferred variation, the body structure **110** includes a lip structure **121** that extends and protrudes inward across an opening of the inner chamber **120**. The lip structure **121** can function as a rim to the chamber opening. Accordingly, the lip structure **121** can partially define the volume of the internal chamber. The lip structure **121** preferably extends from a bottom face of the body structure **110**.

As one variation, the lip structure **121** can extend inward from the body structure to define a rounded chamber opening. The lip structure **121** preferably forms a circular, elliptical, or other type of symmetrical rounded shape for the

chamber opening. However, the lip structure **121** may be used to make any suitable shape of chamber opening. The lip structure **121** may extend uniformly from all sides of the body structure **110**. The lip structure **121** may alternatively not extend uniformly.

In one variation, the lip structure **121** extends inward from a limited portion of the body structure **110** to define a lip structure **121** covering over only a portion of the chamber opening. In one implementation, the lip structure **121** extends inward from a half of the circumference of the body structure **110** so as to form a lip structure **121** over only a limited portion of the chamber opening as shown in FIGS. **22A** and **22B**. This variation may have enhanced gripping along one dimension. The actuation system used in manipulating the end effector may include an encoder or other way of monitoring end effector orientation such that it can appropriately orient the end effector with the lip in an appropriate direction. This may have particular utility in applications with highly repetitive automated systems where a fixed or consistent form of manipulation path is performed repeatedly and where the orientation of the lip can be integrated into the manipulation path.

The lip structure **121** preferably includes a lip internal wall **124**. In some variations, the lip internal wall **124** may include at least a subset of the array of inlets **130**. The inlets on the lip can be positioned across the surface of the lip internal wall **124**. Accordingly, the lip structure **121** can include an internal channel to couple the inlets on the lip to the internal channel **140** of the body. In one variation, the internal channel **140** of the body extends into the lip structure **121**, such as when the body **110** and the lip structure **121** are a single or integrated piece. In a variation, where the lip structure **121** is a separate part attached to the body **110**, the lip structure **121** may be manufactured with an internal channel that couples inlets of the lip structure **121** to the internal channel **140** of the body when the lip structure **121** is attached to the body **110**.

In alternative variations, the lip structure **121** can be a solid structure, and the inlets may be positioned adjacent to the base of the lip structure **121**.

The lip structure **121** is preferably at least semi rigid and may be made from rigid or semi-rigid materials. In some alternative variations, the lip structure **121** may be made from a flexible material or include a flexible portion. A flexible portion may enable flexing about the base, the mid-section, at the edge, or at any suitable portion.

The lip structure **121** may be a substantially flat structure. However, the lip may have patterned structures (protrusions, troughs, etc.) and/or other features. The lip structure **121** preferably extends transverse to the central direction of force under pressure. For example, if the primary direction of pressure force at the chamber opening is upward in the longitudinal direction, then the lip structure **121** at least partially extends in the horizontal direction. In alternative variations, the lip may be angled downward, upward or otherwise have some form of slope or additional structural feature as shown in FIG. **23**.

The lip structure **121** can include a low-friction, rounded edge along the chamber opening, which functions to better allow the bag to be pulled into the inner chamber **120**. The lip structure **121** may alternatively or additionally include a discrete edge to promote a crease point on the bag after the bag is engaged with inlets on or near the lip structure **121**.

In some hybrid variations, the end effector includes transitional air channels **125**, which function to facilitate establishing a transitional region between the chamber opening and the suction cup system **160**. This may have the potential

benefit of automatic adaptive grasping of different types of bagged items. For example, the transitional air channels **125** can allow selective handling of tightly bagged objects and loosely bagged objects. The transitional air channels **125** leak air to the suction cup when bag material isn't fully grasped within the inner chamber **120**. In this way, the transitional air channels **125** can enable the suction cup system **160** to grasp a tightly bagged object with bag material lacking flexibility to fully engage within the inner chamber **120**. However, when engaging with a loosely bagged object, the bag material can be suitably gripped within the inner chamber **120**.

The transitional air channels **125** can be defined grooves between the chamber opening and an outer edge of the sealing lip **161**. The transitional air channels **125** can extend from an inner edge of the concave inner chamber **120** (at or near the chamber opening) toward the sealing lip **161**. The air channels **125** may only extend partly toward the edge of the sealing lip **161**. The transitional air channels may be periodically placed in a ring around the opening, but any suitable pattern may be used. In one implementation, the internal structure **112** includes a set of flanges that extend at least partially in the horizontal direction. In such a variation, the internal structure **112** can be made of rigid material that is inserted into a central opening of the suction cup system **160**. In this way, the flanges extend outward from the chamber opening. The flanges establish side walls and the surface of the sealing lip **161** can serve as a bottom surface of the channel.

In another implementation, the sealing lip **161** may include ridges that run to where the internal structure **112** engages with the opening of the suction cup system **160**, wherein the ridges define cavities extending from the chamber opening toward the outer edge of the sealing lip **161**. The transitional air channels **125** can be defined as linear channels, but may alternatively be any suitable shape. For example, a network of defined channels may connect the outer edge of the chamber opening to an outer region of the sealing lip **161**.

The array of inlets **130** functions to define a plurality of through-channels extending through the walls of the body **110** so that a pressure force can be applied from the inner chamber **120**. The array of inlets **130** is preferably positioned on the internal walls of the internal structure **112** defining the concave inner chamber **120**. In one variation, the inlets **130** are arranged primarily or entirely on the top internal wall **122**. In one such variation, the inlets **130** may be made from a mesh or grid. In some variations, subsets of the inlets (e.g. one or more) can be positioned on the top internal wall **122**, side internal wall **123**, and/or lip internal wall **124**.

An inlet can be a small defined cavity in the body **110**. The defined through-channel may be cylindrically shaped. In another variation, an inlet could be a long slit making a more rectangular defined through-channel. In one variation, the array of inlets **130** or at least a subset of the array of inlets **130** may be formed through mesh material. An inlet may alternatively use any suitable shape, arrangement and have any suitable dimension. Additionally, the inlets of the array of inlets **130** may be substantially uniform but may alternatively have different dimensions and shapes, which may be configured to each inlet's role.

Portions of the array of inlets **130** may be distributed in distinct regions. The arrangement and configuration of the inlets **130** can be customized to the particular performance objectives of an end effector.

In some variations, the end effector may desire to pull bag material upward into the inner chamber **120** as much as possible. In this way, the array of inlets may be entirely or primarily located along a top internal wall **122**.

In another variation, the placement may be configured to promote a desired way that a bag is pulled into the inner chamber **120** and then further pulled towards inlets towards the side and/or bottom. The array of inlets **130** may be configured to promote a desired flow and manipulation of a membrane when pulled into the inner chamber **120**. The arrangement of the inlets can include configuration to promote a sequence of engagement between a gripped membrane and the array of inlets **130** such that inlets sequentially engage (i.e., flow is blocked) with the membrane in an expanding manner across the inner surfaces of the inner chamber **120** during the initial gripping of the object. The arrangement of the array of inlets **130** refers to the position and pattern of the inlets. The arrangement may additionally refer patterns in the properties of the inlets such as size and shape. In one variation, the arrangement is a series of outwardly expanding inlets, which can be a radiating pattern of inlets. The inlets may radiate symmetrically (or asymmetrically) from the top internal wall **122**. A radiating pattern of inlets can function to promote the flow of a membrane material into the inner chamber **120** and initially up to the top internal wall inlet. When the centrally located inlets are blocked, the flow of the membrane may be pulled to cover the inlets proximate to and possibly surrounding the covered inlets. This can continue until substantially all inlets are blocked thereby the membrane is held by inlets in strategically placed positions like the lip internal wall **124**. Any suitable arrangement may alternatively be used.

As shown in FIG. **10A**, one exemplary variation can include a first subset of inlets (e.g., one inlet) in a region proximate to the top internal wall **122** (e.g., centered at the top, around the center top, etc.), a second subset of inlets along a lower portion of the side internal walls **123**, and a third subset of inlets on the lip internal wall **124**.

In a variation including a lip structure **121**, at least a subset of the inlets is positioned on the lip structure **121** and/or proximate to the lip structure **121**. When positioned on the lip structure **121**, the inlets can be uniformly distributed across the lip internal wall **124**, preferably in some pattern such as shown in FIG. **3B**. When positioned proximate to the lip structure **121**, a subset of the array of inlets **130** may be positioned adjacent to the base, which may be an approach used if the lip is substantially thin (e.g., in height) or does not have an internal channel as shown in FIG. **8**.

In some variations, the array of inlets **130** preferably has inlets **130** positioned along the walls of the inner chamber **120** so that the inlets are directed in a variety of directions. This may function to diversify the directions of applied force. Herein, the direction of an inlet is characterized as a vector in the direction of flow defined along an axis substantially normal to the surface of the body at the position of the inlet. Additionally, a subset of the array of inlets **130** may be positioned offset to the outer side of the chamber opening. When the end effector includes an expanded inner chamber **120** and/or a lip structure **121**, inlets are offset from the outer side of the chamber opening may better grip the bag material by promoting bending of the bag material against the lip structure **121**.

In one variation, the array of inlets **130** include at least a first subset of inlets opening in the direction of the chamber opening and a second subset of inlets opening in a direction away from the chamber opening. For example, if the cham-

ber opening is oriented to have airflow upwards, then a first subset of inlets is configured to also direct airflow upwards in one subregion of the inner chamber **120** and a second subset of inlets are configured to direct airflow downwards in another subregion of the inner chamber **120**. In one particular variation, at least part of the second subset of inlets is positioned on the lip internal wall **124** but may alternatively be positioned in other directions as discussed above.

As shown in the alternative variation of FIG. **24**, some variations may include inlets that are primarily offset from the chamber opening and that are oriented in a direction of the chamber opening (e.g., used in applying an at least partially upward force). This shows an exemplary variation that does not include inlets with a direction opposing the direction of the chamber opening.

In one variation, the array of inlets **130** may include one or more actively controlled inlets. An actively controlled inlet is preferably one that can change its open-state. In one variation, an actively controlled inlet can open and close. In another variation, an actively controlled inlet can alter the amount of openness to let more or less air through. In one implementation of a controlled inlet, the system includes a controlled valve that can be opened and closed according to a control signal. Other suitable mechanisms may be used. In some instances a plurality of inlets may be controlled through one mechanism. Actively controlled inlets may be controlled in a manner coordinated with grasping. For example, the controlled inlets may be in one state when initial pulling the bag into the inner chamber **120** as shown in FIG. **25A** and then in a different state for subsequent grasping of the bag as shown in FIG. **25B**.

The defined internal channel **140** functions as an open volume contained by the walls of the body structure **110**. The internal channel **140** fluidically couples a vacuum line interface **150** with the inner chamber **120** through the array of inlets **130**. The internal channel **140** may be an open cavity. In some variations, the body structure **110** may be made of a connected rigid material that forms the external surface and the inner chamber, which may include the internal channel **140**. In another variation, the internal channel **140** may be the defined cavity between the bellows of a suction cup system **160** and an internal structure **112**. The internal channel **140** may alternatively be the defined cavity when the end effector connects with a vacuum line interface **150**. In one particular implementation, the internal channel **140** may be one or more tubes connecting the inlets to the vacuum line interface **150**.

The vacuum line interface **150** functions as the defined space through which a pressure system can establish fluidic coupling with the inlets. A decreased pressure at the vacuum line interface **150** preferably results in air flow and inward pressure force at each of the array of inlets **130** as well as an inward pressure force across the chamber opening. The end effector preferably includes a vacuum line interface, which functions as a connector to a pressure line and/or an actuation system. The vacuum line interface preferably defines the cavity of the vacuum line interface **150**. The vacuum line interface can be a threaded fastener, a locking mechanism, friction fit, snap fit, and/or any suitable mechanism to couple to a pressure line and/or an actuation system. The actuation system may alternatively attach to or be physically coupled at a different position on the body structure **110**. In one variation the vacuum line interface can be a magnetized attachment face for magnetic attachment to an actuation system and pressure system.

As discussed, in some variations, the end effector may be integrated into or formed as part of a hybrid end effector. In a hybrid variation, the end effector may include a suction cup system **160** which may be attached to and/or be part of the body structure **120**. The suction cup system **160** with a sealing lip **161** extending beyond the object engagement region of the inner chamber **120**. The suction cup system **160** functions to provide a suction cup mechanism that is usable for grasping some types of objects.

The suction cup system **160** may help make an initial seal with a bag or object using the compliance of the suction cup, sealing lip **161**. If a bag, the bag material may then be pulled inside of the inner chamber **120** of the rigid body structure **110** for grasping. The flexible sealing lip **161** may additionally enable the end effector system to function across a wider variety of objects. For example, a hybrid variation could grip flat, hard surfaces (e.g., a cardboard box) as well as loose polybags. This could be particularly useful in applications like in parcel handling.

The suction cup system **160** preferably has an object engagement region that substantially aligns with that of the inner chamber **120**. They are generally along parallel planes in close proximity as shown in FIG. **21B** and may be coplanar.

In one variation, the suction cup system **160** may completely surround the body structure **110**. The suction cup system **160** may alternatively be positioned on the end of the end effector. In yet another variation, the suction cup system **160** may be used in combination with a rigid insert so that the defined internal channel **140** may be cooperatively formed from the suction cup system **160** and the rigid body structure **110** in the form of an insert, as shown in FIG. **28** and also shown in FIGS. **14-19**. The suction cup system **160** can include structural features to hold the insert when fitted into place. Alternatively, the flexible suction cup **160** may be integrally attached to the rigid insert (e.g., overmolding around the insert).

The suction cup system **160** preferably includes at least a sealing lip **161** which is a flexible lip or flanges extending outward. The sealing lip **161** has a sealing surface in a connected path such as a ring, an ellipse, or any suitable path shape. The sealing lip **161** may include any suitable design features of a suction cup. The sealing lip **161** when engaging with suitable objects, makes contact across a surface, flexes, and establishes a sealed grasp of the object.

The suction cup system **160** can additionally include bellows **162**. The bellows can provide flexibility when engaging with the surface of an object. In one variation, bellows **162** can be positioned on the distal end of the end effector near the suction cup head. In another variation, bellows **162** can occur on the proximal end of the end effector, closer to the vacuum line interface. In one variation, the bellows **162** can form an outer structure of the body structure **110**. The bellows can be connected to the sealing lip. In one variation, the bellows and lip are made of one flexible material component.

In some variations, the end effector may additionally include a rigid shroud **180** that at least partially encloses the bellows. The rigid shroud **180** can be a rigid ring structure that extends horizontally outward from an upper portion (e.g., proximal side opposite the engagement region) past the bellows and then downward towards the object engagement side.

The above features and optional variations of the end effector may be combined in a variety of ways with a variety of different forms while still keeping to the disclosed concept of the end effector.

In one additional variation, the end effector system may include a body structure **110** with two or more defined internal channels **120** each connecting distinct vacuum line openings **150** and distinct arrays of inlets **130**. As an example of such a variation, a first vacuum line interface **1501** may be coupled through a first defined internal channel **1401** to a first subset of inlets **1301** and a second vacuum line interface **1502** may be coupled through a second defined internal channel **1402** to a second subset of inlets **1302** as shown in FIG. **26**. The end effector system may include individually controlled vacuum pressure systems or at least individually controlled pressure lines such that suction can be controlled individually for the different subsets of inlets.

This variation may be controlled such that during an initial gripping stage, a first subset is used to pull a bag into the inner chamber **120** while the second subset is inactive and during a subsequent gripping stage, a second subset of inlets is used to grip the bag material within the inner chamber **120** along inlets positioned for manipulation of the object. The second subset of inlets in one variation can be along the internal wall of the lip for example.

In another additional variation, the end effector may include multiple distinct concave inner chambers **120** as shown in FIG. **27**. These may each be controlled individually or controlled through a shared vacuum line interface **150**. The different inner chambers **120** may be substantially identical or vary in various details. The multiple inner chambers **120** may be patterned along the object engagement region in any suitable manner.

In another additional variation, the end effector may include one or more internal lips as shown in FIG. **9**. These internal lips may extend in a horizontal direction or may alternatively be oriented in different directions. As with the lip structure **121** described herein, an internal lip variation can similarly have inlets positioned on or near a surface of the internal lip.

In some variations, the end effector maybe used as part of a multi-head end effector system that includes at least a first end effector and a second end effector, wherein at least one of the first or second end effectors is a bag grasping end effector such as described above.

Two end effectors are mentioned, but the multi-headed end effector system may include any suitable number of end effectors. The engagement regions of the first and the second end effectors may be aligned to be coplanar or substantially parallel planes. However, the end effector may alternatively be aligned along different planes.

The two end effectors may share a common connection to a common vacuum pressure system **170**. Alternatively, the first and second end effectors may have distinct connections to independent vacuum pressure systems. In this way, the multi-head end effector system may include a first vacuum pressure system coupled to the first end effector and a second vacuum pressure system coupled to the second end effector.

Multiple end effectors may be used for redundancy for some implementations. In other implementations, the two end effectors are different types of end effectors for different grasping capabilities.

At least one of the end effectors is preferably a bag grasping end effector. For simplicity, the first end effector is described as being such a bag grasping end effector where it comprises a body structure with a vacuum line opening and an object engagement region, the vacuum line opening being configured to couple at least one pressure line of a vacuum pressure system to a defined internal channel of the body structure; the body structure comprising a suction cup system that comprises a flexible sealing lip at the object

21

engagement region; the body structure comprising an internal structure defining a concave inner chamber with a chamber opening at the object engagement region, the chamber opening being positioned within a grasping region of the sealing lip; the internal structure comprising an array of inlets positioned along at least one wall of the concave inner chamber, wherein each inlet defines an opening in the body to the defined internal channel.

The second end effector in one variation could be a suction cup end effector as shown in FIG. 29. The second end effector may alternatively be any suitable type of contact end effector.

The second end effector in another variation could be another type of bag grasping end effector. It may be configured differently from the first end effector for diversified grasping capabilities. In one example shown in FIG. 30, the chamber diameter of the opening of the first end effector can differ from the diameter of the chamber opening of the second end effector. The first and second end effector may alternatively include any other combination of differing features and/or configurations.

The end effector is not limited to only these features and could include any suitable features of an end effector or be combined with other end effector components or pick and place robotic system elements.

As a person skilled in the art will recognize from the previous detailed description and from the figures and claims, modifications and changes can be made to the embodiments of the invention without departing from the scope of this invention as defined in the following claims.

We claim:

1. An end effector for a pick-and-place system comprising:

a body structure with a vacuum line opening and an object engagement region, the vacuum line opening being configured to couple at least one pressure line of a vacuum pressure system to a defined internal channel of the body structure;

the body structure comprising a suction cup system that comprises a flexible sealing lip at the object engagement region;

the body structure comprising an internal structure defining a concave inner chamber having an inner chamber diameter and a chamber opening at the object engagement region, the chamber opening being positioned within a grasping region of the sealing lip and having a chamber opening diameter smaller than the inner chamber diameter; and

the internal structure comprising an array of inlets positioned along at least one wall of the concave inner chamber, wherein each inlet defines an opening in the body structure to the defined internal channel, the internal structure further comprising a plurality of air channels, each of which defines an opening in the internal structure between the defined internal channel and the object engagement region;

wherein flow to controllably engage an object at the object engagement region may be sequenced from the vacuum line opening, to the defined internal channel, through the array of inlets to the concave inner chamber, and through the plurality of air channels to the object engagement region.

2. The end effector of claim 1, wherein the array of inlets comprises a first subset of inlets positioned along a wall of the internal structure that is opposite the chamber opening.

3. The end effector of claim 2, wherein the array of inlets comprises at least a second subset of inlets along a second

22

wall of the concave inner chamber, wherein the second subset of inlets are defined at an orientation different from an orientation of the first subset of inlets.

4. The end effector of claim 3, wherein the internal structure further comprises a lip structure at least partially defining the chamber opening; wherein the first subset of inlets opens in a direction of the chamber opening and the second subset of inlets is positioned on the lip structure and opens in a direction away from the chamber opening.

5. The end effector of claim 1, wherein an average width of the chamber opening is less than a height of the concave inner chamber.

6. The end effector of claim 1, wherein each air channel extends from an inner edge of the concave inner chamber outward toward the sealing lip.

7. The end effector of claim 1, wherein the suction cup system is made of a flexible material; wherein the concave inner chamber is made of rigid material and is inserted into a central opening in the suction cup system.

8. The end effector of claim 7, wherein the concave inner chamber comprises a set of flanges extending outward from the chamber opening thereby forming the plurality of air channels when inserted into the central opening in the suction cup system.

9. The end effector of claim 1, wherein the suction cup system comprises bellows forming an external surface of the body structure, wherein the bellows are connected to the sealing lip.

10. The end effector of claim 9, further comprising rigid shroud enclosing the bellows.

11. An end effector system comprising:
a first end effector that comprises:

a body structure with a vacuum line opening and an object engagement region, the vacuum line opening being configured to couple at least one pressure line of a vacuum pressure system to a defined internal channel of the body structure;

the body structure comprising a suction cup system that comprises a flexible sealing lip at the object engagement region;

the body structure comprising an internal structure defining a concave inner chamber with a chamber opening at the object engagement region, the chamber opening being positioned within a grasping region of the sealing lip;

the internal structure comprising an array of inlets positioned along at least one wall of the concave inner chamber, wherein each inlet defines an opening in the body structure to the defined internal channel, the internal structure further comprising a plurality of air channels, each of which defines an opening in the internal structure between the defined internal channel and the object engagement region; wherein flow to controllably engage an object at the object engagement region may be sequenced from the vacuum line opening, to the defined internal channel, through the array of inlets to the concave inner chamber, and through the plurality of air channels to the object engagement region; and

a second end effector;

wherein the second end effector comprises a second body structure comprising a second internal structure defining a second concave inner chamber with a second chamber opening; the second internal structure comprising a second array of inlets positioned along at least one wall of the second concave inner chamber;

23

wherein the chamber opening of the first end effector has a diameter different from the second chamber opening of the second end effector.

12. The end effector system of claim 11, wherein the first end effector and second end effector have object engagement regions defined substantially along the same plane. 5

13. The end effector system of claim 11, further comprising a first vacuum line coupled to the first end effector; and second vacuum line coupled to the second end effector.

14. The end effector system of claim 11, wherein the second end effector is a suction cup end effector. 10

15. The end effector system of claim 11, wherein each air channel extends from an inner edge of the concave inner chamber outward toward the sealing lip.

16. The end effector system of claim 11, wherein the suction cup system comprises bellows forming an external surface of the body structure, wherein the bellows are connected to the sealing lip. 15

17. An end effector system comprising:
a first end effector that comprises: 20

a body structure with a vacuum line opening and an object engagement region, the vacuum line opening being configured to couple at least one pressure line of a vacuum pressure system to a defined internal channel of the body structure; 25

the body structure comprising a suction cup system that comprises a flexible sealing lip at the object engagement region;

the body structure comprising an internal structure defining a concave inner chamber with a chamber opening at the object engagement region, the chamber opening being positioned within a grasping region of the sealing lip; 30

the internal structure comprising an array of inlets positioned along at least one wall of the concave inner chamber, wherein each inlet defines an opening 35

24

in the body structure to the defined internal channel, the internal structure further comprising a plurality of air channels, each of which defines an opening in the internal structure between the defined internal channel and the object engagement region; wherein flow to controllably engage an object at the object engagement region may be sequenced from the vacuum line opening, to the defined internal channel, through the array of inlets to the concave inner chamber, and through the plurality of air channels to the object engagement region; and

a second end effector;

wherein the array of inlets comprises a first subset of inlets positioned along a wall of the internal structure that is opposite the chamber opening;

wherein the array of inlets further comprises at least a second subset of inlets along a second wall of the concave inner chamber, wherein the second subset of inlets is defined at an orientation different from an orientation of the first subset of inlets.

18. The end effector system of claim 17, wherein the first end effector and second end effector have object engagement regions defined substantially along the same plane.

19. The end effector system of claim 17, further comprising a first vacuum line coupled to the first end effector; and second vacuum line coupled to the second end effector.

20. The end effector system of claim 17, wherein the second end effector is a suction cup end effector.

21. The end effector system of claim 17, wherein each air channel extends from an inner edge of the concave inner chamber outward toward the sealing lip.

22. The end effector system of claim 17, wherein the suction cup system comprises bellows forming an external surface of the body structure, wherein the bellows are connected to the sealing lip.

* * * * *