



US011430331B2

(12) **United States Patent**
Rice et al.

(10) **Patent No.:** US 11,430,331 B2

(45) **Date of Patent:** Aug. 30, 2022

(54) **POWER AND THERMAL MANAGEMENT SYSTEMS AND METHODS FOR AUTONOMOUS VEHICLES**

(71) Applicant: **UATC, LLC**, San Francisco, CA (US)

(72) Inventors: **David Patrick Rice**, Wexford, PA (US);
Scott Klaus Boehmke, Wexford, PA (US)

(73) Assignee: **UATC, LLC**, Mountain View, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 642 days.

(21) Appl. No.: **15/722,346**

(22) Filed: **Oct. 2, 2017**

(65) **Prior Publication Data**

US 2019/0080602 A1 Mar. 14, 2019

Related U.S. Application Data

(60) Provisional application No. 62/555,895, filed on Sep. 8, 2017.

(51) **Int. Cl.**

G08G 1/0967 (2006.01)
B60H 1/00 (2006.01)
G05D 1/00 (2006.01)

(52) **U.S. Cl.**

CPC ... **G08G 1/096725** (2013.01); **B60H 1/00764** (2013.01); **B60H 1/00878** (2013.01);
(Continued)

(58) **Field of Classification Search**

CPC G08G 1/096725; B60H 1/00878; B60H 1/00764; G05D 1/0088; G05D 2201/0213; B60L 2240/36

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,408,714 A 10/1983 Kobayashi
4,741,477 A 5/1988 Ito
(Continued)

FOREIGN PATENT DOCUMENTS

CN 101900393 12/2010
CN 102101426 6/2011
(Continued)

OTHER PUBLICATIONS

International Search Report and Written Opinion for PCT/US2016/067718, dated Mar. 20, 2017 10 pages.
(Continued)

Primary Examiner — Donald J Wallace


(74) *Attorney, Agent, or Firm* — Dority & Manning, P.A.

(57)

ABSTRACT

Systems and methods for power and thermal management of autonomous vehicles are provided. In one example embodiment, a computing system includes processor(s) and one or more tangible, non-transitory, computer readable media that collectively store instructions that when executed by the processor(s) cause the computing system to perform operations. The operations include obtaining data associated with an autonomous vehicle. The operations include identifying one or more vehicle parameters associated with the autonomous vehicle based at least in part on the data associated with the autonomous vehicle. The operations include determining a modification to one or more operating characteristics of one or more systems onboard the autonomous vehicle based at least in part on the one or more vehicle parameters. The operations include controlling a heat generation of at least a portion of the autonomous vehicle via implementation of the modification of the operating characteristic(s) of the system(s) onboard the autonomous vehicle.

20 Claims, 6 Drawing Sheets

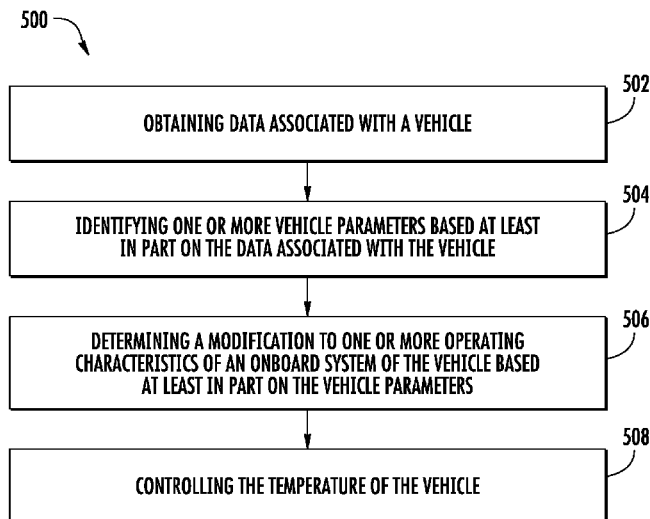

(52) **U.S. CL.**
 CPC **G05D 1/0088** (2013.01); **B60L 2240/36**
 (2013.01); **G05D 2201/0213** (2013.01)

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,537,956 A 7/1996 Rennfeld
 5,590,540 A 1/1997 Ikeda
 5,756,157 A 5/1998 Kannan
 6,021,371 A 2/2000 Fultz
 6,112,807 A 9/2000 Dage
 6,144,954 A * 11/2000 Li G05B 19/0426
 706/62
 6,238,725 B1 5/2001 Bush
 6,282,911 B1 9/2001 Watanabe
 6,360,835 B1 3/2002 Skala
 6,367,272 B1 4/2002 Zeng
 6,394,207 B1 5/2002 Skala
 6,606,251 B1 8/2003 Kenny, Jr.
 6,622,500 B1 9/2003 Archibald
 7,103,460 B1 * 9/2006 Breed B60C 23/0408
 701/29.1
 7,191,858 B2 3/2007 Vanderwees
 7,404,461 B2 7/2008 Varenne
 7,424,868 B2 9/2008 Reckels
 8,373,099 B2 2/2013 Lifson
 8,402,776 B2 3/2013 Johnston
 8,599,001 B2 12/2013 Schofield
 8,820,351 B1 9/2014 Harrington
 9,219,295 B2 12/2015 Weng
 9,227,482 B2 1/2016 DiGasbarro
 9,274,525 B1 * 3/2016 Ferguson B60K 31/0008
 9,820,409 B1 11/2017 Ross
 9,869,982 B1 1/2018 Clidaras
 2007/0261648 A1 * 11/2007 Reckels F01P 7/167
 123/41.12
 2008/0023248 A1 1/2008 Bradlev
 2008/0102758 A1 * 5/2008 Camuffo H03G 3/3042
 455/73
 2008/0112571 A1 5/2008 Bradicich
 2008/0139102 A1 6/2008 Major
 2008/0186670 A1 8/2008 Lyon
 2008/0251235 A1 10/2008 Zhou
 2008/0271878 A1 11/2008 Harvey
 2009/0020620 A1 1/2009 Douarre
 2009/0071178 A1 3/2009 Major
 2009/0138544 A1 5/2009 Wegenkittl
 2009/0145674 A1 6/2009 Lee
 2009/0225189 A1 * 9/2009 Morin H04N 5/347
 348/229.1
 2009/0301125 A1 12/2009 Myles
 2010/0032150 A1 2/2010 Determan
 2010/0100306 A1 4/2010 Gamache
 2010/0230505 A1 9/2010 Ribadeneira
 2010/0262301 A1 10/2010 Schwartz
 2010/0292976 A1 11/2010 Newcombe
 2010/0305794 A1 12/2010 Foster
 2010/0316255 A1 12/2010 Mathony
 2011/0114739 A1 5/2011 Misumi
 2011/0154324 A1 6/2011 Pagan
 2011/0246023 A1 10/2011 Lockwood
 2011/0295451 A1 * 12/2011 Fassnacht B60W 10/04
 701/22
 2012/0087088 A1 4/2012 Killion
 2012/0143430 A1 6/2012 Broggi
 2012/0180979 A1 7/2012 Harrington

2012/0205088 A1 8/2012 Morisita
 2012/0316711 A1 12/2012 Christian
 2013/0054059 A1 * 2/2013 Qian H02H 7/222
 701/22
 2013/0091348 A1 * 4/2013 Kwon G05B 15/02
 713/100
 2013/0238233 A1 9/2013 Kim
 2013/0255601 A1 10/2013 Gooden
 2013/0261942 A1 * 10/2013 Mcquade F02D 29/02
 701/115
 2013/0291637 A1 * 11/2013 Dorner G01C 1/00
 73/504.08
 2013/0306276 A1 11/2013 Duchesneau
 2014/0157803 A1 6/2014 Pebley
 2014/0189390 A1 * 7/2014 Gough G06F 1/206
 713/320
 2014/0217080 A1 8/2014 Hoke
 2014/0229059 A1 8/2014 Surnilla
 2014/0260233 A1 9/2014 Giovanardi
 2014/0350768 A1 11/2014 Filippov
 2014/0371924 A1 12/2014 Kodama
 2015/0245539 A1 8/2015 Pelletier
 2015/0251741 A1 9/2015 Cantwell
 2015/0316334 A1 11/2015 Chainer
 2015/0323940 A1 11/2015 Venkatesan
 2016/0120019 A1 4/2016 Shedd
 2016/0274589 A1 * 9/2016 Templeton G05D 1/0246
 2016/0291653 A1 * 10/2016 Vootukuru G01K 13/00
 2016/0349330 A1 * 12/2016 Barfield, Jr. G07C 5/008
 2017/0168531 A1 6/2017 Casparian
 2017/0174037 A1 * 6/2017 Meyhofer B60H 1/00392
 2017/0264493 A1 9/2017 Cencini
 2017/0313158 A1 11/2017 Porras
 2017/0355380 A1 * 12/2017 Fendt G06F 1/206
 2018/0050704 A1 * 2/2018 Tascione B60W 50/0205
 2018/0141552 A1 * 5/2018 Marcicki H01M 10/625
 2018/0148036 A1 * 5/2018 Gaither B60W 20/19
 2018/0188726 A1 7/2018 Newman
 2018/0209324 A1 7/2018 Schwartz
 2018/0212687 A1 7/2018 Westmeyer
 2018/0258900 A1 9/2018 Namuduri
 2018/0357554 A1 12/2018 Hazan
 2018/0370540 A1 12/2018 Yousuf
 2018/0372504 A1 12/2018 Singhal
 2019/0031015 A1 1/2019 Borud
 2019/0049952 A1 * 2/2019 Miller G01C 21/3492
 2021/0221199 A1 * 7/2021 Lee B60K 11/02

FOREIGN PATENT DOCUMENTS

CN 103346661 10/2013
 CN 103863136 6/2014
 CN 104477024 4/2015
 CN 104508274 4/2015
 CN 104589958 5/2015
 DE 102009048674 5/2010
 WO WO2005053974 6/2005

OTHER PUBLICATIONS

Cerullo, "Keeping your car heater hot", Popular Science, vol. 223,
 No. 6, Dec. 1983, pp. 122-124.
 Extended European Search Report for 16879958.3, dated Dec. 20,
 2018, 7 pages.

* cited by examiner

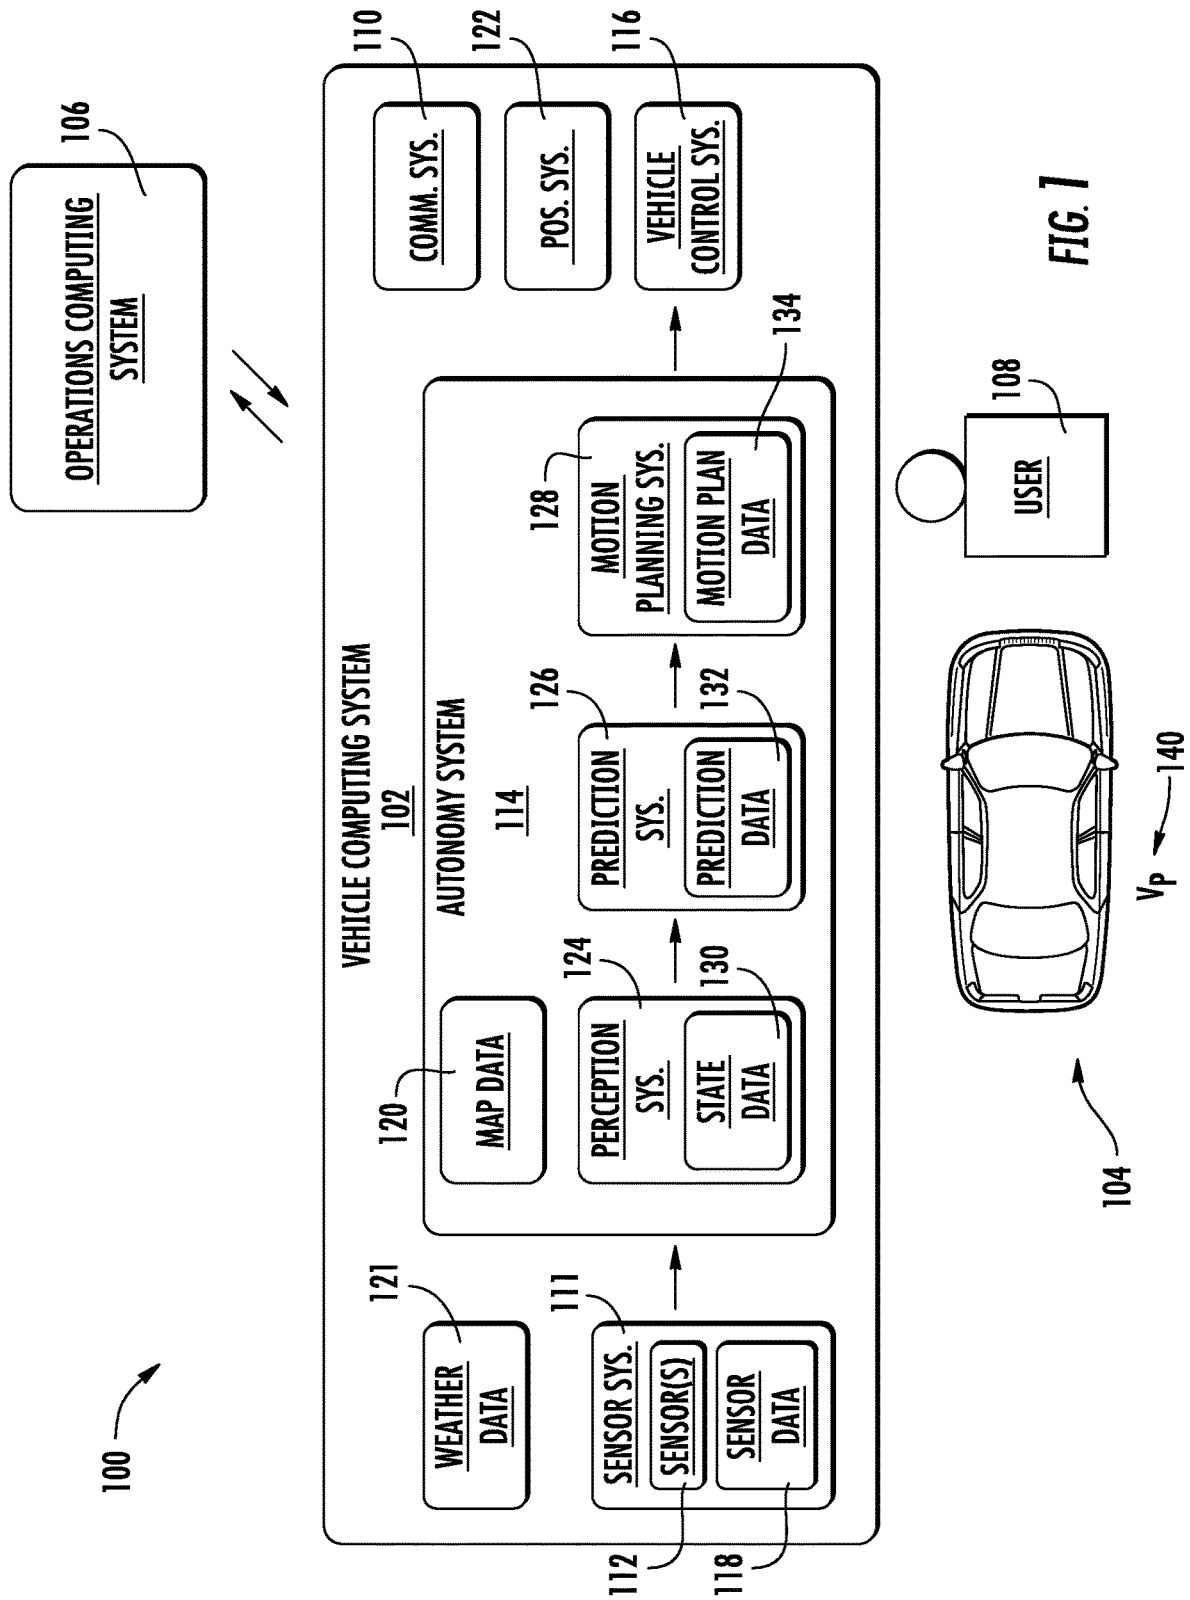


FIG. 1


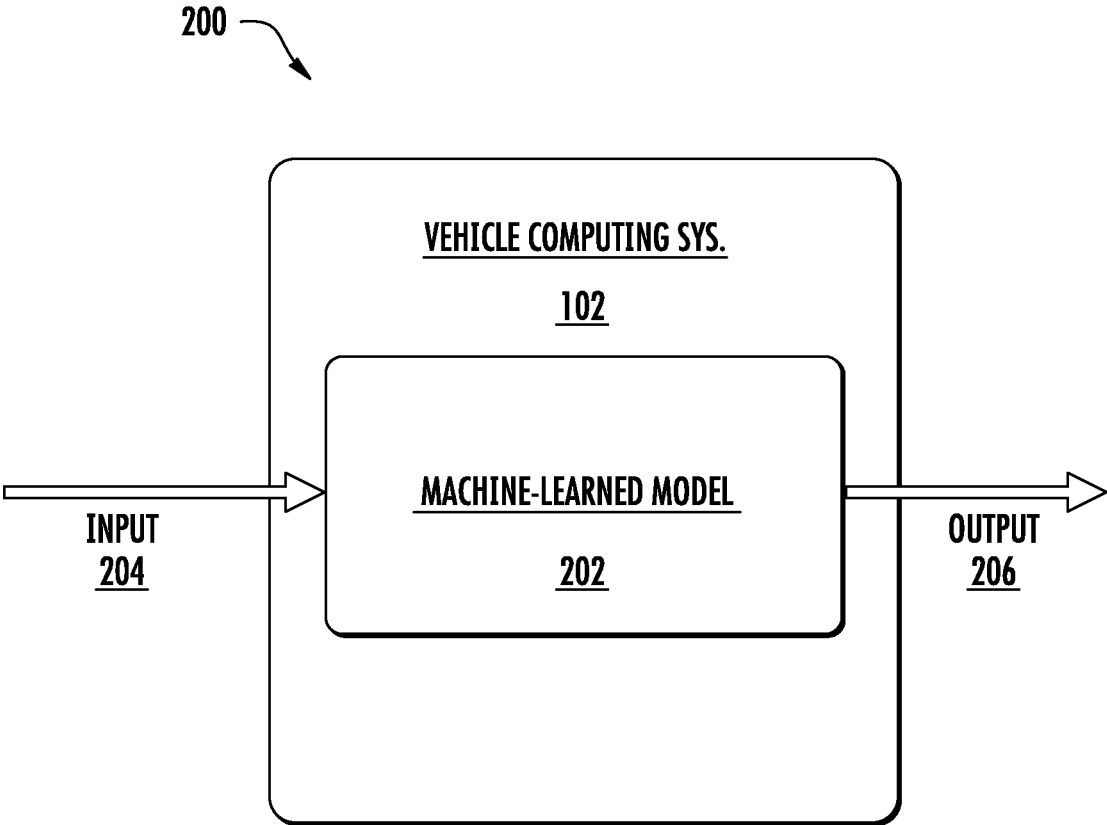


FIG. 2

300

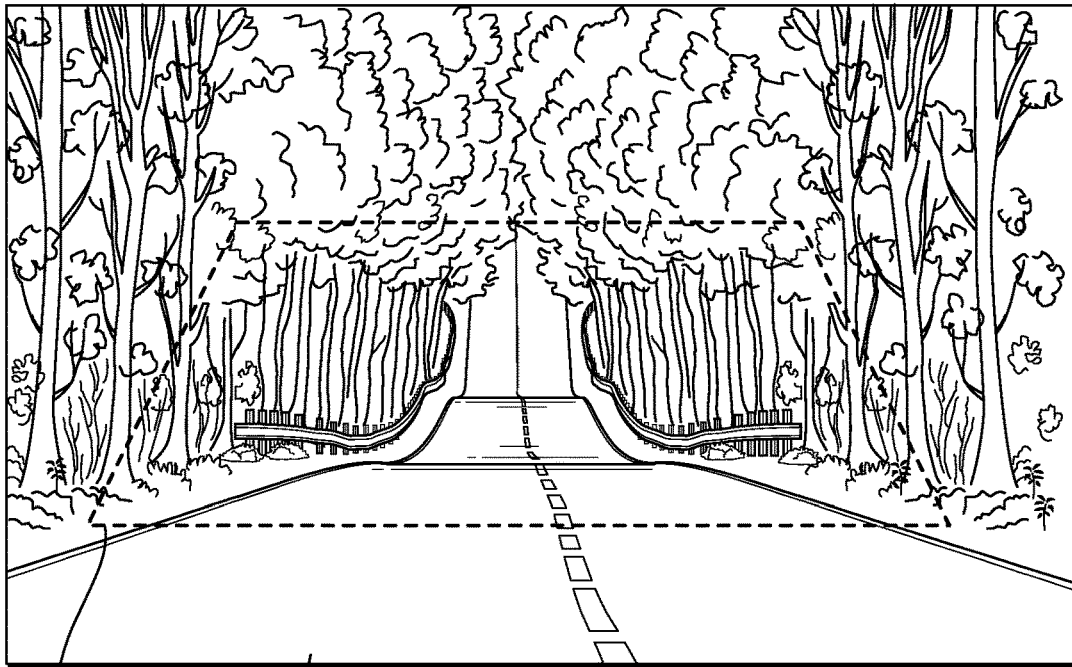


304

302

FIG. 3A

320

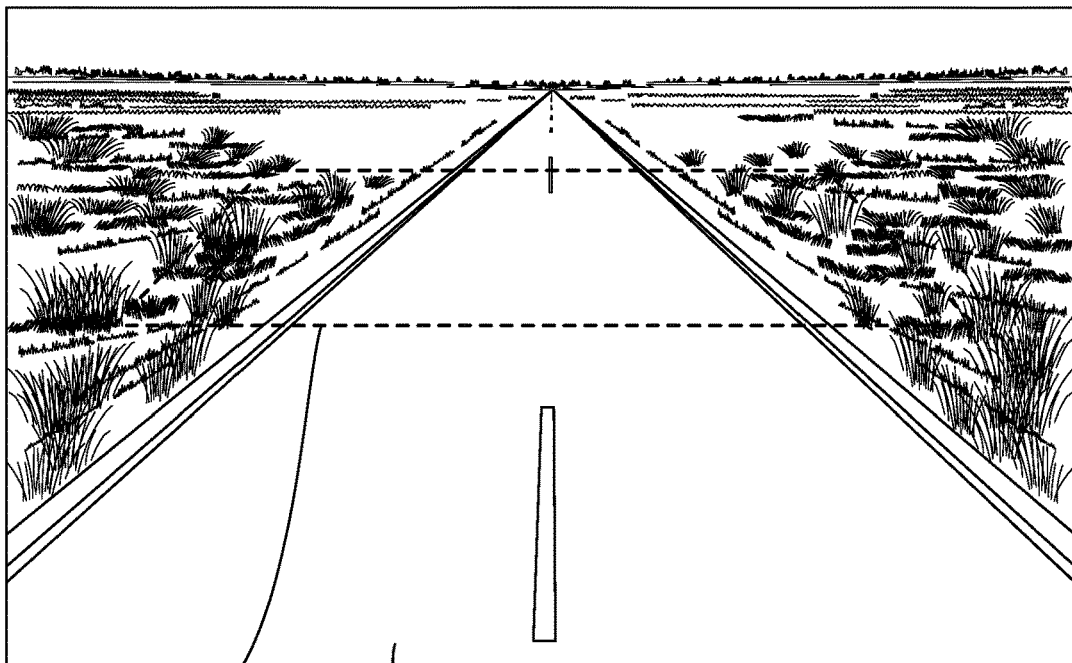

304

322

FIG. 3B

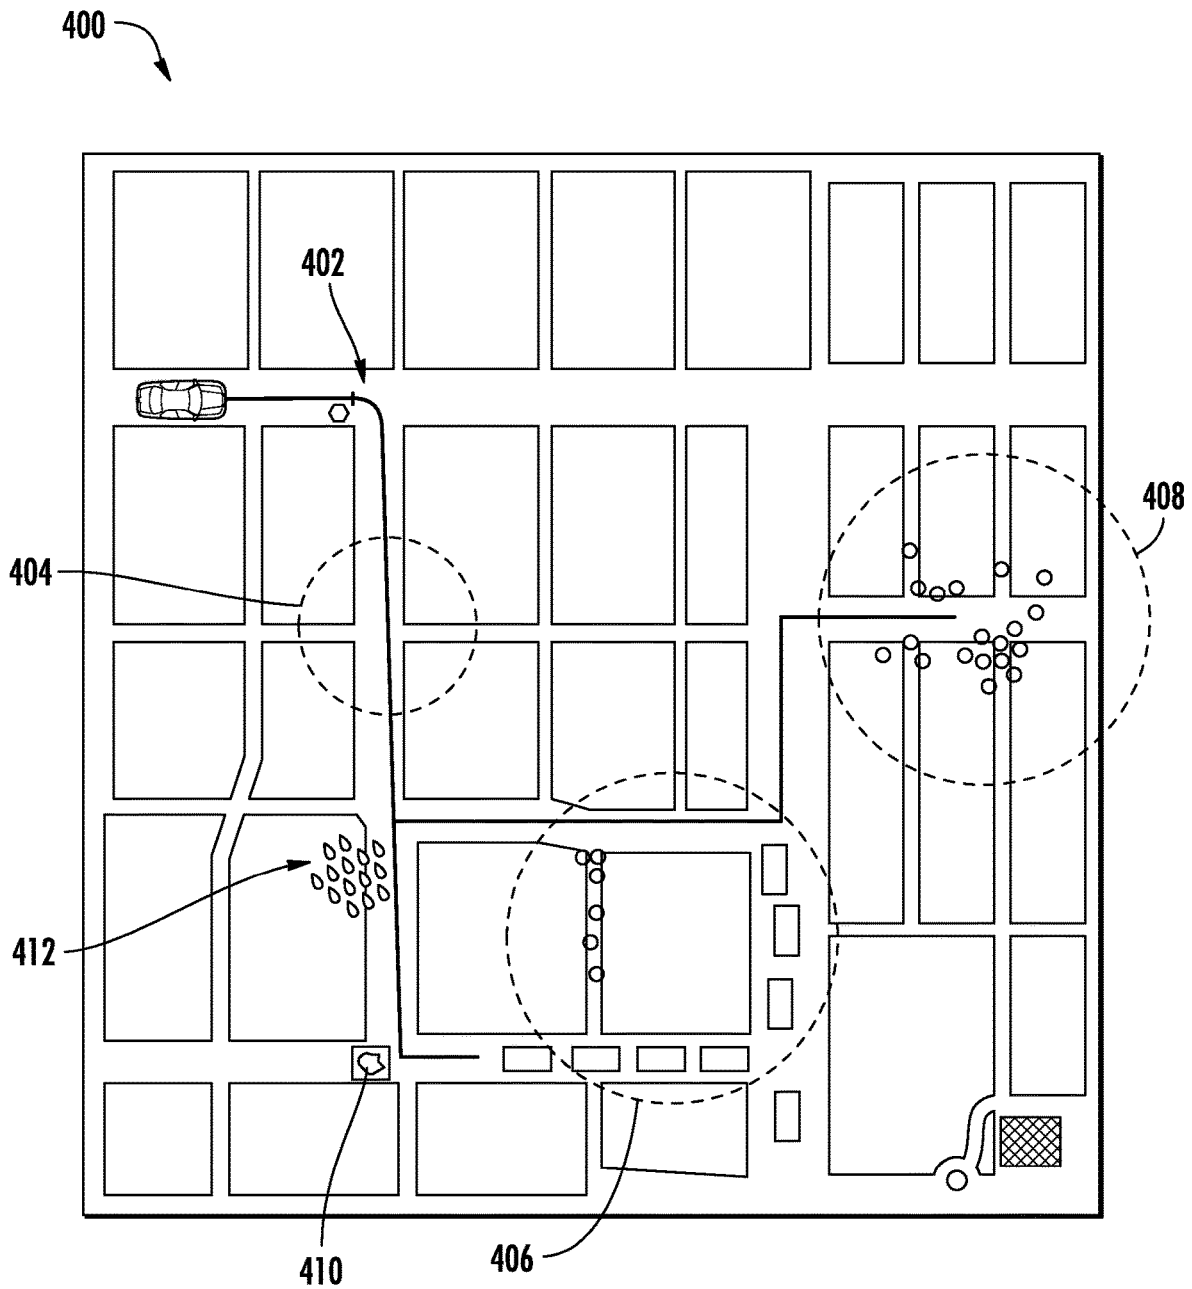


FIG. 4

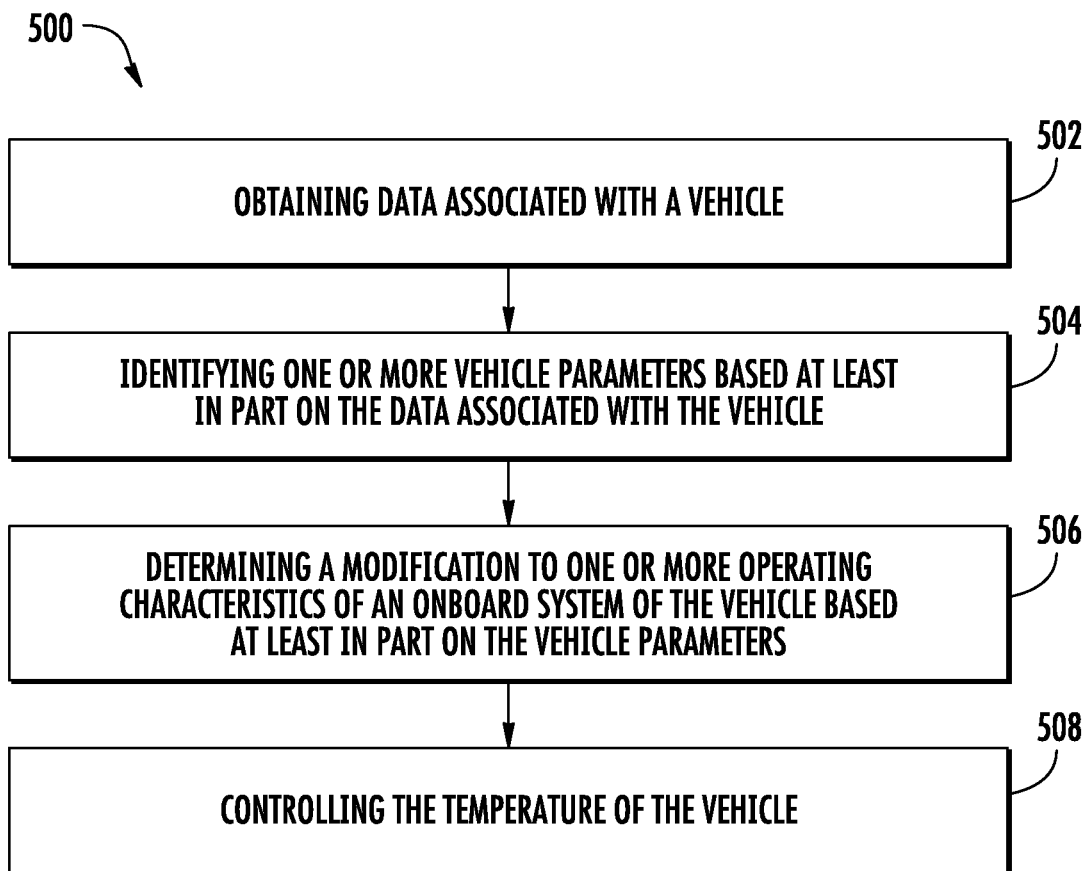


FIG. 5

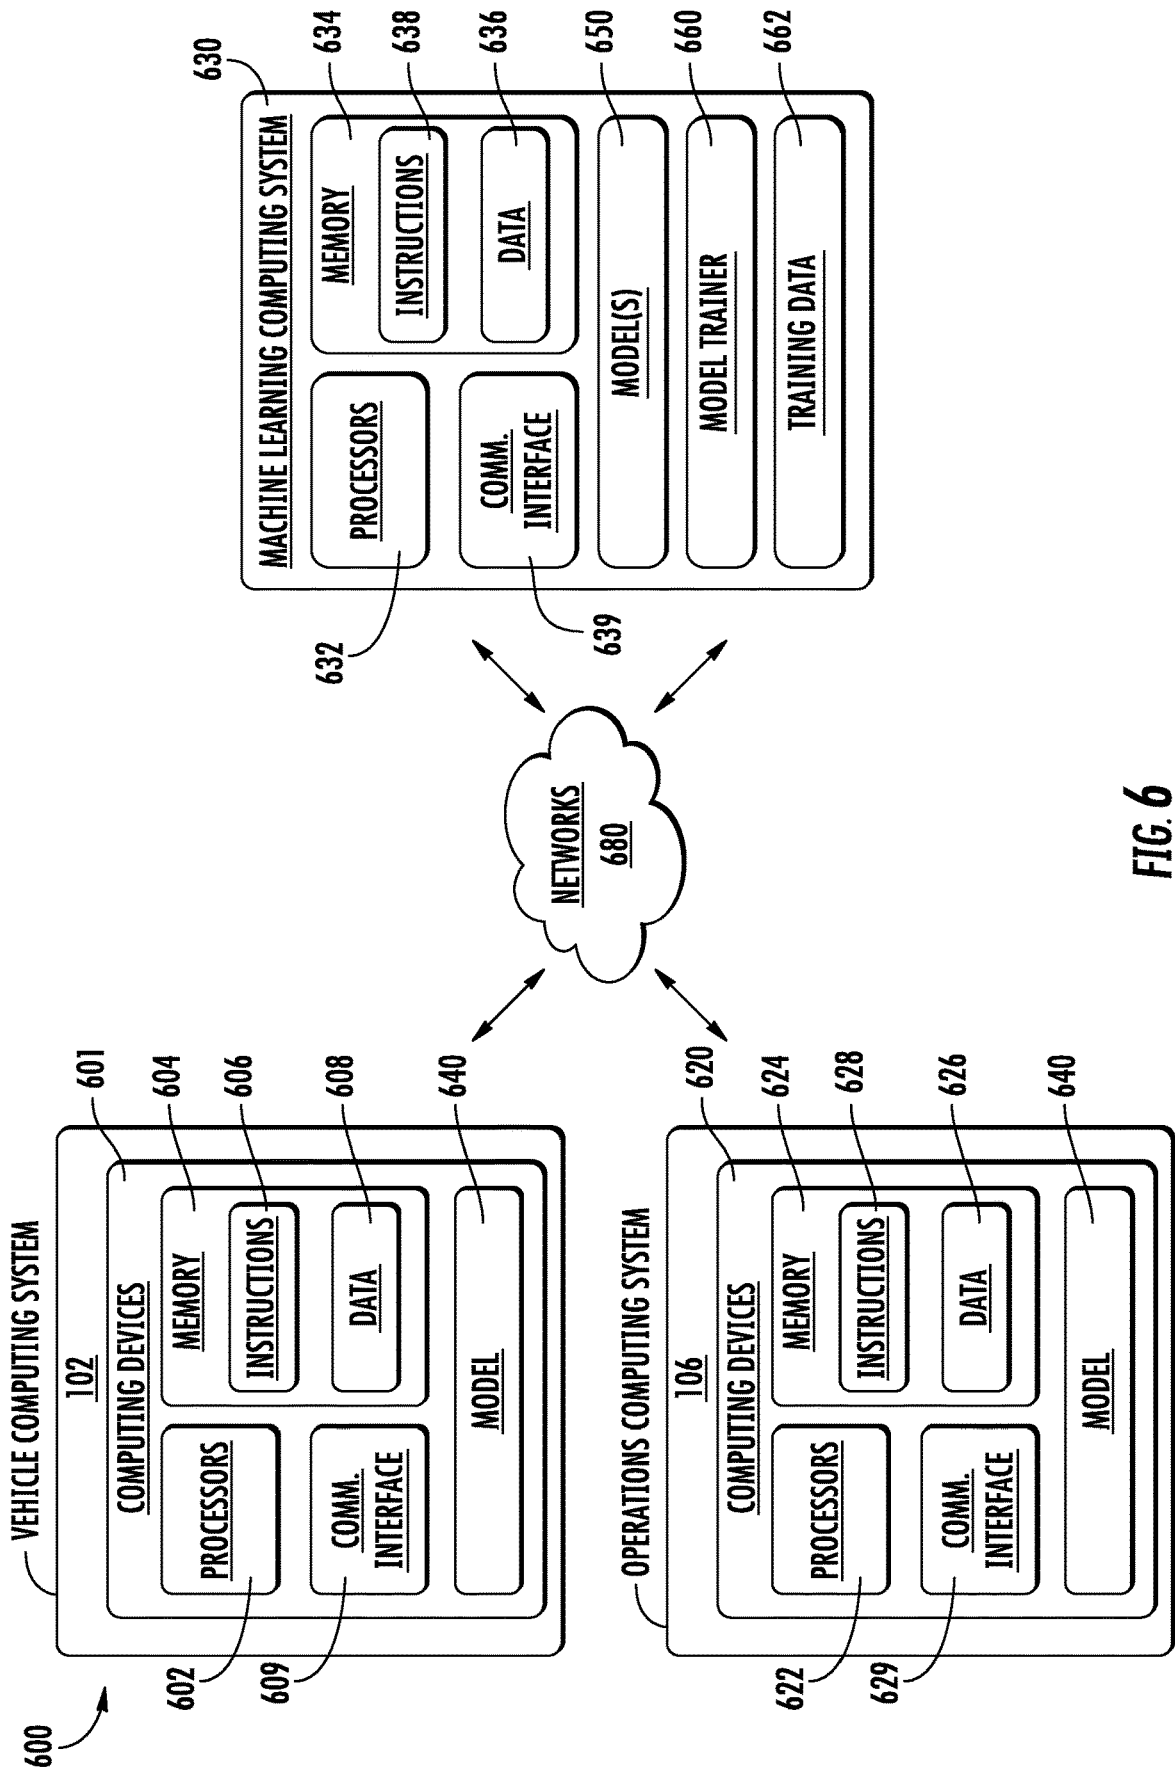


FIG. 6

1

**POWER AND THERMAL MANAGEMENT
SYSTEMS AND METHODS FOR
AUTONOMOUS VEHICLES**

PRIORITY CLAIM

The present application is based on and claims priority to U.S. Provisional Application 62/555,895 having a filing date of Sep. 8, 2017, which is incorporated by reference herein.

FIELD

The present disclosure relates generally to controlling the power consumption and thermal management of an autonomous vehicle.

BACKGROUND

An autonomous vehicle is a vehicle that is capable of sensing its environment and navigating with little to no human input. In particular, an autonomous vehicle can observe its surrounding environment using a variety of sensors and can attempt to comprehend the environment by performing various processing techniques on data collected by the sensors. Given knowledge of its surrounding environment, the autonomous vehicle can navigate through such surrounding environment.

SUMMARY

Aspects and advantages of embodiments of the present disclosure will be set forth in part in the following description, or may be learned from the description, or may be learned through practice of the embodiments.

One example aspect of the present disclosure is directed to a computer-implemented method of autonomous vehicle thermal management. The method includes identifying, by a computing system including one or more computing devices, one or more vehicle parameters associated with an autonomous vehicle. The method includes determining, by the computing system, a modification to one or more operating characteristics of a sensor system of the autonomous vehicle based at least in part on the one or more vehicle parameters. The method includes controlling, by the computing system, a heat generation of the sensor system of the autonomous vehicle via implementation of the modification of the one or more operating characteristics of the sensor system.

Another example aspect of the present disclosure is directed to a computing system for autonomous vehicle thermal management. The computing system includes one or more processors and one or more tangible, non-transitory, computer readable media that collectively store instructions that when executed by the one or more processors cause the computing system to perform operations. The operations include obtaining data associated with an autonomous vehicle. The data is indicative of at least one of a future action to be performed by the autonomous vehicle, a future geographic area in which the autonomous vehicle is to be located, or a weather condition to be experienced by the autonomous vehicle. The operations include identifying one or more vehicle parameters associated with the autonomous vehicle based at least in part on the data associated with the autonomous vehicle. The operations include determining a modification to one or more operating characteristics of one or more systems onboard the autonomous vehicle based at least in part on the one or more vehicle parameters. The

2

operations include controlling a heat generation of at least a portion of the autonomous vehicle via implementation of the modification of the one or more operating characteristics of the one or more systems onboard the autonomous vehicle.

Yet another example aspect of the present disclosure is directed to an autonomous vehicle. The autonomous vehicle includes one or more processors and one or more tangible, non-transitory, computer readable media that collectively store instructions that when executed by the one or more processors cause the autonomous vehicle to perform operations. The operations include obtaining data associated with the autonomous vehicle. The operations include identifying one or more vehicle parameters associated with an autonomous vehicle based at least in part on the data associated with the autonomous vehicle. The operations include determining a modification to one or more operating characteristics of one or more systems onboard the autonomous vehicle based at least in part on the one or more vehicle parameters. The one or more systems include at least one of a sensor system of the autonomous vehicle or a motion planning system of the autonomous vehicle. The operations include controlling a heat generation of at least a portion of the autonomous vehicle via implementation of the modification of the one or more operating characteristics of the one or more systems onboard the autonomous vehicle.

Other example aspects of the present disclosure are directed to systems, methods, vehicles, apparatuses, tangible, non-transitory computer-readable media, and memory devices for predicting object motion and controlling autonomous vehicles with respect to the same.

These and other features, aspects and advantages of various embodiments will become better understood with reference to the following description and appended claims. The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate embodiments of the present disclosure and, together with the description, serve to explain the related principles.

BRIEF DESCRIPTION OF THE DRAWINGS

Detailed discussion of embodiments directed to one of ordinary skill in the art are set forth in the specification, which makes reference to the appended figures, in which:

FIG. 1 depicts an example system overview according to example embodiments of the present disclosure;

FIG. 2 depicts an example implementation of a model according to example embodiments of the present disclosure;

FIGS. 3A and 3B depict example environments of an autonomous vehicle according to example embodiments of the present disclosure;

FIG. 4 depicts example geographic areas according to example embodiments of the present disclosure;

FIG. 5 depicts a flow diagram of an example method of autonomous vehicle thermal management according to example embodiments of the present disclosure; and

FIG. 6 depicts example system components according to example embodiments of the present disclosure.

DETAILED DESCRIPTION

Reference now will be made in detail to embodiments, one or more example(s) of which are illustrated in the drawings. Each example is provided by way of explanation of the embodiments, not limitation of the present disclosure. In fact, it will be apparent to those skilled in the art that various modifications and variations can be made to the

embodiments without departing from the scope or spirit of the present disclosure. For instance, features illustrated or described as part of one embodiment can be used with another embodiment to yield a still further embodiment. Thus, it is intended that aspects of the present disclosure cover such modifications and variations.

Example aspects of the present disclosure are directed to selectively operating one or more systems of an autonomous vehicle for improved power consumption and thermal management of the autonomous vehicle. For instance, an autonomous vehicle can include an onboard vehicle computing system that includes a variety of computing devices. As the computing devices perform various tasks (e.g., data processing for autonomous operation of the vehicle), the devices generate heat that can affect the operation of the autonomous vehicle due to hardware heating. For instance, continuous operation of the vehicle's sensor system while the autonomous vehicle is slowing down and/or stopped can increase the temperature of the autonomous vehicle due to the lack of airflow from the vehicle's motion. In accordance with the present disclosure, the vehicle's onboard computing system can help control the vehicle's temperature by selectively operating certain systems onboard the autonomous vehicle (e.g., reducing the power consumption) and, ultimately, the heat generated by those systems. Moreover, the vehicle computing system can predictively reduce the power consumption/heat generation of these systems (e.g., while the vehicle is in motion) based on parameters to occur at a future point in time. The vehicle computing system can identify one or more vehicle parameters associated with the autonomous vehicle to determine the circumstances faced/to be faced by the vehicle, determine a modification to the system(s) onboard the vehicle, and implement the modification to control the vehicle's temperature, heat generation, etc. By way of example, the vehicle computing system can evaluate the motion plan of the autonomous vehicle to determine that the vehicle will be stopping at a stop sign in five hundred feet. As the autonomous vehicle approaches the stop sign, the vehicle computing system can reduce the frequency with which the vehicle's sensor system acquires image data associated with the vehicle's surroundings. This can decrease the power dissipated and thereby the heat generated by the sensor system. Accordingly, the vehicle computing system can predictively manage the systems onboard the autonomous vehicle to control the vehicle's heat generation, temperature, etc. This can help reduce potential overheating of the autonomous vehicle while also avoiding the need for more complex cooling systems.

More particularly, an autonomous vehicle can be a ground-based autonomous vehicle (e.g., car, truck, bus, etc.), aerial vehicle, or another type of vehicle that can operate with minimal and/or no interaction from a human operator located within the vehicle or at a remote location. The autonomous vehicle can include a vehicle computing system located onboard the autonomous vehicle to help control the autonomous vehicle. The vehicle computing system is located onboard the autonomous vehicle, in that the vehicle computing system is located on or within the autonomous vehicle. The vehicle computing system can include a sensor system, an autonomy system (e.g., for determining and planning autonomous vehicle navigation/motion), one or more vehicle control systems (e.g., for controlling braking, steering, powertrain), etc.

The sensor system can include one or more sensors that are configured to acquire sensor data associated with surrounding environment of the autonomous vehicle (e.g., within a field of view of the sensor(s)). The sensor(s) can

include, for example, cameras, a Light Detection and Ranging (LIDAR) system, a Radio Detection and Ranging (RADAR) system, and/or other types of sensors. The sensor data can include image data, LIDAR data, RADAR data, etc.

The sensor data can be processed to help the autonomous vehicle perceive its surrounding environment and generate an appropriate motion plan through such surrounding environment. For example, the vehicle computing system (e.g., the autonomy system) can include a perception system, a prediction system, and a motion planning system. The perception system can be configured to perceive object(s) (e.g., vehicles, pedestrians, bicyclists, etc.) within the surrounding environment of the autonomous vehicle based at least in part on the sensor data. The prediction system can be configured to predict a motion of the perceived object(s). The motion planning system can be configured to plan the motion of the autonomous vehicle, for example, with respect to the object(s) and the predicted motion of the objects. The motion plan can be indicative of one or more future vehicle action(s) (e.g., acceleration adjustments, speed adjustments, steering adjustments, etc.) to be performed by the autonomous vehicle. The vehicle computing system can utilize the vehicle control system(s) to implement the determined motion plan.

The vehicle computing system can help control the temperature of the autonomous vehicle by selectively operating one or more of the systems onboard the autonomous vehicle. To do so, the vehicle computing system can determine whether the appropriate circumstances existence in order for the autonomous vehicle to modify the operating characteristic(s) of its onboard system(s). If so, the vehicle computing system can help control the temperature of the autonomous vehicle by reducing and/or limiting the power consumption of one or more of these systems.

The vehicle computing system can identify one or more vehicle parameters associated with the autonomous vehicle to determine whether it is safe and/or appropriate to modify the power consumption of the system(s) onboard the autonomous vehicle. For instance, the vehicle computing system can obtain data associated with the autonomous vehicle. Such data can include data indicative of the vehicle's current operating conditions. Additionally, or alternatively, such data can include data indicative of a motion plan of the autonomous vehicle (e.g., that indicates future vehicle actions). The data associated with the autonomous vehicle can also, or alternatively, include map data. The map data can be indicative of current and/or future geographic locations in which the autonomous vehicle is/will be located, information associated with a particular travel way, etc. Additionally, or alternatively, the data associated with the autonomous vehicle can include weather data (e.g., indicative of current and/or future weather condition(s)), sensor data, and/or other types of data.

The vehicle computing system can identify the vehicle parameter(s) associated with the autonomous vehicle based at least in part on the data associated with the autonomous vehicle. For instance, the vehicle computing system can process this data to determine whether certain vehicle parameters exist (or will exist) such that one or more systems onboard the autonomous vehicle can be modified (e.g., to a reduced power state). For example, the vehicle computing system can process the data indicative of the vehicle's current operating conditions to determine a current state (e.g., speed, heading, acceleration, etc.) of the vehicle. The vehicle computing system can process the data indicative of the motion plan of the autonomous vehicle to determine a future vehicle action to be performed by the

5

autonomous vehicle. The vehicle computing system can identify one or more vehicle parameters (e.g., such as future vehicle speed, heading, acceleration, etc.) based at least in part on the future vehicle action (e.g., a pull over action for a transportation service, turn, etc.). In another example, the vehicle computing system can evaluate the map data to determine vehicle parameter(s) such as, for example, current and/or future: travel way condition(s) (e.g., obstructions, roadwork, etc.), travel way type (e.g., urban city streets, rural highway, etc.), travel way geometry (e.g., slope, curvature, etc.), crowd density, traffic pattern(s), and/or other parameters. Additionally, or alternatively, the vehicle computing system can process the weather data to determine the weather conditions that the vehicle is currently experiencing and/or will experience in the future. In some implementations, the vehicle computing system can process the sensor data to identify one or more vehicle parameters (e.g., road type, road conditions, weather conditions, etc.).

The vehicle computing system can determine a modification to one or more operating characteristics of the one or more systems onboard the autonomous vehicle based at least in part on the vehicle parameters. In some implementations, the modification can aim to reduce the heat generation of the respective system by adjusting the operating characteristics of that system. This can include an adjustment to how the system's functions are operated (e.g., via a software modification), rather than a physical adjustment of the system hardware. In some implementations, the vehicle computing system can include an algorithm (e.g., a rule(s)-based algorithm) that is stored in an accessible memory onboard the autonomous vehicle. The vehicle parameter(s) can be provided as input into the algorithm. Based on the vehicle parameter(s), the algorithm can indicate which of the system(s) onboard the autonomous vehicle should be modified (e.g., to reduce that system's heat generation) and how the respective system(s) should be modified (e.g., which operating characteristics to modify). In some implementations, the system modification can be determined at least in part from a model, such as a machine-learned model. For example, the machine-learned model can be or can otherwise include one or more various model(s) such as, for example, models using boosted random forest techniques, neural networks (e.g., deep neural networks), or other multi-layer non-linear models. Neural networks can include recurrent neural networks (e.g., long short-term memory recurrent neural networks), feed-forward neural networks, and/or other forms of neural networks. For instance, supervised training techniques can be performed to train the model (e.g., using previous logs of autonomous vehicle operations) to determine which systems and types of modifications were most effective in controlling the heat generation of a vehicle system, the temperature of the vehicle, power consumption, etc. The input data for the model can include, for example, the vehicle parameters, as described herein. The machine-learned model can provide, as an output, data indicative of one or more recommended modifications to one or more operating characteristics of one or more systems onboard the autonomous vehicle.

The vehicle computing system can determine system modifications for current and/or future implementation on the autonomous vehicle. The modification can be determined while the autonomous vehicle is in motion (e.g., rather than when parked). In some implementations, the vehicle computing system can determine a current modification for a system onboard the autonomous vehicle based at least in part on the current operating conditions of the vehicle. By way of example, the vehicle computing system

6

can determine that the vehicle's current speed is decreasing and/or below a threshold and that the vehicle is travelling in a geographic area with a low crowd density (e.g., in a rural environment without pedestrians). Given these vehicle parameter(s), the vehicle computing system can determine that the vehicle can safely operate below the maximum capability of the sensor system. As such, the vehicle computing system can determine a modification to the operating characteristic(s) of the sensor system. The operating characteristic(s) associated with sensor system can include, for example, data acquisition characteristics (e.g., associated with the collection of sensor data by a vehicle sensor) and/or data processing characteristics (e.g., associated with the processing of such sensor data). For example, the vehicle computing system can determine (e.g., using the rule(s)-based algorithm, machine-learned model, etc.) that one or more of the vehicle's sensors (e.g., cameras) should be modified to utilize a lower frame rate and/or acquire images a lower rate. This can allow the sensor system to consume less power for image acquisition/processing and, ultimately, to generate less heat. In another example, the vehicle computing system can determine that the vehicle is currently travelling on a relatively flat travel way (e.g., road). The vehicle computing system can determine a modification to the vehicle's sensor system to cause a decrease in the power consumption of the sensor system while the vehicle is on the flat travel way. For instance, the vehicle computing system can determine that the vehicle's sensors can utilize a smaller window of interest (e.g., +/-two degrees) for the flat travel way, while still maintaining safe operation of the vehicle. This can allow the sensor system to process less image data and, thus, decrease the power consumed for such processing, while also generating less heat.

In some implementations, the vehicle computing system can predictively reduce the power consumption of a system of the autonomous vehicle based on future conditions that are expected by the vehicle. By way of example, the vehicle computing system can determine that the autonomous vehicle will decelerate to a stopped position at a future point in time based at least in part on the vehicle's motion plan (e.g., which indicates the future stopping action). The vehicle computing system can preemptively determine that as the vehicle decelerates and/or reaches the stopped position the operating characteristic(s) of the sensor system of the autonomous vehicle can be modified to control the system's power consumption and heat generation. For example, the vehicle computing system can determine that once the vehicle eventually reaches a certain location, point in time, speed, etc. the sensor system can sub-sample the sensor data to decrease the power needed for image processing. In some implementations, the vehicle computing system can determine that one or more of the vehicle's sensors can be disabled (e.g., turned-off and/or otherwise prevented from acquiring sensor data). Either approach can lead to less heat generation from the sensor system.

In another example, the vehicle computing system can determine that the autonomous vehicle will be located within a future geographic area (e.g., a rural country road) that has a low level of traffic and a low crowd density (e.g., based on the map data, vehicle route, motion plan, etc.). Accordingly, the vehicle computing system can determine a modification to the operating characteristic(s) of the sensor system of the autonomous vehicle to be implemented when the vehicle is within the future geographic area, so that the sensor system consumes less power (and generates less heat). Such a modification can include, for example, reducing the resolution of the sensor data acquired via the

sensor(s), adjusting the frame rate of the sensor, sub-sampling sensor data, etc. Additionally, or alternatively, the vehicle computing system can determine that the autonomous vehicle will be located within a future geographic area (e.g., a city center) that has a higher crowd density (e.g., based on the map data, motion plan, etc.). Accordingly, the vehicle computing system can determine that the sensor system should not be modified while in the future geographic area so that the vehicle can operate to the maximum capability of the vehicle's sensors.

In some implementations, the vehicle computing system can identify a current and/or future weather condition to be experienced by the autonomous vehicle. In the event that the weather condition requires optimal sensor capability (e.g., wet/icy conditions, etc.), the vehicle computing system can determine that the operating characteristic(s) of the sensor system should not be modified to reduce power consumption, heat generation, etc. under such weather conditions. In the event that the weather condition does not require maximum sensor capability (e.g., clear skies) and that it would be otherwise safe to do so, the vehicle computing system can adjust the operating characteristic(s) of the sensor system of the autonomous vehicle to decrease heat generation, power consumption, etc. (e.g., via acquisition frequency reduction, sub-sampling, etc.) while under such weather conditions. This can allow the vehicle computing system to decrease the temperature of the sensor system under such circumstances.

The vehicle computing system can determine power-saving modifications to systems onboard the autonomous vehicle other than the sensor system. For instance, the vehicle computing system can determine that the temperature of the vehicle's surrounding environment is ninety degrees Fahrenheit (e.g., based on vehicle thermometer, weather data, etc.). In such conditions, the vehicle computing system may reduce the frame-rate and/or implement sub-sampling by the sensor system. Additionally, or alternatively, the vehicle computing system can determine a modification to one or more operating characteristics of the vehicle's motion planning system. The operating characteristic(s) of the motion planning system can be characteristic(s) associated with the determination of the future action(s) of the autonomous vehicle. For example, a modification of the operating characteristic(s) can include restricting the top speed of the autonomous vehicle while the vehicle is operating at the reduced frame rate, sub-sampling, etc. Such a modification can include an adjustment of the cost data utilized by the motion planning system when planning the motion of the autonomous vehicle. For instance, the cost data can be adjusted such that the cost of exceeding the restricted speed is very high. In another example, the autonomous vehicle may only have enough thermal headway to operate the sensor(s) with a forward overhead of a particular distance (e.g., fifty meters). Accordingly, the vehicle computing system can determine a modification to the operating characteristic(s) of the motion planning system to restrict the speed of the autonomous vehicle to not exceed a speed corresponding to the stopping distance at such forward overhead (e.g., twenty-five mph). In another example, the autonomous vehicle may be stopped for an extended period of time due to emergency road construction on a highway. When the autonomous vehicle finally passes the roadwork, significant heat may be generated if the vehicle attempts to reach the appropriate speed in a short time period (e.g., due to sensor frame rate increase, additional sensor activation, etc.). The vehicle computing system can modify the operating characteristic(s) of the motion planning system such that the autonomous vehicle is

caused to travel within a buffer speed/acceleration as the vehicle is getting up to speed on the highway. This can help control the power consumption of the other vehicle systems as the autonomous vehicle reaches the appropriate speed and, thus, the heat generation.

The modifications to the operating characteristic(s) of a system can be configured to adjust the system in a variety of manners. In some implementations, the operating characteristic(s) of the system(s) onboard the autonomous vehicle can be modified in a proportional manner. By way of example, in the event that the speed of the autonomous vehicle is decreasing (or will be decreasing), the frame rate of a sensor can be decreased proportionally to the decrease in vehicle speed. In some implementations, the operating characteristic(s) of the system(s) onboard the autonomous vehicle can be modified in a pre-set manner. For example, in the event that the autonomous vehicle is travelling (or will be travelling) below a certain speed threshold, in a certain weather condition, and/or under another circumstance for which its existence can be represented in a binary manner, the sensor system can begin to sub-sample the sensor data, according to a pre-determined approach that defines the particular sub-sampling type, factors, resolutions, etc.

The vehicle computing system can control the temperature of at least a portion of the autonomous vehicle via implementation of the modification of the one or more operating characteristics of the one or more systems onboard the autonomous vehicle. For instance, the vehicle computing system can control the heat generation of at least a portion of the autonomous vehicle via implementation of the modification of the operating characteristic(s) of the system(s) onboard the autonomous vehicle. For instance, the vehicle computing system can send data indicative of the determined modification (e.g., control signal(s)) to the respective system(s) onboard the autonomous vehicle (e.g., sensor system, motion planning system) to implement the modification (e.g., decrease in the frame rate, adjust a window of interest, adjust cost data, etc.). Such data can be provided while the autonomous vehicle is in motion. Moreover, such data can be sent at a current point in time to immediately implement the modification (e.g., for the vehicle's current situation) or a future point in time to implement the modification for future conditions to be experienced by the vehicle (e.g., at a future stop, flat travel way, low crowd density area, etc.). In some implementations, the system(s) of the autonomous vehicle can be configured to operate in a plurality of operating modes that include, for example, a low heat operating mode. By way of example, the sensor system can be configured to operate in a plurality of sensor operating modes that include a low heat sensor operating mode in which the sensor(s) operate at a decreased frame rate, utilize sub-sampling, etc. To implement the determined modification, the vehicle computing system can cause the sensor system to enter into the low heat sensor operating mode.

The systems and methods described herein provide a number of technical effects and benefits. For instance, the present disclosure provides an improved approach to thermal management of an autonomous vehicle. In particular, the systems and methods enable an autonomous vehicle to reduce the power consumption of the systems that are utilized by the autonomous vehicle for perceiving the surrounding environment (e.g., sensor system) and planning its motion through the surrounding environment (e.g., autonomy system, motion planning system). By doing so, the autonomous vehicle can leverage its existing onboard systems to better control the vehicle's temperature (e.g., heat

generation), rather than relying on more complex (and expensive) cooling systems. This can also help avoid the difficulty associated with up-fitting such cooling hardware to an autonomous vehicle as well as the allocation of computational resources needed to run such systems. Moreover, the improved thermal management of the vehicle's onboard system can help avoid potential overheating and, thus, lead to more efficient operation of the vehicle computing system.

The systems and methods of the present disclosure also provide an improvement to vehicle computing technology, such as autonomous vehicle computing technology. The systems and methods of the present disclosure can control the heat generation of an autonomous vehicle by selectively modifying its onboard systems (e.g., the associated power consumption) when it is most appropriate. For instance, the vehicle computing system can obtain data associated with the autonomous vehicle. The data can be indicative of current and/or future operating conditions of the autonomous vehicle. For instance, the data can be indicative of a current or future action to be performed by the autonomous vehicle, a current or future geographic area in which the vehicle is to be located, a weather condition experienced (or to be experienced) by the autonomous vehicle, etc. The vehicle computing system can identify one or more vehicle parameters associated with an autonomous vehicle based at least in part on the data associated with the autonomous vehicle. As described herein, the vehicle parameter(s) can include, for example, current and/or future: vehicle speed(s), vehicle action(s), travel way condition(s) (e.g., obstructions, roadwork, etc.), travel way type(s) (e.g., urban city streets, rural highway, etc.), travel way geometry (e.g., slope, curvature, etc.), crowd density, traffic pattern(s), weather conditions, etc. The vehicle computing system can determine a modification to one or more operating characteristics of one or more systems onboard the autonomous vehicle based at least in part on the vehicle parameters. The system(s) can be those associated with the autonomous operation of the vehicle such as, for example, the sensor system, motion planning system, etc. In some implementations, implementing the modification can cause a decrease in a power consumption of that respective system. The vehicle computing system can thereby control a temperature (e.g., heat generation) of at least a portion of the autonomous vehicle via implementation of the modification. In this way, the vehicle computing system can evaluate the appropriate vehicle parameters to ensure that the autonomous vehicle can safely modify the vehicle's onboard autonomy operations to control vehicle system heat generation when appropriate.

Additionally, the systems and methods of the present disclosure can be implemented while the autonomous vehicle is in motion to scale down power usage while the vehicle is in motion (e.g., rather than parked). This can be particularly helpful for autonomous vehicles that are equipped for both high-speed and low-speed operation. For example, when an autonomous vehicle is operating (e.g., driving) at low-speed, high-speed sensors can be disengaged and/or their data collection may be throttled for power consumption.

Moreover, the vehicle computing system can leverage its knowledge of the vehicle's future actions/operating conditions (e.g., via motion planning data) to predictively determine system modifications that will be advantageous for thermal management at a future point in time. This can enable the autonomous vehicle to preemptively control the temperature (e.g., heat generation) of the vehicle computing system, improving the ability to avoid potential thermal

harm to its computing components (e.g., from overheating). As described herein, the improved thermal management can allow for more efficient operation of the vehicle's computing system (e.g., improved processing), under circumstances that still allow for the safe operation of the autonomous vehicle.

With reference now to the FIGS., example embodiments of the present disclosure will be discussed in further detail. FIG. 1 depicts an example system 100 according to example embodiments of the present disclosure. The system 100 can include a vehicle computing system 102 associated with a vehicle 104 and an operations computing system 106 that is remote from the vehicle 104.

In some implementations, the vehicle 104 can be associated with an entity (e.g., a service provider, owner, manager). The entity can be one that provides one or more vehicle service(s) to a plurality of users via a fleet of vehicles that includes, for example, the vehicle 104. In some implementations, the entity can be associated with only vehicle 104 (e.g., a sole owner, manager). In some implementations, the operations computing system 106 can be associated with the entity. The vehicle 104 can be configured to provide one or more vehicle services to one or more users 108 (e.g., services offered by the entity). The vehicle service(s) can include transportation services (e.g., rideshare services in which a user 108 rides in the vehicle 104 to be transported), courier services, delivery services, and/or other types of services. The vehicle service(s) can be offered to users 108 by the entity, for example, via a software application (e.g., a mobile phone software application). In some implementations, the entity can utilize the operations computing system 106 to coordinate and/or manage the vehicle 104 (and its associated fleet, if any) to provide the vehicle services to a user 108.

The operations computing system 106 can include one or more computing devices that are remote from the vehicle 104 (e.g., located off-board the vehicle 104). For example, such computing device(s) can be components of a cloud-based server system and/or other type of computing system that can communicate with the vehicle computing system 102 of the vehicle 104. The computing device(s) of the operations computing system 106 can include various components for performing various operations and functions. For instance, the computing device(s) can include one or more processor(s) and one or more tangible, non-transitory, computer readable media (e.g., memory devices). The one or more tangible, non-transitory, computer readable media can store instructions that when executed by the one or more processor(s) cause the operations computing system 106 (e.g., the one or more processors, etc.) to perform operations and functions, such as coordinating vehicles to provide vehicle services.

The vehicle 104 can include a communications system 110 configured to allow the vehicle computing system 102 (and its computing device(s)) to communicate with other computing devices. The vehicle computing system 102 can use the communications system 110 to communicate with the operations computing system 106 and/or one or more other remote computing device(s) over one or more networks (e.g., via one or more wireless signal connections). In some implementations, the communications system 110 can allow communication among one or more of the system(s) on-board the vehicle 104. The communications system 110 can also be configured to enable the autonomous vehicle to communicate and/or otherwise receive data from other computing devices (e.g., a user device). The communications system 110 can include any suitable components for inter-

facing with one or more network(s), including, for example, transmitters, receivers, ports, controllers, antennas, and/or other suitable components that can help facilitate communication.

The vehicle **104** incorporating the vehicle computing system **102** can be a ground-based autonomous vehicle (e.g., car, truck, bus, etc.), an air-based autonomous vehicle (e.g., airplane, drone, helicopter, or other aircraft), or other types of vehicles (e.g., watercraft, etc.). The vehicle **104** can be an autonomous vehicle that can drive, navigate, operate, etc. with minimal and/or no interaction from a human operator. In some implementations, a human operator can be omitted from the vehicle **104** (and/or also omitted from remote control of the vehicle **104**).

The vehicle **104** can be configured to operate in a plurality of vehicle operating modes. The vehicle **104** can be configured to operate in a fully autonomous (e.g., self-driving) operating mode in which the vehicle **104** can drive and navigate with no input from a user **108** present in the vehicle **104** (and/or at a remote location). The vehicle **104** can be configured to operate in a semi-autonomous operating mode in which the vehicle **104** can operate with some input from a user **108** present in the vehicle **104** (and/or at a remote location). The vehicle **104** can enter into a manual operating mode in which the vehicle **104** is fully controllable by a user **108** (e.g., human operator) and can be prohibited from performing autonomous navigation (e.g., autonomous driving). In some implementations, the vehicle **104** can implement vehicle operating assistance technology (e.g., collision mitigation system, power assist steering, etc.) while in the manual operating mode to help assist the operator of the vehicle **104**. The power and thermal management systems and methods described herein can be implemented while the vehicle **104** is in any one of the plurality of vehicle operating modes.

The operating mode of the vehicle **104** can be adjusted in a variety of manners. In some implementations, the operating mode of the vehicle **104** can be selected remotely, off-board the vehicle **104**. For example, an entity associated with the vehicle **104** (e.g., a service provider) can utilize the operations computing system **106** to manage the vehicle **104** (and/or an associated fleet). The operations computing system **106** can send one or more control signals to the vehicle **104** instructing the vehicle **104** to enter into, exit from, maintain, etc. an operating mode. By way of example, the operations computing system **106** can send one or more control signals to the vehicle **104** instructing the vehicle **104** to enter into the fully autonomous operating mode. In some implementations, the operating mode of the vehicle **104** can be set onboard and/or near the vehicle **104**. For example, the vehicle computing system **102** can automatically determine when and where the vehicle **104** is to enter, change, maintain, etc. a particular operating mode (e.g., without user input). Additionally, or alternatively, the operating mode of the vehicle **104** can be manually selected via one or more interfaces located onboard the vehicle **104** (e.g., key switch, button, etc.) and/or associated with a computing device proximate to the vehicle **104** (e.g., a tablet operated by authorized personnel located near the vehicle **104**). In some implementations, the operating mode of the vehicle **104** can be adjusted based at least in part on a sequence of interfaces located on the vehicle **104**. For example, the operating mode may be adjusted by manipulating a series of interfaces in a particular order to cause the vehicle **104** to enter into a particular operating mode.

The vehicle computing system **102** can include one or more computing devices located onboard the vehicle **104**.

For example, the computing device(s) can be located on and/or within the vehicle **104**. The computing device(s) can include various components for performing various operations and functions. For instance, the computing device(s) can include one or more processor(s) and one or more tangible, non-transitory, computer readable media (e.g., memory devices). The one or more tangible, non-transitory, computer readable media can store instructions that when executed by the one or more processor(s) cause the vehicle **104** (e.g., its computing system, one or more processors, etc.) to perform operations and functions, such as those described herein for power consumption and thermal management.

As shown in FIG. **1**, the vehicle **104** can include a sensor system **111** that includes one or more sensors **112**, an autonomy computing system **114**, and one or more vehicle control systems **116**. One or more of these systems can be configured to communicate with one another via a communication channel. The communication channel can include one or more data buses (e.g., controller area network (CAN)), on-board diagnostics connector (e.g., OBD-II), and/or a combination of wired and/or wireless communication links. The onboard systems can send and/or receive data, messages, signals, etc. amongst one another via the communication channel.

The sensor(s) **112** can be configured to acquire sensor data **118** associated with one or more objects that are proximate to the vehicle **104** (e.g., within a field of view of one or more of the sensor(s) **112**). The sensor(s) **112** can include a LIDAR system, a RADAR system, one or more cameras (e.g., visible spectrum cameras, infrared cameras, etc.), motion sensors, and/or other types of imaging capture devices and/or sensors. The sensor data **118** can include image data, radar data, LIDAR data, and/or other data acquired by the sensor(s) **112**. The object(s) can include, for example, vehicles, pedestrians, bicycles, and/or other objects. The object(s) can be located in front of, to the rear of, above, below, and/or to the side of the vehicle **104**. The sensor data **118** can be indicative of locations associated with the object(s) within the surrounding environment of the vehicle **104** at one or more times. The sensor(s) **112** can provide the sensor data **118** to the autonomy computing system **114**.

In addition to the sensor data **118**, the vehicle computing system **102** can retrieve or otherwise obtain other types of data associated with geographic area(s) in which the objects (and/or the vehicle **104**) have been, are, and/or will be located. For example, the vehicle computing system **102** can obtain map data **120** that provides detailed information about the surrounding environment of the vehicle **104**. The map data **120** can be indicative of current and/or future geographic locations in which the autonomous vehicle is/will be located, information associated with a particular travel way, etc. The map data **120** can provide information regarding: the identity and location of different roadways, road segments, buildings, sidewalks, walls, or other items; the location and directions of traffic lanes (e.g., the boundaries, location, direction, etc. of a parking lane, a turning lane, a bicycle lane, or other lanes within a particular travel way); traffic control data (e.g., the location and instructions of signage, traffic lights, or other traffic control devices); the location of obstructions (e.g., roadwork, accident, etc.) and/or any other map data that provides information that assists the computing system in comprehending and perceiving its surrounding environment and its relationship thereto. In some implementations, the vehicle computing system **102** can obtain satellite imagery of a geographic area (e.g.,

13

overhead imagery) in which the object(s) and/or the vehicle **104** is located. Such satellite imagery can be provided to the vehicle computing system **102** from the operations computing system **106** and/or other computing device(s) that are remote from the vehicle **104**.

Additionally, or alternatively, the vehicle computing system **102** can obtain weather data **121**. The weather data **121** can be indicative of one or more past, current, and/or future weather conditions. The weather condition(s) can be associated with geographic area(s) in which the vehicle **104** is travelling and/or will be travelling. For example, the weather data **121** can be indicative of whether a particular geographic area is to experience wet, icy, snowy, dry, humid, sunny, hot, cold, and/or other weather conditions. In some implementations, the weather data **121** can be indicative of one or more times at which these weather condition(s) are expected to occur.

The vehicle **104** can include a positioning system **122**. The positioning system **122** can determine a current position of the vehicle **104**. The positioning system **122** can be any device or circuitry for analyzing the position of the vehicle **104**. For example, the positioning system **122** can determine position by using one or more of inertial sensors, a satellite positioning system, based on IP/MAC address, by using triangulation and/or proximity to network access points or other network components (e.g., cellular towers, WiFi access points, etc.) and/or other suitable techniques. The position of the vehicle **104** can be used by various systems of the vehicle computing system **102** and/or provided to one or more remote computing device(s) (e.g., of the operations computing system **106**). For example, the map data **120** can provide the vehicle **104** relative positions of the surrounding environment of the vehicle **104**. The vehicle **104** can identify its position within the surrounding environment (e.g., across six axes) based at least in part on the data described herein. For example, the vehicle **104** can process the sensor data **118** (e.g., LIDAR data, camera data) to match it to a map of the surrounding environment to get an understanding of the vehicle's position within that environment.

The autonomy computing system **114** can include a perception system **124**, a prediction system **126**, a motion planning system **128**, and/or other systems that cooperate to perceive the surrounding environment of the vehicle **104** and determine a motion plan for controlling the motion of the vehicle **104** accordingly. For example, the autonomy computing system **114** can receive the sensor data **118** from the sensor(s) **112**, attempt to comprehend the surrounding environment by performing various processing techniques on the sensor data **118** (and/or other data), and generate an appropriate motion plan through such surrounding environment. The autonomy computing system **114** can control the one or more vehicle control systems **116** to operate the vehicle **104** according to the motion plan.

The autonomy computing system **114** can identify one or more objects that are proximate to the vehicle **104** based at least in part on the sensor data **118** and/or the map data **120**. For example, the perception system **124** can process the sensor data **118** to detect one or more objects that are within the surrounding environment of the vehicle **104** as well as state data **130** associated therewith. The state data **130** can be indicative of at least a current or past state of an object that is within the surrounding environment of the vehicle **104**. For example, the state data **130** for each object can describe an estimate of the object's current and/or past location (also referred to as position), current and/or past speed/velocity, current and/or past acceleration, current and/or past heading, current and/or past orientation, size/foot-

14

print, class (e.g., vehicle class vs. pedestrian class vs. bicycle class), the uncertainties associated therewith, and/or other state information. The perception system **124** can provide the state data **130** to the prediction system **126**.

The prediction system **126** can create predicted data **132** associated with each of the respective one or more objects proximate to the vehicle **104**. The predicted data **132** can be indicative of one or more predicted future locations of each respective object that are determined as further described herein. The predicted data **132** can be indicative of a predicted trajectory (e.g., predicted path) of at least one object within the surrounding environment of the vehicle **104**. For example, the predicted trajectory can indicate a path along which the respective object is predicted to travel over time. In some implementations, the predicted data **132** can indicate the speed at which the object is predicted to travel along the predicted trajectory. The prediction system **126** can provide the predicted data **132** associated with the object(s) to the motion planning system **128**, for generation of a motion plan **134**.

The motion planning system **128** can determine a motion plan **134** for the vehicle **104** based at least in part on the predicted data **132** (and/or other data). The motion plan **134** can include vehicle actions (e.g., future vehicle actions) with respect to the objects proximate to the vehicle **104** as well as the predicted movements. For instance, the motion planning system **128** can implement an optimization algorithm that considers cost data associated with a vehicle action as well as other objective functions (e.g., cost functions based on speed limits, traffic lights, etc.), if any, to determine optimized variables that make up the motion plan **134**. By way of example, the motion planning system **128** can determine that the vehicle **104** can perform a certain action (e.g., pass an object) without increasing the potential risk to the vehicle **104** and/or violating any traffic laws (e.g., speed limits, lane boundaries, signage). The motion plan **134** can include a planned trajectory, speed, acceleration, other actions, etc. of the vehicle **104**.

The motion planning system **128** can provide the motion plan **134** with data indicative of the vehicle actions, a planned trajectory, and/or other operating parameters to the vehicle control system(s) **116** to implement the motion plan **134** for the vehicle **104**. For instance, the vehicle **104** can include a mobility controller configured to translate the motion plan **134** into instructions. By way of example, the mobility controller can translate a determined motion plan **134** into instructions to adjust the steering of the vehicle **104** "X" degrees, apply a certain magnitude of braking force, etc. The mobility controller can send one or more control signals to the responsible vehicle control component (e.g., braking control system, steering control system, acceleration control system) to execute the instructions and implement the motion plan **134**.

The vehicle computing system **102** can be configured to can help control the temperature of the vehicle **104** by selectively operating one or more of the systems onboard the vehicle **104**. For example, the vehicle computing system **102** can be configured to control the heat generation of a system onboard the vehicle **104**. To do so, the vehicle computing system **102** can determine whether the appropriate circumstances existence in order for the vehicle computing system **102** to modify the operating characteristic(s) of one or more of the onboard system(s). The operating characteristic(s) can be indicative of the parameters by which a respective system performs its respective functions. The vehicle computing system **102** can help control the heat generation of the vehicle **104** by reducing and/or limiting the power consump-

tion of one or more of these systems via modification of the system's operating characteristic(s), while the vehicle **104** is in motion. In some implementations, the vehicle **104** may increase power consumption (e.g., to the extent supplemental cooling measures are needed by an onboard cooling system).

The vehicle computing system **102** can be configured to identify one or more vehicle parameters **140** associated with the vehicle **104** to determine whether it is safe and/or appropriate to modify the heat generation, power consumption, etc. of the system(s) onboard the vehicle **104**. For instance, the vehicle computing system **102** can obtain data associated with the vehicle **104**. In some implementations, the data associated with the vehicle **104** can include data indicative of the vehicle's current operating conditions such as, for example, a current heading, speed, acceleration, temperature of onboard vehicle components (e.g., sensors, processors, other computing components, etc.), and/or other conditions.

In some implementations, the data associated with the vehicle **104** can be indicative of at least one of a future action to be performed by the vehicle **104**, a future geographic area in which the vehicle **104** is to be located, or a weather condition to be experienced by the vehicle **104**. For example, the data associated with the vehicle **104** can include data indicative of a motion plan **134** of the vehicle **104** (e.g., that indicates one or more future vehicle actions to be performed by the vehicle **104**). Additionally, or alternatively, the data associated with the vehicle **104** can include the map data **120**. As described herein, the map data **120** can be indicative of current and/or future geographic area in which the vehicle **104** is/is to be located, information associated with a particular travel way, etc. The data associated with the vehicle **104** can include the weather data **121**. The weather data can be indicative of current and/or future weather condition(s) that may be experienced by the vehicle **104** (and/or a particular geographic area). In some implementations, the data associated with the vehicle **104** can include the sensor data **118**. The sensor data **118** can be indicative of the surrounding environment of the vehicle **104** and the objects located therein. The data associated with the vehicle **104** can include other types of data.

The vehicle computing system **102** can be configured to identify the one or more vehicle parameters **140** associated with the vehicle **104** based at least in part on the data associated with the vehicle **104**. For instance, the vehicle computing system **102** can process this data to determine whether certain vehicle parameters exist (or will exist) such that one or more systems onboard the vehicle **104** can be modified (e.g., to a reduced power state, to a reduced heat generation state, etc.). For example, the vehicle computing system **102** can process the data indicative of the vehicle's current operating conditions to determine vehicle parameter(s) **140** such as a current state (e.g., speed, heading, acceleration, etc.) of the vehicle **104**, a temperature of vehicle components/computing devices (e.g., sensors, processors, etc.), and/or other parameter(s). The vehicle computing system **102** can process the data indicative of the motion plan **134** of the vehicle **104** to determine vehicle parameter(s) **140** such as a future vehicle action to be performed by the vehicle **104**. The future vehicle action can include, for example, a future vehicle action that decreases the speed of the vehicle **104**, a future vehicle action that changes a heading of the vehicle **104** (e.g., a turn), a future stopping action, a future pull over action to provide a vehicle service (e.g., transportation service, a courier service, a delivery service, etc.), and/or other future vehicle actions.

The vehicle computing system **102** can identify a future vehicle speed, heading, acceleration, location, etc. based at least in part on the future vehicle action (e.g., a pull over action for a transportation service, turn, etc.). In another example, the vehicle computing system **102** can process the map data **120** to determine vehicle parameter(s) **140** such as, for example, current and/or future: travel way condition(s) (e.g., obstructions, roadwork, etc.), travel way type (e.g., urban city streets, rural highway, etc.), travel way geometry (e.g., slope, curvature, etc.), crowd density, traffic pattern(s), and/or other vehicle parameters indicated by the map data **120**. Additionally, or alternatively, the vehicle computing system **102** can process the weather data **121** to determine vehicle parameter(s) **140** such as the weather conditions that the vehicle **104** is currently experiencing and/or will experience as a future point in time. In some implementations, the vehicle computing system **102** can process the sensor data **118** to identify one or more vehicle parameters **140** (e.g., road type, road conditions, weather conditions, etc.) and/or other vehicle parameter(s).

The vehicle computing system **102** can be configured to determine a modification to one or more operating characteristics of the one or more systems onboard the vehicle **104** based at least in part on the one or more vehicle parameters **140**. Such a modification can be determined while the vehicle **104** is in motion (e.g., travelling for a vehicle service). The modification can aim to reduce the heat generation of the respective system by adjusting one or more of the operating characteristics of that system. In some implementations, this can include an adjustment to how the system's functions are operated (e.g., via a software modification), rather than a physical adjustment of the system hardware. In some implementations, the physical operating characteristics (e.g., spin rate) of the respective system (e.g., LIDAR system) can be modified (e.g., in real-time, near real-time, etc.). The modification can, for example, throttle data collection and/or data analysis. The modification can cause a decrease in power consumption by that system.

In some implementations, the vehicle computing system **102** can include an algorithm (e.g., a rule(s)-based algorithm) that is stored in an accessible memory onboard the vehicle **104**. The vehicle parameter(s) **140** can be provided as input into the algorithm. The algorithm can indicate which of the system(s) onboard the vehicle **104** should be modified (e.g., to reduce that system's power consumption) and how the respective system(s) should be modified (e.g., which operating characteristics to modify) based at least in part on the one or more vehicle parameter **140**.

In some implementations, the modification to the one or more operating characteristics of a system onboard the vehicle **104** can be determined at least in part from a model, such as a machine-learned model. For example, FIG. 2 depicts an example implementation **200** of a model **202** according to example embodiments of the present disclosure. The vehicle computing system can include, employ, and/or otherwise leverage the model **202** to help determine a modification to one or more operating characteristics of one or more systems onboard the vehicle **104**. In particular, the model **202** can be a machine-learned model. For example, the machine-learned model can be or can otherwise include one or more various model(s) such as, for example, neural networks (e.g., deep neural networks), or other multi-layer non-linear models. The machine-learned model can include neural networks such as, for example, a convolutional neural networks, recurrent neural networks

(e.g., long short-term memory recurrent neural networks), feed-forward neural networks, and/or other forms of neural networks.

The model 202 can be trained to determine a modification to one or more operating characteristics of a system onboard the vehicle 104. For instance, training techniques (e.g., supervised training techniques) can be performed to train the model 202 to determine which operating characteristics of which systems to modify. By way of example, the model 202 can be trained based on, for example, a number of sets of data from previous events (e.g., previous logs of vehicle operations). The training data can be associated with a data recorded from previously modified systems and operating characteristics (e.g., which were modified for power consumption/thermal management). The training data can allow the model 202 to be trained to determine which systems and types of modifications were most effective in controlling the temperature of the vehicle 104 (e.g., via the heat generated by the vehicle system(s)). The model can be trained based on training data associated with the vehicle 104 and/or other vehicle(s).

The model 202 can be configured to receive input data 204 and provide output data 206 based at least in part on the input data 204. For example, the input data 204 for the model 202 can include the vehicle parameters 140, as described herein. The vehicle computing system 102 can obtain data indicative of a model 202 (e.g., machine-learned model) from an accessible memory located onboard the vehicle 104. The vehicle computing system 102 can provide input data 204 to the model 202. The model 202 can provide, as an output, output data 206 indicative of one or more recommended modifications to one or more operating characteristics of one or more systems onboard the vehicle 104.

The vehicle computing system 102 can determine a modification of the operating characteristic(s) of an onboard system for current and/or future implementation on the vehicle 104. The modification can be determined while the vehicle 104 is in motion (e.g., rather than when parked). The one or more systems onboard the vehicle 104 can include at least one of the sensor system 111 of the vehicle 104 or the motion planning system 128 of the vehicle 104. Additionally, or alternatively, the modification can be associated with another system onboard the vehicle 104.

In some implementations, the vehicle computing system 102 can determine a current modification for a system onboard the vehicle 104 based at least in part on the current operating conditions of the vehicle 104. By way of example, the vehicle computing system 102 can determine that the vehicle's current speed is decreasing and/or below a threshold and that the vehicle 104 is travelling in a geographic area with a low crowd density (e.g., in a rural environment without pedestrians). The vehicle computing system 102 can determine that the vehicle 104 can safely operate below the maximum capability of the sensor system 111 based at least in part on such vehicle parameter(s) 140. Accordingly, the vehicle computing system 102 can determine a modification to one or more operating characteristics of the sensor system 111. The operating characteristic(s) of the sensor system 111 can include, for example, data acquisition characteristics (e.g., associated with the collection of the sensor data 118 by a sensor 112) and/or data processing characteristics (e.g., associated with the processing of the sensor data 118). For instance, the vehicle computing system 102 can determine (e.g., using the rule(s)-based algorithm, model 202, etc.) that one or more of the sensors 118 (e.g., cameras) should be modified to utilize a lower frame rate and/or acquire sensor data 118 at a lower rate. This can allow the sensor system 111

to consume less power for image acquisition/processing and, ultimately, to generate less heat.

In another example, the modification to the sensor system can include a modification to the physical operating characteristic(s) of the sensor system. For example, a sensor (e.g., spinning LIDAR sensor) can be modified to reduce the spin rate of the sensor (e.g., from 10 Hz to 5 Hz). Additionally, or alternatively, the modification can include a reduction (e.g., by one half) in the firing rate of the sensor's emissions (e.g., lasers). This can lead to a reduction in the frequency of emissions for the same resolution sensor frames. Moreover, this can lead to a significant impact on the permissible ambient temperature for sensor operation.

In another example, the vehicle computing system 102 can determine that the vehicle 104 is currently travelling on a relatively hilly travel way 302, as shown for example in the example environment 300 of vehicle 104 in FIG. 3A. Due to the type of travel way 302, the vehicle computing system 102 can determine that a window of interest 304 of the sensor system 111 should not be decreased such that the vehicle 104 can accurately perceive the travel way 302 (and its change in elevation). In such a case, the vehicle computing system 102 would refrain from modifying the window of interest of the sensor system 111 (e.g., to reduce power consumption, heat generation, etc. of the sensor system 111). The vehicle 104 may eventually begin travelling on a relatively flat travel way 322 of the example environment 320 of the vehicle 104 as shown in FIG. 3B. The vehicle computing system 102 can determine a modification to the operating characteristic(s) of the sensor system 111 to cause a decrease in the heat generation of the sensor system 111 while the vehicle 104 is on the flat travel way 322. For example, the vehicle computing system 102 can determine that the sensors 112 can utilize a smaller window of interest 304 (e.g., +/-two degrees) for the flat travel way 322, while still maintaining safe operation of the vehicle 104. Accordingly, the vehicle computing system 102 can determine a modification to the operating characteristic(s) of the sensor system 111 that includes adjusting the window of interest 304 of a sensor 112 of the sensor system 111. The reduced window of interest 304 can allow the sensor system 111 to process less sensor data 118 (e.g., image data), decrease the power consumed for such processing and, thus, decrease heat generation.

In some implementations, the vehicle computing system 102 can predictively reduce the power consumption of a system of the vehicle 104 based on future conditions that are expected by the vehicle 104. FIG. 4 depicts a diagram 400 of geographic areas according to example embodiments of the present disclosure. By way of example, the vehicle computing system 102 can determine, at a first point in time, that the vehicle 104 will decelerate to a stopped position 402 (e.g., at a stop sign) at a second, future point in time (e.g., occurring after the first point in time) based at least in part on the motion plan 134 (e.g., which indicates the future stopping action). The vehicle computing system 102 can preemptively determine that as the vehicle 104 decelerates and/or reaches the stopped position the operating characteristic(s) of the sensor system 111 of the vehicle 104 can be modified to control the heat generated by the sensor system 111. For example, the vehicle computing system 102 can determine that once the vehicle 104 eventually reaches a certain location, point in time, speed, etc. the sensor system 111 can sub-sample the sensor data 118 to decrease the power needed for data processing. In some implementations, the vehicle computing system 102 can determine that one or more of the sensors 112 can be disabled (e.g., turned-off

and/or otherwise prevented from acquiring sensor data **118**). These modifications in operating characteristic(s) of the sensor system **111** can lead to less heat generation from the sensor system **111**.

In another example, the vehicle computing system **102** can determine that the vehicle **104** will be located within a future geographic area/location **404** that has a low level of traffic and a low crowd density based at least in part on the data associated with the vehicle **104** (e.g., the map data **120**, motion plan **134**, a vehicle route, etc.). Accordingly, the vehicle computing system **102** can determine a modification to the operating characteristic(s) of the sensor system **111** of the vehicle **104** to be implemented when the vehicle **104** is within the future geographic area **404**, so that the sensor system **111** consumes less power (and generates less heat). The modification of the one or more operating characteristics of the sensor system **111** can include, for example, at least one of adjusting an acquisition of sensor data **118** (e.g., image data) by a sensor **112**, adjusting a window of interest **304** associated with the sensor **112**, sub-sampling sensor data **118** acquired via a sensor **112**, reducing the resolution of the sensor data **118** acquired via a sensor **112**, reducing a motion rate (e.g., spin rate) of a sensor **112**, reducing emission frequency (e.g., laser firing rate) of a sensor **112**, or disabling a sensor **112**. Additionally, or alternatively, the vehicle computing system **102** can determine that the vehicle **104** will be located within a future geographic area **406**, **408** that has a higher level of traffic and/or a higher crowd density (e.g., based at least in part on the map data **120**, motion plan **134**, etc.). Accordingly, the vehicle computing system **102** can determine that the sensor system **111** should not be modified while in the future geographic areas **406**, **408** so that the vehicle **104** can operate to the maximum capability of the sensors **112**. In another example, the vehicle computing system **102** can process the data associated with the vehicle **104** (e.g., motion plan **134**, map data **120**) to determine that the vehicle **104** will travel within proximity of an obstruction **410** in a travel way. As such, the vehicle computing system **102** can determine that the sensor system **111** should not be modified as the vehicle **104** attempts to traverse the obstruction **410**.

In some implementations, the sensor system can be modified to increase the capability of the sensor system **111**. For instance, in the event that the sensors **112** run at one quarter of a max frame rate, the vehicle computing system **102** can increase the frame rate (e.g., in a high density area). The vehicle computing system could compensate for increased cooling (e.g., via the onboard cooling system) to help offset any additional heat generation.

In some implementations, the vehicle computing system **102** can identify a current and/or future weather condition **412** to be experienced by the vehicle **104**. In the event that the weather condition **412** requires optimal sensor capability (e.g., wet/icy conditions, etc.), the vehicle computing system **102** can determine that the operating characteristic(s) of the sensor system **111** should not be modified to reduce power consumption under such weather conditions. In the event that the weather condition **412** does not require maximum sensor capability (e.g., clear skies) and that it would be otherwise safe to do so, the vehicle computing system **102** can determine a modification to the operating characteristic(s) of the sensor system **111** of the vehicle **104** (e.g., via acquisition frequency reduction, sub-sampling, etc.) while under such weather conditions **412**. This can allow the vehicle computing system **102** to decrease the heat generation, temperature, etc. of the sensor system **111** under such circumstances.

The vehicle computing system **102** can determine modifications to systems onboard the vehicle **104** other than the sensor system **111**. For instance, the vehicle computing system **102** can determine that the temperature of the vehicle's surrounding environment is ninety degrees Fahrenheit (e.g., based on a vehicle thermometer, weather data **121**, etc.). In such conditions, the vehicle computing system **102** may determine a modification that reduces the frame-rate and/or implements sub-sampling by the sensor system **111**. Additionally, or alternatively, the vehicle computing system **102** can determine a modification to one or more operating characteristics of the motion planning system **128**. The operating characteristic(s) of the motion planning system **128** can be characteristic(s) associated with the determination of the vehicle's motion (e.g., one future vehicle action(s)). For example, a modification of the operating characteristic(s) can include restricting the top speed of the vehicle **104** while the vehicle **104** is operating at the reduced frame rate, sub-sampling, etc. The modification of the one or more operating characteristics can include adjusting of the cost data utilized by the motion planning system **128** when planning the motion of the vehicle **104**. For instance, the cost data can be adjusted such that the cost of exceeding the restricted speed is very high. In another example, the vehicle **104** may only have enough thermal headway to operate the sensor(s) **112** with a forward overhead of a particular distance (e.g., fifty meters). Accordingly, the vehicle computing system **102** can determine a modification to the operating characteristic(s) of the motion planning system **128** to restrict the speed of the vehicle **104** to not exceed a speed corresponding to the stopping distance at such forward overhead (e.g., twenty-five mph).

In another example, the vehicle **104** may be stopped for an extended period of time due to emergency road construction on a highway. When the vehicle **104** finally passes the roadwork, significant heat may be generated if the vehicle **104** attempts to reach the appropriate speed in a short time period (e.g., due to sensor frame rate increase, additional sensor activation, etc.). The vehicle computing system **102** can modify the operating characteristic(s) of the motion planning system **128** such that the vehicle **104** is caused to travel within a buffer speed/acceleration as the vehicle **104** is getting up to speed on the highway. This can help control the power consumption/heat generation of the other vehicle systems as the vehicle **104** reaches the appropriate speed.

The modifications to the operating characteristic(s) of a system can be configured to adjust the respective system in a variety of manners. In some implementations, the operating characteristic(s) of the system(s) onboard the vehicle **104** can be modified in a proportional manner. By way of example, in the event that the speed of the vehicle **104** is decreasing (or will be decreasing), the frame rate of a sensor **112** can be decreased proportionally to the decrease in vehicle speed. In some implementations, the operating characteristic(s) of the system(s) onboard the vehicle **104** can be modified in a pre-set manner. For example, in the event that the vehicle **104** is travelling (or will be travelling) below a certain speed threshold, in a certain weather condition, and/or under another circumstance for which its existence can be represented in a binary manner, the sensor system **111** can begin to sub-sample the sensor data **118**, according to a pre-determined approach that defines the particular sub-sampling type, factors, resolutions, etc.

The vehicle computing system can be configured to control the heat generation of at least a portion of the vehicle **104** (e.g., the modified system) via implementation of the modification of the one or more operating characteristics of

the one or more systems onboard the vehicle **104**. For instance, the vehicle computing system **102** can send data indicative of the determined modification (e.g., control signal(s)) to the respective system(s) onboard the vehicle **104** (e.g., sensor system **111**, motion planning system **128**, etc.) to implement the modification (e.g., decrease in the frame rate, adjust a window of interest, adjust cost data, etc.). The vehicle computing system **102** can provide such data while the vehicle **104** is in motion to implement the modification while the vehicle **104** is in motion. In some implementations, the vehicle computing system **102** can provide the data indicative of the modification at a current point in time to immediately implement the modification (e.g., for the vehicle's current situation). In some implementations, the vehicle computing system **102** can provide the data indicative of the modification to the one or more systems at a future point in time (e.g., approaching a future stop, flat travel way, low crowd density area, etc.). For example, the vehicle computing system **102** can determine a modification while the vehicle **104** is in a first geographic area and implement the modification when the vehicle **104** is in a second geographic area.

In some implementations, a future modification of the systems onboard the vehicle **104** can be based on the current parameters of the vehicle **104**. For instance, the vehicle computing system **102** can determine that the vehicle **104** will enter into an area with low crowd density, low traffic, flat terrain, etc. at some future point in time that will allow the operating characteristics of the sensor system **111** to be modified (e.g., to reduce heat generation). Accordingly, the vehicle computing system **102** can determine that the sensor system **112** may currently operate in a manner that generates a higher amount of heat based on the determination that the operating characteristic(s) of the sensor system **111** can be modified in the future to reduce heat generation. In another example, the vehicle computing system **102** can determine that the vehicle **104** is currently travelling in an area with low crowd density, low traffic, flat terrain, etc. that allows the operating characteristics of the sensor system **111** to be modified (e.g., to reduce heat generation), but that the vehicle **104** will be travelling in an crowded, high traffic area, that may require significant power consumption by the sensor system **111** (e.g., increasing heat generation). Accordingly, the vehicle computing system **102** can implement a modification to the operating characteristic(s) of the sensor system **111** to reduce heat generation at a current time, as a pre-cursor to offset the increased amount of future heat generation by the sensor system **111**.

In some implementations, the system(s) of the vehicle **104** can be configured to operate in a plurality of operating modes that include, for example, a low heat operating mode (e.g., in which the system generates less heat). By way of example, the sensor system **111** can be configured to operate in a plurality of sensor operating modes that include a low heat sensor operating mode in which the sensor(s) **112** operate at a decreased frame rate, utilize sub-sampling, etc. To implement the determined modification, the vehicle computing system **102** can cause the sensor system **111** to enter into the low heat sensor operating mode.

FIG. 5 depicts a flow diagram of an example method **500** of autonomous vehicle thermal management according to example embodiments of the present disclosure. One or more portion(s) of the method **500** can be implemented by one or more computing devices such as, for example, the one or more computing device(s) of the vehicle computing system **102** and/or other systems. Each respective portion of the method **500** can be performed by any (or any combina-

tion) of the one or more computing devices. Moreover, one or more portion(s) of the method **500** can be implemented as an algorithm on the hardware components of the device(s) described herein (e.g., as in FIGS. 1 and 6), for example, to control the heat generation, power consumption, and/or temperature of an autonomous vehicle. FIG. 5 depicts elements performed in a particular order for purposes of illustration and discussion. Those of ordinary skill in the art, using the disclosures provided herein, will understand that the elements of any of the methods discussed herein can be adapted, rearranged, expanded, omitted, combined, and/or modified in various ways without deviating from the scope of the present disclosure.

At (**502**), the method **500** can include obtaining data associated with a vehicle. For instance, the vehicle computing system **102** can obtain data associated with a vehicle **104**. By way of example, the vehicle computing system **102** can obtain data indicative of a motion plan **134** of the vehicle **104**. The motion plan **134** can be indicative of a future vehicle action to be performed by the vehicle **104**. Additionally, or alternatively, the vehicle computing system **102** can obtain map data **120** indicative of a future geographic area **404**, **406**, **408** in which the vehicle **104** is planning to be located at a future point in time. As described herein, the vehicle computing system **102** can obtain also, or alternatively, obtain weather data **121**, sensor data **118**, and/or other types of data.

At (**504**), the method **500** can include identifying one or more vehicle parameters based at least in part on the data associated with the vehicle. For instance, the vehicle computing system **102** can identify one or more vehicle parameters **140** associated with the vehicle **104** based at least in part on the data associated with the vehicle **104**. For instance, the vehicle computing system **102** can identify the one or more vehicle parameters **140** based at least in part on the future vehicle action to be performed by the vehicle **104** (e.g., as indicated in the motion plan **134**). Additionally, or alternatively, the vehicle computing system **102** can identify the one or more vehicle parameters **140** based at least in part on the future geographic area **404**, **406**, **408** in which the vehicle **104** is to be located (e.g., as indicated by the map data **120**, motion plan **134**, vehicle route, etc.). The vehicle computing system **102** can also, or alternatively, identify one or more vehicle parameters **140** based at least in part on the weather data **121**, the sensor data **118**, and/or other types of data.

As described herein, the vehicle parameter(s) **140** can be indicative of a variety of information. For example, the one or more vehicle parameters **140** can be indicative of at least one of: a speed of the vehicle **104**, a condition of a travel way, a type of the travel way, a geometry of a travel way, a crowd density (e.g., associated with a future geographic area **404**, **406**, **408**), a traffic pattern, (e.g., associated with a future geographic area **404**, **406**, **408**), a future vehicle action (and/or the heading, speed, acceleration, etc. associated therewith), or the weather condition (associated with a future geographic area **404**, **406**, **408**). In some implementations, the one or more vehicle parameters **140** can be indicative of other types of vehicle parameters.

At (**506**), the method **500** can include determining a modification to one or more operating characteristics of an onboard system of the vehicle based at least in part on the vehicle parameters. The vehicle computing system **102** can determine a modification to one or more operating characteristics of one or more systems onboard the vehicle **104** based at least in part on the one or more vehicle parameters **140**. As described herein, the vehicle computing system **102**

can determine the modification of the one or more operating characteristics based at least in part on the one or more vehicle parameters **140** and at least one of a rule-based algorithm or a model **202** (e.g., a machine-learned model). For instance, the vehicle computing system **102** can access the rule-based algorithm and/or the model **202** from an accessible memory onboard the vehicle **104** (and/or from a memory that is remote from the vehicle **104**). The vehicle computing system **102** can input the vehicle parameters **140** into the rule-based algorithm and/or the model **202**. The vehicle computing system **102** can obtain, as an output from the rule-based algorithm and/or the model **202**, a modification of one or more operating characteristics of one or more systems onboard the vehicle **104**.

In some implementations, the vehicle computing system **102** can determine a modification to one or more operating characteristics of a sensor system **111** of the vehicle **104** based at least in part on the one or more vehicle parameters **140**. In some implementations, the modification can cause a decrease in a power consumption of the sensor system **111**. For instance, the modification to the one or more operating characteristics of the sensor system **111** of the vehicle **104** can include a decrease in a frame rate of a sensor **112** of the sensor system **111**. Additionally, or alternatively, the modification to the one or more operating characteristics of the sensor system **111** of the vehicle **104** can include sub-sampling sensor data **118** obtained via the sensor system **111**. The modification can include a reduction in the data collection and/or processing of the collection of data (e.g., by providing some data during processing). By way of example, the vehicle computing system can determine one or more vehicle parameters such as a current and/or future speed of the vehicle **104**. The vehicle computing system **102** can determine a modification to the sensor system **111** based on the vehicle parameters. The modification can include a decrease (and/or increase) in a spin rate, emission frequency, frame rate, sub-sampling, etc. of the sensor system. The vehicle computing system **102** can implement the modification as the vehicle **104** is travelling (e.g., a decrease/increase in spin rate, emission frequency, frame rate, sub-sampling, etc. in proportion to the vehicle speed decrease/increase).

In some implementations, the operating characteristic(s) of another system of the vehicle **104** can be modified. For instance, the vehicle computing system **102** can determine a modification to one or more operating characteristics of a motion planning system **128** of the vehicle **104** based at least in part on the one or more vehicle parameters **140**. The modification to the one or more operating characteristics of the motion planning system **128** can include, for example, a restriction on a speed of the vehicle **104**.

At **(508)**, the method **500** can include controlling the temperature of the vehicle. The vehicle computing system **102** can control a heat generation of at least a portion of the vehicle **104** (e.g., the respective system and the portions of the vehicle **104** affected by the respective system's heat generation) via implementation of the modification of the one or more operating characteristics of the one or more systems onboard the vehicle **104**. By way of example, the vehicle computing system **102** can control a heat generation of at least a portion of the vehicle **104** via implementation of the modification of the one or more operating characteristics of the sensor system **111** of the vehicle **104**. This can help control the temperature of the sensor system **111** as well as the portions of the vehicle **104**, if any, that are affected by the heat generated by the sensor system **111**. Additionally, or alternatively, the vehicle computing system **102** can control

the heat generation of at least the portion of the vehicle **104** via the implementation of the modification to the one or more operating characteristics of the motion planning system **128** of the vehicle, as described herein.

In some implementations, the modification to the operating characteristic(s) of a system onboard the vehicle **104** can include the respective system adjusting from a first mode to a second mode in which the system is configured to generate less heat (e.g., due to less power consumption). For example, the sensor system **111** can be configured to operate in a plurality of sensor operating modes. The plurality of sensor operating modes can include a low heat sensor operating mode in which the sensor system **111** generates less heat (e.g., than in one or more other operating modes). While in the low heat sensor operating mode, the sensor system **111** can implement one or more of the modifications (e.g., frame-rate reduction, resolution reduction, sub-sampling, etc.) to reduce the power consumption and heat generation of the sensor system. The vehicle computing system **102** can control the temperature of at least a portion of the vehicle **104** by causing the sensor system **111** to enter into the low heat sensor operating mode.

FIG. **6** depicts example system components of an example system **600** according to example embodiments of the present disclosure. The example system **600** can include the vehicle computing system **102**, the operations computing system **106**, and a machine learning computing system **630** that are communicatively coupled over one or more network(s) **680**.

The vehicle computing system **102** can include one or more computing device(s) **601**. The computing device(s) **601** of the vehicle computing system **102** can include processor(s) **602** and a memory **604** (e.g., onboard the vehicle **104**). The one or more processors **602** can be any suitable processing device (e.g., a processor core, a micro-processor, an ASIC, a FPGA, a controller, a microcontroller, etc.) and can be one processor or a plurality of processors that are operatively connected. The memory **604** can include one or more non-transitory computer-readable storage media, such as RAM, ROM, EEPROM, EPROM, one or more memory devices, flash memory devices, etc., and combinations thereof.

The memory **604** can store information that can be accessed by the one or more processors **602**. For instance, the memory **604** (e.g., one or more non-transitory computer-readable storage mediums, memory devices) can include computer-readable instructions **606** that can be executed by the one or more processors **602**. The instructions **606** can be software written in any suitable programming language or can be implemented in hardware. Additionally, or alternatively, the instructions **606** can be executed in logically and/or virtually separate threads on processor(s) **602**.

For example, the memory **604** can store instructions **606** that when executed by the one or more processors **602** cause the one or more processors **602** (the computing system **102**) to perform operations such as any of the operations and functions of the vehicle computing system **102**, the vehicle **104**, or for which the vehicle computing system **102** and/or the vehicle **104** are configured, as described herein, the operations for power consumption and thermal management of an autonomous vehicle (e.g., one or more portions of method **500**), and/or any other functions for the vehicle computing system **102**, as described herein.

The memory **604** can store data **608** that can be obtained, received, accessed, written, manipulated, created, and/or stored. The data **608** can include, for instance, sensor data, state data, predicted data, motion planning data, data indica-

tive of rule-based algorithms (e.g., for determining modifications), data indicative of machine-learned models (e.g., for determining modifications), map data, weather data, other data associated with geographic area(s), data indicative of vehicle parameter(s), data indicative of operating characteristic(s) of the system(s) onboard the vehicle, data indicative of modification(s) of the operating characteristic(s), input data, data indicative of machine-learned model(s) (e.g., for determining modifications), data indicative of model outputs, and/or other data/information described herein. In some implementations, the computing device(s) **601** can obtain data from one or more memory device(s) that are remote from the vehicle **104**.

The computing device(s) **601** can also include a communication interface **609** used to communicate with one or more other system(s) on-board the vehicle **104** and/or a remote computing device that is remote from the vehicle **104** (e.g., the other systems of FIG. 6, etc.). The communication interface **609** can include any circuits, components, software, etc. for communicating via one or more networks (e.g., **680**). In some implementations, the communication interface **609** can include, for example, one or more of a communications controller, receiver, transceiver, transmitter, port, conductors, software and/or hardware for communicating data/information.

The operations computing system **106** can perform the operations and functions for managing vehicles (e.g., a fleet of autonomous vehicles) and/or otherwise described herein. The operations computing system **106** can be located remotely from the vehicle **104**. For example, the operations computing system **106** can operate offline, off-board, etc. The operations computing system **106** can include one or more distinct physical computing devices.

The operations computing system **106** can include one or more computing devices **620**. The one or more computing devices **620** can include one or more processors **622** and a memory **624**. The one or more processors **622** can be any suitable processing device (e.g., a processor core, a microprocessor, an ASIC, a FPGA, a controller, a microcontroller, etc.) and can be one processor or a plurality of processors that are operatively connected. The memory **624** can include one or more non-transitory computer-readable storage media, such as RAM, ROM, EEPROM, EPROM, one or more memory devices, flash memory devices, etc., and combinations thereof.

The memory **624** can store information that can be accessed by the one or more processors **622**. For instance, the memory **624** (e.g., one or more non-transitory computer-readable storage mediums, memory devices) can store data **626** that can be obtained, received, accessed, written, manipulated, created, and/or stored. The data **626** can include, for instance, data indicative of model(s), map data, weather data, data associated with geographic area(s), and/or other data or information described herein. In some implementations, the operations computing system **106** can obtain data from one or more memory device(s) that are remote from the operations computing system **106**.

The memory **624** can also store computer-readable instructions **628** that can be executed by the one or more processors **622**. The instructions **628** can be software written in any suitable programming language or can be implemented in hardware. Additionally, or alternatively, the instructions **628** can be executed in logically and/or virtually separate threads on processor(s) **622**. For example, the memory **624** can store instructions **628** that when executed by the one or more processors **622** cause the one or more processors **622** to perform any of the operations and/or

functions of the operations computing system **106** and/or other operations and functions.

The computing device(s) **620** can also include a communication interface **629** used to communicate with one or more other system(s). The communication interface **629** can include any circuits, components, software, etc. for communicating via one or more networks (e.g., **680**). In some implementations, the communication interface **629** can include for example, one or more of a communications controller, receiver, transceiver, transmitter, port, conductors, software and/or hardware for communicating data/information.

According to an aspect of the present disclosure, the vehicle computing system **102** and/or the operations computing system **106** can store or include one or more machine-learned models **640**. As examples, the machine-learned models **640** can be or can otherwise include various machine-learned models such as, for example, neural networks (e.g., deep neural networks), support vector machines, decision trees, ensemble models, k-nearest neighbors models, Bayesian networks, or other types of models including linear models and/or non-linear models. Example neural networks include feed-forward neural networks, recurrent neural networks (e.g., long short-term memory recurrent neural networks), or other forms of neural networks. The machine-learned models **640** can include the model **202**, as described herein.

In some implementations, the vehicle computing system **102** and/or the operations computing system **106** can receive the one or more machine-learned models **640** from the machine learning computing system **630** over the network(s) **680** and can store the one or more machine-learned models **640** in the memory of the respective system. The vehicle computing system **102** and/or the operations computing system **106** can use or otherwise implement the one or more machine-learned models **640** (e.g., by processor(s) **602**, **622**). In particular, the vehicle computing system **102** and/or the operations computing system **106** can implement the machine learned model(s) **640** to determine a modification to one or more operating characteristics of a system onboard a vehicle, as described herein.

The machine learning computing system **630** can include one or more processors **632** and a memory **634**. The one or more processors **632** can be any suitable processing device (e.g., a processor core, a microprocessor, an ASIC, a FPGA, a controller, a microcontroller, etc.) and can be one processor or a plurality of processors that are operatively connected. The memory **634** can include one or more non-transitory computer-readable storage media, such as RAM, ROM, EEPROM, EPROM, one or more memory devices, flash memory devices, etc., and combinations thereof.

The memory **634** can store information that can be accessed by the one or more processors **632**. For instance, the memory **634** (e.g., one or more non-transitory computer-readable storage mediums, memory devices) can store data **636** that can be obtained, received, accessed, written, manipulated, created, and/or stored. In some implementations, the machine learning computing system **630** can obtain data from one or more memory devices that are remote from the machine learning computing system **630**.

The memory **634** can also store computer-readable instructions **638** that can be executed by the one or more processors **632**. The instructions **638** can be software written in any suitable programming language or can be implemented in hardware. Additionally, or alternatively, the instructions **638** can be executed in logically and/or virtually separate threads on processor(s) **632**. The memory **634** can

store the instructions **638** that when executed by the one or more processors **632** cause the one or more processors **632** to perform operations. The machine learning computing system **630** can include a communication system **639**, including devices and/or functions similar to that described with respect to the vehicle computing system **102** and/or the operations computing system **106**.

In some implementations, the machine learning computing system **630** can include one or more server computing devices. If the machine learning computing system **630** includes multiple server computing devices, such server computing devices can operate according to various computing architectures, including, for example, sequential computing architectures, parallel computing architectures, or some combination thereof.

In addition or alternatively to the model(s) **640** at the vehicle computing system **102** and/or the operations computing system **106**, the machine learning computing system **630** can include one or more machine-learned models **650**. As examples, the machine-learned models **650** can be or can otherwise include various machine-learned models such as, for example, neural networks (e.g., deep neural networks), support vector machines, decision trees, ensemble models, k-nearest neighbors models, Bayesian networks, or other types of models including linear models and/or non-linear models. Example neural networks include feed-forward neural networks, recurrent neural networks (e.g., long short-term memory recurrent neural networks, or other forms of neural networks). The machine-learned models **650** can be similar to and/or the same as the machine-learned models **640**.

As an example, the machine learning computing system **630** can communicate with the vehicle computing system **102** and/or the operations computing system **106** according to a client-server relationship. For example, the machine learning computing system **630** can implement the machine-learned models **650** to provide a web service to the vehicle computing system **102** and/or the operations computing system **106**. For example, the web service can provide machine-learned models to an entity associated with an autonomous vehicle; such that the entity can implement the machine-learned model (e.g., to determine modification(s) to operating parameter(s) of system(s), etc.). Thus, machine-learned models **650** can be located and used at the vehicle computing system **102** and/or the operations computing system **106** and/or machine-learned models **650** can be located and used at the machine learning computing system **630**.

In some implementations, the machine learning computing system **630**, the vehicle computing system **102**, and/or the operations computing system **106** can train the machine-learned models **640** and/or **650** through use of a model trainer **660**. The model trainer **660** can train the machine-learned models **640** and/or **650** using one or more training or learning algorithms. One example training technique is backwards propagation of errors. In some implementations, the model trainer **660** can perform supervised training techniques using a set of labeled training data. In other implementations, the model trainer **660** can perform unsupervised training techniques using a set of unlabeled training data. The model trainer **660** can perform a number of generalization techniques to improve the generalization capability of the models being trained. Generalization techniques include weight decays, dropouts, or other techniques.

In particular, the model trainer **660** can train a machine-learned model **640** and/or **650** based on a set of training data **662**. The training data **662** can include, for example, a

number of sets of data from previous events (e.g., previous event logs indicative of power consumption and/or heat generation). The training data **662** can be associated with a previous event associated with controlling the temperature of the vehicle, controlling system power consumption, etc. and can allow the training data **662** to train a model based on real-world events and the data associated therewith. In some implementations, the training data **662** can be taken from the same vehicle as that which utilizes that model **640/650**. In this way, the models **640/650** can be trained to determine outputs (e.g., modification(s) of operating characteristic(s)) in a manner that is tailored to that particular vehicle. Additionally, or alternatively, the training data **662** can be taken from one or more different vehicles that that which is utilizing that model **640/650**. The model trainer **660** can be implemented in hardware, firmware, and/or software controlling one or more processors.

The network(s) **680** can be any type of network or combination of networks that allows for communication between devices. In some embodiments, the network(s) **680** can include one or more of a local area network, wide area network, the Internet, secure network, cellular network, mesh network, peer-to-peer communication link and/or some combination thereof and can include any number of wired or wireless links. Communication over the network(s) **680** can be accomplished, for instance, via a network interface using any type of protocol, protection scheme, encoding, format, packaging, etc.

FIG. 6 illustrates one example system **600** that can be used to implement the present disclosure. Other computing systems can be used as well. For example, in some implementations, the vehicle computing system **102** and/or the operations computing system **106** can include the model trainer **660** and the training dataset **662**. In such implementations, the machine-learned models **640** can be both trained and used locally at the vehicle computing system **102** and/or the operations computing system **106**. As another example, in some implementations, the vehicle computing system **102** and/or the operations computing system **106** may not be connected to other computing systems.

Computing tasks discussed herein as being performed at computing device(s) remote from the vehicle can instead be performed at the vehicle (e.g., via the vehicle computing system), or vice versa. Such configurations can be implemented without deviating from the scope of the present disclosure. The use of computer-based systems allows for a great variety of possible configurations, combinations, and divisions of tasks and functionality between and among components. Computer-implemented operations can be performed on a single component or across multiple components. Computer-implemented tasks and/or operations can be performed sequentially or in parallel. Data and instructions can be stored in a single memory device or across multiple memory devices.

While the present subject matter has been described in detail with respect to specific example embodiments and methods thereof, it will be appreciated that those skilled in the art, upon attaining an understanding of the foregoing can readily produce alterations to, variations of, and equivalents to such embodiments. Accordingly, the scope of the present disclosure is by way of example rather than by way of limitation, and the subject disclosure does not preclude inclusion of such modifications, variations and/or additions to the present subject matter as would be readily apparent to one of ordinary skill in the art.

What is claimed is:

1. A computer-implemented method of autonomous vehicle thermal management, comprising:
 - identifying one or more vehicle parameters associated with an autonomous vehicle;
 - determining a modification to one or more operating characteristics of a sensor system of the autonomous vehicle based at least in part on a sensor capability requirement corresponding to the one or more vehicle parameters, wherein the sensor capability requirement is configured based at least in part on an operating condition of the autonomous vehicle; and
 - controlling a heat generation of the sensor system of the autonomous vehicle via implementation of the modification.
2. The computer-implemented method of claim 1, further comprising:
 - obtaining data indicative of a motion plan of the autonomous vehicle, wherein the motion plan is indicative of a future vehicle action to be performed by the autonomous vehicle, and
 - wherein identifying the one or more vehicle parameters associated with the autonomous vehicle comprises identifying the one or more vehicle parameters based at least in part on the future vehicle action to be performed by the autonomous vehicle.
3. The computer-implemented method of claim 1, further comprising:
 - obtaining map data indicative of a future geographic area in which the autonomous vehicle is to be located at a future point in time, and
 - wherein identifying the one or more vehicle parameters associated with the autonomous vehicle comprises identifying the one or more vehicle parameters based at least in part on the future geographic area in which the autonomous vehicle is to be located.
4. The computer-implemented method of claim 3, wherein the one or more vehicle parameters are indicative of a crowd density associated with the future geographic area.
5. The computer-implemented method of claim 3, wherein the one or more vehicle parameters are indicative of a traffic pattern associated with the future geographic area.
6. The computer-implemented method of claim 1, wherein the modification to the one or more operating characteristics of the sensor system comprises a decrease in a frame rate of a sensor of the sensor system.
7. The computer-implemented method of claim 1, wherein the modification to the one or more operating characteristics of the sensor system comprises sub-sampling sensor data obtained via the sensor system.
8. The computer-implemented method of claim 1, further comprising:
 - determining a modification to one or more operating characteristics of a motion planning system of the autonomous vehicle based at least in part on the one or more vehicle parameters.
9. The computer-implemented method of claim 8, wherein the modification to the one or more operating characteristics of the motion planning system comprises a restriction on a speed of the autonomous vehicle.
10. The computer-implemented method of claim 8, wherein the modification comprises, during a change in the sensor capability requirement, operating within a buffer speed or a buffer acceleration.
11. The computer-implemented method of claim 1, wherein the sensor capability requirement comprises operating the sensor system to sense at least a forward distance

ahead of the autonomous vehicle, wherein the forward distance is determined based at least in part on the operating condition.

12. The computer-implemented method of claim 1, wherein the sensor capability requirement is decreased based at least in part on a decrease in speed of the autonomous vehicle.

13. A computing system for autonomous vehicle thermal management, comprising:

- one or more processors; and
- one or more tangible, non-transitory, computer readable media that collectively store instructions that when executed by the one or more processors cause the computing system to perform operations, the operations comprising:
 - obtaining data associated with an autonomous vehicle, wherein the data is indicative of at least one of a future action to be performed by the autonomous vehicle, a future geographic area in which the autonomous vehicle is to be located, or a weather condition to be experienced by the autonomous vehicle;
 - identifying one or more vehicle parameters associated with the autonomous vehicle based at least in part on the data associated with the autonomous vehicle;
 - determining a modification to one or more operating characteristics of one or more systems onboard the autonomous vehicle based at least in part on a sensor capability requirement corresponding to the one or more vehicle parameters, wherein the sensor capability requirement is configured based at least in part on an operating condition of the autonomous vehicle, and wherein the one or more systems onboard the autonomous vehicle comprise at least one of a sensor system of the autonomous vehicle or a motion planning system of the autonomous vehicle; and
 - controlling a heat generation of at least a portion of the autonomous vehicle via implementation of the modification.

14. The computing system of claim 13, wherein the modification comprises adjusting a window of interest of a sensor of the sensor system.

15. The computing system of claim 13, wherein the modification comprises adjusting cost data utilized by the motion planning system when planning a motion of the autonomous vehicle.

16. The computing system of claim 13, wherein the one or more vehicle parameters are indicative of at least one of: a speed of the autonomous vehicle, a condition of a travel way, a type of the travel way, a geometry of a travel way, other parameters indicated by map data, a crowd density, a traffic pattern, the future action, a temperature of a vehicle computing device, or the weather condition.

17. The computing system of claim 13, wherein the modification is determined at a first point in time, and wherein controlling the heat generation comprises:

- providing at a second point in time data indicative of the modification to the one or more systems.

18. An autonomous vehicle comprising:

- one or more processors; and
- one or more tangible, non-transitory, computer readable media that store instructions that when executed by the one or more processors cause the autonomous vehicle to perform operations, the operations comprising:
 - obtaining data associated with the autonomous vehicle;

identifying one or more vehicle parameters associated with the autonomous vehicle based at least in part on the data associated with the autonomous vehicle;
 determining a modification to one or more operating characteristics of one or more systems onboard the autonomous vehicle based at least in part on a sensor capability requirement corresponding to the one or more vehicle parameters, wherein the sensor capability requirement is configured based at least in part on an operating condition of the autonomous vehicle, and wherein the one or more systems comprise at least one of a sensor system of the autonomous vehicle or a motion planning system of the autonomous vehicle; and
 controlling a heat generation of at least a portion of the autonomous vehicle via implementation of the modification.

19. The autonomous vehicle of claim **18**, wherein the data associated with the autonomous vehicle comprises data indicative of a motion plan of the autonomous vehicle, map data indicative of a future geographic area in which the autonomous vehicle is to be located, or weather data indicative of a weather condition to be experienced by the autonomous vehicle.

20. The autonomous vehicle of claim **18**, wherein the sensor system comprises a sensor; and wherein the modification comprises at least one of: adjusting an acquisition of image data by the sensor, adjusting a window of interest associated with the sensor, subsampling image data acquired via the sensor, reducing a resolution of the image data acquired via the sensor, or disabling the sensor.

* * * * *