

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 August 2010 (26.08.2010)

PCT

(10) International Publication Number
WO 2010/096272 A1


- (51) **International Patent Classification:**
H04R 3/00 (2006.01)
- (21) **International Application Number:**
PCT/US2010/023098
- (22) **International Filing Date:**
3 February 2010 (03.02.2010)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/153,260 17 February 2009 (17.02.2009) US
12/698,920 2 February 2010 (02.02.2010) US
- (71) **Applicant (for all designated States except US):** SONY
COMPUTER ENTERTAINMENT INC. [JP/JP];
2-6-21 Minami-Aoyama, Minato-Ku, Tokyo 107-0062
(JP).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** CHEN, Ruxin
[US/US]; 919 East Hillsdale Boulevard, 2nd Floor, Foster
City, California 94404 (US).
- (74) **Agent:** ISENBERG, Joshua D.; JDI Patent, 809 Corpo-
rate Way, Fremont, California 94539 (US).

- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report (Art. 21(3))

WO 2010/096272 A1

(54) **Title:** SPEECH PROCESSING WITH SOURCE LOCATION ESTIMATION USING SIGNALS FROM TWO OR MORE MICROPHONES

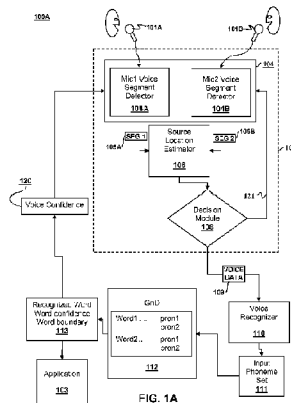

(57) **Abstract:** Computer implemented speech processing is disclosed. First and second voice segments are extracted from first and second microphone signals originating from first and second microphones. The first and second voice segments correspond to a voice sound originating from a common source. An estimated source location is generated based on a relative energy of the first and second voice segments and/or a correlation of the first and second voice segments. A determination whether the voice segment is desired or undesired may be made based on the estimated source location.

**SPEECH PROCESSING WITH SOURCE LOCATION ESTIMATION USING
SIGNALS FROM TWO OR MORE MICROPHONES**

COPYRIGHT NOTICE

A portion of the disclosure of this patent document contains
5 material which is subject to copyright protection. The
copyright owner has no objection to the facsimile
reproduction by anyone of the patent document or the patent
disclosure, as it appears in the Patent and Trademark Office
patent file or records, but other-wise reserves all
10 copyright rights whatsoever.

CROSS-REFERENCE TO RELATED APPLICATION

This application claims the benefit of priority of US
provisional application number 61/153,260, entitled SPEECH
PROCESSING WITH SOURCE LOCATION ESTIMATION USING SIGNALS
15 FROM TWO OR MORE MICROPHONES, filed February 17, 2009, the
entire disclosures of which are incorporated herein by
reference.

This application claims the benefit of priority of US
application number 12/698,920, entitled SPEECH PROCESSING
20 WITH SOURCE LOCATION ESTIMATION USING SIGNALS FROM TWO OR
MORE MICROPHONES, filed February 02, 2010, the entire
disclosures of which are incorporated herein by reference.

FIELD OF INVENTION

Embodiments of the present invention relate generally to
25 computer-implemented voice recognition, and more
particularly, to a method and apparatus that estimates a
distance and direction to a speaker based on input from two
or more microphones.

BACKGROUND OF INVENTION

30 A speech recognition system receives an audio stream and
filters the audio stream to extract and isolate sound
segments that make up speech. Speech recognition
technologies allow computers and other electronic devices
equipped with a source of sound input, such as a microphone,

to interpret human speech, e.g., for transcription or as an alternative method of interacting with a computer. Speech recognition software is being developed for use in consumer electronic devices such as mobile telephones, game
5 platforms, personal computers and personal digital assistants. In a typical speech recognition algorithm, a time domain signal representing human speech is broken into a number of time windows and each window is converted to a frequency domain signal, e.g., by fast Fourier transform
10 (FFT). This frequency or spectral domain signal is then compressed by taking a logarithm of the spectral domain signal and then performing another FFT. From the compressed signal, a statistical model can be used to determine phonemes and context within the speech represented by the
15 signal. The extracted phonemes and context may be compared to stored entries in a database to determine the word or words that have been spoken.

In the field of computer speech recognition a speech recognition system receives an audio stream and filters the
20 audio stream to extract and isolate sound segments that make up speech. The sound segments are sometimes referred to as phonemes. The speech recognition engine then analyzes the phonemes by comparing them to a defined pronunciation dictionary, grammar recognition network and an acoustic
25 model.

Speech recognition systems are usually equipped with a way to compose words and sentences from more fundamental units. For example, in a speech recognition system based on phoneme
30 models, pronunciation dictionaries can be used as look-up tables to build words from their phonetic transcriptions. A grammar recognition network can then interconnect the words.

A data structure that relates words in a given language represented, e.g., in some graphical form (e.g., letters or symbols) to particular combinations of phonemes is generally

referred to as a Grammar and Dictionary (GnD). An example of a Grammar and Dictionary is described, e.g., in U.S. Patent Application publication number 20060277032 to Gustavo Hernandez-Abrego and Ruxin Chen entitled Structure for
5 Grammar and Dictionary Representation in Voice Recognition and Method For Simplifying Link and Node-Generated Grammars, the entire contents of which are incorporated herein by reference.

Certain applications utilize computer speech recognition to
10 implement voice activated commands. One example of a category of such applications is computer video games. Speech recognition is sometimes used in video games, e.g., to allow a user to select or issue a command or to select an option from a menu by speaking predetermined words or
15 phrases.

Video game devices and other applications that use speech recognition are often used in noisy environments that may include sources of speech other than the person playing the game or using the application. In such situations, stray
20 speech from persons other than the user may inadvertently trigger a command or menu selection.

Some prior art applications that use speech recognition, e.g., for voice activated commands, also use two microphones. Prior art solutions have either performed
25 voice detection on only one microphone signal. Unfortunately voice volume is very unreliable for source distance estimation because the real voice volume of the source is unknown. Furthermore, determining whether a voice signal in a noisy game environment corresponds to an
30 intended voice or an unwanted voice is particularly challenging for a single source.

Other prior art systems perform signal arrival direction estimation using an array of sound signals from an array of

microphones. Unfortunately, prior art systems based on arrays of microphones generally utilize far-field microphones that are not used for close talk. Consequently, signals from such microphones are sub-optimal for speech
5 recognition.

It is within this context that embodiments of the current invention arise.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGS. 1A-1C are block diagrams illustrating different
10 versions of a speech processing system according to an embodiment of the present invention.

FIG. 2A is a diagram illustrating a speech processing method in accordance with an embodiment of the present invention.

FIG. 2B is a listing of code for implementing source
15 location in speech processing according to an embodiment of the present invention.

Fig. 2C is a listing of code for implementing source direction in speech processing according to an embodiment of the present invention.

20 FIG. 3 is a block diagram of a speech processing apparatus according to an embodiment of the present invention.

FIG. 4 is a block diagram of a computer readable medium containing computer readable instructions for implementing speech processing in accordance with an embodiment of the
25 present invention.

Common reference numerals are used to refer to common features of the drawings.

DESCRIPTION OF THE SPECIFIC EMBODIMENTS

According to an embodiment of the invention, a distance and
30 direction of a source of sound are estimated based on input

from two or more microphone signals from two or more different microphones. The distance and direction estimation are used to determine whether the speech segment is coming from a predetermined source. The distance and
5 direction may be determined by comparing the volume and time of arrival delay property of signals from different microphones corresponding to a short segment of a single human voice signal. The distance and direction information can be used to reject background human speech.

10 By combining detection of a voice signal on two or more channels with information regarding the volume of the speech signals and their time delay properties, embodiments of the invention may reliably estimate the intended voice signal for a pre-specified microphone. This is especially true for
15 microphones with closed talk sensitivity.

As seen in FIG. 1A, a speech recognition system **100A** may generally include a sound source discriminator **102**. The system **100A** may use the sound source discriminator **102** in conjunction with an application **103**, a voice recognizer **110**
20 and a grammar and dictionary **112**. The sound source discriminator **102**, application **103**, voice recognizer **110**, and grammar and dictionary **112** may be implemented in hardware, software or firmware or any suitable combination of two or more of hardware, software, or firmware. By way
25 of example, and not by way of limitation, the sound source discriminator **102**, application **103**, voice recognizer **110**, and grammar and dictionary **112** may be implemented in software as a set of computer executable instructions and associated configured to implement the functions described
30 herein on a general purpose computer. The system **100A** may also operate in conjunction with signals from two or more microphones **101A**, **101B**.

By way of example, and not by way of limitation, the system **100A** may operate according to a method **200** as illustrated in

FIG. 2A. Specifically, voice segments from a common source may be detected at both microphones as indicated at **202A**, **202B**. The voice segments may be analyzed to estimate a location of the source, as indicated at **204**. Based on the estimated location, a decision may be made as to whether the sound segment originated from a desired source, as indicated at **206**. If the source is a desired, further processing (e.g., voice recognition) may be performed on the voice segment, as indicated at **208**. Otherwise, further processing of the voice segment may be disabled, as indicated at **210**.

In the example depicted in FIG. 1A, each microphone **101A**, **101B** may be operated by a different user during part of the application. An example of such an application is a singing competition video game known as SingStar®. SingStar® is a registered trademark of Sony Computer Entertainment Europe.

In the embodiment depicted in FIG. 1A, the signal from only one microphone (e.g., a "blue" microphone **101A**) is used for voice control command functions, such as menu selection, song selection, and the like and the other microphone (e.g., a "red" microphone "**101B**"). However, both microphones **101A**, **101B** are used for other portions of the application, such as a singing competition. The microphones may be coupled to the rest of the system **100A** through a wired or wireless connection. Signals from the red microphone **101B** are normally ignored by the application **103** or voice recognizer **110** for voice control command functions. It is noted that for the embodiment depicted in FIG. 1A, it does not matter whether both microphones are synchronized to a common clock.

The sound source discriminator **102** may generally include the following subcomponents: an input module **104** having one or more voice segment detector modules **104A**, **104B**, a source location estimator module **106**, and a decision module **108**. All of these subcomponents may be implemented in hardware,

software, or firmware or combinations of two or more of these.

The voice segment detector modules **104A**, **104B** are configured, e.g., by suitable software programming, to
5 isolate a common voice segment from first and second microphone signals originating respectively from the red and blue microphones **101A**, **101B**. The voice segment detector modules **104A**, **104B** may receive electrical signals from the microphones **101A**, **101B** that correspond to sounds
10 respectively detected by the microphones **101A**, **101B**. The microphone signals may be in either analog or digital format. If in analog format, the voice segment detector modules **104A**, **104B** may include analog to digital A/D converters to convert the incoming microphone signals to
15 digital format. Alternatively, the microphones **101A**, **101B** may include A/D converters so that the voice segment detector modules receive the microphone signals in digital format.

By way of example, each microphone **101A**, **101B** may convert
20 speech sounds from a common speaker into an electrical signal using an electrical transducer. The electrical signal may be an analog signal, which may be converted to a digital signal through use of an A/D converter. The digital signal may then be divided into a multiple units called
25 frames, each of which may be further subdivided into samples. The value of each sample may represent sound amplitude at a particular instant in time.

The voice segment detector modules **104A**, **104B** sample the two microphone signals to determine when a voice segment begins
30 and ends. Each voice segment detector module may analyze the frequency and amplitude of its corresponding incoming microphone signal as a function of time to determine if the microphone signal corresponds to sounds in the range of human speech. In some embodiments, the two voice segment

detector modules **104A**, **104B** may perform up-sampling on the incoming microphone signals and analyze the resulting up-sampled signals. For example, if the incoming signals are sampled at 16 kilohertz, the voice segment detector modules
5 may up-sample these signals to 48 kilohertz by estimating signal values between adjacent samples. The resulting voice segments **105A**, **105B** serve as inputs to the source location estimation module **106**. The detector modules **104A** and **104B** may perform the up-sampling slightly different up-sampling
10 rates so as to balance a sample rate difference in two input signals.

The source location estimation module **106** may compare two signals to extract a voice segment that is "common" to signals from both microphone **101A**, **101B**. By way of example,
15 the source location estimation module **106** may perform signal analysis to compare one microphone signal to another by a) identifying speech segments in each signal and b) correlating the speech segments with each other to identify speech segments that are common to both signals.

20 The source location estimation module **106** may be configured to produce an estimated source location based on a relative energy of the common voice segment from the first and second microphone signals and/or a correlation of the common voice segment from the first and second microphone signals. By
25 way of example, and not by way of limitation, the source location estimation module **106** may track both the energy and correlation of the common voice segment from the two microphone signals until the voice segment ends.

By way of example, and not by way of limitation, the source
30 location estimation module **106** may be configured to estimate a distance to the source from a relative energy $c1c2$ and relative amplitude $a1a2$ of the voice segments **105A**, **105B** from the two microphones. As used herein the term relative energy ($c1c2$) refers to a value determined using the sum of

the squares of the amplitudes of signal samples from both microphones. As used herein the term relative amplitude (a1a2) refers to a value determined using a mean of the absolute values of the amplitudes of signal samples from both microphones. Since the signal energy from each microphone depends on the distance from the source to the microphone, it can reasonably be expected that the larger energy signal comes from the microphone closest to the source. By way of example, and not by way of limitation, the relative energy c1c2 may be calculated according to Equation 1.1 below.

$$\text{Equation 1.1: } c1c2 = \frac{\sum x_1^2(t)}{\sum x_2^2(t)}$$

By way of example, and not by way of limitation, the relative amplitude a1a2 may be calculated according to Equation 1.2 below. The mean amplitude for $x_1(t)$ is calculated on the major voice portion of the signal from the first microphone **101A**. The mean amplitude for $x_2(t)$ is calculated on the major voice portion of the signal from the second microphone **101B**.

$$\text{Equation 1.2: } a1a2 = \frac{\text{MEAN}|x_1(t)|}{\text{MEAN}|x_2(t)|}$$

In Equations 1.1 and 1.2, the $x_1(t)$ are signal sample amplitudes for the voice segment from the first microphone and the $x_2(t)$ are signal sample amplitudes for the voice segment from the second microphone. In the SingStar example, it may be assumed that desired speech is to come from the first microphone. The location estimation module **106** may compare the relative energy c1c2 to a predetermined threshold cc1. If c1c2 is at or above the threshold the source may be regarded as "close enough", otherwise the source may be regarded as "not close enough". Similarly the

location estimation module **106** may compare the relative amplitude ala_2 to a predetermined threshold aal to decide the source is either "close enough" in the same manner as clc_2 is used.

5 The decision module **108** may be configured to determine whether the common voice segment is desired or undesired based on the estimated source location. The determination as to whether a voice segment is desired may be based on either consideration of clc_2 or of ala_2 , as the common voice
10 segment is presumed to be desired. By way of example, the decision module **108** may trigger further processing of the voice segment if the estimated source location is "close enough" and disable further processing if the estimated source location is "not close enough".

15 Until a desired voice segment is found, decision module **108** may go back to input module **104** as indicated at **121** to re-adjust the up-sampling rate, the voice segment alignment between **104A** and **104B** for a few iteration rounds.

By way of example, if the source of sound for the blue
20 microphone **101A** is within a threshold distance, e.g., 1-10 cm, 5 cm in some embodiments, the source can be assumed be the "right" user and the sounds may be analyzed to determine whether they correspond to a command. If not, the sounds may be ignored as noise. The method **200** may include an
25 optional training phase to make the estimate from the source location estimation module **106** and the decision from the decision module **108** more robust.

Further processing of the voice segment may be implemented in any suitable form depending on the result of the decision
30 module **108**. By way of example, the decision module **108** may trigger or disable voice recognizer **110** to perform voice recognition processing on the voice segment as a result of

the location estimate from the source location estimation module **106**.

By way of example, and not by way of limitation, the voice recognition module **110** may receive a voice data **109**

5 corresponding to the first or second voice segment **105A**, **105B** or some combination of the two voice segments. Each frame of the voice data **109** may be analyzed, e.g., using a Hidden Markov Model (HMM) to determine if the frame contains a known phoneme. The application of Hidden Markov Models to
10 speech recognition is described in detail, e.g., by Lawrence Rabiner in "A Tutorial on Hidden Markov Models and Selected Applications in Speech Recognition" in Proceedings of the IEEE, Vol. 77, No. 2, February 1989, which is incorporated herein by reference in its entirety for all purposes.

15 Sets of input phonemes determined from the voice data **109** may be compared against phonemes that make up pronunciations in the database **112**. If a match is found between the phonemes from the voice data **109** and a pronunciation in an entry in the database (referred to herein as a matching
20 entry), the matching entry word **113** may correspond to a particular change of state of a computer apparatus that is triggered when the entry matched the phonemes determined from the voice signal. As used herein, a "change of state" refers to a change in the operation of the apparatus. By
25 way of example, a change of state may include execution of a command or selection of particular data for use by another process handled by the application **103**. A non-limiting example of execution of a command would be for the apparatus to begin the process of selecting a song upon recognition of
30 the word "select". A non-limiting example of selection of data for use by another process would be for the process to select a particular song for play when the input phoneme set **111** matches the title of the song.

A confidence **120** of the recognized word and word boundary information obtained at **113** could be used to refine the operation of the input module **104** to generate a better decision on the voice segment and the recognition output.

5 It is noted that in some embodiments, the source location estimation module **106** may alternatively be configured to generate an estimated source location in terms of a direction to the source of the speech segment. The source location estimation module **106** may optionally combine the
10 direction estimate with a distance estimate, e.g., as described above to produce an estimated location. There are a number of situations in which a direction estimate may be useful with the context of embodiments of the present invention.

15 For example, as shown in FIG. 1B, a system **100B** utilizes a headset **114** having a near-field microphone **101A** and a far-field microphone **101B**. Both microphones **101A**, **101B** may be synchronized to the same clock. The headset **114** and microphones **101A**, **101B** may be coupled to the rest of the
20 system **100B** through a wired or wireless connection. By way of example, the headset may be connected to the rest of the system **100B** via a personal area network (PAN) interface, such as a Bluetooth interface. An example of such a headset is described, e.g., in commonly assigned US Patent
25 Application Number 12/099,046 entitled "GAMING HEADSET AND CHARGING METHOD" to Xiadong Mao et al. filed April 7, 2008, the entire disclosures of which are incorporated herein by reference. To discriminate between desired and undesired speech in such a headset it is desirable to determine both a
30 distance and a direction to the sound source. For example, in the case depicted in FIG. 1B, a speaker **S** wearing the headset **114** may issue voice commands that can be recognized by the voice recognizer **110** to trigger changes of state by the application **103**. The speaker's mouth **M** may reasonably

be expected to lie within a cone-shaped region **R**. Any sounds originating outside this region may be ignored. Those originating within this region may be analyzed by the voice recognizer **110**. To estimate whether a voice segment originates from a source inside or outside the cone-shaped region **R**, the source location estimation module **106** may estimate both a direction and a distance to the source of sound.

By way of example, and not by way of limitation, the direction estimate may be obtained from a correlation between the voice segment from the near field microphone and a voice segment from the far-field microphone. The correlation may be calculated from sample values of the two voice segments according to Equation 2.

Equation 2
$$R(c) = \frac{\sum_t x_1(t+c) \cdot x_2(t)}{\sum_t x_1^2(t+c) + x_2^2(t)}$$

In Equation 1, $x_1(t+c)$ is a signal sample amplitude for the voice segment from the near-field microphone at time $t+c$, $x_2(t)$ is a signal sample amplitude for the voice segment from the far-field microphone at time t , and c is a time difference between the two samples. The value of the correlation R may be calculated over a whole frame for different possible values of c . From the set of values of R a maximum correlation \max_cor may be determined as $\max_cor = R_{\max}(c)$ and the value of c that produces the maximum value of R may be determined as $\max_c = \operatorname{argmax}[R(c)]$.

The source location estimator **106** may compare the computed value of \max_cor to a lower threshold $r1$, $r2$, or $rr3$.

The value of \max_c is related to the direction to the speaker's mouth **M**. In this example, it is expected that the speaker's mouth will be in front of both microphones and

closer to the near-field microphone **101A**. In such a case, one would expect max_c to lie within some range that is greater than zero since the sound from the speaker's mouth **M** would be expected to reach the near-field microphone first.

5 The apex angle of the cone-shaped region may be adjusted by a value $c1$ corresponding to an upper end of the range. The source location estimator **106** may compute a value of max_c that is zero if the source is either too far away or located to the side. Such cases may be distinguished by adjusting

10 the upper end of the range.

Since it is also expected that the speaker's mouth is within a certain distance from the near-field microphone, the source location estimator may also generate an estimated distance using a relative energy of the two voice segments

15 as described above.

By way of example, and not by way of limitation, the source location estimation module **106** may implement programmed instructions of the type shown in FIG. 2B. In the example depicted in FIG. 2B, the instructions are written in the C++

20 programming language. Location determination in accordance with the instructions depicted in FIG. 2B may be summarized as follows. The source of the voice segment may be located within the desired region **R** if either A) or B) is true:

A) max_c is greater than a minimum threshold $c1$ and any

25 of the following is true:

a. max_cor is greater than a first correlation threshold $r1$; or

b. the relative energy $c1c2$ is greater than a quantity $cc0$ and max_cor is greater than a second

30 correlation threshold $r2$.

B) max_c is greater than or equal to zero and less than $c1$ and the quantity $(1.0f*\text{max_c} - \text{max_cor})$ is less

than a third threshold r_3 and any of the following is true:

- a. max_cor is greater than a third correlation threshold rr_3 ; or
- 5 b. max_c is greater than or equal to 1 and the relative energy c_1c_2 is greater than an energy threshold cc_1 ; or
- 10 c. max_c is equal to zero and the relative energy c_1c_2 is greater than a second relative energy threshold cc_2 .

The thresholds c_1 , r_1 , r_2 , r_3 , rr_3 , cc_0 , cc_1 , cc_2 and the parameter f may be adjusted to optimize the performance and robustness of the source location estimation module **106**.

In other embodiments of the invention, the source location
15 estimation module **106** may determine a direction to the source but not necessarily a distance to the source. For example, FIG. 1C illustrates a voice recognition system **100C** according to another embodiment of the present invention. The system **100C** may be implemented in conjunction with a
20 video camera **116** that tracks a user of the system and a microphone array **118** having two or more microphones **101A**, **101B**. The microphones **101A**, **101B** in the array may be synchronized to the same clock. The source location estimation module **106** may be configured to analyze images
25 obtained with the camera **116** (e.g., in electronic form) to track a user's face and mouth and determine whether the user is speaking. Sound signals from two or more microphones **101A**, **101B** in the array may be analyzed to determine an estimated direction **D** to a source of sound. The estimated
30 direction **D** may be determined based on a maximum correlation between voice segments **105A**, **105B** obtained from the

microphones **101A**, **101B**, and a sample difference value c for which the maximum correlation occurs.

As a simple example, direction estimation may be obtained using program code instructions of the type shown FIG. 2C.

5 In the example depicted in FIG. 2B, the instructions are written in the C++ programming language. In this example, the value of \max_c may be determined as described above with respect to FIG. 2B. The value of \max_c is compared to a coefficient mic_c that is related to the specific
10 microphones used, e.g., in the headset **114** or in the array **118**. An example of a value of mic_c is 8. Generally, value of mic_c may be adjusted, either at the factory or by a user, during a training phase, to optimize operation.

A direction angle may be determined from the inverse cosine
15 of the quantity $(\max_c/\text{mic_c})$. The value of \max_c may be compared to mic_c and $-\text{mic_c}$. If \max_c is less than $-\text{mic_c}$, the value of \max_c may be set equal to $-\text{mic_c}$ for the purpose of determining $\arccos(\max_c/\text{mic_c})$. If \max_c is greater than mic_c , the value of \max_c may be taken as being
20 equal to mic_c for the purpose of determining $\arccos(\max_c/\text{mic_c})$.

The source location estimation module **106** may combine image analysis with a direction estimate to determine if the source of sound lies within a field of view **FOV** of the
25 camera. In some embodiments, a distance estimate may also be generated if the speaker is close enough. Alternatively, in some embodiments, the camera **116** may be a depth camera, sometimes also known as a 3D camera or zed camera. In such a case, the estimation module **106** may be configured (e.g.,
30 by suitable programming) to analyze one or more images from the camera **116** to determine a distance to the speaker if the speaker lies within the field of view **FOV**.

The estimated direction **D** may be expressed as a vector, which may be projected forward from the microphone array to determine if it intersects the field of view **FOV**. If the projection of the estimated direction **D** intersects the field of view, the location source of sounds may be estimated as within the field of view **FOV**, otherwise, the estimated source location lies outside the field of view **FOV**. If the source of the sounds corresponding to the voice segments **105A**, **105B** lies within the field of view **FOV**, the decision module **108** may trigger the voice recognizer **110** to analyze one voice segment or the other or some combination of both. If the source of sounds corresponding to the voice segments **105A**, **105B** lies outside the field of view **FOV**, the decision module may trigger the voice recognizer to ignore the voice segments.

FIGs. 1A-1C and FIGs. 2A-2C depict only a few examples among a number of potential embodiments of the present invention. Other embodiments within the scope of these teachings may combine the features of the foregoing examples.

According to another embodiment, a voice recognition apparatus may be configured in accordance with embodiments of the present invention in any of a number of ways. By way of example, FIG. 3 is a more detailed block diagram illustrating a voice processing apparatus **300** according to an embodiment of the present invention. By way of example, and without loss of generality, the apparatus **300** may be implemented as part of a computer system, such as a personal computer, video game console, personal digital assistant, cellular telephone, hand-held gaming device, portable internet device or other digital device. In a preferred embodiment, the apparatus is implemented as part of a video game console.

The apparatus **300** generally includes a processing unit (CPU) **301** and a memory unit **302**. The apparatus **300** may also

include well-known support functions **311**, such as input/output (I/O) elements **312**, power supplies (P/S) **313**, a clock (CLK) **314** and cache **315**. The apparatus **300** may further include a storage device **316** that provides non-
5 volatile storage for software instructions **317** and data **318**. By way of example, the storage device **316** may be a fixed disk drive, removable disk drive, flash memory device, tape drive, CD-ROM, DVD-ROM, Blu-ray, HD-DVD, UMD, or other optical storage devices.

10 The apparatus may operate in conjunction with first and second microphones **322A**, **322B**. The microphones may be an integral part of the apparatus **300** or a peripheral component that is separate from the apparatus **300**. Each microphone may include an acoustic transducer configured to convert
15 sound waves originating from a common source of sound into electrical signals. By way of example, and not by way of limitation, electrical signals from the microphones **322A**, **322B** may be converted into digital signals via one or more A/D converters, which may be implemented, e.g., as part of
20 the I/O function **312** or as part of the microphones. The voice digital signals may be stored in the memory **302**.

The processing unit **301** may include one or more processing cores. By way of example and without limitation, the CPU **302** may be a parallel processor module, such as a Cell
25 Processor. An example of a Cell Processor architecture is described in detail, e.g., in Cell Broadband Engine Architecture, copyright International Business Machines Corporation, Sony Computer Entertainment Incorporated, Toshiba Corporation August 8, 2005 a copy of which may be
30 downloaded at <http://cell.scei.co.jp/>, the entire contents of which are incorporated herein by reference.

The memory unit **302** may be any suitable medium for storing information in computer readable form. By way of example, and not by way of limitation, the memory unit **302** may

include random access memory (RAM) or read only memory (ROM), a computer readable storage disk for a fixed disk drive (e.g., a hard disk drive), or a removable disk drive.

The processing unit **301** may be configured to run software applications and optionally an operating system. Portions of such software applications may be stored in the memory unit **302**. Instructions and data may be loaded into registers of the processing unit **302** for execution. The software applications may include a main application **303**, such as a video game application. The main application **303** may operate in conjunction with speech processing software, which may include a voice segment detection module **304**, a distance and direction estimation module **305**, and a decision module **306**. The speech processing software may optionally include a voice recognizer **307**, and a GnD **308**, portions of all of these software components may be stored in the memory **302** and loaded into registers of the processing unit **301** as necessary.

Through appropriate configuration of the foregoing components, the CPU **301** may be configured to implement the speech processing operations described above with respect to FIG. 1, FIG. 2A and FIG. 2B. Specifically, the voice segment detection module **304** may include instructions that, upon execution, cause the processing unit **301** to extract first and second voice segments from digital signals derived from the microphones **322A**, **322B** and corresponding to a voice sound originating from a common source. The source location estimation module **305** may include instructions that, upon execution, cause the processing unit **301** produce an estimated source location based on a relative energy of the first and second voice segments and/or a correlation of the first and second voice segments. The decision module **306** may include instructions that, upon execution, cause the processing unit **301** to determine whether the first voice

segment is desired or undesired based on the estimated source location.

The voice recognizer **307** module may include a speech conversion unit configured to cause the processing unit **301** to convert a voice segment into a set of input phonemes. The voice recognizer **307** may be further configured to compare the set of input phonemes to one or more entries in the GnD **308** and trigger the application **303** to execute a change of state corresponding to an entry in the GnD that matches the set of input phonemes.

The apparatus **300** may include a network interface **325** to facilitate communication via an electronic communications network **327**. The network interface **325** may be configured to implement wired or wireless communication over local area networks and wide area networks such as the Internet. The system **300** may send and receive data and/or requests for files via one or more message packets **326** over the network **327**.

The apparatus **300** may further comprise a graphics subsystem **330**, which may include a graphics processing unit (GPU) **335** and graphics memory **337**. The graphics memory **337** may include a display memory (e.g., a frame buffer) used for storing pixel data for each pixel of an output image. The graphics memory **337** may be integrated in the same device as the GPU **335**, connected as a separate device with GPU **335**, and/or implemented within the memory unit **302**. Pixel data may be provided to the graphics memory **337** directly from the processing unit **301**. In some embodiments, the graphics unit may receive a video signal data extracted from a digital broadcast signal decoded by a decoder (not shown). Alternatively, the processing unit **301** may provide the GPU **335** with data and/or instructions defining the desired output images, from which the GPU **335** may generate the pixel data of one or more output images. The data and/or

instructions defining the desired output images may be stored in memory **302** and/or graphics memory **337**. In an embodiment, the GPU **335** may be configured (e.g., by suitable programming or hardware configuration) with 3D rendering capabilities for generating pixel data for output images from instructions and data defining the geometry, lighting, shading, texturing, motion, and/or camera parameters for a scene. The GPU **335** may further include one or more programmable execution units capable of executing shader programs.

The graphics subsystem **330** may periodically output pixel data for an image from the graphics memory **337** to be displayed on a video display device **340**. The video display device **350** may be any device capable of displaying visual information in response to a signal from the apparatus **300**, including CRT, LCD, plasma, and OLED displays that can display text, numerals, graphical symbols or images. The digital broadcast receiving device **300** may provide the display device **340** with a display driving signal in analog or digital form, depending on the type of display device. In addition, the display **340** may be complemented by one or more audio speakers that produce audible or otherwise detectable sounds. To facilitate generation of such sounds, the apparatus **300** may further include an audio processor **350** adapted to generate analog or digital audio output from instructions and/or data provided by the processing unit **301**, memory unit **302**, and/or storage **316**. The audio output may be converted to audible sounds, e.g., by a speaker **355**.

The components of the apparatus **300**, including the processing unit **301**, memory **302**, support functions **311**, data storage **316**, user input devices **320**, network interface **325**, graphics subsystem **330** and audio processor **350** may be operably connected to each other via one or more data buses **360**. These components may be implemented in hardware,

software or firmware or some combination of two or more of these.

Embodiments of the present invention are usable with applications or systems that utilize a camera, which may be a depth camera, sometimes also known as a 3D camera or zed camera. By way of example, and not by way of limitation, the apparatus **300** may optionally include a camera **324**, which may be a depth camera, which, like the microphones **322A**, **322B**, may be coupled to the data bus via the I/O functions.

10 The main application **303** may analyze images obtained with the camera to determine information relating to the location of persons or objects within a field of view **FOV** of the camera **324**. The location information can include a depth **z** of such persons or objects. The main application **304** may use the location information in conjunction with speech

15 processing as described above to obtain inputs.

According to another embodiment, instructions for carrying out speech recognition processing as described above may be stored in a computer readable storage medium. By way of example, and not by way of limitation, FIG. 4 illustrates an example of a computer-readable storage medium **400**. The storage medium contains computer-readable instructions stored in a format that can be retrieved interpreted by a computer processing device. By way of example, and not by way of limitation, the computer-readable storage medium **400** may be a computer-readable memory, such as random access memory (RAM) or read only memory (ROM), a computer readable storage disk for a fixed disk drive (e.g., a hard disk drive), or a removable disk drive. In addition, the

20 computer-readable storage medium **400** may be a flash memory device, a computer-readable tape, a CD-ROM, a DVD-ROM, a Blu-ray, HD-DVD, UMD, or other optical storage medium.

The storage medium **400** contains voice discrimination instructions **401** including one or more voice segment

instructions **402**, one or more source location estimation instructions **403** and one or more decision instructions **404**. The voice segment instructions **402** may be configured such that, when executed by a computer processing device, they
5 cause the device to extract first and second voice segments from digital signals derived from first and second microphone signals and corresponding to a voice sound originating from a common source. The instructions **403** may be configured such that, when executed, they cause the
10 device to produce an estimated source location based on a relative energy of the first and second voice segments and/or a correlation of the first and second voice segments. The decision instructions **404** may include instructions that, upon execution, cause the processing device to determine
15 whether the first voice segment is desired or undesired based on the estimated source location. The decision instructions may trigger a change of state of the processing device based on whether the first voice segment is desired or undesired.

20 The storage medium may optionally include voice recognition instructions **405** and a GnD **406** configured such that, when executed, the voice recognition instructions **405** cause the device to convert a voice segment into a set of input phonemes, compare the set of input phonemes to one or more
25 entries in the GnD **406** and trigger the device to execute a change of state corresponding to an entry in the GnD that matches the set of input phonemes.

The storage medium **400** may also optionally include one or more image analysis instructions **407**, which may be
30 configured to operate in conjunction with source location estimation instructions **403**. By way of example, the image analysis instructions **407** may be configured to cause the device to analyze an image from a video camera and the location estimation instructions **403** may determine from an

estimated direction and an analysis of the image whether a source of sound is within a field of view of the video camera.

Embodiments of the present invention provide a complete
5 system and method to automatically determine whether a voice signal is originating from a desired source. Embodiments of the present invention have been used to implement a voice recognition that is memory and computation efficient as well as robust. Implementation has been done for the PS3
10 Bluetooth headset, the PS3EYE video camera SingStar microphones and SingStar wireless microphones.

While the above is a complete description of the preferred embodiment of the present invention, it is possible to use various alternatives, modifications and equivalents.
15 Therefore, the scope of the present invention should be determined not with reference to the above description but should, instead, be determined with reference to the appended claims, along with their full scope of equivalents. Any feature described herein, whether preferred or not, may
20 be combined with any other feature described herein, whether preferred or not. In the claims that follow, the indefinite article "A", or "An" refers to a quantity of one or more of the item following the article, except where expressly stated otherwise. The appended claims are not to be
25 interpreted as including means-plus-function limitations, unless such a limitation is explicitly recited in a given claim using the phrase "means for".

WHAT IS CLAIMED IS:

- 1 1. A computer speech processing system, comprising:
2 one or more voice segment detection modules configured to
3 extract first and second voice segments from first and
4 second microphone signals originating from first and
5 second microphones, wherein the first and second voice
6 segments correspond to a voice sound originating from a
7 common source;
8 a source location estimation module configured to produce
9 an estimated source location based on a relative energy
10 of the first and second voice segments and/or a
11 correlation of the first and second voice segments; and
12 a decision module configured to determine whether the
13 voice segment is desired or undesired based on the
14 estimated source location.
- 1 2. The system of claim 1, further comprising:
2 a speech recognition module coupled to the decision
3 module, wherein the speech recognition module configured
4 to convert the first voice segment into a group of input
5 phonemes, compare the group of phonemes to one or more
6 entries in a database stored in a memory, and trigger a
7 change of state of the system corresponding to a database
8 entry that matches the group of input phonemes.
- 1 3. The system of claim 2 wherein the decision module is
2 further configured to enable processing of a desired
3 voice segment by the speech recognition module and
4 disable processing of an undesired speech segment by the
5 speech recognition module.
- 1 4. The system of claim 1 wherein the source location
2 estimation module is configured to generate an estimated
3 distance to the source from the relative energy of the
4 first and second voice segments.

- 1 5. The system of claim 4, wherein the decision module is
2 configured to determine whether the first voice segment
3 is desired or undesired based on the estimated distance.
- 1 6. The system of claim 4, wherein the source location
2 estimation module is further configured to generate an
3 estimated direction to the common source from on a
4 correlation of the first and second voice segments.
- 1 7. The system of claim 6, wherein the decision module is
2 configured to determine whether the first voice segment
3 is desired or undesired based on the estimated distance
4 and the estimated direction.
- 1 8. The system of claim 6, wherein the first microphone
2 signal is from a near-field microphone and the second
3 signal is from a far-field microphone.
- 1 9. The system of claim 6, wherein the decision module is
2 configured to analyze an image from a video camera and
3 determine from the estimated direction and an analysis of
4 the image whether the common source is within a field of
5 view of the video camera.
- 1 10. The system of claim 9, wherein the video camera is a
2 depth camera and the estimation module is configured to
3 analyze one or more images from the depth camera to
4 determine the estimated distance.
- 1 11. The system of claim 1 wherein the first and second
2 microphones are synchronized to a common clock.
- 1 12. In a computer voice processing system having a
2 processing unit and a memory unit, and first and second
3 microphones coupled to the processing unit a computer
4 implemented method for voice recognition, the method
5 comprising:
6 a) extracting first and second voice segments from first

7 and second microphone signals originating from the first
8 and second microphones, wherein the first and second
9 voice segments correspond to a voice sound originating
10 from a common source;
11 b) producing an estimated source location based on a
12 relative energy of the first and second voice segments
13 and/or a correlation of the first and second voice
14 segments; and
15 c) determining whether the first voice segment is desired
16 or undesired based on the estimated source location.

1 13. The method of claim 12, further comprising:

2 d) changing a state of the system based on whether the
3 first voice segment is desired or undesired.

1 14. The method of claim 13, wherein d) comprises:

2 e) converting the first voice segment into a group of
3 input phonemes;
4 f) comparing the group of phonemes to one or more entries
5 in the database; and
6 g) executing a command corresponding to an entry that
7 matches the group of input phonemes.

1 15. The method of claim 12, wherein b) includes generating
2 an estimated distance to the common source from the
3 relative energy of the common voice segment from the
4 first and second microphone signals.

1 16. The method of claim 15, wherein c) includes determining
2 whether the voice segment is desired or undesired based
3 on the estimated distance.

1 17. The method of claim 16, wherein b) includes generating
2 an estimated direction to the source from on a
3 correlation of the common voice segment from the first
4 and second microphone signals.

- 1 18. The method of claim 17, wherein c) includes determining
2 whether the voice segment is desired or undesired based
3 on the estimated distance and the estimated direction.
- 1 19. The method of claim 17, wherein the first microphone
2 signal is from a near-field microphone and the second
3 signal is from a far-field microphone.
- 1 20. The method of claim 17, wherein c) includes analyzing
2 an image from a video camera and determining from the
3 estimated direction and an analysis of the image whether
4 the source of sound is within a field of view of the
5 video camera.
- 1 21. The method of claim 20, wherein the video camera is a
2 depth camera and the estimated distance is determined by
3 analyzing one or more images from the depth camera.
- 1 22. The method of claim 12 wherein the first and second
2 microphones are synchronized to a common clock.
- 1 23. A computer apparatus for implementing computer voice
2 recognition, the apparatus comprising:
3 a) means for extracting first and second voice segments
4 from first and second microphone signals originating from
5 the first and second microphones, wherein the first and
6 second voice segments correspond to a voice sound
7 originating from a common source;
8 b) means for producing an estimated source location based
9 on a relative energy of the first and second voice
10 segments and/or a correlation of the first and second
11 voice segments; and
12 c) means for determining whether the first voice segment
13 is desired or undesired based on the estimated source
14 location.
- 1 24. A computer readable storage medium, having embodied
2 therein computer readable instructions executable by a

3 computer speech processing apparatus having a processing
4 unit and a memory unit, the computer readable
5 instructions being configured to implement a speech
6 processing method upon execution by the processor, the
7 method comprising:
8 a) extracting first and second voice segments from first
9 and second microphone signals originating from the first
10 and second microphones, wherein the first and second
11 voice segments correspond to a voice sound originating
12 from a common source;
13 b) producing an estimated source location based on a
14 relative energy of the first and second voice segments
15 and/or a correlation of the first and second voice
16 segments; and
17 c) determining whether the first voice segment is desired
18 or undesired based on the estimated source location.

1/7

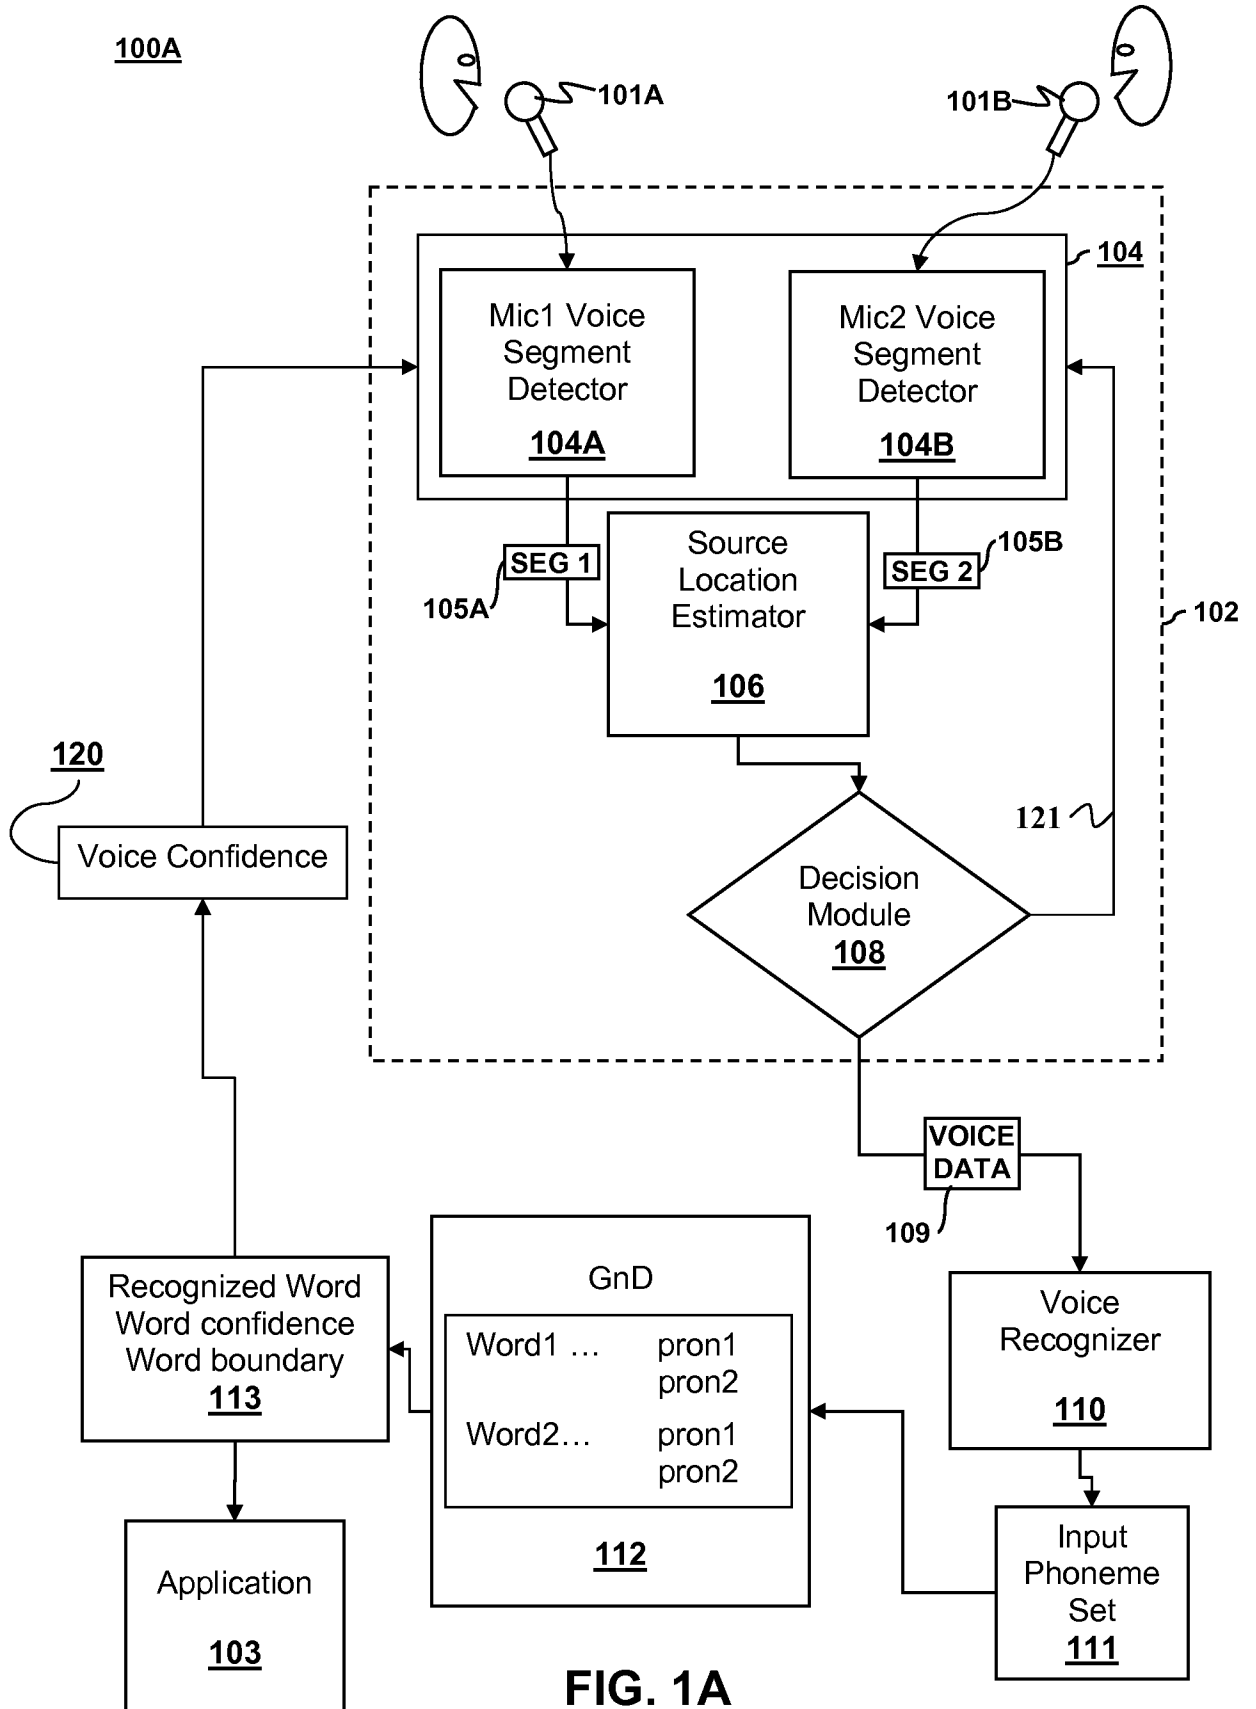


FIG. 1A

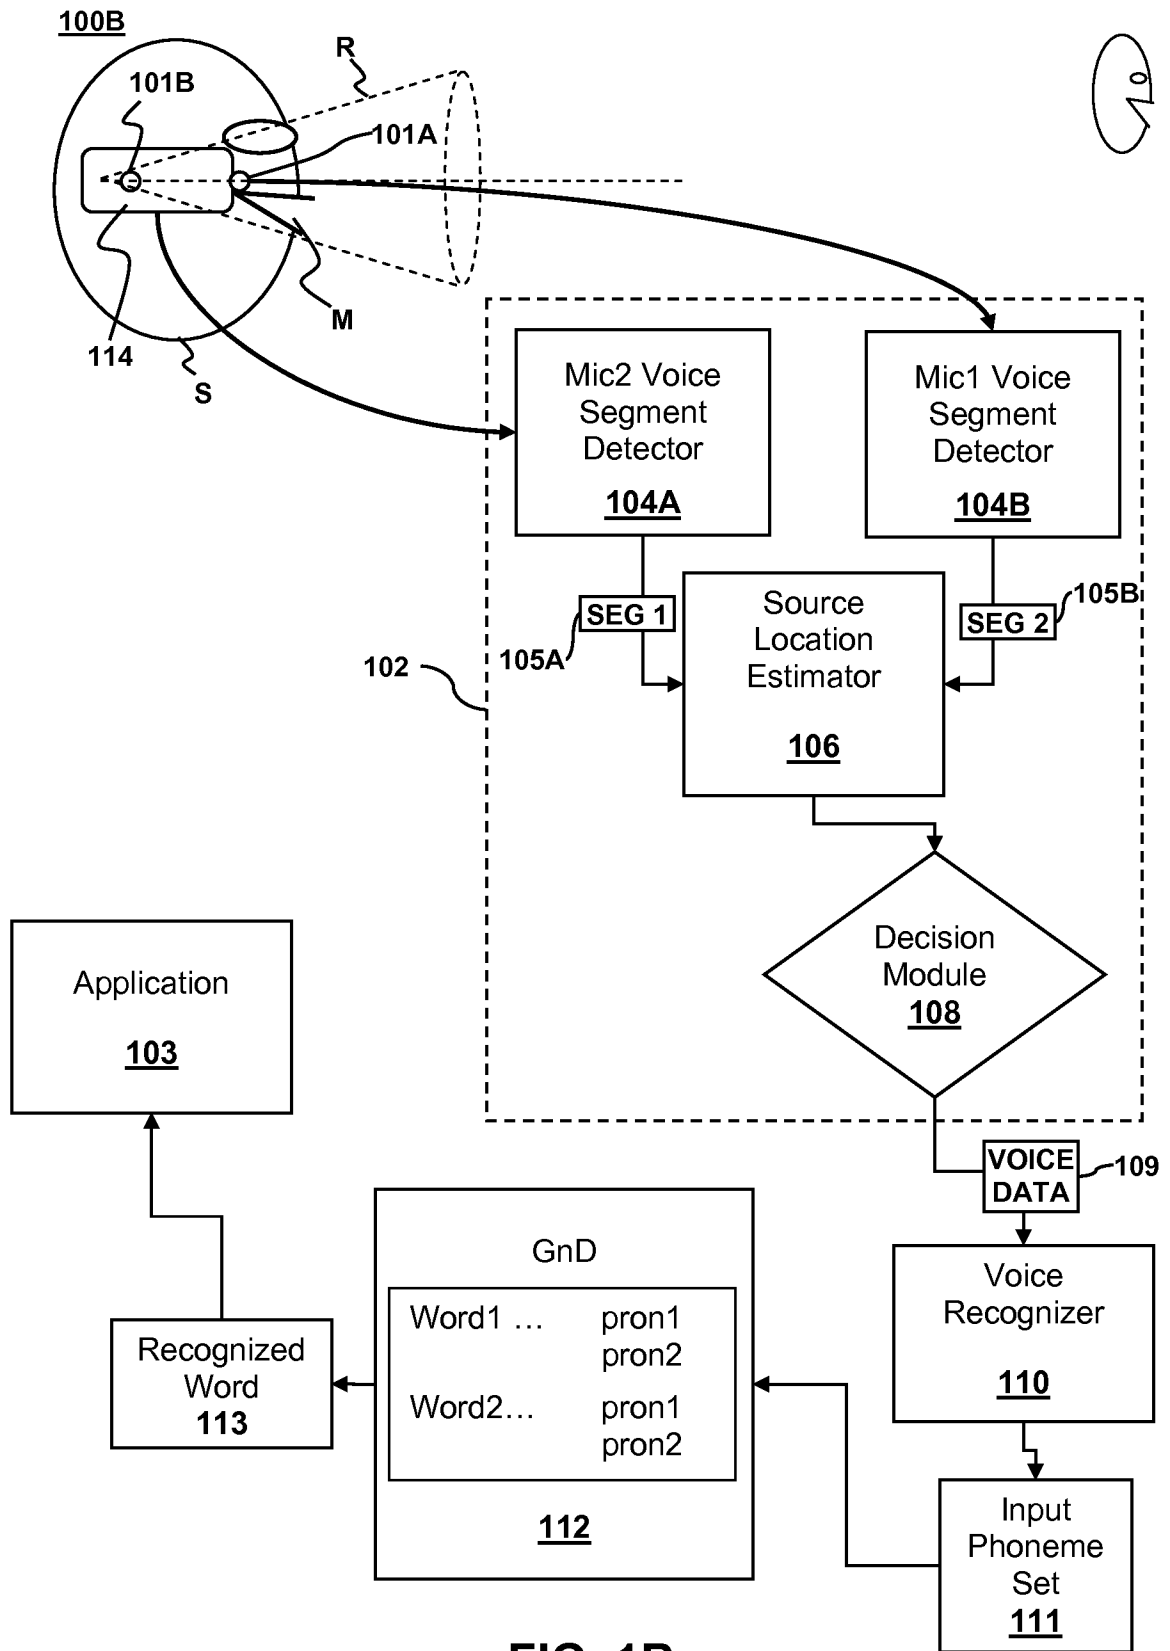


FIG. 1B

3/7

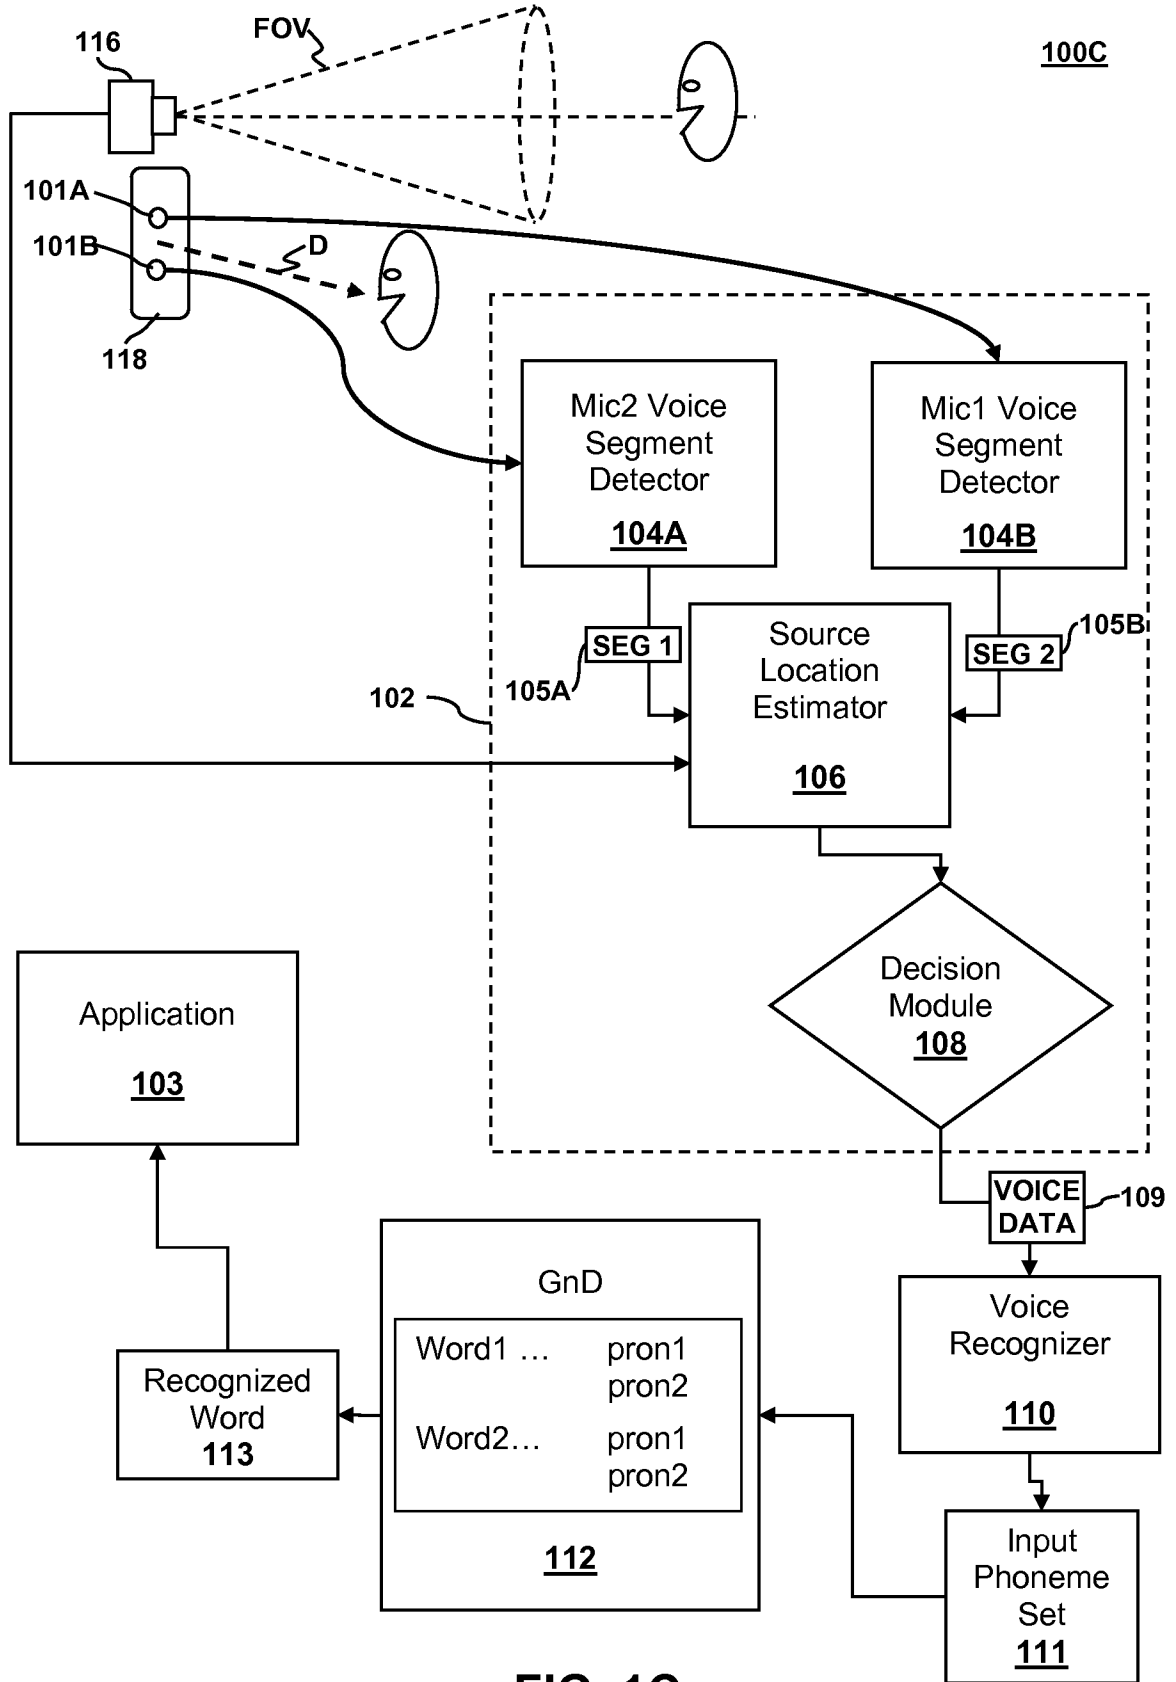


FIG. 1C

200

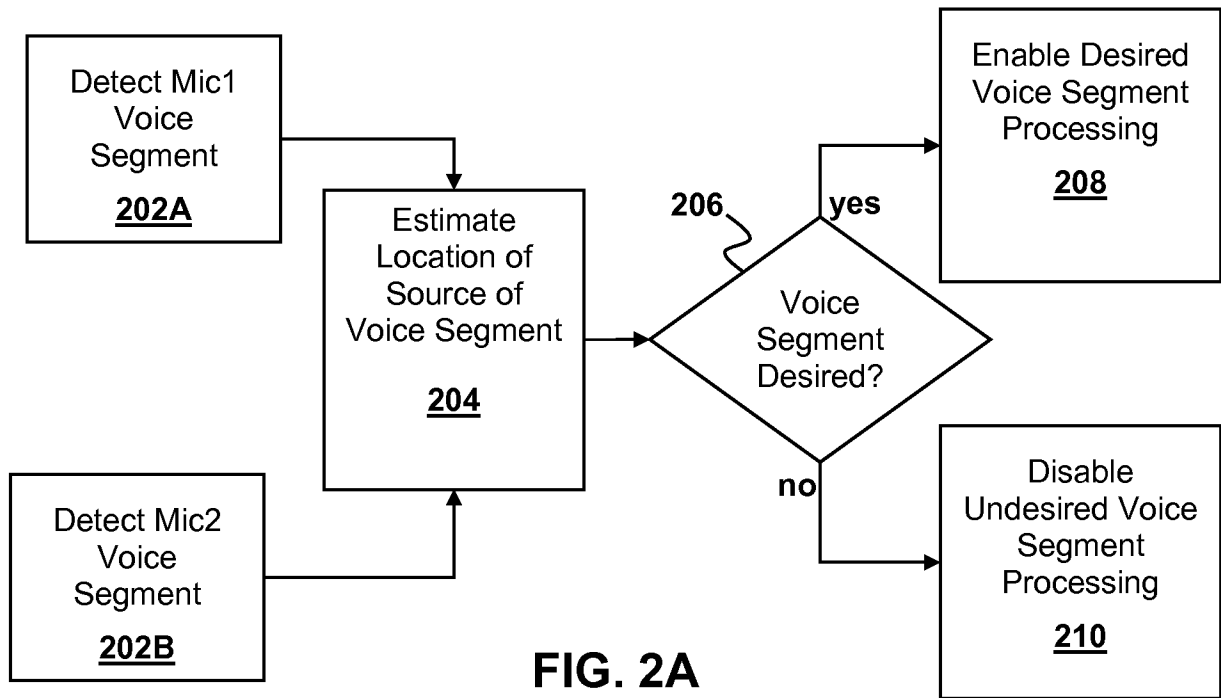


FIG. 2A

5/7

```
int mc1 = max_c>=c1 && (max_cor>r1 || c1c2>cc0 && max_cor>r2);
int mc2 = max_c>=0 && max_c<c1 && (1.0f*max_c - max_cor < r3) &&
(max_cor>rr3 || max_c>=1 && c1c2>cc1 || max_c==0 && c1c2>cc2);
    if (mc1 || mc2) {
        rcr->location.distance = 5;
    } else {
        rcr->location.distance = 20;
    }
```

FIG. 2B

© 2009 SONY COMPUTER ENTERTAINMENT INC.

```
if (max_c> mic_c) max_c = mic_c;
if (max_c<-mic_c) max_c = -mic_c;
direction =
acosf((float)max_c/mic_c)*90/1.5708;
```

FIG. 2C

© 2009 SONY COMPUTER ENTERTAINMENT INC.

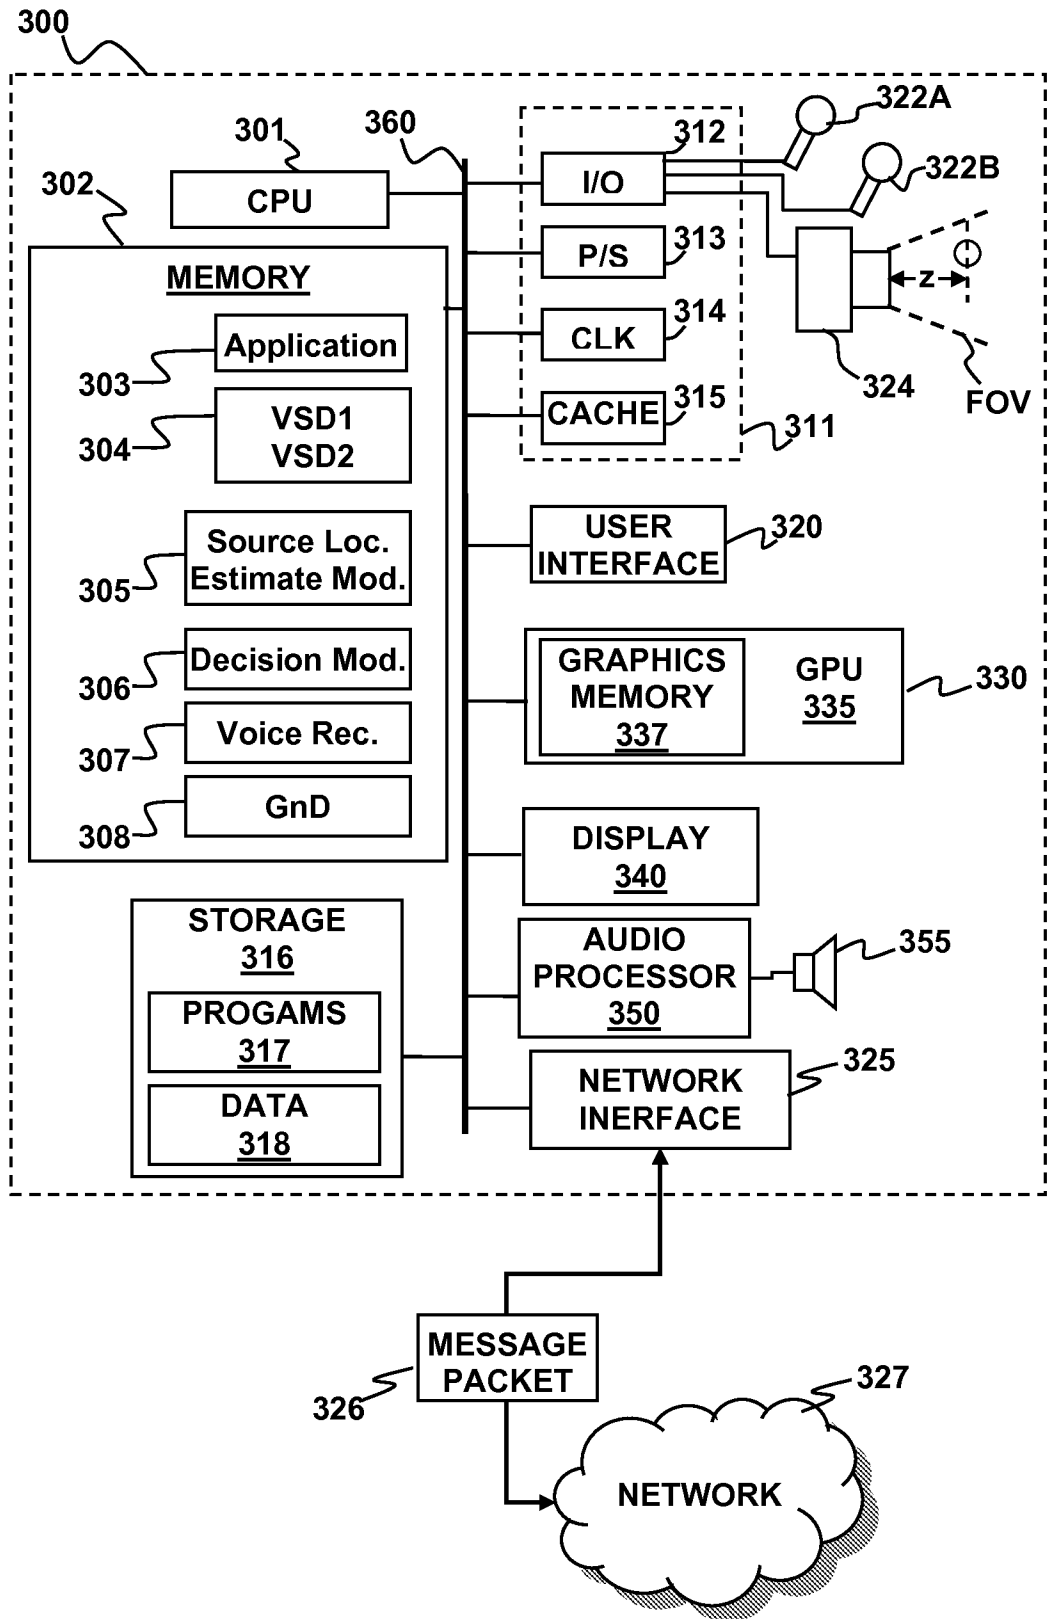


FIG. 3

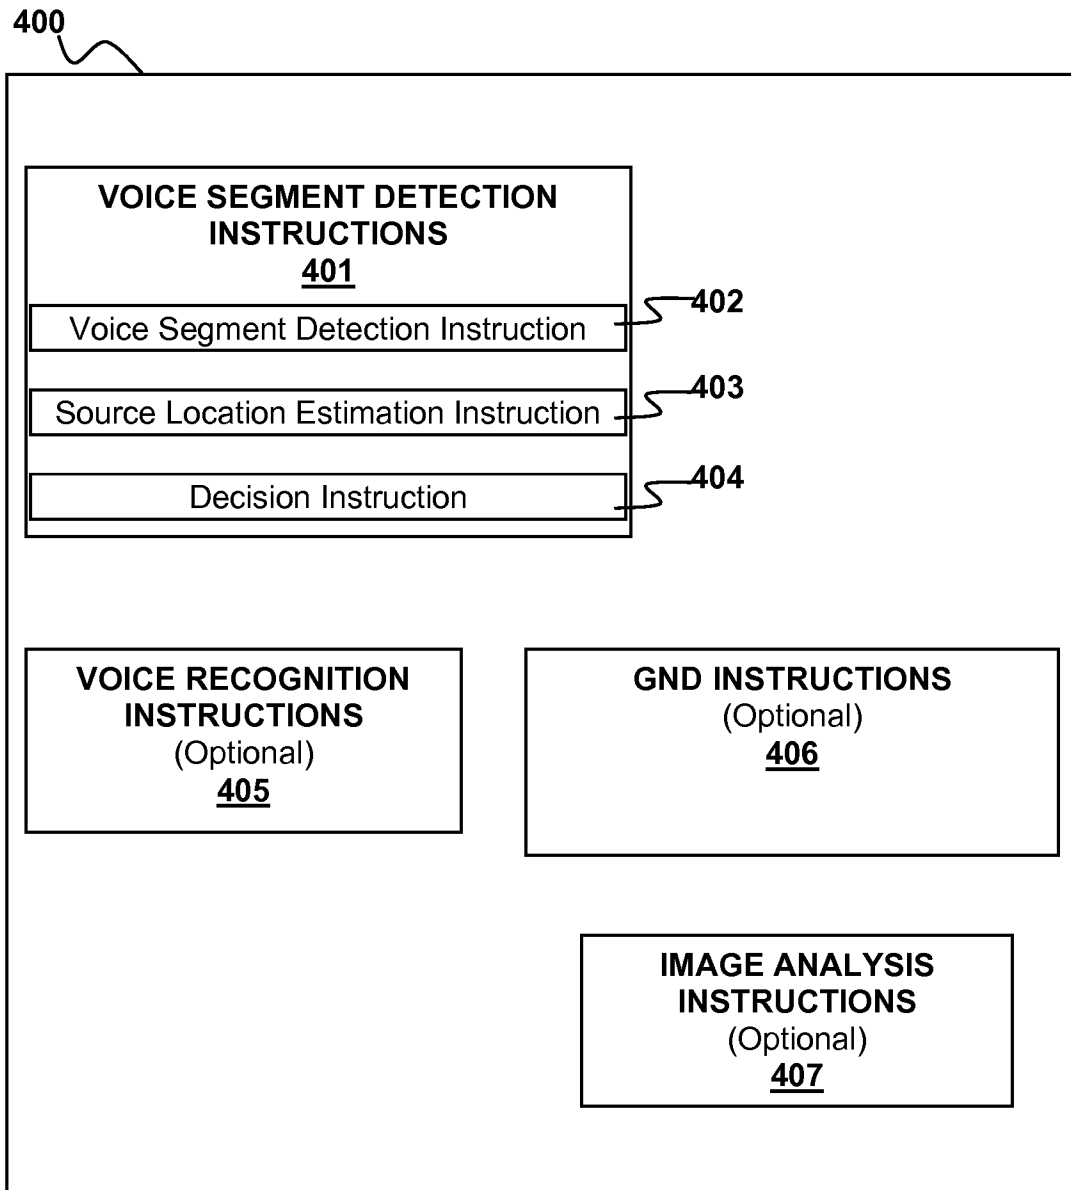


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US 10/23098

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - H04R 3/00 (2010.01)

USPC - 381/92

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - H04R 3/00 (2010.01)

USPC - 381/92

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
USPC: 381/91, 92, 122, 150; 348/14.01, 14.16, 15, 116, 140, 169, 211.9, 211.12; 704/270, 275 (Keyword limited - search terms below)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PubWEST (PGPB, USPT, EPAB, JPAB); Google Scholar

Search Terms Used: speech recognition analysis location estimate microphones distance direction phoneme database camera video field of view computer command unwanted filter

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6,593,956 B1 (POTTS et al.), 15 July 2003 (15.07.2003), entire document, especially	1, 4-7, 9-13, 15-18, 20-24
-	Abstract; Fig.13; col 2, ln 40-45; col 3, ln 3-10, 23-43, 56-64; col 3 ln 56 to col 4, ln 23; col 18, ln	
Y	3-24; col 19, ln 53-65; col 22, ln 46 to col 23, ln 8	2, 3, 8, 14, 19
Y	US 2002/0116196 A1 (TRAN), 22 August 2002 (22.08.2002), entire document, especially	2, 3, 8, 14, 19
	Abstract; Figs.7, 25; para [0011], [0053]-[0054], [0082], [0150]-[0151], [0167]	
A	US 2003/0177006 A1 (CHIKAWA et al.), 18 September 2003 (18.09.2003), entire document,	1 - 24
	especially para [0002], [0035]-[0039], [0077], [0085], [0117], [0221]	
A	US 2003/0033145 A1 (PETRUSHIN), 13 February 2003 (13.02.2003), entire document	1 - 24

Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

16 March 2010 (16.03.2010)

Date of mailing of the international search report

19 MAR 2010

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774