



US009986602B2

(12) **United States Patent**  
**Chen et al.**

(10) **Patent No.:** **US 9,986,602 B2**  
(45) **Date of Patent:** **May 29, 2018**

(54) **ENCLOSURE FOR HEATING THREE DIMENSIONAL STRUCTURE**

(58) **Field of Classification Search**  
CPC .... H05B 6/105; H05B 6/40; H05B 2206/023; B29C 35/0805; B29C 2035/0816; B29C 35/0227; B29C 2035/0811; B29C 70/44  
USPC ..... 425/174.8 R; 264/486, 487, 314, 315  
See application file for complete search history.

(71) Applicant: **The Boeing Company**, Chicago, IL (US)

(72) Inventors: **Cameron Kai-Ming Chen**, Seattle, WA (US); **Robert James Miller**, Seattle, WA (US); **Marc Rollo Matsen**, Seattle, WA (US); **Leah Gillian Glauber**, Seattle, WA (US); **James M. Kestner**, Seattle, WA (US); **Christopher John Hottes**, Seattle, WA (US); **Wendi Lynn Pickett Otto**, Everett, WA (US)

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,946,349	A	3/1976	Haldeman, III	
4,366,356	A	12/1982	Ando	
5,313,037	A	5/1994	Hansen et al.	
6,528,771	B1	3/2003	Matsen et al.	
6,747,253	B1 *	6/2004	Firth	H05B 6/105
				219/634
6,824,724	B2 *	11/2004	Mori	B29D 30/0601
				264/315
6,884,975	B2	4/2005	Matsen et al.	

(Continued)

FOREIGN PATENT DOCUMENTS

WO WO 2014020342 A2 \* 2/2014 ..... B29C 70/46  
*Primary Examiner* — Nahida Sultana  
(74) *Attorney, Agent, or Firm* — McDonnell Boehnen Hulbert & Berghoff LLP

(73) Assignee: **The Boeing Company**, Chicago, IL (US)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 445 days.

(57) **ABSTRACT**

An enclosure for heating a three dimensional structure. The enclosure comprising a body defining a cavity therein. The cavity sized to receive a three dimensional structure. A plurality of heating blankets configured to heat the three dimensional structure to a substantially uniform temperature. At least one of the plurality of heating blankets comprises a conductor for receiving current and generating a magnetic field in response thereto, a first susceptor wire comprising an alloy having a first Curie temperature point and a second susceptor wire. The second susceptor wire comprising a second Curie temperature point that is different than the first Curie temperature point of the first susceptor wire.

(21) Appl. No.: **14/640,234**

(22) Filed: **Mar. 6, 2015**


(65) **Prior Publication Data**

US 2016/0257034 A1 Sep. 8, 2016

(51) **Int. Cl.**  
**B29C 35/02** (2006.01)  
**H05B 6/10** (2006.01)  
**B29C 35/00** (2006.01)  
**H05B 6/40** (2006.01)  
**B29C 35/08** (2006.01)

(52) **U.S. Cl.**  
CPC ..... **H05B 6/105** (2013.01); **B29C 35/0805** (2013.01); **H05B 6/40** (2013.01); **B29C 2035/0811** (2013.01); **B29C 2035/0816** (2013.01); **H05B 2206/023** (2013.01)

**18 Claims, 7 Drawing Sheets**

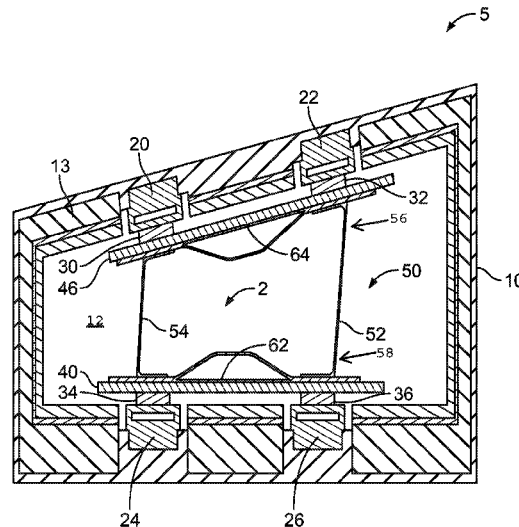

(56)

**References Cited**

U.S. PATENT DOCUMENTS

8,330,086 B2 \* 12/2012 Miller ..... B29C 73/30  
156/272.4  
2002/0015746 A1 \* 2/2002 Mitamura ..... B29C 35/0272  
425/50  
2002/0015747 A1 \* 2/2002 Mitamura ..... B29D 30/0645  
425/50  
2002/0029842 A1 \* 3/2002 Nishida ..... B29C 35/06  
156/171  
2005/0035115 A1 \* 2/2005 Anderson ..... B29C 33/04  
219/759  
2008/0128078 A1 6/2008 May et al.  
2010/0170613 A1 \* 7/2010 Kendall ..... B29C 35/02  
156/60  
2012/0145702 A1 6/2012 Miller et al.  
2013/0134154 A1 5/2013 Matsen et al.  
2015/0013894 A1 \* 1/2015 Matsen ..... B23K 20/12  
156/272.4  
2015/0137424 A1 \* 5/2015 Lyons ..... B29C 70/44  
264/317  
2015/0217491 A1 \* 8/2015 Syvret ..... B29C 70/46  
296/180.1  
2015/0321388 A1 \* 11/2015 Jaderberg ..... B29C 43/52  
264/403  
2015/0321441 A1 \* 11/2015 Marcoe ..... B32B 1/08  
87/9  
2017/0095986 A1 \* 4/2017 Feigenblum ..... B29C 35/0805  
2017/0144337 A1 \* 5/2017 Matsen ..... B29C 43/52

\* cited by examiner

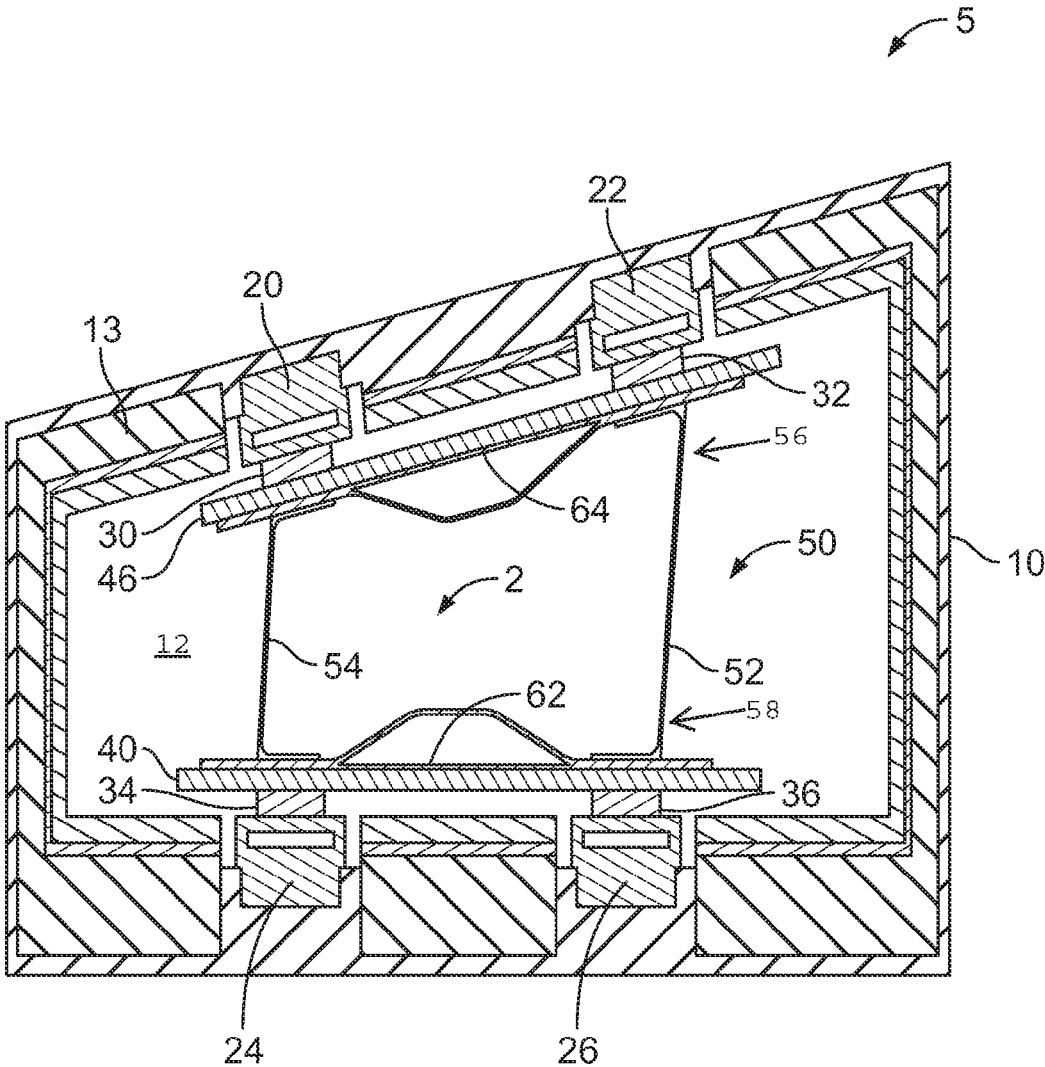


FIG. 1

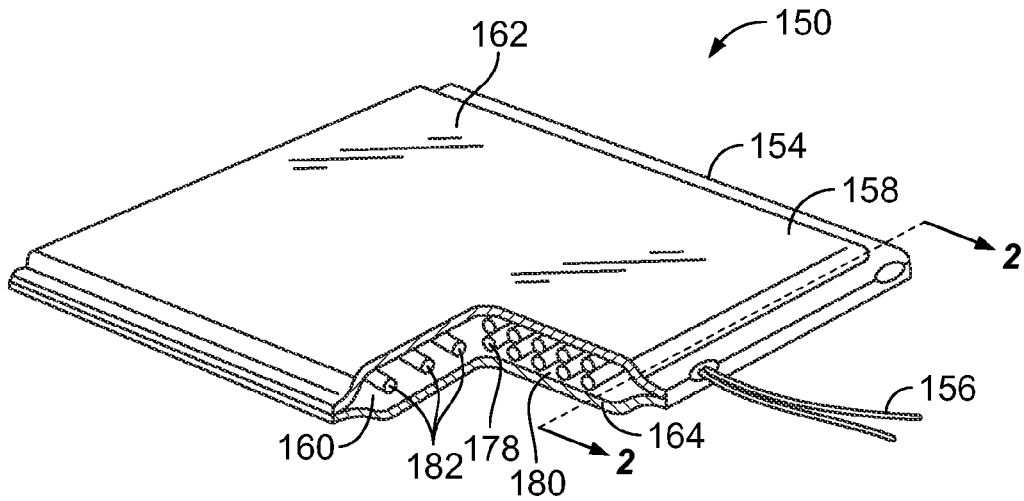


FIG. 2

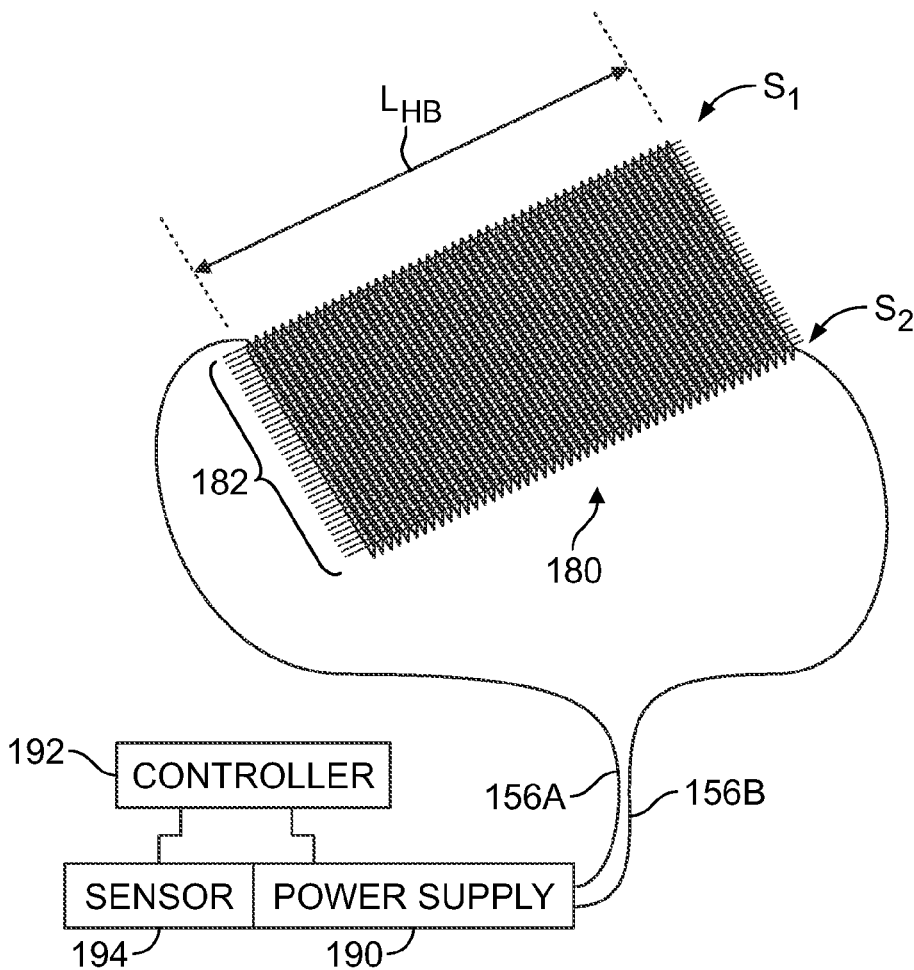


FIG. 3

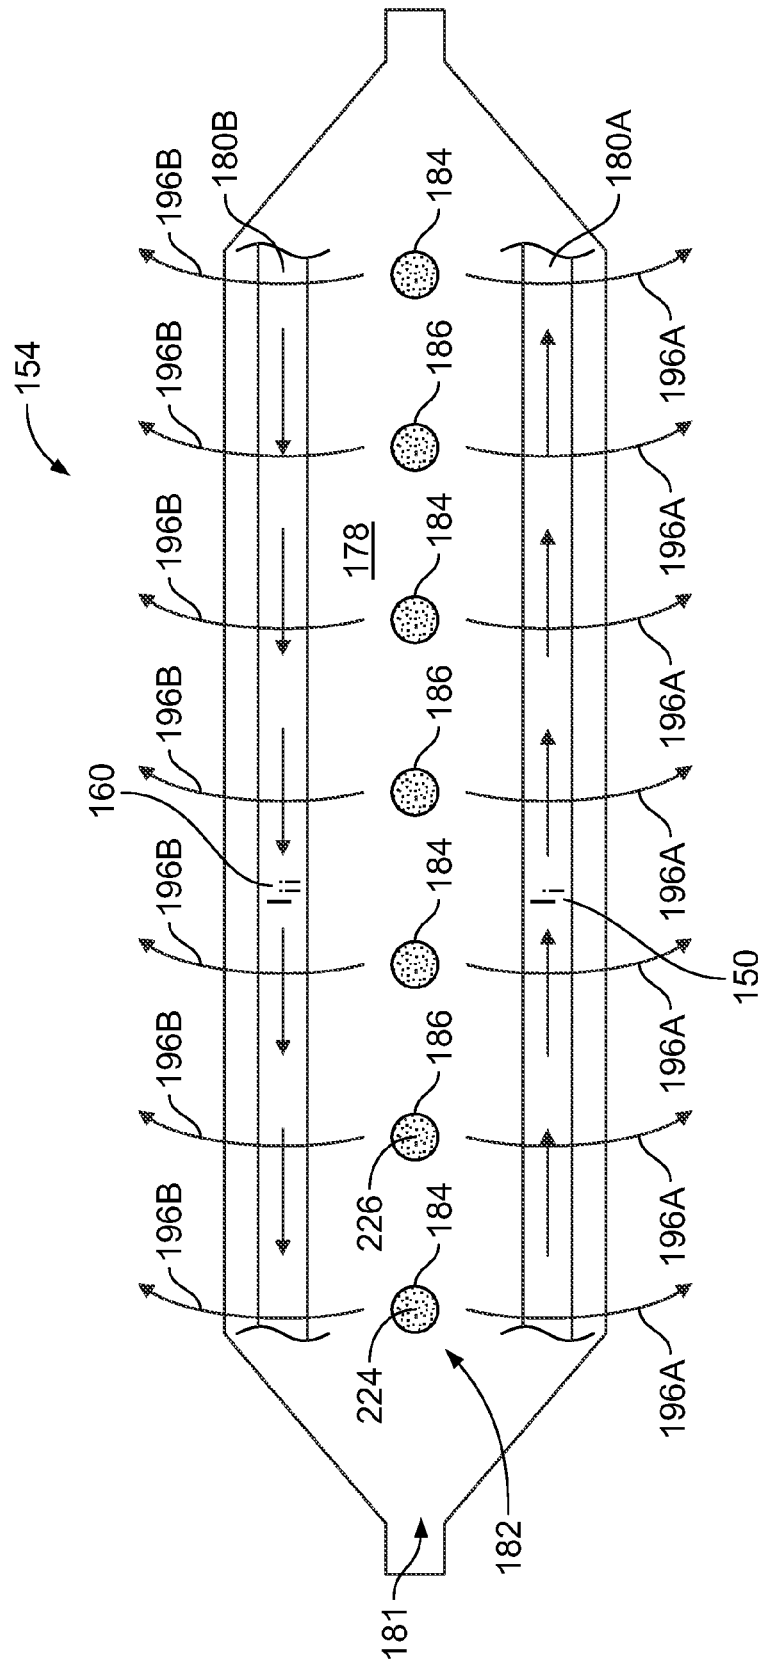


FIG. 4

Alloy 32 and Alloy 34 in a 2 to 1 concentration ratio

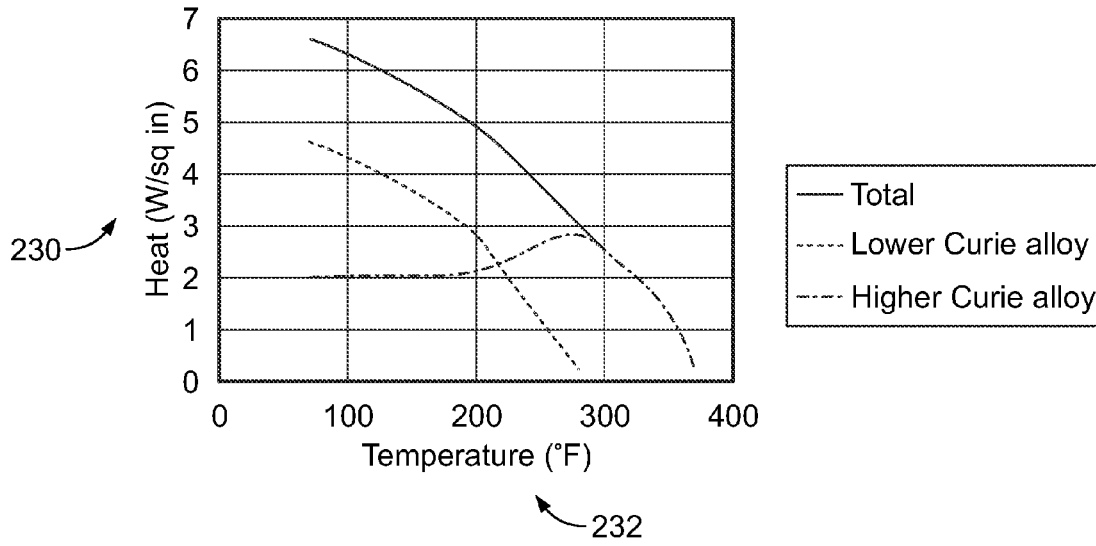


FIG. 5

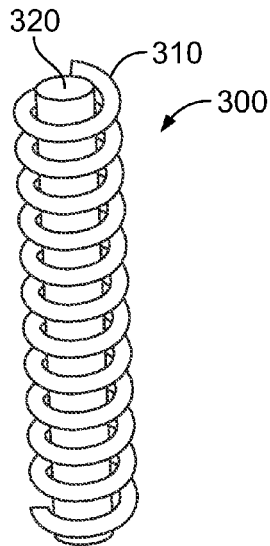


FIG. 6

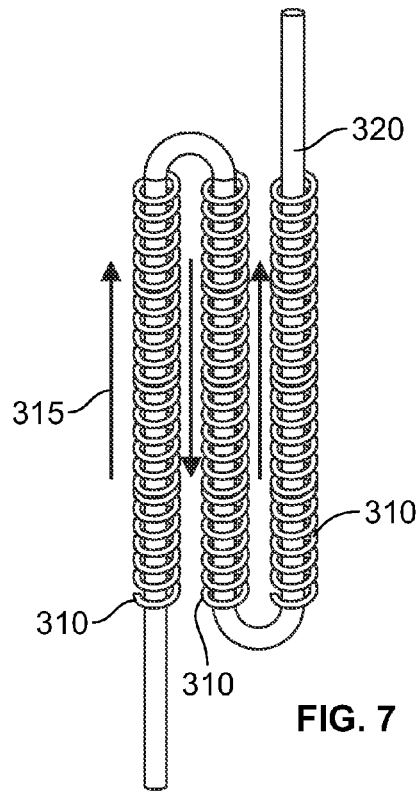


FIG. 7

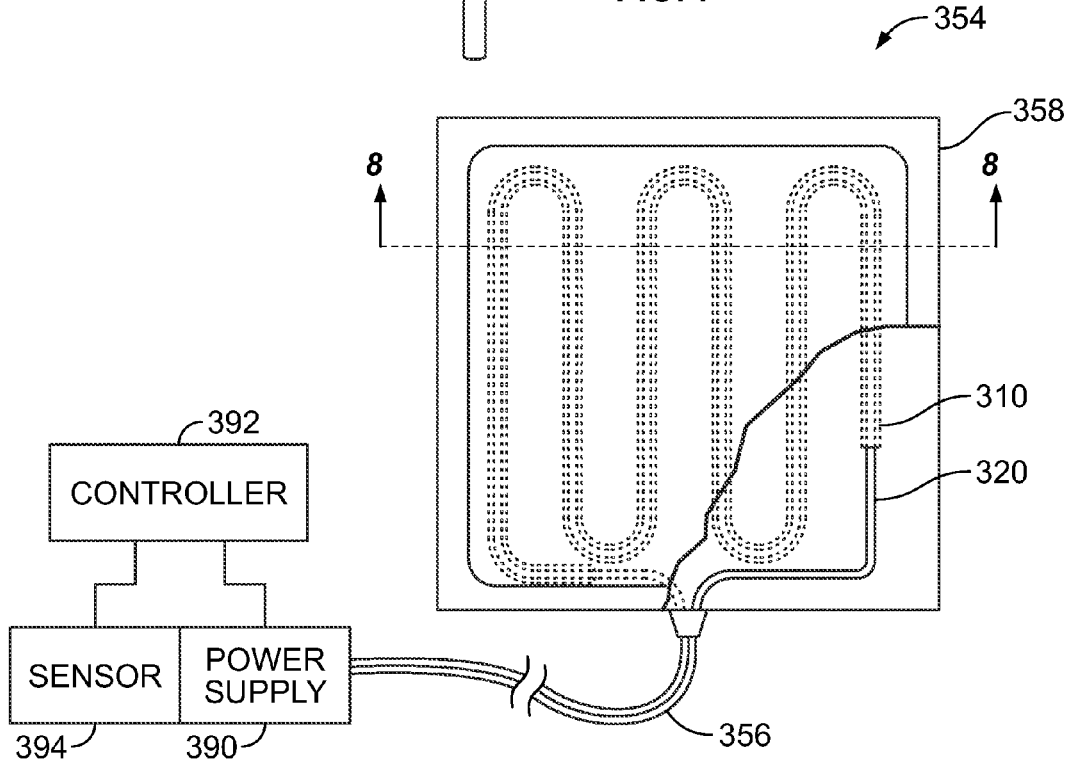


FIG. 8

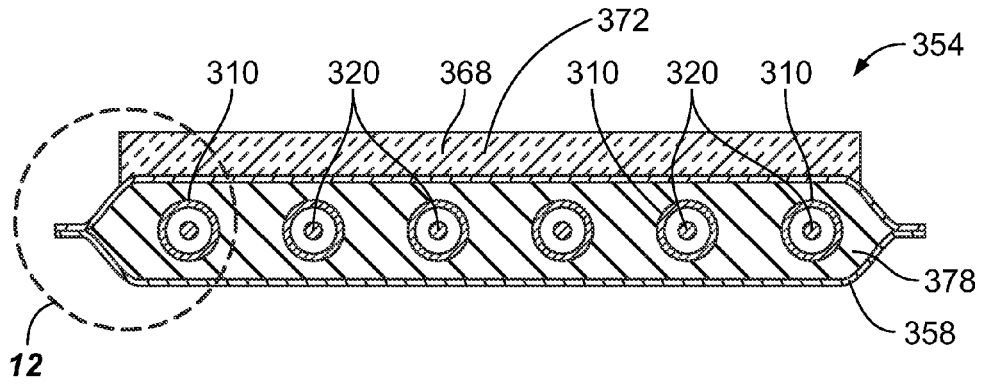


FIG. 9

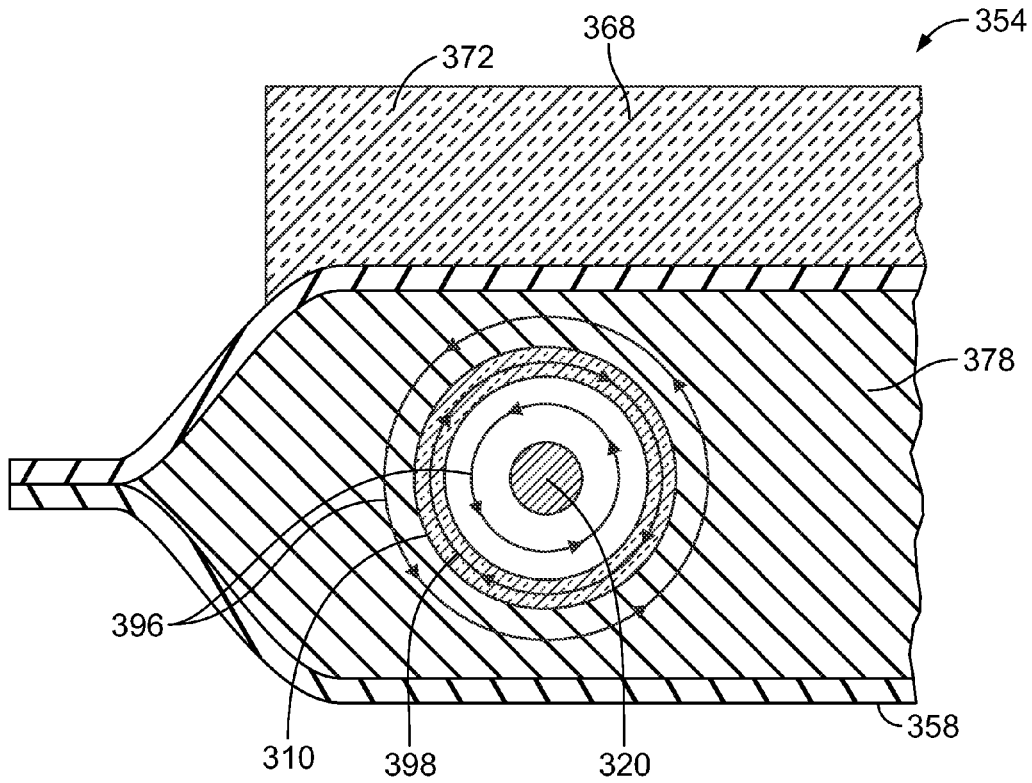


FIG. 10



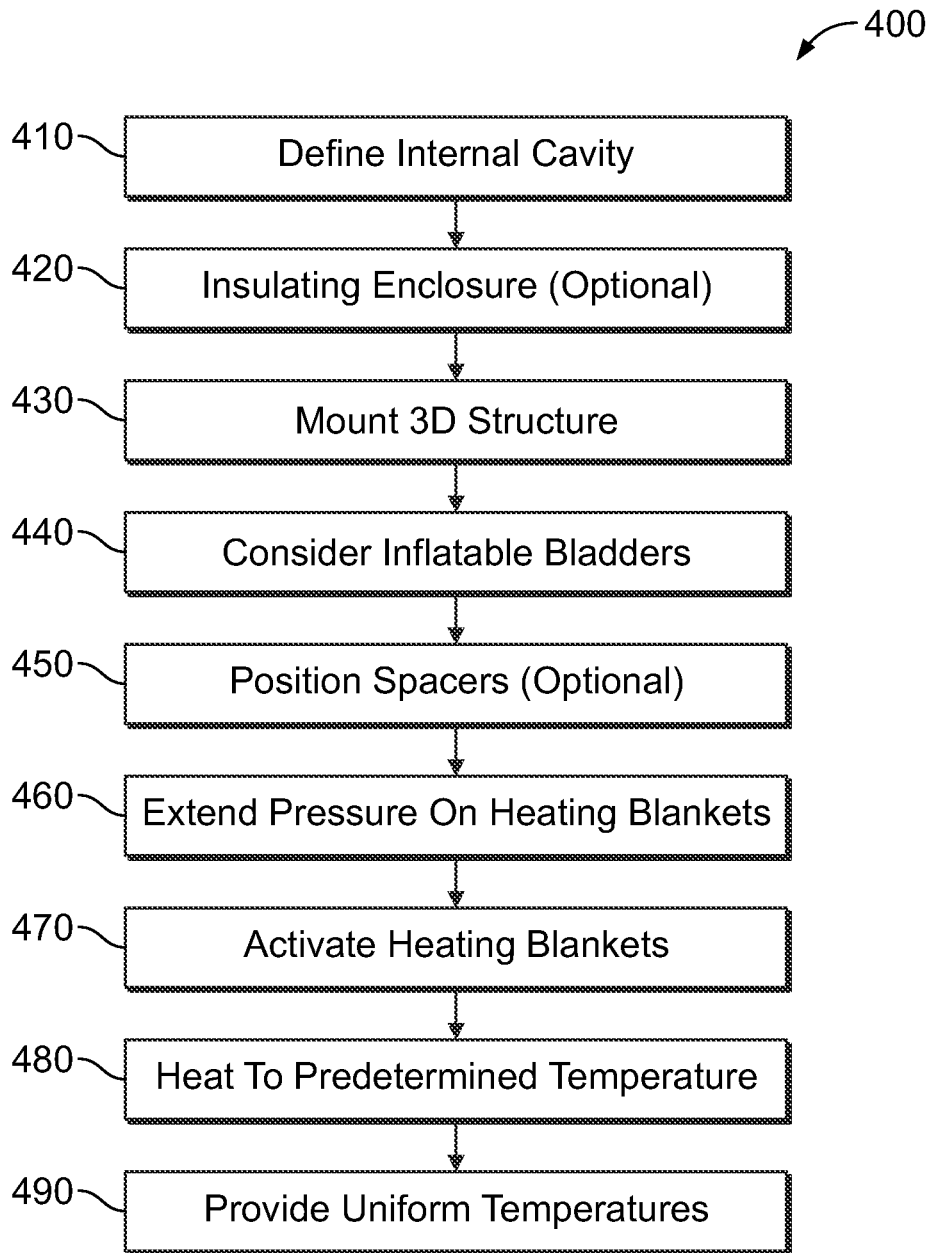


FIG. 11

1

## ENCLOSURE FOR HEATING THREE DIMENSIONAL STRUCTURE

### FIELD

The present disclosure relates generally to susceptors for use with heating blankets. More particularly, the present disclosure relates to an enclosure utilizing heating blankets to heat a three dimensional structure.

### BACKGROUND

A composite part may be bonded or cured in an oven or an autoclave where heat is applied to the part while supported on a cure tool that maintains the shape of the part during the curing process. Techniques have been developed for curing composite parts without the need for an oven or autoclave, however these techniques have been limited to curing relatively small, simple parts and/or require relatively complicated and/or expensive tooling. Out-of-autoclave processing of more complex, three-dimensional composite parts is made more challenging by the need for constant, evenly distributed heat over the entire area of the part being bonded or cured. Recently, curing of relatively small composite parts has been achieved using induction heating equipment employing susceptors that produce a maximum, constant temperature when inductively heated. For example, heating blankets using inductively heated susceptors have been used to cure relatively small areas of a composite rework patch applied to a structure such as an aircraft skin. Other attempts at using inductive heating to cure composite parts have been limited to smaller, simple geometry parts and/or involve relatively complicated tooling which may be too expensive for some applications, such as curing short-run or prototype production parts.

Accordingly, there is a need for a method and device that utilizes susceptor heating blanket technology to heat a three dimensional structure so as to create a uniform temperature around a volume contained within the enclosure without using an autoclave. There is also a need for an insulated enclosure that utilizes susceptor based heating blankets for heating a complex, three dimensional structure. For example, heating blankets can be applied to a surface of a part to assist in the bonding and curing process.

### SUMMARY

According to an exemplary arrangement, an enclosure for heating a three dimensional structure is disclosed. The enclosure comprising a body defining a cavity sized to receive a three dimensional structure. A plurality of heating blankets are configured to heat the three dimensional structure to a substantially uniform temperature. In one arrangement, at least one of the plurality of heating blankets comprises a conductor for receiving current and generating a magnetic field in response thereto, a first susceptor wire comprising an alloy having a first Curie temperature point, and a second susceptor wire. The second susceptor wire comprising a second Curie temperature point that is different than the first Curie temperature point of the first susceptor wire. In another arrangement, the plurality heating blankets are in contact with the three dimensional structure.

According to another arrangement, a method of heating a three dimensional structure is disclosed. The method includes the steps of defining an internal cavity of a body of an enclosure; mounting a three dimensional structure within the cavity of the enclosure; and configuring one or more

2

inflatable bladders to exert pressure on the three dimensional structure. The method also includes the step of utilizing one or more inflatable bladders to exert a pressure on the heating blankets so as to maintain the heating blankets against the three dimensional structure; activating the heating blankets; heating the three dimensional structure to a predetermined temperature and utilizing the heating blankets to provide a uniform temperature of the three dimensional structure. The method may also include the steps of insulating the enclosure by way of an insulation layer so as to efficiently maintain the heat generated within the enclosure. The method may also include the step of positioning one or more spacers between one or more bladders and the three dimensional structure. The method may also include the step of utilizing one or more inflatable bladders to exert a predetermined pressure on the heating blankets so as to maintain the heating blankets against the three dimensional structure; and heating the three dimensional structure to the predetermined temperature and at a desired pressure created by the one or more inflatable bladders. In one arrangement, the method includes the step of utilizing the heating blankets to provide a uniform temperature of the three dimensional structure, wherein the uniform temperature propagates into and through the structure so as to properly cure the three dimensional structure.

The features, functions, and advantages can be achieved independently in various embodiments of the present disclosure or may be combined in yet other embodiments in which further details can be seen with reference to the following description and drawings.

### BRIEF DESCRIPTION OF THE DRAWINGS

The novel features believed characteristic of the illustrative embodiments are set forth in the appended claims. The illustrative embodiments, however, as well as a preferred mode of use, further structures and descriptions thereof, will best be understood by reference to the following detailed description of an illustrative embodiment of the present disclosure when read in conjunction with the accompanying drawings, wherein:

FIG. 1 is one illustration of an enclosure for heating a three dimensional structure, the enclosure utilizing at least one heating blanket according to one aspect of the present disclosure;

FIG. 2 is a perspective illustration of a heating blanket in an embodiment as may be used for heating a three dimensional structure, the heating blanket comprising a flattened helical wire conductor positioned perpendicular to an array of susceptor wires that are positioned within the flattened helical wire conductor;

FIG. 3 is a schematic illustration of the heating blanket illustrated in FIG. 2 (with the housing and matrix removed) illustrating the helical wire conductor connected to a power supply, a controller, and a sensor, and with an linear array of susceptor wires contained within the helical wire conductor;

FIG. 4 is a cross-sectional illustration of the heating blanket taken along line 2-2 of FIG. 2 and illustrating the linear array of susceptor wires provided within the helical wire conductor for induction heating thereof in response to magnetic fields generated by an alternating current applied to the helical wire conductor;

FIG. 5 is an illustration of a plot of heat output measured over temperature for an embodiment of an exemplary array of susceptor wires;

3

FIG. 6 is an illustration of an alternative susceptor and conductor arrangement that may be used in a heating blanket, such as one or more heating blankets illustrated in FIGS. 1-3;

FIG. 7 is an illustration of an alternative heating blanket layout of the alternative susceptor and conductor arrangement illustrated in FIG. 6;

FIG. 8 is a schematic illustration of an alternative heating blanket connected to a power supply, a controller and a sensor and illustrating the susceptor and conductor arrangement illustrated in FIG. 6 housed within a housing of the heating blanket;

FIG. 9 is a cross-sectional illustration of the heating blanket taken along line 8-8 of FIG. 8 and illustrating the conductor provided with a plurality of susceptor wires spirally surrounding the conductor for induction heating thereof in response to a magnetic field generated by an alternating current applied to the conductor;

FIG. 10 is an enlarged sectional illustration of the conductor and susceptor arrangement of FIG. 9 surrounded by thermally conductive matrix and illustrating a magnetic field encircling the susceptor wires and generating an eddy current in the susceptor wires oriented in a direction opposite the direction of the magnetic field; and

FIG. 11 illustrates steps of a method for heating a three dimensional structure using the enclosure illustrated in FIG. 1.

#### DETAILED DESCRIPTION

Disclosed embodiments will now be described more fully hereinafter with reference to the accompanying drawings, in which some, but not all of the disclosed embodiments are shown. Indeed, several different embodiments may be provided and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete and will fully convey the scope of the disclosure to those skilled in the art.

FIG. 1 is one illustration of an insulated enclosure 5 for heating a three dimensional structure 50, the enclosure utilizing a heating blanket according to one aspect of the present disclosure. In this illustrated enclosure arrangement, the enclosure 5 utilizes a plurality of heating blankets, such as the heating blankets discussed and illustrated herein. Specifically, the enclosure may be used to uniformly heat and cure a three dimensional structure, such as a wing structure 50.

The insulated enclosure 5 comprises a body 10 that defines an internal cavity 12. The body 10 is preferably insulated by way of an insulation layer 13 so as to efficiently maintain the heat generated within the enclosure 5 and therefore reduce electrical consumption during the heating or curing process of the three dimensional structure 50. The heat 44 generated within the insulated enclosure 5 is generated by at least one, and preferably two susceptor based heating blankets, as described in greater detail herein. For example, in the illustrated insulated enclosure 5 illustrated in FIG. 1, two susceptor based heating blankets 40, 46 are utilized.

As illustrated, this wing structure 50 comprises two vertically extending aluminum spars 52, 54 that tend to act as heat sinks. The heating blankets 40, 46 provide a uniform temperature to bond a three dimensional structure 50 so as to properly cure the three dimensional structure 50 and avoid overheating the structure. The insulated enclosure 5 is utilized to adhesively bond these spars 52, 54 to both a

4

bottom skin portion 62 and a top skin portion 64 of the wing structure 50. Advantageously, the illustrated enclosure arrangement may utilize one or more heat blankets as herein disclosed. One advantage of such a heating enclosure 5 is that natural heat convection may be utilized to achieve proper cure, rather than requiring a controlled heated environment, such as by way of a typical autoclave. As such, the enclosure 5 does not require any type of additional external fan or external air circulation equipment to carry out such a curing process.

As illustrated, the three dimensional structure 50 is illustrated as being mounted inside the cavity 12 of the enclosure 5. To facilitate this mounting, the enclosure 5 comprises a plurality of inflatable bladders. In this illustrated arrangement, the enclosure 5 is provided with four different inflatable bladders 20, 22, 24, and 26. As illustrated, two of these inflatable bladders 20, 22 are configured to exert pressure on a top portion 56 of the three dimensional structure and two of these inflatable bladders 24, 26 exert a pressure on a bottom portion 58 of the three dimensional structure 50. In addition, various spacer elements may be provided between the various bladders and the three dimensional structure. For example, a first spacer 30 is positioned between a first bladder 20 and a first portion of the first heating blanket 46 and a second spacer 32 is positioned between a second bladder 22 and a second portion of the first heating blanket 46. Similarly, a third spacer 34 is positioned between a third bladder 24 and a first portion of the second heating blanket 40 and a fourth spacer 36 is positioned between a fourth bladder 26 and a second portion of the second heating blanket 40.

The various inflatable bladders 20, 22, 24, 26 are configured to exert a pressure on the heating blankets 40, 46 so as to maintain the heating blankets against an outside surface of the three dimensional structure, preferably at a predetermined pressure. More specifically, when bonding certain structures together, specifications require that a certain amount of force is applied to the adhesive at a certain temperature to adequately complete the curing process. In this case, the various inflatable bladders 20, 22, 24, 26 are extended from the body 10 of the enclosure 5 so as to make contact with the blankets 40, 46. The inflatable bladders 20, 22, 24, 26 press the blankets 40, 46 via the spacers 30, 32, 34, and 36 against the three dimensional structure 50 at the predetermined pressure. Spacers 30, 32, 34, and 36 positioned between the inflatable bladders 20, 22, 24, and 26 and the heating blankets 40, 46 help to ensure proper pressure is applied to the three dimensional structure 50 during the bonding process.

As will be described herein, the heating blankets 46, 40 may be activated by way of a controller, sensor, and power supply so as to heat the three dimensional structure to the predetermined temperature and at the desired pressure created by the inflatable bladders 20, 22, 24, and 26. Preferably, the insulated enclosure 5 may be used to heat a three dimensional structure 50 for bonding, curing, repair, sealants, liquid shims, etc. As the susceptor based heating blankets 40, 46 provide a uniform temperature of the three dimensional structure, the uniform temperature propagates into and through the structure.

FIG. 2 is a perspective illustration of a heating blanket 154 in an embodiment as may be used with a three dimensional structure, such as the structure illustrated in FIG. 1. The heating blanket 154 comprising a flattened helical wire conductor 180 and a linear array of susceptor wires 182. Preferably, the linear array of susceptor wires 182 are positioned within alternating conductors of the helical wire

conductor **180** of the heating blanket. More preferably, the linear array of susceptor wires **182** are arranged perpendicular to the plurality of conductor portions making up the helical wire conductor **180**. In one preferred arrangement, the flattened helical wire conductor **180** comprises a Litz wire that is wound in a flattened helical like structure (e.g., a solenoid) so as to define a plurality of alternating conductors. For example, FIG. **3** is a schematic illustration of the heating blanket **154** illustrated in FIG. **2** (with the heating blanket housing **158** and matrix **178** removed) so as to illustrate the helical wire conductor **180** connected to a power supply **190**, a controller **192**, and a sensor **194**. As illustrated, the helical wire conductor **180** comprises a unitary wire that winds back and forth between a first side  $S_1$  of the heating blanket **154** and a second side  $S_2$  of the heating blanket in a flattened helical structure, along a length  $L_{HB}$  of the heating blanket **154**. Importantly, in this illustrated arrangement of the heating blanket **154**, the linear array of susceptor wires **182** are positioned between the alternating conductors or wires making up the helical wire conductor **180** for inductive heating of the array of susceptor wires **182** in the presence of an alternating current provided by the p source **190**. The inductively heated array of susceptor wires **182** thermally conducts heat to a matrix **178** (FIG. **2**). The matrix **178** may thermally conduct heat to a structure to which the heating blanket **154** is positioned against.

Referring to FIGS. **2** and **3**, the heating blanket **154** may include a housing **158** defining an interior **160**. This interior may be formed of a suitable material which is preferably thermally conductive and which may also be flexible and/or resilient such that the heating blanket **154** may conform to curved areas to which it may be applied. In this regard, the housing **158** is preferably formed of a pliable and/or conformable material having a relatively high thermal conductivity and relatively low electrical conductivity. The housing **158** may comprise upper and lower face sheets **162**, **164** formed of silicone, rubber, polyurethane or other suitable elastomeric or flexible material that provides dimensional stability to the housing **158** while maintaining flexibility for conforming the heating blanket **154** to curved surfaces. Although shown as having a generally hollow interior **160** bounded by the upper and lower face sheets **162**, **164**, the housing **158** may comprise an arrangement wherein the conductor **180** and the associated magnetic material are integrated or embedded within the housing **158** such that the conductor **180** is encapsulated within the housing **158** to form a unitary structure **150** that is preferably flexible for conforming to curved surfaces.

FIG. **3** illustrates a perspective view of certain components of the heating blanket **154** showing the flattened helical structure of the conductor **180** and the array of susceptor wires **182** residing within this helical structure in greater detail. In one preferred arrangement, and as illustrated in FIG. **3**, the susceptor wires **182** are arranged within the helical conductor **180** such that a longitudinal axis of the array of susceptor wires **182** resides substantially perpendicular to an electrical current flowing through the helical conductor **180**. In this manner, the varying magnetic fields generated by the helical conductor **180** induce eddy currents in the array of susceptor wires **182** as will be discussed in greater detail herein.

A power supply **190** providing alternating current power may be connected to the heating blanket **154** by means of the heating blanket wiring **156 A,B**. The power supply **190** may be configured as a portable or fixed power supply which may be connected to a conventional 60 Hz, 110 volt or 220

volt, (480V or higher as necessary to deliver power to very large blankets) outlet. Although the power supply **190** may be connected to a conventional 60 Hz outlet, the frequency of the alternating current that is provided to the conductor **180** may preferably range from approximately 1,000 Hz to approximately 400,000 Hz. In some cases, the frequency of the alternating current provided to the conductor **180** may be as high as 4 MHz. The voltage provided to the conductor **180** may range from approximately 10 volts to 1,000-2,000 volts but is preferably less than approximately 450 volts. Likewise, the alternating current provided to the conductor **180** by the power supply is preferably between approximately 10 amps and approximately 1000 amps.

FIG. **4** illustrates a cross sectional view of the array of susceptor wires **182** that may be used with the heating blankets illustrated in FIGS. **1-3** taken along line **2-2** of FIG. **2**. As illustrated, the linear array of susceptor wires **182** comprises a first plurality of susceptor wires **184**, **186** arranged in at least one row **181**. In an alternative linear array arrangement, the linear array of susceptor wires **182** comprises a second plurality of susceptor s arranged in a second row.

In one preferred arrangement, at least one of the first plurality of susceptor wires within the linear array **182** comprises a magnetic material having a first Curie temperature. In addition, at least one of the plurality of susceptor wires within the linear array **182** comprises a magnetic material having a second Curie temperature, the second Curie temperature being different than the first Curie temperature of the first susceptor wire.

As illustrated in FIG. **4**, in one arrangement, the linear array of susceptor wires **182** comprises a plurality of first susceptor wires **184** and a plurality of second susceptor wires **186** within the linear array of susceptor wires **182**. Preferably, in one arrangement, the first plurality of susceptor wires **184** comprise a first Curie temperature alloy **224** and the second plurality of susceptor wires **186** comprises a second Curie temperature alloy **226** that is different from the first Curie temperature alloy of the first susceptor wire **224**.

As those of ordinary skill will recognize, alternative susceptor array **182** may also be utilized. As just one example, the linear susceptor array **188** may comprise a plurality of third susceptor wires comprising a third Curie temperature alloy. In such an arrangement, the third Curie temperature alloy may be different than the first Curie temperature alloy **224** of the first susceptor wire **184** and also different than the second Curie temperature alloy **226** of the second susceptor wire **186**.

In addition, in one exemplary linear array arrangement, the linear array **182** may comprise an equal number of the first susceptor wires **184** and the second susceptor wires **186**. In one preferred arrangement, the linear array **182** comprises an unequal number of the first susceptor wires **184** and the second susceptor wires **186**. Alternatively, where the linear array **182** further comprises a plurality of third susceptor wires, the number of these third susceptor wires may be same as, greater than or less than the number of first susceptor wires **184**. Similarly, the number of third susceptor wires may be same as, greater than or less than the number of second susceptor wires **186**. In an alternative arrangement, more of the first or second susceptor wires **184**, **186** may be provided. In addition, a diameter size of the first susceptor wires **184**, a diameter size of the second susceptor wires **186**, and a diameter size of the third susceptor wires may all be the same or may all be different. However, as those of ordinary skill in the relevant art will recognize, alternative sized susceptor wire arrangements may be pro-

vided. As just one example, the first susceptor wires **184** may comprise may comprise a 10 mil diameter, the second susceptor wires **186** may comprise 13 mil diameter, and the third susceptor wires may comprise 15 mil diameter. Of course, alternative linear arrangements comprising different wire sizes may also be used.

Increasing the number of different susceptor wire types provided within the linear susceptor array **182** can be beneficial to obtaining an enhanced temperature regulation over an even wider range of operating temperatures.

In one preferred arrangement, the first susceptor conductor **184** comprises a first Curie temperature alloy **224** and the second susceptor conductor **186** comprises a second Curie temperature alloy **228** wherein the second Curie temperature of the second susceptor conductor **186** is a lower temperature than the first Curie temperature alloy of the first susceptor conductor **184**. In one preferred arrangement, the first Curie temperature alloy comprises Alloy 34 having 34% Ni and 66% Fe having a Curie temperature point about 450° F. and comprises a negligible magnetic properties above 400° F. In this same arrangement, the second Curie temperature alloy comprises Alloy having 32% Ni and 68% Fe having a Curie temperature of about 392° F. and comprises a negligible magnetic properties above 250° F.

The magnetic fields generated by the alternating current flowing through the helical conductor **180** wound in a Litz wire flattened helix (or solenoid) and inducing eddy currents within the array of susceptor wires **182** will now be described with reference to FIG. 4. As those of ordinary skill in the art recognize, a Litz wire is typically used to carry alternating current and may consist of many thin wire strands, individually insulated and twisted or woven together.

As can be seen as an example in FIG. 6, seven susceptor wires **184**, **186** are illustrated and these wire reside in a row, adjacent one another and between two alternating conductors of a helical conductor **180**, such as the helical conductor **180** illustrated in FIG. 3. In one preferred helical conductor arrangement, the helical conductor is of unitary construction and comprises a single conductor that is wound from one end of the heating blanket to the other in a continuous, flattened helix shape. As just one example, if the helical conductor comprises a single conductor such as helical conductor **180** illustrated in FIG. 3, this single conductor **180** may make ten (10) turns per inch in the helix.

In an alternative helical conductor arrangement, the helical conductor may comprise two or more conductors forming two or more parallel circuits. Utilizing two or more conductors does not materially affect the generated magnetic field as long as each conductor carries the same amount of current as the single conductor. With such a multiple conductor helical configuration, the controller **192** and sensor **194** may be operated to adjust and maintain this type of desired current control. One advantage of such a multiple conductor helical configuration is that it acts to reduce the voltage need to provide current from one end of the blanket to the other end of the blanket. For example, instead of having one conductor making ten (10) turns per inch in the helix, the multiple conductor configuration may have, for example, ten (10) conductors making one (1) turn per inch.

Another advantage of such a multiple conductor helical configuration is that it acts to reduce the voltage needed to provide current from one end of the blanket to the other end of the blanket. For example, a separate conductor helical configuration may be utilized to activate a first susceptor conductor whereas a second separate conductor may be utilized to activate a second susceptor conductor. As such, in

one exemplary arrangement, under the operation and control of the controller (FIG. 3), different susceptor wires within the susceptor array may be activated at different times or points within the heating process.

Returning to FIG. 4, the linear array **182** comprises a plurality of first susceptor wires **184** having a first Curie temperature **24** and a plurality of second susceptor wires **186** having a second Curie temperature **226**. The first Curie temperature being lower than the second Curie temperature. In this illustrated arrangement, the first susceptor wires **184** may be positioned adjacent two of the plurality of second susceptor wires **186**. In addition, the susceptor linear array **182** may be positioned an equal distance from both a first, lower conductor portion **180A** and a second, upper conductor portion **180B**. The susceptor wires are preferably electrically insulated from these conductor portions **180A,B**.

Initially, the application of a first alternating current  $I_1$ , **250** by way of a power source (FIG. 3) to the first conductor portion **180A** produces an alternating magnetic field lines **196A** that comprise concentric circles around the cylindrically current carrying conductor **180A**. In FIG. 4, these concentric circles **196A** may be illustrated as comprising a first magnetic field **196** which is illustrated as directed perpendicularly out of the paper. Similarly, the application of a second alternating current  $I_2$ , **260** (flowing in an opposite direction as the first alternation current  $I_1$ , **250**) through the second conductor portion **180B** produces an alternating magnetic field lines **196B** that comprise concentric circles around the cylindrically current carrying conductor **180B**.

Because of the orientation of the first and second magnetic fields **196A,B**, these fields **196A,B** will essentially cancel each another out on the outside of the blanket **154**, below the first conductor **180A** as they reside in opposite directions. Similarly, above the second or upper conductor **180B** on the outside of the blanket **154**, the first and second magnetic fields **196A,B** will also essentially cancel one another out. In contrast, within the heating blanket matrix **178** and hence within the susceptor linear array **182**, the first and second magnetic fields **196A,B** will be additive to one another since both fields are oriented substantially parallel to the axis of the susceptor wires linear array **182**. This substantially parallel combined oscillating magnetic field **196A,B** will therefore generate eddy currents that travel circumferentially within the susceptors **184**, **186** contained within the susceptor array **182**. Therefore, both the susceptors **184**, **186** will generate heat simultaneously with the application of the magnetic fields **196A,B**.

Initially, the concentration of the magnetic fields **196A,B** results in relatively large eddy currents generated in the plurality of first susceptor wires **184** having the lower Curie temperature as well as eddy currents generated in the plurality of second susceptor wires **186** having the higher curie temperature. As illustrated, eddy currents are generated in both the lower and higher Curie temperature materials **184**, **186** as long as a susceptor has high permeability and is of sufficient diameter so that the skin depth is substantially smaller than the wire radius. In the present disclosure, and in this illustrated arrangement, the second susceptor does not dominate heating at low temperature by having a smaller concentration of the second susceptor than the first. The induced eddy currents in both the first and second materials result in resistive heating of the first and second susceptor wires **184** and **186**. Although most of the heating is provided by way of the lower Curie temperature material, the eddy currents within the higher Curie susceptor **186** will also provide a certain amount of resistive heating at lower temperatures, albeit less than the heat generated by way of

lower Curie temperature susceptor **184**. As such, the first susceptor wire **184** and the second susceptor wire **186** both act to conductively heat the matrix **178** and the structure in thermal contact with the heating blanket **154**, such as the wing structure **50** illustrated in FIG. **1**. The heating of the first susceptor wire **184** and second susceptor wire **186** continues during application of the alternating current until the magnetic material of the first susceptor wire **184** approaches its Curie temperature, which again in this illustrated arrangement is lower than the Curie temperature of the second susceptor wire **184**.

Upon approaching the temperature where the magnetic properties of the first susceptor wire **184** becomes negligible, the first susceptor wire **184** becomes non-magnetic. At this non-magnetic point, the magnetic fields **196A,B** generated by the first conductor portion and the second conductor portion **180A,B** continue to generate eddy currents in the higher Curie temperature susceptor because it is still electrically conductive due to its higher Curie temperature. As such, once the lower Curie temperature of the first susceptor wire **184** is achieved, temperature regulation by way of both the first susceptor wire **184** and the second susceptor wire **186** continue, albeit at a higher Curie temperature.

As the first susceptor wire **184** no longer generates heat, the concentration of the magnetic field **196B** continues to generate large eddy currents in the second susceptor wire **186**. The continued induction of eddy currents within both the first and second susceptor wire **186** result in resistive heating of the second susceptor wire **186**. The first and second susceptor wire **186** therefore continue to conductively heat the matrix **178** and the structure in thermal contact with the heating blanket **154**. The heating of the susceptor wire **186** continues during application of the alternating current  $I_i$  **250** and  $I_{ii}$  **260** until the magnetic material of the susceptor wire **186** approaches its Curie temperature, which again in this illustrated arrangement comprises a higher Curie temperature than the Curie temperature of the first susceptor wire **184**. Upon reaching the higher Curie temperature of the second susceptor wire **186**, the susceptor wire **186** becomes non-magnetic. At this non-magnetic point, the magnetic fields **196A,B** are no longer concentrated in the susceptor wire **186**. The induced eddy currents and associated resistive heating of the susceptor wire **186** therefore diminishes to a level sufficient to maintain the temperature of the first and second susceptor wire **186** at the higher Curie temperature.

As an example of the heating of the magnetic material to the Curie temperature, FIG. **5** illustrates a plot of heat output **230** measured over temperature **232** for an exemplary heating blanket comprising an array of susceptors as disclosed herein. Specifically, the heating blanket may comprise an array of susceptors mounted within a conductor **180** wherein the conductor **180** comprises a Litz wire formed as a flattened helix as illustrated in FIG. **3**. To generate the data presented in this graph, the array of susceptors comprise a 2:1 mixture of a first plurality of first susceptor wires comprising Alloy **32** and a second plurality of second susceptor wires Alloy **34**, wherein each of the first and second wires comprised a 10 mil diameter. Both first and second susceptor wires were inductively heated by way of a 300 KHz magnetic field whose amplitude was increased from 5 Oe to 10 Oe as the temperature rises to compensate for increasing heat losses that occur at higher temperature. The first plurality of first susceptor wires comprised a susceptor wire comprising a 10 mil diameter alloy **32** (32% Ni and 68% Fe). The second plurality of second susceptor wires comprised a susceptor wire comprising a 10 mil

diameter alloy **34** (34% Ni and 66% Fe) wire. In this susceptor wire arrangement, the susceptor array comprises a 12 mil center-to-center spacing. As those of ordinary skill in the art will recognize, alternative diameter sizes and center-to-center spacing configurations may also be utilized. As can be seen in FIG. **5**, this susceptor arrangement provided an extended useful temperature range for such a susceptor including a controlled temperature range from about 150° F. to about 380° F. It should be noted that typically, in certain applications, more heat is needed to compensate for higher heat losses at higher temperatures as those temperatures illustrated in FIG. **5**. In order to provide the required increase in heat, the current and therefore the magnetic fields may be increased as necessary by increasing the power supply current. This increase in current will effectively shift the curve in FIG. **5** upward so as to provide a desired amount of heat while still maintaining the same negative slope curve shape while providing a greater amount of heat to cooler areas, such as those located near heat sinks. (e.g., such as the two vertically extending aluminum spars **52**, **54** illustrated in FIG. **1**).

FIG. **6** is an illustration of an alternative susceptor and conductor arrangement **300** that may be used in a heating blanket, such as the heating blankets illustrated in FIG. **1**. In this illustrated alternative arrangement **300**, the susceptor **310** comprises a spring shaped susceptor and is wound around a conductor **320**. In one preferred arrangement, the susceptor **310** comprises a first and second susceptor wire arrangement as describe and illustrated herein. In an alternative preferred arrangement, the susceptor **310** comprises a first, a second, and a third susceptor wire arrangement as described and illustrated in FIG. **4**, however alternative susceptor arrangements may also be utilized.

FIG. **7** is an illustration of an alternative layout of the alternative susceptor and conductor arrangement illustrated in FIG. **6**. And FIG. **8** illustrates a top view of an alternative heating blanket arrangement **354** showing the meandering pattern of the conductor **320** and the array of susceptor wires **310** within the housing **358**. In one preferred arrangement, the array of susceptor wires **310** comprise spring formed wires as illustrated in FIG. **6**. Such susceptor wires **310** may be wound around the conductor **320** such that a longitudinal axis of the of susceptor wires **310** is substantially perpendicular to an electrical current flowing through the conductor **320** and generating a magnetic field parallel to the longitudinal axis of the susceptor wires **310**. In this manner, a varying magnetic field generated by the conductor **320** induces eddy currents in the array of susceptor wires **310** as discussed in greater detail herein.

A power supply **390** providing alternating current electric power may be connected to the heating blanket **354** by means of the heating blanket wiring **356**. The power supply **390** may be configured as a portable or fixed power supply **390** which may be connected to a conventional 60 Hz, 110 volt or 220 volt outlet. Although the power supply **390** may be connected to a conventional 60 Hz outlet, the frequency of the alternating current that is provided to the conductor **320** may preferably range from approximately 1000 Hz to approximately 400,000 Hz. In some cases, the frequency of the alternating current may be as high as 4 MHz. The voltage provided to the conductor **320** may range from approximately 10 volts to 1,000-2,000 volts but is preferably less than approximately 450 volts. Likewise, the frequency of the alternating current provided to the conductor **320** by the power supply is preferably between approximately 10 amps and approximately 1000 amps. In this regard, the power supply **390** may be provided in a constant-current configu-

ration wherein the voltage across the conductor **320** may decrease as the magnetic materials within the heating blanket **354** approach the Curie temperature at which the voltage may cease to increase when the Curie temperature is reached as described in greater detail below.

Referring to FIGS. **9** and **10**, shown is an embodiment of the magnetic blanket **354** having a spring susceptor **310** formed of magnetic material having a Curie temperature and provided around a conductor **320**. The susceptor **310** may be formed as a solid or unitary component in a cylindrical arrangement in a spiral or spring configuration around the conductor **320** in order to enhance the flexibility of the heating blanket **354**. As just one example, the susceptor **310** may comprise a first plurality of first susceptor wires having a first Curie temperature and a second plurality of second susceptor wires having a second Curie temperature, as illustrated in FIG. **4**. The first Curie temperature being lower than the second Curie temperature.

As can be seen in FIG. **10**, the susceptor **310** may extend along a length of the conductor **320** within the housing **358**. The application of alternating current to the conductor **320** produces an alternating magnetic field **396**. The magnetic field **396** is absorbed by the magnetic material from which the susceptor **310** is formed causing the susceptor **310** to be inductively heated.

More particularly and referring to FIG. **10**, the flow of alternating current through the conductor **320** results in the generation of the magnetic field **396** surrounding the susceptor **310**. Eddy currents **398** generated within the susceptor **310** as a result of exposure thereof to the magnetic field **396** causes inductive heating of the susceptor **310**. The housing **358** may include a thermally conductive matrix **378** material such as silicone to facilitate thermal conduction of the heat generated by the susceptor **310** to the surface of the heating blanket **354**. The magnetic material from which the susceptor **310** is formed preferably has a high magnetic permeability and a Curie temperature that corresponds to the desired temperature to which a structure is to be heated by the heating blanket **354**. The susceptor **310** and conductor **320** are preferably sized and configured such that at temperatures below the Curie temperature of the magnetic material, the magnetic field **396** is concentrated in the susceptor **310** due to the magnetic permeability of the material.

As a result of the close proximity of the susceptor **310** to the conductor **320**, the concentration of the magnetic field **396** results in relatively large eddy currents **398** in the susceptor **310**. The induced eddy currents **398** result in resistive heating of the susceptor **310**. The susceptor **310** conductively heats the matrix **378** and a structure (e.g., structure **50** in FIG. **1**) in thermal contact with the heating blanket **354**. The heating of the first and second susceptor wires of the susceptor **310** occurs as previously described herein with reference to FIG. **4**.

The magnetic materials of the first susceptor wire and the second susceptor wire may be provided in a variety of compositions including, but not limited to, a metal, an alloy, or any other suitable material having a suitable Curie temperature. For example, the first or second susceptor wire may be formed of an alloy having a composition of 32 wt. % Ni-64 wt. % Fe having a Curie temperature of approximately 390° F. The alloy may also be selected as having a composition of 34 wt. % Ni-66 wt. % Fe having a Curie temperature of approximately 450° F. However, the susceptor wires may be formed of a variety of other magnetic materials such as alloys which have Curie temperatures in the range of the particular application such as the range of

the adhesive curing temperature or the curing temperature of the composite material from which the patch may be formed. Metals comprising the magnetic material may include iron, cobalt or nickel. Alloys from which the magnetic material may be formed may comprise a combination of the above-described metals including, but not limited to, iron, cobalt and nickel.

Likewise, the presently disclosed conductor (such as the conductor **180** illustrated in FIGS. **2-3** and the conductor **320** illustrated in FIGS. **6-9**) may be formed of any suitable material having an electrical conductivity. Furthermore, the conductor is preferably formed of flexible material to facilitate the application of the heating blanket to curved surfaces. In this regard, the conductor may be formed of Litz wire or other similar wire configurations having a flexible nature and which are configured for carrying high frequency alternating current with minimal weight. The conductor material preferably possesses a relatively low electrical resistance in order to minimize unwanted and/or uncontrollable resistive heating of the conductor. The conductor may be provided as a single strand of wire of unitary construction or the conductor may be formed of braided material such as braided cable. In addition, the conductor may comprise a plurality of conductors which may be electrically connected in parallel in order to minimize the magnitude of the voltage otherwise required for relative long lengths of the conductor such as may be required for large heating blanket configurations.

Referring back to FIGS. **9** and **10**, the heat blanket housing **358** may be formed of a flexible material to provide thermal conduction of heat generated by the susceptor sleeve to the structure to which the heating blanket is applied. In order to minimize environmental heat losses from the heating blanket **354**, an insulation layer **368** may be included as illustrated in FIGS. **9** and **10**. The insulation layer **368** may comprise insulation **372** formed of silicone or other suitable material to minimize heat loss by radiation to the environment. In addition, the insulation layer **368** may improve the safety and thermal efficiency of the heating blanket **354**. As was indicated above, the housing **358** of the heating blanket **354** may be formed of any suitable high temperature material such as silicone or any other material having a suitable thermal conductivity and low electrical conductivity. Such material may include, but is not limited to, silicone, rubber and polyurethanes or any other thermally conductive material that is preferably flexible.

Referring back to FIGS. **1**, **3** and **8**, the heating blankets **40**, **46**, **154**, and **354** may include thermal sensors such as thermocouples or other suitable temperature sensing devices for monitoring heat at locations along the area of the heating blankets in contact with the structure **50** (FIG. **1**). Alternatively, the heating blankets may include a voltage sensor **194**, **394** or other sensing devices connected to the power supply **190**, **390** as illustrated in FIGS. **3** and **8**.

Referring still to FIGS. **3** and **8**, sensors **194**, **394** may be configured to indicate the voltage level provided by power supplies **190**, **390**, respectively. For a constant current configuration of the herein disclosed heating blankets, the voltage may decrease as the magnetic material approaches the Curie temperature. Power supplies **190**, **390** may also be configured to facilitate adjustment of the frequency of the alternating current in order to alter the heating rate of the magnetic material. In this regard, power supplies **190**, **390** may be coupled to a respective controller **192**, **392** in order to facilitate adjustment of the alternating current over a predetermined range in order to facilitate the application of a heating blanket to a wide variety of structures having different heating requirements.

FIG. 11 broadly illustrates steps of a method 400 for heating a three dimensional structure using a heated enclosure, such as the heated enclosure 300 illustrated in FIG. 1 utilizing one or more heating blankets is described herein. For example, step 410 includes the step of utilizing a body of an enclosure to define an internal cavity. Optionally, at step 420, the method includes the step of insulating the enclosure by way of an insulation layer so as to efficiently maintain the heat generated within the enclosure so as to reduce electrical consumption during the heating or curing process. The step 430 includes the step of mounting the three dimensional structure within the cavity of the enclosure. At step 440, one or more inflatable bladders are configured to exert pressure on the three dimensional structure. Optionally, at step 450, the method includes the step of positioning various spacer between the various bladders and the three dimensional structure.

Next, at step 460, the method includes the step of utilizing one or more inflatable bladders to exert a pressure on the heating blankets so as to maintain the heating blankets against the three dimensional structure. Preferably, the inflatable bladders exert a predetermined pressure on the heating blankets.

At step 470, the heating blankets may be activated by way of a controller, sensor, and power supply as described herein. At step 480, the three dimensional structures are heated to a predetermined temperature and at the desired pressure created by the inflatable bladders. At step 490, the susceptor based heating blankets provide a uniform temperature of the three dimensional structure. At step 480, the uniform temperature propagates into and through the structure so as to properly cure the three dimensional structure.

The presently disclosed enclosure comprising a heating blanket comprising a susceptor wire array provides a number of advantages. For example, the enclosure provides for one or more heating blankets that provides uniform, controlled heating of large surface areas. In addition, a proper selection of the metal or alloy in the heating blanket susceptor arrays' first and second susceptor wires facilitates avoiding excessive heating of the work piece irrespective of the input power. By predetermining the first and second susceptor wire metal alloys, improved control and temperature uniformity in the work piece facilitates consistent production of work pieces. The Curie temperature phenomenon of both the first and second susceptor wires (again, more than two different types of susceptor wire materials may be utilized) is used to control both the temperature ranges as well as the absolute temperature of the work piece within the enclosure. This Curie temperature phenomenon is also utilized to obtain substantial thermal uniformity in the work piece, by matching the Curie temperature of the susceptor to the desired temperature of the induction heating operation being performed.

The description of the different advantageous embodiments has been presented for purposes of illustration and description, and is not intended to be exhaustive or limited to the embodiments in the form disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art. Further, different advantageous embodiments may provide different advantages as compared to other advantageous embodiments. The embodiment or embodiments selected are chosen and described in order to best explain the principles of the embodiments, the practical application, and to enable others of ordinary skill in the art to understand the disclosure for various embodiments with various modifications as are suited to the particular use contemplated.

We claim:

1. An enclosure for heating a three dimensional structure, the enclosure comprising:
  - a body defining a cavity therein, the cavity sized to receive a three dimensional structure;
  - a plurality of heating blankets configured to heat the three dimensional structure to a substantially uniform temperature; and
  - at least one expandable bladder positioned such that a heating blanket of the plurality of heating blankets is positioned between the three dimensional structure and the at least one expandable bladder.
2. The enclosure of claim 1 wherein
  - at least one heating blanket of the plurality of heating blankets comprises:
    - a conductor configured to receive current and generate a magnetic field in response thereto;
    - a first susceptor wire comprising an alloy having a first Curie temperature; and
    - a second susceptor wire,
 the second susceptor wire comprising a second Curie temperature that is different than the first Curie temperature of the first susceptor wire.
3. The enclosure of claim 1 wherein
  - the plurality of heating blankets are in contact with the three dimensional structure.
4. The enclosure of claim 1 wherein comprising:
  - the at least one expandable bladder is configured to maintain a heating blanket of the plurality of heating blankets in contact with the three dimensional structure.
5. The enclosure of claim 1 wherein at least one heating blanket of the plurality of heating blankets comprises
  - a plurality of conductors configured to receive an alternating current and generate a magnetic field in response to the alternating current.
6. The enclosure of claim 5 wherein the plurality of conductors configured to receive the alternating current comprise Litz wires.
7. The enclosure of claim 1 wherein each heating blanket of the plurality of heating blankets comprises a plurality of susceptors configured to generate heat in response to a magnetic field.
8. The enclosure of claim 1, wherein at least one heating blanket of the plurality of the heating blankets comprises:
  - a first susceptor wire comprising an alloy having a first Curie temperature; and
  - a second susceptor wire comprising an alloy having a second Curie temperature,
 wherein the second Curie temperature is different than the first Curie temperature of the first susceptor wire.
9. The enclosure of claim 8 wherein
  - the second Curie temperature of the second susceptor wire is lower than the first Curie temperature of the first susceptor wire.
10. The enclosure of claim 8 further comprising:
  - a third susceptor wire,
  - the third susceptor wire comprising an alloy having a third Curie temperature.
11. The enclosure of claim 10 wherein
  - the third Curie temperature of the third susceptor wire is different than the first Curie temperature of the first susceptor wire.
12. A method for heating a three dimensional structure comprising the steps of:
  - defining an internal cavity of a body of an enclosure;



**15**

mounting a three dimensional structure within the cavity of the enclosure;  
 configuring one or more inflatable bladders to exert pressure on the three dimensional structure;  
 providing one or more heating blankets;  
 utilizing the one or more inflatable bladders to exert a pressure on the one or more heating blankets so as to maintain the one or more heating blankets against at least a portion of the three dimensional structure;  
 activating the heating blankets;  
 heating the three dimensional structure to a predetermined temperature; and  
 utilizing the heating blankets to provide a uniform temperature of the three dimensional structure.

**13.** The method of claim **12** further comprising the step of insulating the enclosure by way of an insulation layer so as to efficiently maintain the heat generated within the enclosure.

**14.** The method of claim **12** further comprising the step of positioning one or more spacers between the one or more bladders and the three dimensional structure.

**16**

**15.** The method of claim **12** further comprising the step of utilizing the one or more inflatable bladders to exert a predetermined pressure on the heating blankets so as to maintain the heating blankets against the three dimensional structure.

**16.** The method of claim **12** further comprising the step of activating the heating blankets by way of a controller, a sensor, and power supply.

**17.** The method of claim **12** further comprising the step of heating the three dimensional structure to the predetermined temperature and at a desired pressure created by the one or more inflatable bladders.

**18.** The method of claim **12** further comprising the step of utilizing the heating blankets to provide a uniform temperature of the three dimensional structure, wherein the uniform temperature propagates into and through the structure so as to cure the three dimensional structure.

\* \* \* \* \*