



US009869872B2

(12) **United States Patent**  
**Huang**

(10) **Patent No.:** **US 9,869,872 B2**

(45) **Date of Patent:** **Jan. 16, 2018**

- (54) **THREE-DIMENSIONAL DISPLAY DEVICE**
- (71) Applicant: **Delta Electronics, Inc.**, Taoyuan (TW)
- (72) Inventor: **June-Jei Huang**, Taoyuan (TW)
- (73) Assignee: **Delta Electronics, Inc.**, Taoyuan (TW)
- (\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.
- (21) Appl. No.: **15/180,387**
- (22) Filed: **Jun. 13, 2016**

(56) **References Cited**

U.S. PATENT DOCUMENTS

- 6,593,957 B1 \* 7/2003 Christie ..... G02B 27/225 348/42
- 7,864,419 B2 \* 1/2011 Cossairt ..... G02B 27/0087 359/446
- 8,011,786 B2 \* 9/2011 Hentschke ..... G02B 27/2214 348/59
- 8,144,390 B2 \* 3/2012 Nam ..... G02B 27/2214 359/298
- 8,149,348 B2 \* 4/2012 Yun ..... G02B 27/2214 349/57
- 8,558,961 B2 \* 10/2013 Yun ..... G02B 27/2214 349/57
- 8,736,957 B2 \* 5/2014 Endo ..... G02B 27/26 348/57

(Continued)

- (65) **Prior Publication Data**  
US 2017/0139220 A1 May 18, 2017

FOREIGN PATENT DOCUMENTS

- (30) **Foreign Application Priority Data**  
Nov. 13, 2015 (TW) ..... 104137466 A

- CN 103852819 A 6/2014
- TW 201534980 A 9/2015

*Primary Examiner* — Bao-Luan Le

(74) *Attorney, Agent, or Firm* — Muncy, Geissler, Olds, & Lowe, P.C.


- (51) **Int. Cl.**  
**G02B 27/22** (2006.01)  
**G02B 3/08** (2006.01)  
**G03B 21/606** (2014.01)  
**G03B 35/24** (2006.01)
- (52) **U.S. Cl.**  
CPC ..... **G02B 27/2214** (2013.01); **G02B 3/08** (2013.01); **G02B 27/225** (2013.01); **G03B 21/606** (2013.01); **G03B 35/24** (2013.01)

(57) **ABSTRACT**

A display device is provided. The display device includes a projection lens, a Fresnel lens, an angle magnifying screen, a vertical diffuser and a first micro-deflector. The projection lens is configured to provide an original image. The first micro-deflector is provided between the Fresnel lens and the angle magnifying screen, and the angle magnifying screen is provided between the first micro-deflector and the vertical diffuser. The first micro-deflector is configured to redirect the original image into a first perspective image and a second perspective image. A perspective direction of the first perspective image differs from a perspective direction of the second perspective image.

- (58) **Field of Classification Search**  
CPC .. G02B 27/2214; G02B 27/26; G02B 27/225; G03B 35/20; G03B 35/26; H04N 13/0404; H04N 13/0409  
See application file for complete search history.

**10 Claims, 9 Drawing Sheets**

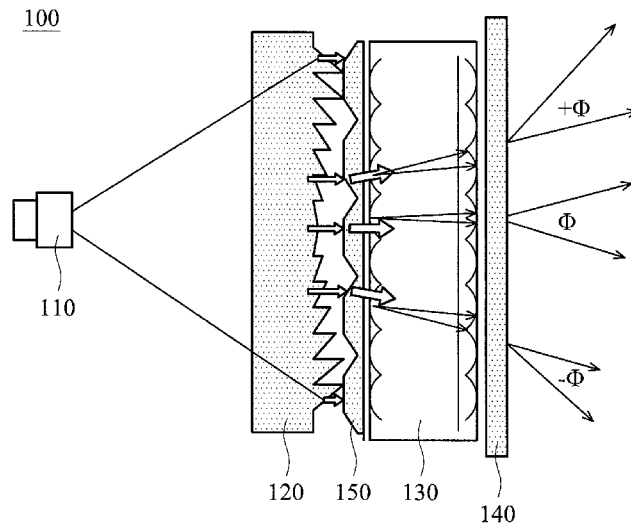

(56)

**References Cited**

U.S. PATENT DOCUMENTS

8,939,585	B2 *	1/2015	Chen .....	H04N 13/0402	2011/0063575	A1 *	3/2011	Nelson .....	H04N 13/0404
				348/54					353/7
9,001,423	B2 *	4/2015	Woodgate .....	H04N 13/0402	2011/0164318	A1 *	7/2011	Yun .....	G02B 27/2214
				359/462					359/463
9,225,971	B2 *	12/2015	Woodgate .....	H04N 13/0402	2012/0069435	A1	3/2012	Oikawa et al.	
9,420,266	B2 *	8/2016	Woodgate .....	H04N 13/0402	2012/0127570	A1 *	5/2012	Sakai .....	G02B 27/2214
9,632,406	B2 *	4/2017	Wang .....	G02B 3/005					359/463
2005/0168816	A1 *	8/2005	Fukaishi .....	G02B 27/26	2012/0212814	A1 *	8/2012	Endo .....	G02B 27/26
				359/465					359/465
2005/0270645	A1 *	12/2005	Cossairt .....	G02B 27/0087	2014/0092472	A1 *	4/2014	Woodgate .....	H04N 13/0402
				359/463					359/464
2008/0239484	A1 *	10/2008	Fukaishi .....	G02B 27/2214	2014/0133020	A1 *	5/2014	Woodgate .....	H04N 13/0402
				359/465					359/462
2009/0033873	A1 *	2/2009	Hentschke .....	G02B 27/2214	2014/0185015	A1 *	7/2014	Chen .....	H04N 13/0402
				353/7					353/7
2009/0147365	A1 *	6/2009	Inokuma .....	C03C 17/007	2014/0192285	A1 *	7/2014	Shinkai .....	H04N 13/0402
				359/599					349/15
2009/0262420	A1 *	10/2009	Yun .....	H04N 13/0404	2014/0232836	A1 *	8/2014	Woodgate .....	H04N 13/0402
				359/463					348/54
2010/0091354	A1 *	4/2010	Nam .....	G02B 27/2214	2014/0300709	A1 *	10/2014	Futterer .....	G03H 1/2286
				359/298					348/51
					2016/0246165	A1 *	8/2016	Wang .....	H04N 13/0459

\* cited by examiner

1

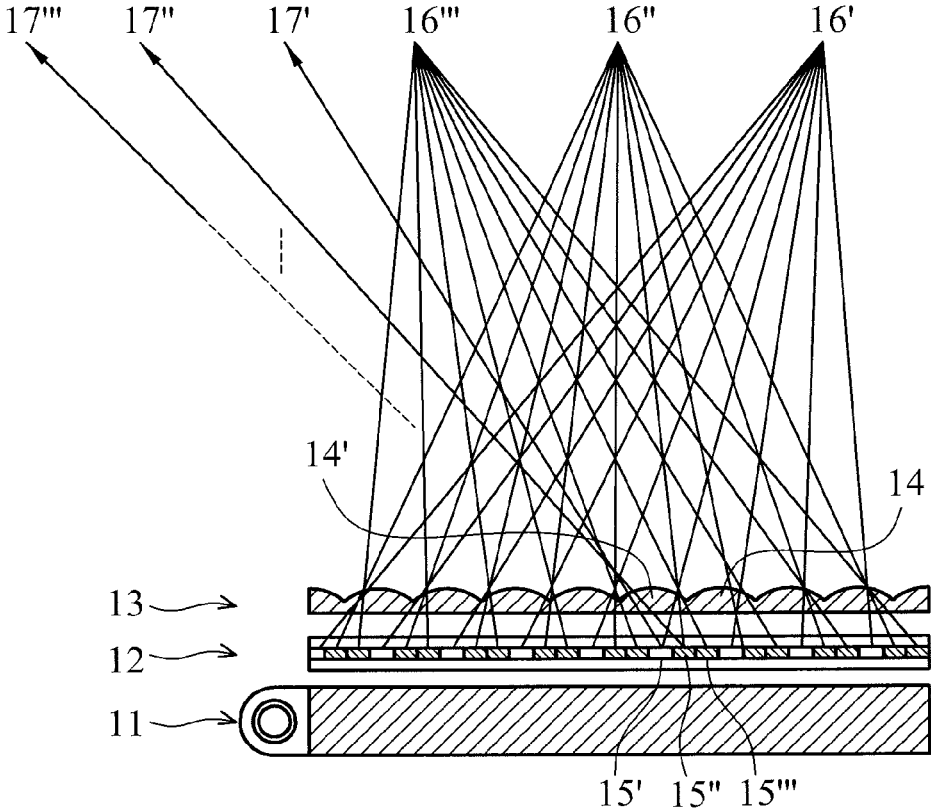


FIG. 1 ( PRIOR ART )

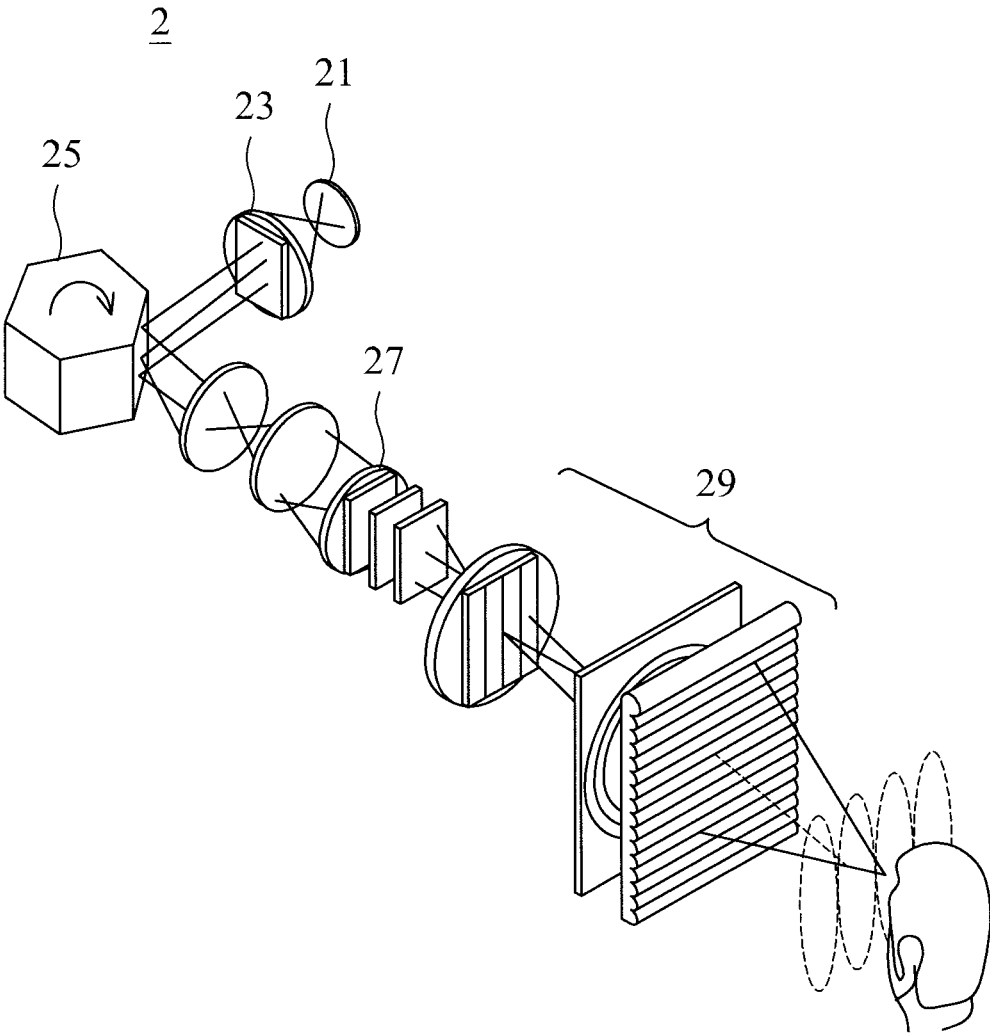


FIG. 2 ( PRIOR ART )

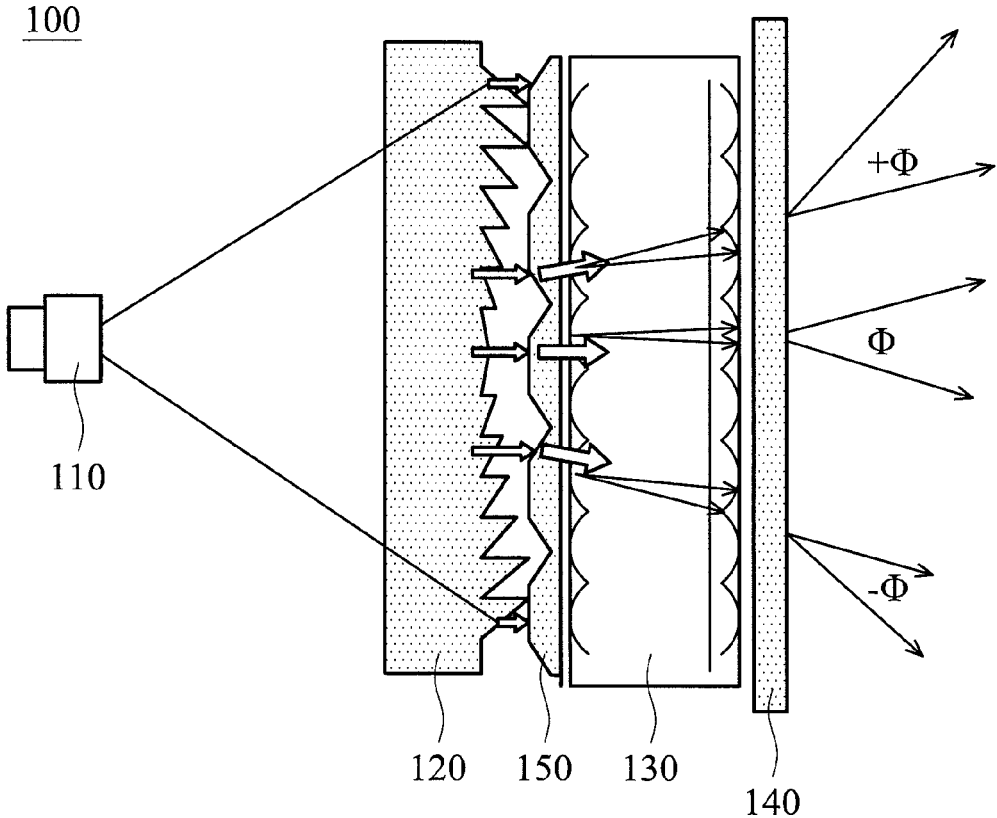


FIG. 3

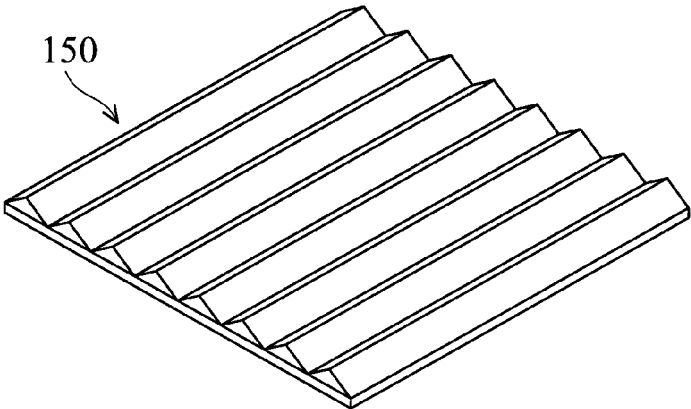


FIG. 4A

150'

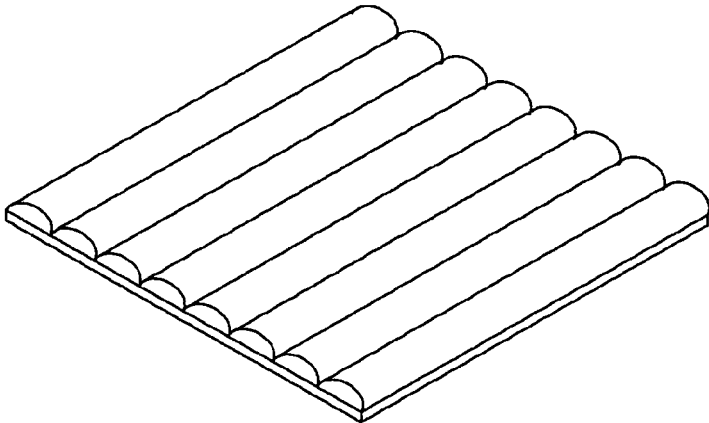


FIG. 4B

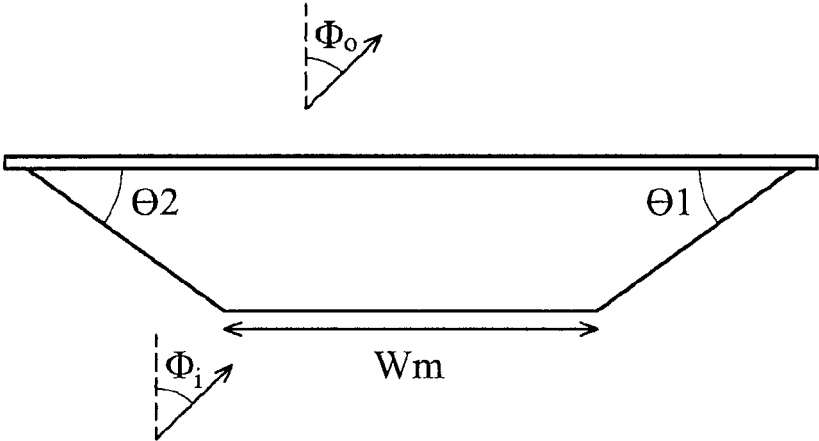


FIG. 4C

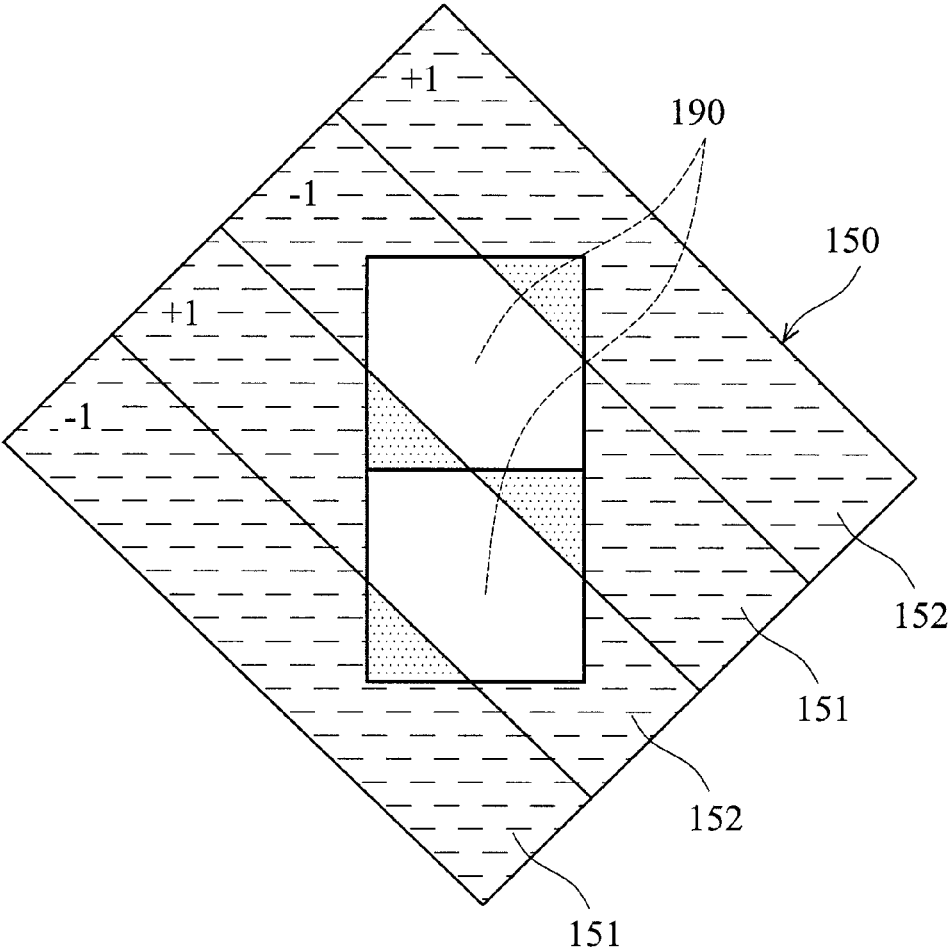


FIG. 5A

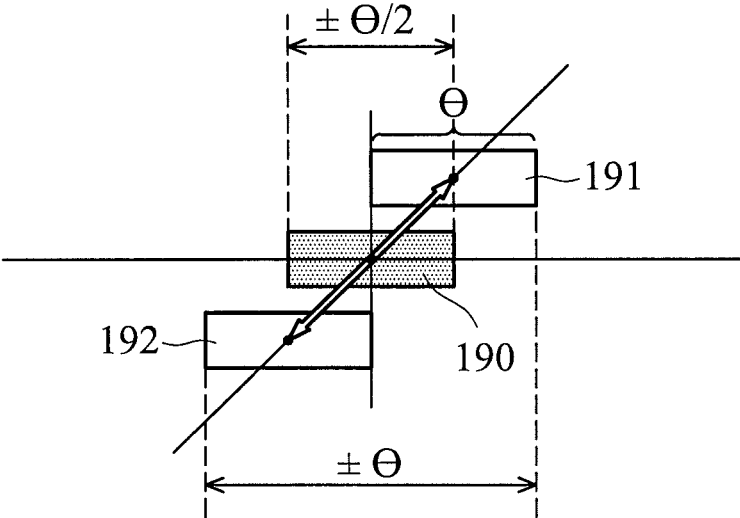


FIG. 5B

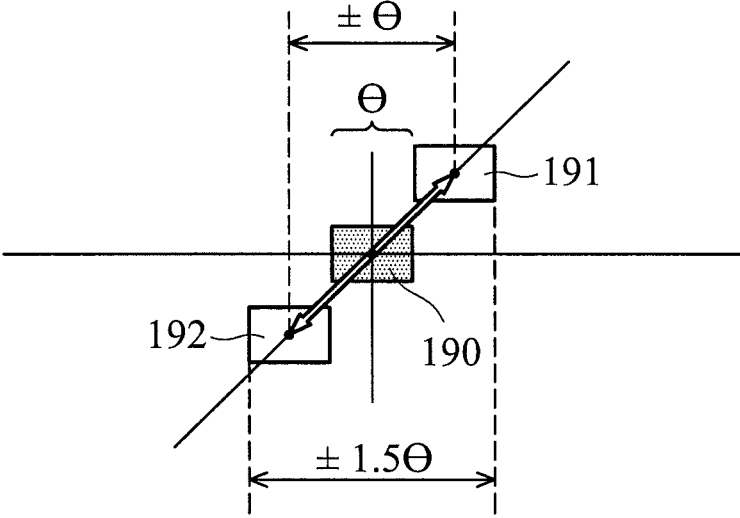


FIG. 5C



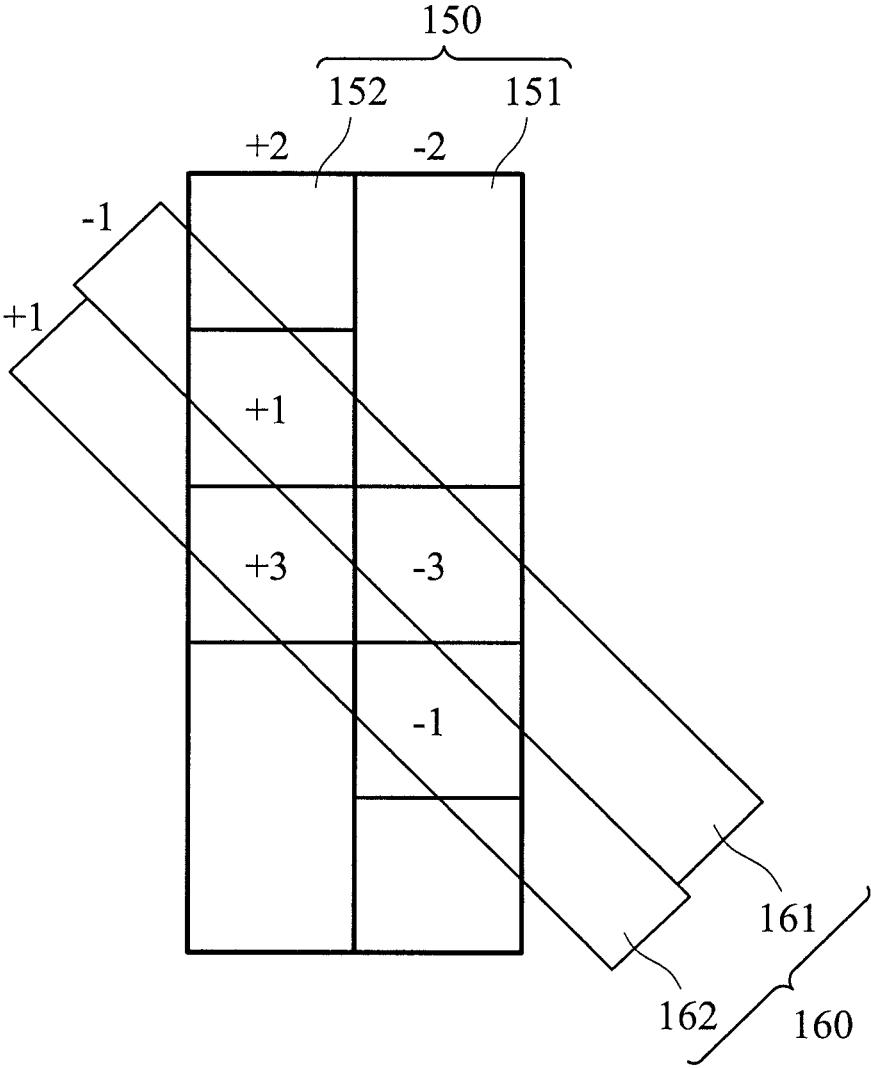


FIG. 6

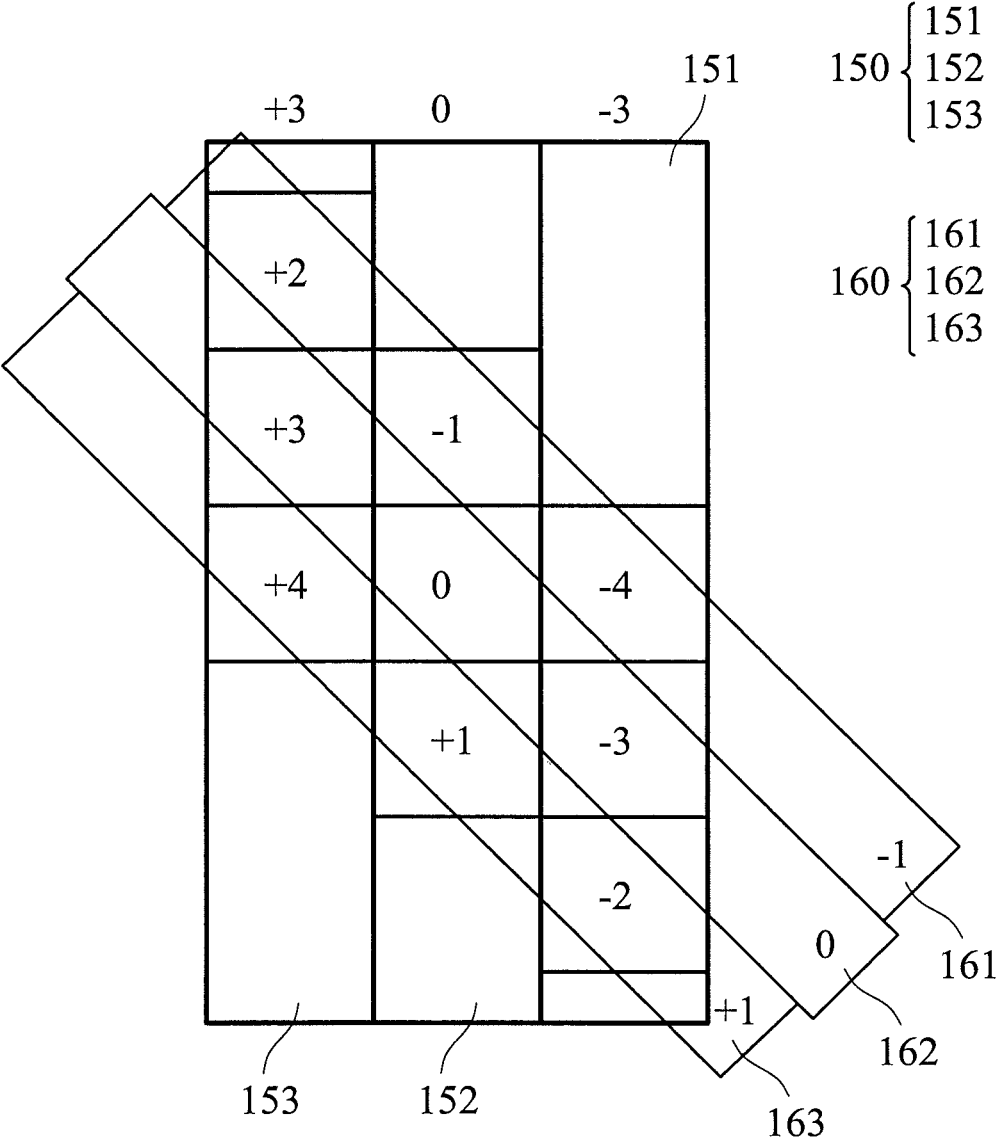


FIG. 7

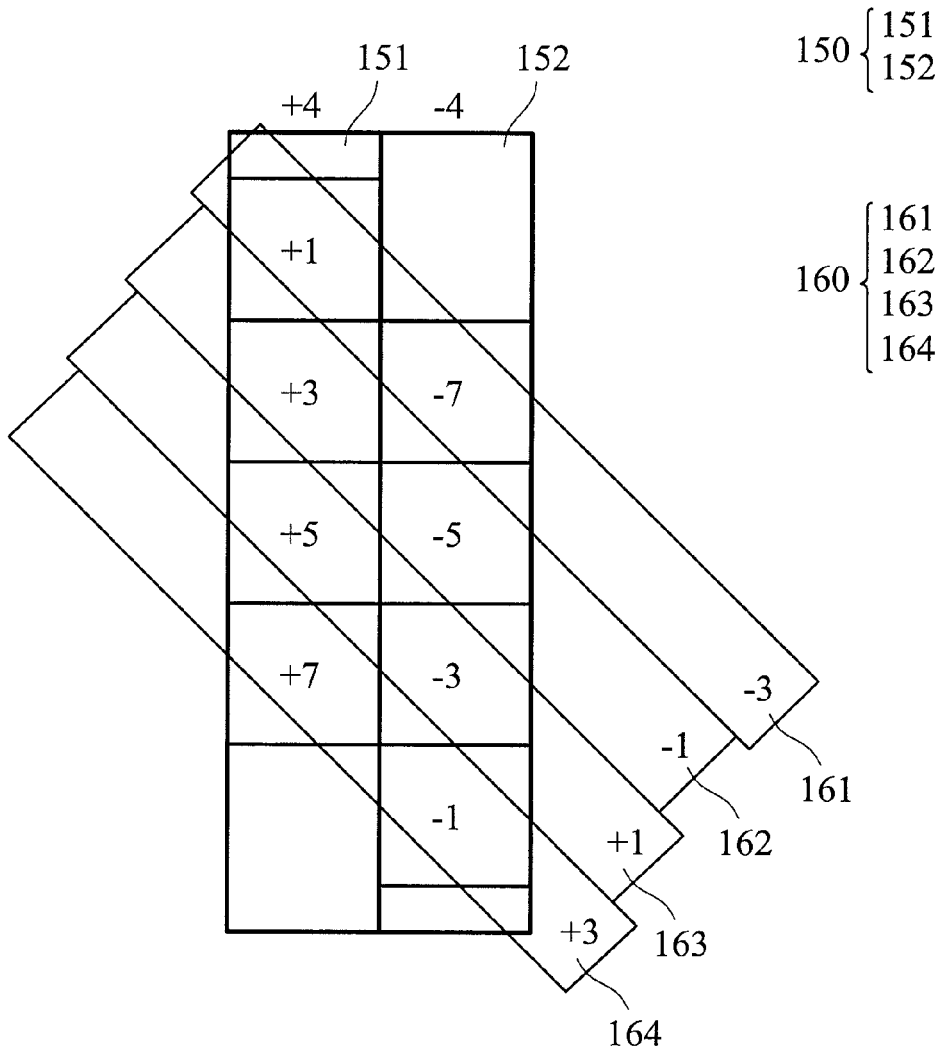


FIG. 8

THREE-DIMENSIONAL DISPLAY DEVICE

CROSS REFERENCE TO RELATED APPLICATIONS

This Application claims priority of Taiwan Patent Application No. 104137466, filed on Nov. 13, 2015, the entirety of which is incorporated by reference herein.

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a display device, and in particular to a three-dimensional display device.

Description of the Related Art

In recent years, in order to approach realistic imaging, display technologies have advanced to meet the needs of viewers. Early planar display devices ameliorated color and resolution. Currently, three-dimensional display devices are providing the sensation of three-dimensional imagery.

In three-dimensional display technology, different perspective images are provided to the right and left eyes. Based on the visual characteristics of the human eye, when the eyes view the two images with the same content but different parallax, the observer experiences a sense of layering and depth, and the brain interprets these stereo images as being three-dimensional.

The application of three-dimensional display technology includes using purpose-built 3D glasses for viewing, or technologies relating to viewing by a person's naked-eye. In recent years, major developments have been made in naked-eye technologies. For example, in accordance with different methods of providing images to a viewing person, the naked-eye technology can be classified into the time multiplex method and the spatial multiplex method.

FIG. 1 is a schematic view of a conventional projection-type three-dimensional image display apparatus 1 using the spatial multiplex method. The three-dimensional display apparatus 1 comprises a backlight 11, a display device 12 and a lens array 13. The lenses 14 of the lens array 13 direct the pixels 15', 15" and 15''' to different spatial positions 16', 16" and 16'''. Similarly, the lenses 14' of the lens array 13 direct the pixels 15', 15" and 15''' to different spatial positions 17', 17" and 17'''.

FIG. 2 is a schematic view of a conventional projection-type three-dimensional image display apparatus 2 using the time multiplex method. As shown in FIG. 2, the three-dimensional display apparatus 2 comprises a light source 21, a polarizer 23, a rotary polygonal mirror 25, a liquid crystal panel 27, and a number of optical components 29. The light beam generated by the light source 21 is polarized by the polarizer 23, and then the polarized light beam is reflected by the rotary polygonal mirror 25 towards the liquid crystal panel 27 to form images, creating a scanning-like effect. Subsequently, the images are projected onto different viewing zones by operations of the optical components 29. The aperture of the lens is divided into vertical lines. Corresponding to the scanning of the light source, the lines of the light source are scanning different lines, which are guided into different view zones. However, the reliability of this type of three-dimensional display apparatus 2 is poor due to the mechanical rotation of the rotary polygonal mirror 25. Also, the mechanical rotation creates high noise due to friction, and has a constrained rotational speed.

Both the spatial multiplex method and the time multiplex method have shortcomings and a three-dimensional display device having a lower cost, simplified structure, and high resolution is desirable.

BRIEF SUMMARY OF THE INVENTION

In one embodiment, a display device is provided. The display device includes a projection lens, a Fresnel lens, an angle magnifying screen, a vertical diffuser and a first micro-deflector. The projection lens is configured to provide an original image. The first micro-deflector is provided between the Fresnel lens and the angle magnifying screen, and the angle magnifying screen is provided between the first micro-deflector and the vertical diffuser. The first micro-deflector is configured to redirect the original image into a first perspective image and a second perspective image. A perspective direction of the first perspective image differs from a perspective direction of the second perspective image.

In one embodiment, the first micro-deflector comprises a first deflective area configured to redirect the original image into the first perspective image; and a second deflective area configured to redirect the original image into the second perspective image.

In one embodiment, the first deflective area and the second deflective area extend along a first direction.

In one embodiment, the first direction extends along a direction 45 degrees from a horizontal direction.

In one embodiment, the display device further comprises a second micro-deflector provided between the first micro-deflector and the angle magnifying screen. The second micro-deflector is configured to redirect the first perspective image into a first sub-perspective image and a second sub-perspective image; and redirect the second perspective image into a third sub-perspective image and a fourth sub-perspective image, and wherein perspective directions of the first, second, third and fourth sub-perspective images differ from each other.

In one embodiment, the second micro-deflector comprises a first sub-deflective area and a second sub-deflective area configured to redirect the first perspective image into the first sub-perspective image and the second sub-perspective image; and redirect the second perspective image into the third sub-perspective image and the fourth sub-perspective image.

In one embodiment, the first deflective area and the second deflective area extend along a first direction, and the first sub-deflective area and the second sub-deflective area extend along a second direction, and wherein an included angle between the first direction and the second direction is 45 degrees.

The following equation may be used to determine deflective power:

$$\sin \varphi_o = n \sin \theta_2 \sqrt{1 - [\sin(\theta_2 - \varphi_i) / n]^2} - \cos \theta_2 \sin(\theta_2 - \varphi_i)$$

$$\sin \varphi_o = n \sin \theta_1 \sqrt{1 - [\sin(\theta_1 + \varphi_i) / n]^2} - \cos \theta_1 \sin(\theta_1 + \varphi_i)$$

In one embodiment, the deflective powers of the first deflective area and the second deflective area are (-2, +2). In one embodiment, the deflective powers of the first sub-deflective area and the second sub-deflective area are (-1, +1).

In one embodiment, the first deflector further comprises a third deflective area, and the second deflector further com-

3

prises a third sub-deflective area, and wherein the first, second and third deflective areas extend along a first direction, and the first, second and third sub-deflective areas extend along a second direction, and wherein an included angle between the first direction and the second direction is 45 degrees.

In one embodiment, the deflective powers of the first deflective area, the second deflective area and the third deflective area are  $(-3, 0, +3)$ . Deflective powers of the first sub-deflective area, the second sub-deflective area and the third sub-deflective area are  $(-1, 0, +1)$ .

In one embodiment, the second deflector further comprises a third sub-deflective area and a fourth sub-deflective area, and the first deflective area and the second deflective area extend along a first direction, and the first, second, third and fourth sub-deflective areas extend along a second direction, and an included angle between the first direction and the second direction is 45 degrees.

In one embodiment, deflective powers of the first deflective area and the second deflective area are  $(-4, +4)$ . In one embodiment, the deflective powers of the first sub-deflective area, the second sub-deflective area, the third sub-deflective area and the fourth sub-deflective area are  $(-3, -1, +1, +3)$ .

In one embodiment, a display device is provided. The display device includes a projection lens, a first micro-deflector and a second micro-deflector. The projection lens is configured to provide an original image. The original image is redirected by the first micro-deflector into a first perspective image and the second perspective image. The perspective direction of the first perspective image differs from the perspective direction of the second perspective image. The first perspective image is redirected by the second micro-deflector into a first sub-perspective image and the second sub-perspective image. The second perspective image is redirected by the second micro-deflector into a third sub-perspective image and the fourth sub-perspective image. Perspective directions of the first, second, third and fourth sub-perspective image differ from each other.

Utilizing the micro-deflector and the arrangement thereof of the embodiment of the invention, the number of perspective images of the display device may be multiplied to provide three-dimensional images with a high resolution. In particular, the micro-deflector and the arrangement thereof can be utilized in a display device with a time multiplex design, and incorporate the advantages of the spatial multiplex and the time multiplex.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The present invention can be more fully understood by reading the subsequent description and examples with references made to the accompanying drawings, wherein:

FIG. 1 shows a conventional three-dimensional display device utilizing a spatial multiplex design;

FIG. 2 shows a conventional three-dimensional display device utilizing a time multiplex design;

FIG. 3 shows a display device of a first embodiment of the invention;

FIG. 4A shows a first micro-deflector of the first embodiment of the invention;

FIG. 4B shows an alternative micro-deflector embodiment;

FIG. 4C shows a design principle of the first micro-deflector of the embodiments of the invention;

FIG. 5A shows a detailed structure of the first micro-deflector of an embodiment of the invention;

4

FIG. 5B shows a deflective effect of the first micro-deflector of an embodiment of the invention;

FIG. 5C shows a deflective effect of the first micro-deflector of another embodiment of the invention;

FIG. 6 shows a display device of a second embodiment of the invention;

FIG. 7 shows a display device of a third embodiment of the invention; and

FIG. 8 shows a display device of a fourth embodiment of the invention.

#### DESCRIPTION OF THE PREFERRED EMBODIMENT

FIG. 3 shows a display device **100** according to a first embodiment of the invention. The display device **100** includes a projection lens **110**, a Fresnel lens **120**, an angle magnifying screen **130**, a vertical diffuser **140** and a first micro-deflector **150**. The projection lens **110** provides an original image. The first micro-deflector **150** is sandwiched between the Fresnel lens **120** and the angle magnifying screen **130**. The angle magnifying screen **130** is sandwiched between the first micro-deflector **150** and the vertical diffuser **140**. The original image is redirected by the first micro-deflector **150** into a first perspective image and a second perspective image. The perspective direction of the first perspective image differs from the perspective direction of the second perspective image.

FIG. 4A shows an embodiment of the first micro-deflector **150**. In this embodiment, the deflective power of the first micro-deflector **150** is designed to be  $(-1, +1)$ . FIG. 4B shows another embodiment of the first micro-deflector **150'**. In this embodiment, the deflective power of the first micro-deflector **150'** is designed to be  $(-1, 0, +1)$ . With reference to FIG. 4C, the deflective power can be designed according to the following equations:

$$\sin \varphi_o = n \sin \theta_2 \sqrt{1 - [\sin(\theta_2 - \varphi_i)/n]^2} - \cos \theta_2 \sin(\theta_2 - \varphi_i)$$

$$\sin \varphi_o = n \sin \theta_1 \sqrt{1 - [\sin(\theta_1 + \varphi_i)/n]^2} - \cos \theta_1 \sin(\theta_1 + \varphi_i)$$

$\theta_1$  represents the acute angle of the right side,  $\theta_2$  represents the acute angle of the left side,  $W_m$  represents the width of the bottom side,  $n$  represents the index of refraction,  $\Phi_i$  represents the incident angle, and  $\Phi_o$  represents the emission angle.

With reference to FIGS. 5A, 5B and 5C, in one embodiment, the first micro-deflector **150** comprises a first deflective area **151** and a second deflective area **152**. The original image **190** (including a plurality of pixel images) passes the first deflective area **151** and the second deflective area **152** to be redirected into the first perspective image and the second perspective image. In this embodiment, the first deflective area **151** and the second deflective area **152** are arranged along a first direction, and an included angle between the first direction and a horizontal direction is 45 degrees. In an alternate example, the first deflective area **151** and the second deflective area **152** are arranged along a first direction, and the first direction is a horizontal direction. FIGS. 5A and 5C show the effect of the first micro-deflector **150** of the embodiment of FIG. 5A, wherein the original image **190** is redirected into the first perspective image **191** and the second perspective image **192** by the first micro-deflector **150**. In this embodiment, a quarter of the original image **190** (in this embodiment, the upper right corner portion and the lower left corner portion) can be blocked by

## 5

a mask. In this embodiment, the redirection effect in the vertical direction can be removed by the vertical diffuser **140**.

Utilizing the micro-deflector and the arrangement thereof of the embodiment of the invention, the number of perspective images of the display device is multiplied to provide three-dimensional images with a high resolution. The micro-deflector and the arrangement thereof can also be utilized by a display device with a time multiplex design to incorporate the advantages of the spatial multiplex and the time multiplex.

FIG. 6 shows a display device according to a second embodiment of the invention, which further comprises a second micro-deflector **160** overlapping the first micro-deflector **150**. The second micro-deflector **160** comprises a first sub-deflective area **161** and a second sub-deflective area **162**. A first perspective image passes the first sub-deflective area **161** and the second sub-deflective area **162** to be redirected into a first sub-perspective image and a second sub-perspective image. A second perspective image passes the first sub-deflective area **161** and the second sub-deflective area **162** to be redirected into a third sub-perspective image and a fourth sub-perspective image. The first sub-deflective area **161** and the second sub-deflective area **162** are arranged along a second direction. An included angle between the first direction and the second direction is 45 degrees. In one embodiment, the deflective powers of the first deflective area **151** and the second deflective area **152** are  $(-2, +2)$ , and the deflective powers of the first sub-deflective area **161** and the second sub-deflective area **162** are  $(-1, +1)$ . Accordingly, the deflective power of  $(-3, -1, +1, +3)$  is provided, wherein the difference of the deflective power relating to each pixel is 2. Therefore, the embodiment provides a uniform deflective performance. Utilizing this embodiment, the number of perspective images is quadrupled.

FIG. 7 shows a display device according to a third embodiment of the invention, wherein the first deflector **150** further comprises a third deflective area **153** and the second deflector **160** further comprises a third sub-deflective area **163**. The first deflective area **151**, the second deflective area **152** and the third deflective area **153** are arranged along a first direction. The first sub-deflective area **161**, the second sub-deflective area **162** and the third sub-deflective area **163** are arranged along a second direction. An included angle between the first direction and the second direction is 45 degrees. In this embodiment, the deflective powers of the first deflective area **151**, the second deflective area **152** and the third deflective area **153** are  $(-3, 0, +3)$ , and the deflective powers of the first sub-deflective area **161**, the second sub-deflective area **162** and the third sub-deflective area **163** are  $(-1, 0, +1)$ . Accordingly, the deflective power of  $(-4, -3, -2, -1, 0, +1, +2, +3, +4)$  is provided, wherein the difference of the deflective power relating to each pixel is 1. Therefore, the embodiment provides a uniform deflective performance. Utilizing this embodiment, the number of perspective images is increased nine-fold.

FIG. 8 shows the display device according to a fourth embodiment of the invention, wherein the second deflector **160** further comprises a third sub-deflective area **163** and a fourth sub-deflective area **164**. The first deflective area **151** and the second deflective area **152** are arranged along a first direction. The first sub-deflective area **161**, the second sub-deflective area **162**, the third sub-deflective area **163** and the fourth sub-deflective area **164** are arranged along a second direction. An included angle between the first direction and the second direction is 45 degrees. In one embodi-

## 6

ment, the deflective powers of the first deflective area **151** and the second deflective area **152** are  $(-4, +4)$ , and the deflective powers of the first sub-deflective area, the second sub-deflective area, the third sub-deflective area and the fourth sub-deflective area are  $(-3, -1, +1, +3)$ . Accordingly, the deflective power of  $(-7, -5, -3, -1, +1, +3, +5, +7)$  is provided, wherein the difference of the deflective power relating to each pixel is 2. Therefore, the embodiment provides a uniform deflective performance. Utilizing this embodiment, the number of perspective images is increased eightfold.

Use of ordinal terms such as “first”, “second”, “third”, etc., in this specification to modify an element/feature does not by itself connote any priority, precedence, or order of one element/feature over another or the temporal order in which acts of a method are performed, but are used merely as labels to distinguish one element/feature having a certain name from another element/feature having the same name (but for use of the ordinal term).

While the invention has been described by way of example and in terms of the preferred embodiments, it is to be understood that the invention is not limited to the disclosed embodiments. On the contrary, it is intended to cover alternative modifications and similar arrangements (as would be apparent to those skilled in the art). Therefore, the scope of the appended claims should be accorded the broadest interpretation to encompass all such modifications and similar arrangements.

What is claimed is:

1. A display device, comprising:

a projection lens configured to provide an original image;  
a Fresnel lens;  
an angle magnifying screen;  
a vertical diffuser;  
a first micro-deflector; and

a second micro-deflector provided between the first micro-deflector and the angle magnifying screen, wherein the first micro-deflector is provided between the Fresnel lens and the angle magnifying screen, and the angle magnifying screen is provided between the first micro-deflector and the vertical diffuser,

wherein the first micro-deflector is configured to redirect the original image into a first perspective image and a second perspective image, and wherein a perspective direction of the first perspective image differs from a perspective direction of the second perspective image, wherein the first micro-deflector comprises a first deflective area configured to redirect the original image into the first perspective image; and a second deflective area configured to redirect the original image into the second perspective image,

wherein the second micro-deflector is configured to redirect the first perspective image into a first sub-perspective image and a second sub-perspective image; and redirect the second perspective image into a third sub-perspective image and a fourth sub-perspective image, and wherein perspective directions of the first, second, third and fourth sub-perspective images differ from each other,

wherein the second micro-deflector comprises a first sub-deflective area and a second sub-deflective area configured to redirect the first perspective image into the first sub-perspective image and the second sub-perspective image; and redirect the second perspective image into the third sub-perspective image and the fourth sub-perspective image, and

7

wherein using the following equation to determine a deflective power:

$$\sin \varphi_o = n * \sin \theta_2 \sqrt{1 - [\sin(\theta_2 - \varphi_i) / n]^2} - \cos \theta_2 * \sin(\theta_2 - \varphi_i)$$

$$\sin \varphi_o = n * \sin \theta_1 \sqrt{1 - [\sin(\theta_1 + \varphi_i) / n]^2} - \cos \theta_1 * \sin(\theta_1 + \varphi_i)$$

the deflective powers of the first deflective area and the second deflective area are (-2, +2), and the deflective powers of the first sub-deflective area and the second sub-deflective area are (-1, +1).

2. The display device as claimed in claim 1, wherein the first deflective area and the second deflective area extend along a first direction.

3. The display device as claimed in claim 2, wherein the first direction extends along a direction 45 degrees from a horizontal direction.

4. The display device as claimed in claim 1, wherein the first deflective area and the second deflective area extend along a first direction, and the first sub-deflective area and the second sub-deflective area extend along a second direction, and wherein an included angle between the first direction and the second direction is 45 degrees.

5. A display device, comprising:

- a projection lens configured to provide an original image; a Fresnel lens;
- an angle magnifying screen;
- a vertical diffuser;
- a first micro-deflector; and

a second micro-deflector provided between the first micro-deflector and the angle magnifying screen, wherein the first micro-deflector is provided between the Fresnel lens and the angle magnifying screen, and the angle magnifying screen is provided between the first micro-deflector and the vertical diffuser,

wherein the first micro-deflector is configured to redirect the original image into a first perspective image and a second perspective image, and wherein a perspective direction of the first perspective image differs from a perspective direction of the second perspective image, wherein the first micro-deflector comprises a first deflective area configured to redirect the original image into the first perspective image; and a second deflective area configured to redirect the original image into the second perspective image,

wherein the second micro-deflector is configured to redirect the first perspective image into a first sub-perspective image and a second sub-perspective image; and redirect the second perspective image into a third sub-perspective image and a fourth sub-perspective image, and wherein perspective directions of the first, second, third and fourth sub-perspective images differ from each other,

wherein the second micro-deflector comprises a first sub-deflective area and a second sub-deflective area configured to redirect the first perspective image into the first sub-perspective image and the second sub-perspective image; and redirect the second perspective image into the third sub-perspective image and the fourth sub-perspective image,

wherein the first deflector further comprises a third deflective area, and the second deflector further comprises a third sub-deflective area, and wherein the first, second and third deflective areas extend along a first direction, and the first, second and third sub-deflective areas extend along a second direction, and wherein an

8

included angle between the first direction and the second direction is 45 degrees, and wherein using the following equation to determine a deflective power:

$$\sin \varphi_o = n * \sin \theta_2 \sqrt{1 - [\sin(\theta_2 - \varphi_i) / n]^2} - \cos \theta_2 * \sin(\theta_2 - \varphi_i)$$

$$\sin \varphi_o = n * \sin \theta_1 \sqrt{1 - [\sin(\theta_1 + \varphi_i) / n]^2} - \cos \theta_1 * \sin(\theta_1 + \varphi_i)$$

the deflective powers of the first deflective area, the second deflective area and the third deflective area are (-3, 0, +3), and the deflective powers of the first sub-deflective area, the second sub-deflective area and the third sub-deflective area are (-1, 0, +1).

6. A display device, comprising:

- a projection lens configured to provide an original image; a Fresnel lens;
- an angle magnifying screen;
- a vertical diffuser;
- a first micro-deflector; and

a second micro-deflector provided between the first micro-deflector and the angle magnifying screen, wherein the first micro-deflector is provided between the Fresnel lens and the angle magnifying screen, and the angle magnifying screen is provided between the first micro-deflector and the vertical diffuser,

wherein the first micro-deflector is configured to redirect the original image into a first perspective image and a second perspective image, and wherein a perspective direction of the first perspective image differs from a perspective direction of the second perspective image, wherein the first micro-deflector comprises a first deflective area configured to redirect the original image into the first perspective image; and a second deflective area configured to redirect the original image into the second perspective image,

wherein the second micro-deflector is configured to redirect the first perspective image into a first sub-perspective image and a second sub-perspective image; and redirect the second perspective image into a third sub-perspective image and a fourth sub-perspective image, and wherein perspective directions of the first, second, third and fourth sub-perspective images differ from each other,

wherein the second micro-deflector comprises a first sub-deflective area and a second sub-deflective area configured to redirect the first perspective image into the first sub-perspective image and the second sub-perspective image; and redirect the second perspective image into the third sub-perspective image and the fourth sub-perspective image,

wherein the second deflector further comprises a third sub-deflective area and a fourth sub-deflective area, and the first deflective area and the second deflective area extend along a first direction, and the first, second, third and fourth sub-deflective areas extend along a second direction, and an included angle between the first direction and the second direction is 45 degrees, and wherein using the following equation to determine a deflective power:

$$\sin \varphi_o = n * \sin \theta_2 \sqrt{1 - [\sin(\theta_2 - \varphi_i) / n]^2} - \cos \theta_2 * \sin(\theta_2 - \varphi_i)$$

$$\sin \varphi_o = n * \sin \theta_1 \sqrt{1 - [\sin(\theta_1 + \varphi_i) / n]^2} - \cos \theta_1 * \sin(\theta_1 + \varphi_i)$$

the deflective powers of the first deflective area and the second deflective area are (-4, +4), and the deflective powers of the first sub-deflective area, the second sub-deflective area, the third sub-deflective area and the fourth sub-deflective area are (-3, -1, +1, +3).

7. A display device, comprising:

a projection lens configured to provide an original image; a first micro-deflector configured to receive the original image and redirect into a first perspective image and a second perspective image, wherein the first perspective image and the second perspective image comprise different perspective directions; and

a second micro-deflector configured to receive the first perspective image and redirect into a first sub-perspective image and a second sub-perspective image, the second micro-deflector further configured to receive the second perspective image and redirect into a third sub-perspective image and a fourth sub-perspective image, wherein the first, second, third and fourth sub-perspective images comprise different perspective directions,

wherein the first micro-deflector comprises a first deflective area configured to receive the original image and redirect into the first perspective image; and a second deflective area configured to receive the original image and redirect into the second perspective image, and wherein the second micro-deflector comprises a first sub-deflective area configured to receive the first perspective image and redirect into the first sub-perspective image and the second sub-perspective image, and a second sub-deflective area configured to receive the second perspective image and redirect into the third sub-perspective image and the fourth sub-perspective image, and

wherein using the following equation to determine a deflective power:

$$\sin \varphi_o = n * \sin \theta_2 \sqrt{1 - [\sin(\theta_2 - \varphi_i) / n]^2} - \cos \theta_2 * \sin(\theta_2 - \varphi_i)$$

$$\sin \varphi_o = n * \sin \theta_1 \sqrt{1 - [\sin(\theta_1 + \varphi_i) / n]^2} - \cos \theta_1 * \sin(\theta_1 + \varphi_i)$$

the deflective powers of the first deflective area and the second deflective area are (-2, +2), and the deflective powers of the first sub-deflective area and the second sub-deflective area are (-1, +1).

8. The display device as claimed in claim 7, wherein the first deflective area and the second deflective area extend along a first direction, the first sub-deflective area and the second sub-deflective area extend along a second direction, and an included angle between the first direction and the second direction is 45 degrees.

9. A display device, comprising:

a projection lens configured to provide an original image; a first micro-deflector configured to receive the original image and redirect into a first perspective image and a second perspective image, wherein the first perspective image and the second perspective image comprise different perspective directions; and

a second micro-deflector configured to receive the first perspective image and redirect into a first sub-perspective image and a second sub-perspective image, the second micro-deflector further configured to receive the second perspective image and redirect into a third sub-perspective image and a fourth sub-perspective

image, wherein the first, second, third and fourth sub-perspective images comprise different perspective directions,

wherein the first micro-deflector comprises a first deflective area configured to receive the original image and redirect into the first perspective image; and a second deflective area configured to receive the original image and redirect into the second perspective image, and wherein the second micro-deflector comprises a first sub-deflective area configured to receive the first perspective image and redirect into the first sub-perspective image and the second sub-perspective image, and a second sub-deflective area configured to receive the second perspective image and redirect into the third sub-perspective image and the fourth sub-perspective image,

wherein the first deflector further comprises a third deflective area, and the second deflector further comprises a third sub-deflective area, and wherein the first, second and third deflective areas extend along a first direction, and the first, second and third sub-deflective areas extend along a second direction, and wherein an included angle between the first direction and the second direction is 45 degrees, and

wherein using the following equation to determine a deflective power:

$$\sin \varphi_o = n * \sin \theta_2 \sqrt{1 - [\sin(\theta_2 - \varphi_i) / n]^2} - \cos \theta_2 * \sin(\theta_2 - \varphi_i)$$

$$\sin \varphi_o = n * \sin \theta_1 \sqrt{1 - [\sin(\theta_1 + \varphi_i) / n]^2} - \cos \theta_1 * \sin(\theta_1 + \varphi_i)$$

the deflective powers of the first deflective area, the second deflective area and the third deflective area are (-3, 0, +3), and the deflective powers of the first sub-deflective area, the second sub-deflective area and the third sub-deflective area are (-1, 0, +1).

10. A display device, comprising:

a projection lens configured to provide an original image; a first micro-deflector configured to receive the original image and redirect into a first perspective image and a second perspective image, wherein the first perspective image and the second perspective image comprise different perspective directions; and

a second micro-deflector configured to receive the first perspective image and redirect into a first sub-perspective image and a second sub-perspective image, the second micro-deflector further configured to receive the second perspective image and redirect into a third sub-perspective image and a fourth sub-perspective image, wherein the first, second, third and fourth sub-perspective images comprise different perspective directions,

wherein the first micro-deflector comprises a first deflective area configured to receive the original image and redirect into the first perspective image; and a second deflective area configured to receive the original image and redirect into the second perspective image, and wherein the second micro-deflector comprises a first sub-deflective area configured to receive the first perspective image and redirect into the first sub-perspective image and the second sub-perspective image, and a second sub-deflective area configured to receive the second perspective image and redirect into the third sub-perspective image and the fourth sub-perspective image,



wherein the second deflector further comprises a third sub-deflective area and a fourth sub-deflective area, and the first deflective area and the second deflective area extend along a first direction, and the first, second, third and fourth sub-deflective areas extend along a second direction, and an included angle between the first direction and the second direction is 45 degrees, and wherein using the following equation to determine a deflective power:

$$\sin \varphi_o = n * \sin \theta_2 \sqrt{1 - [\sin(\theta_2 - \varphi_i) / n]^2} - \cos \theta_2 * \sin(\theta_2 - \varphi_i) \tag{10}$$

$$\sin \varphi_o = n * \sin \theta_1 \sqrt{1 - [\sin(\theta_1 + \varphi_i) / n]^2} - \cos \theta_1 * \sin(\theta_1 + \varphi_i) \tag{15}$$

the deflective powers of the first deflective area and the second deflective area are (-4, +4), and the deflective powers of the first sub-deflective area, the second sub-deflective area, the third sub-deflective area and the fourth sub-deflective area are (-3, -1, +1, +3).

\* \* \* \* \*