

(12) **United States Patent**  
**Sचना**

(10) **Patent No.:** **US 9,850,994 B2**  
(45) **Date of Patent:** **\*Dec. 26, 2017**

(54) **COMPACT CABLE TENSION TENDER DEVICE**

474/115, 117; 242/388-388.8, 155 R,  
242/155 BW, 390-393; 254/277;  
49/332, 382, 348, 349, 374, 138, 139

(75) Inventor: **Bruce M. Schena**, Menlo Park, CA (US)

See application file for complete search history.

(73) Assignee: **Intuitive Surgical Operations, Inc.**, Sunnyvale, CA (US)

(56) **References Cited**

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1254 days.  
  
This patent is subject to a terminal disclaimer.

U.S. PATENT DOCUMENTS

2,212,823 A	8/1940	Bulk	
2,810,300 A *	10/1957	Pigford .....	74/501.5 R
2,992,568 A *	7/1961	Benkovsky et al. ....	74/501.5 R
3,180,176 A *	4/1965	De Maagd et al. ....	74/501.5 R
3,266,335 A	8/1966	Wright, Jr.	

(Continued)

(21) Appl. No.: **12/766,794**

OTHER PUBLICATIONS

(22) Filed: **Apr. 23, 2010**

PCT/US07/91183 International Search Report, dated Jun. 19, 2008, 3 pages.

(65) **Prior Publication Data**

US 2010/0219388 A1 Sep. 2, 2010

(Continued)

**Related U.S. Application Data**

(63) Continuation of application No. 11/549,087, filed on Oct. 12, 2006, now Pat. No. 7,736,254.

*Primary Examiner* — Daniel D Yabut

(74) *Attorney, Agent, or Firm* — Blakely Sokoloff Taylor & Zafman LLP

(51) **Int. Cl.**

<b>F16H 19/06</b>	(2006.01)
<b>B25J 9/10</b>	(2006.01)
<b>A61B 19/00</b>	(2006.01)
<b>A61B 34/00</b>	(2016.01)
<b>A61B 34/30</b>	(2016.01)

(57) **ABSTRACT**

A compact cable tension tender device includes first and second pulleys rotatably coupled to a drive shaft. First and second plates are fixed to the drive shaft. Drive stops on the plates engage and rotate the pulleys when the drive shaft is rotated. A resilient coupler urges the first and second pulleys to rotate away from engagement with the drive stops. Cables are coupled to the pulleys and adjusted to be in tension such that the first and second pulleys both engage the drive stops at the same time. The engagement of both pulleys with the drive stops at the same time minimizes lost motion when reversing the rotation of the drive shaft.


(52) **U.S. Cl.**

CPC ..... **F16H 19/06** (2013.01); **A61B 34/30** (2016.02); **A61B 34/71** (2016.02); **B25J 9/1045** (2013.01); **F16H 19/0672** (2013.01); **A61B 2034/715** (2016.02)

(58) **Field of Classification Search**

USPC ..... 74/89.22, 89.2, 501.5 R, 500.5, 74/502.4-502.6, 506; 474/101, 109, 112,

**13 Claims, 7 Drawing Sheets**

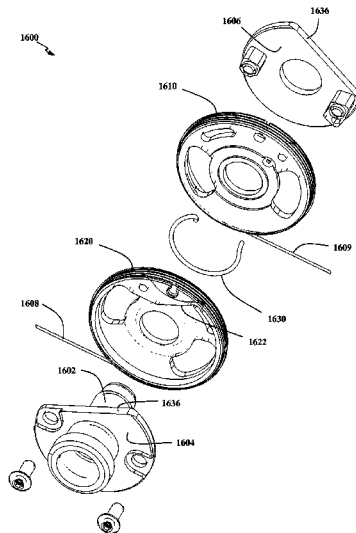

(56)

**References Cited**

U.S. PATENT DOCUMENTS

3,433,089	A *	3/1969	Geyer .....	74/501.5	R
3,712,147	A	1/1973	Bernstein		
4,529,155	A *	7/1985	Bramwell .....	74/501.5	R
4,936,159	A *	6/1990	Kallio .....	74/501.5	R
4,938,304	A *	7/1990	Yamaguchi .....	74/501.5	R
5,365,802	A *	11/1994	Suzuki et al. ....	74/500.5	
5,813,282	A *	9/1998	Azuma .....	74/506	
6,193,621	B1	2/2001	McClosky		
7,025,298	B2 *	4/2006	Priest .....	242/388.8	
7,736,254	B2 *	6/2010	Schena .....	474/101	
2004/0065018	A1	4/2004	Regnier et al.		

OTHER PUBLICATIONS

PCT/US07/81183 Written Opinion of the International Search Authority, dated Jun. 19, 2008, 8 pages.

William Townsend of Barrett Technology, Inc. for Johnson Space Center, Improved Cable-Drive Pretensioner, Jul. 2000, <http://www.nasatech.com/briefs/july00/msc22405>.

Vertut, Jean and Coiffet, Philippe Coiffet, "Robot Technology; Volume 3A Teleoperation and Robotics Evolution and Development", 1986, Prentice-Hall Inc.

\* cited by examiner

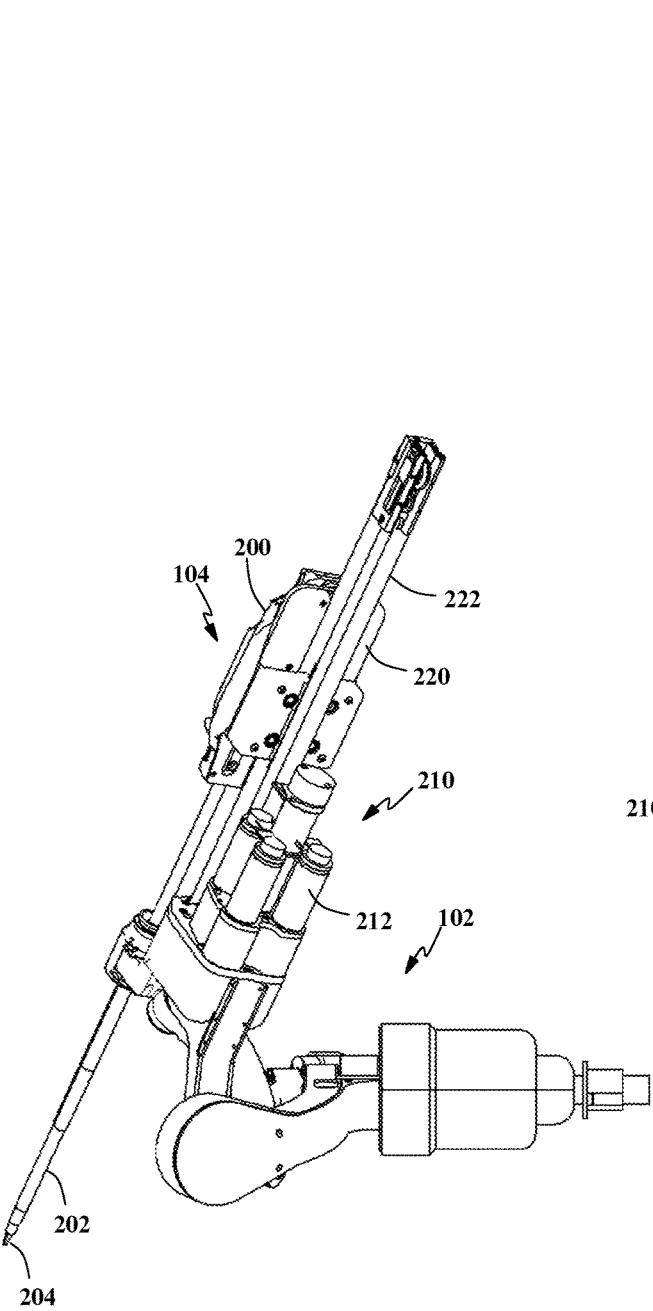


FIG. 1

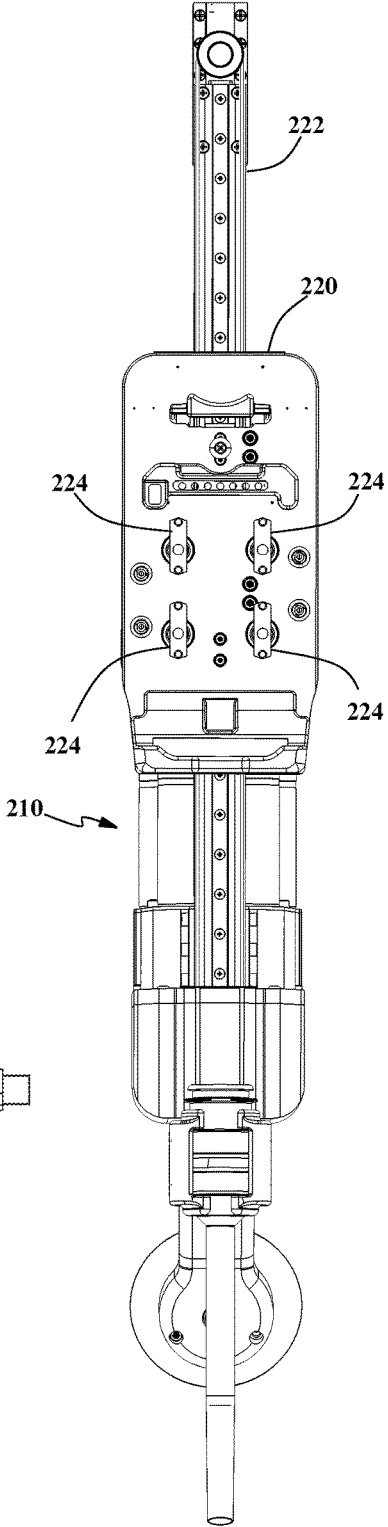


FIG. 2

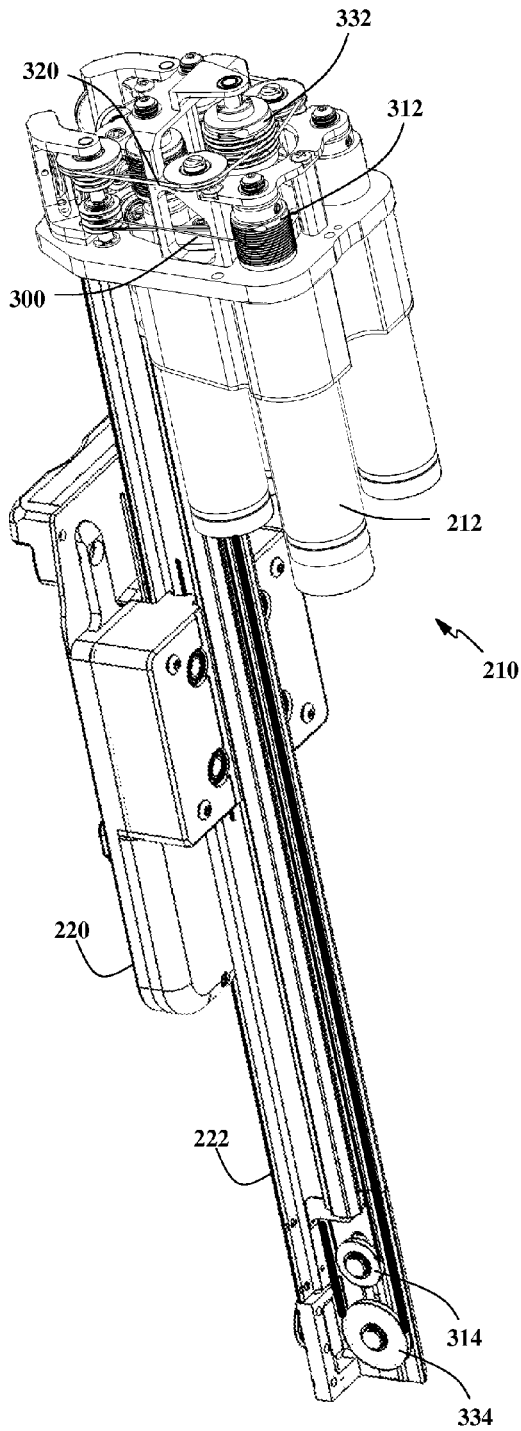


FIG. 3

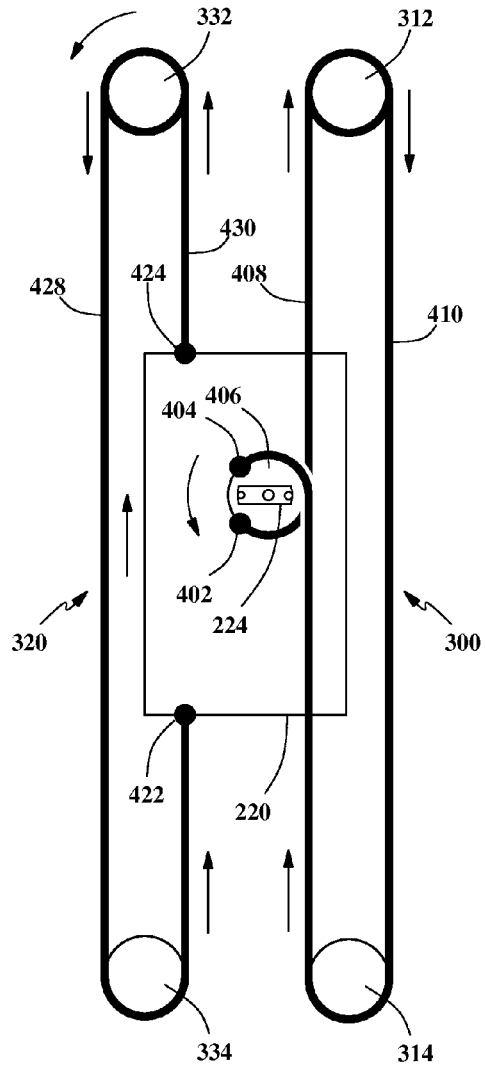
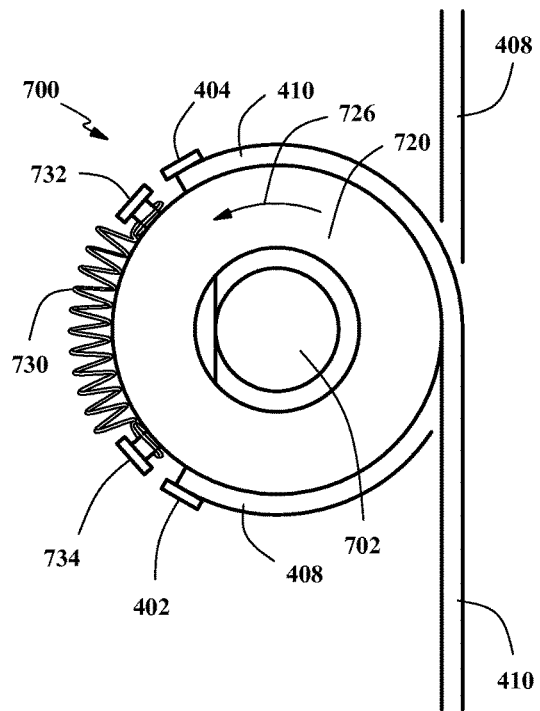
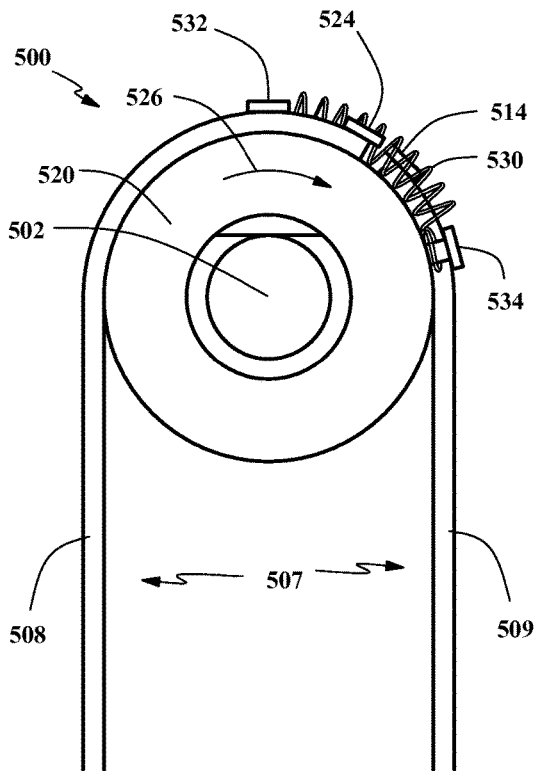
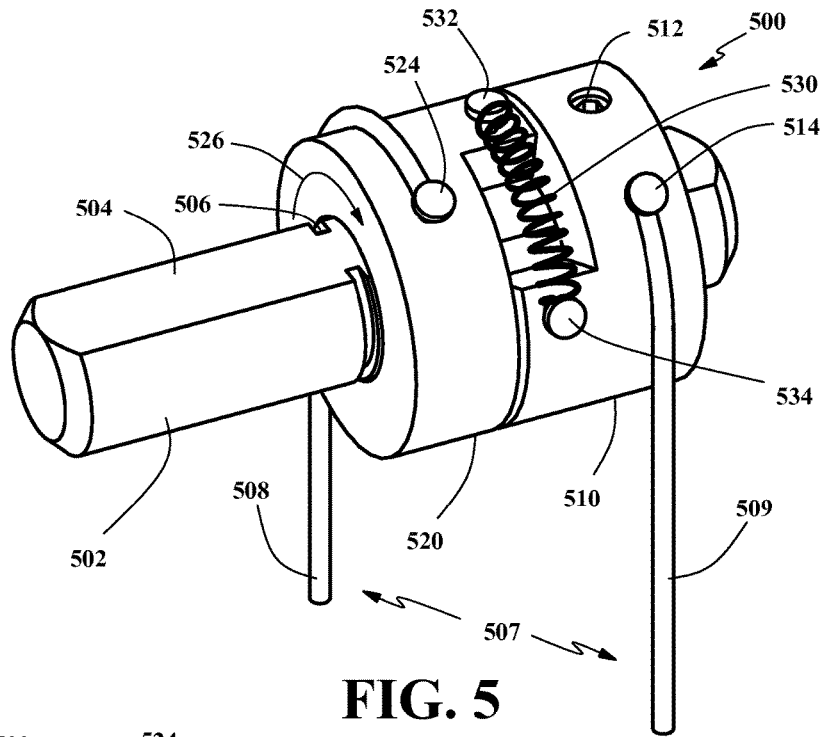


FIG. 4



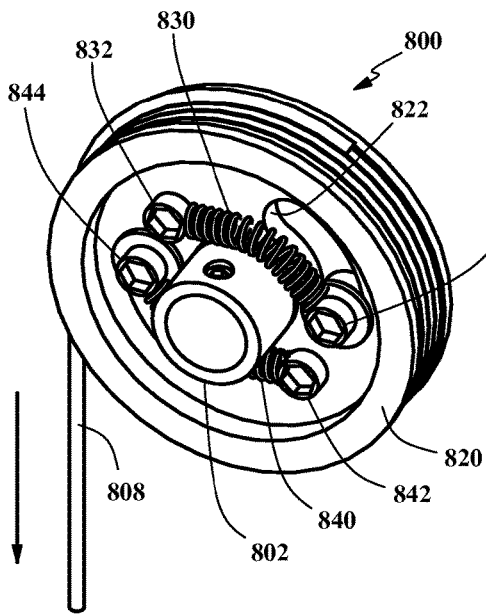


FIG. 8A

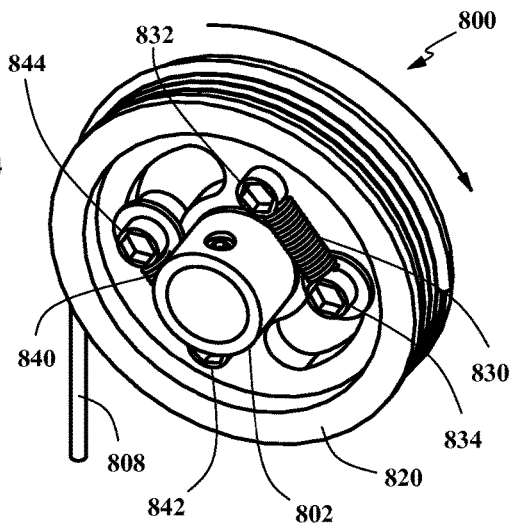


FIG. 8B

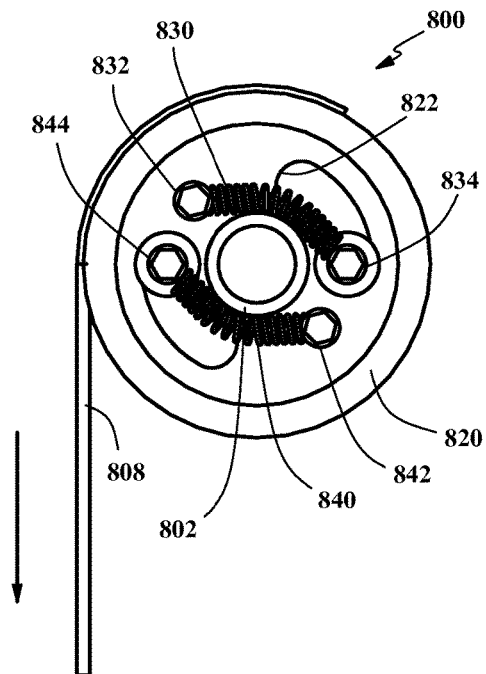


FIG. 9A

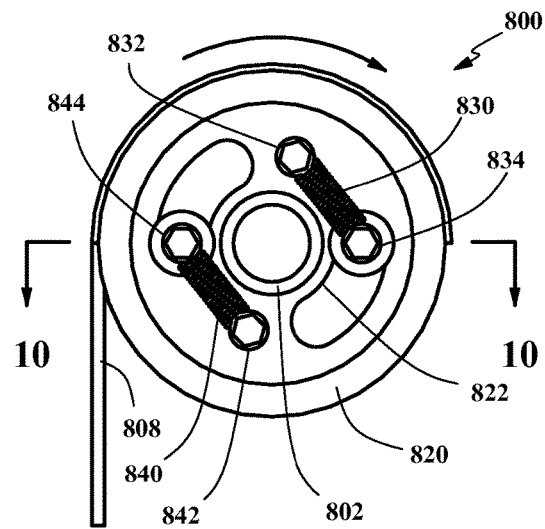


FIG. 9B

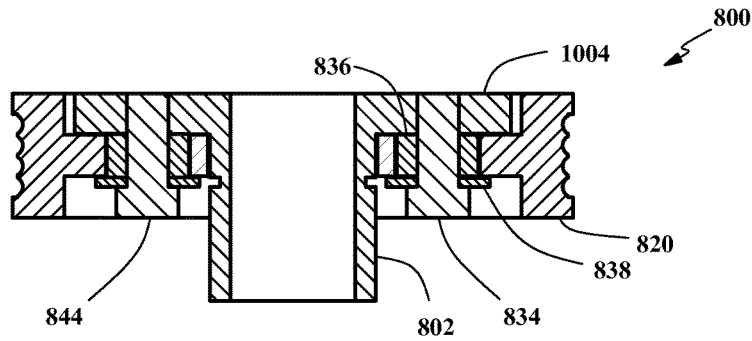


FIG. 10

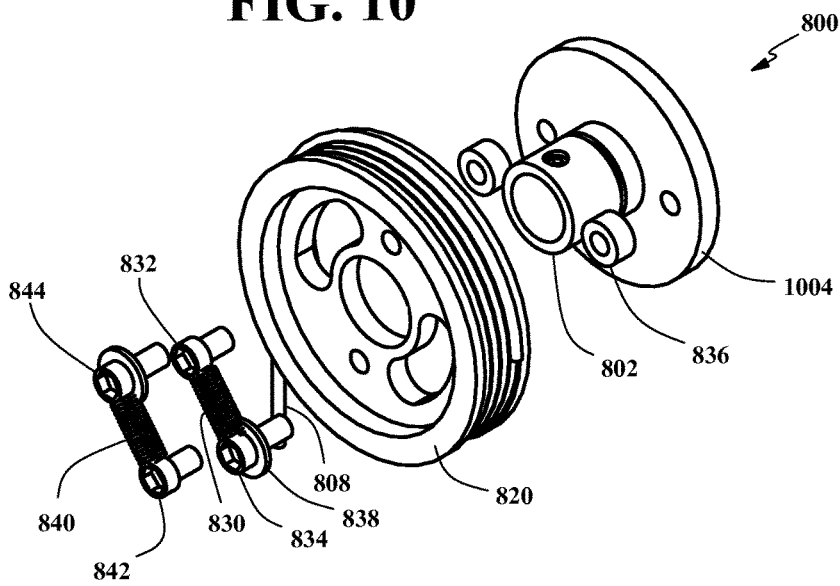


FIG. 11

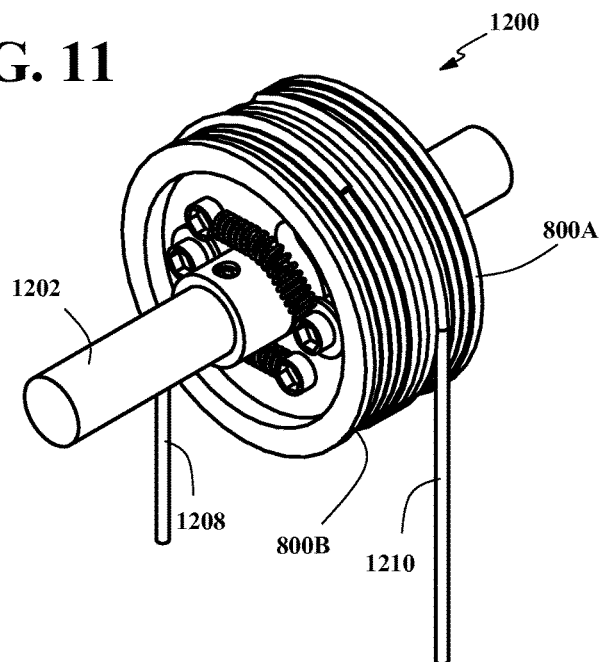


FIG. 12

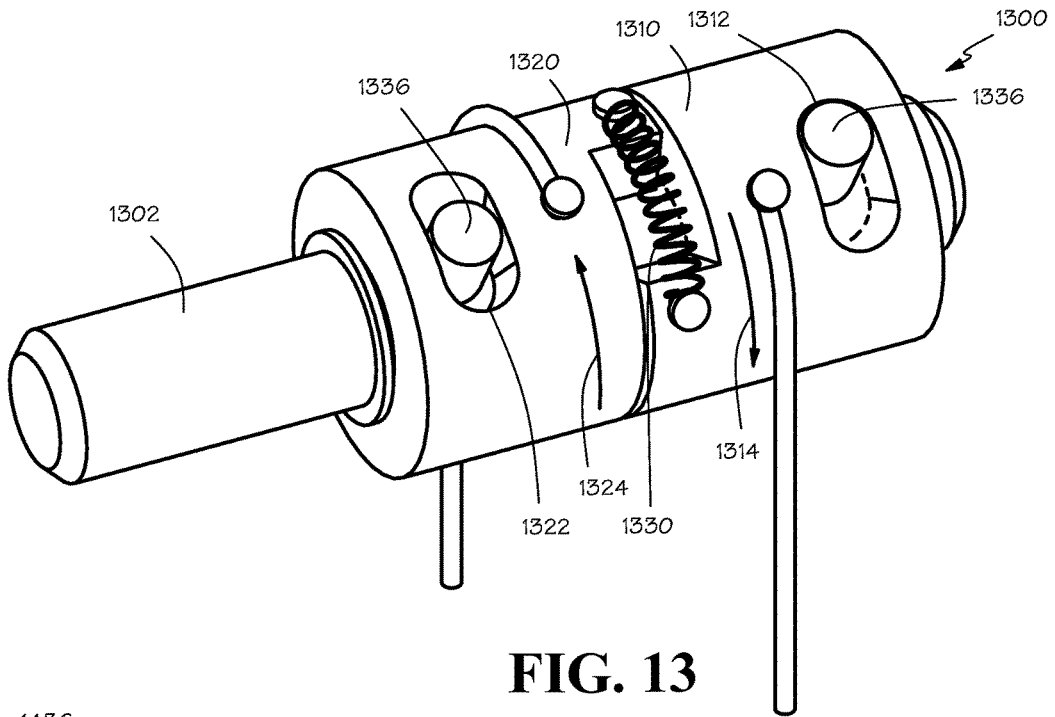


FIG. 13

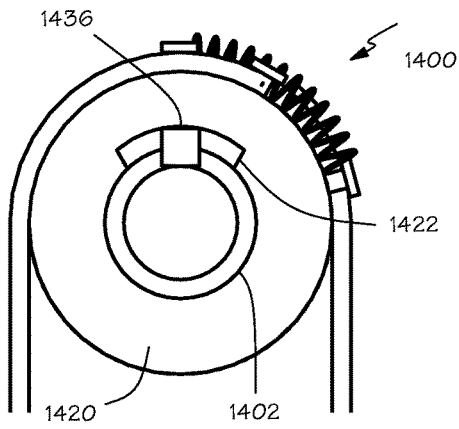


FIG. 15

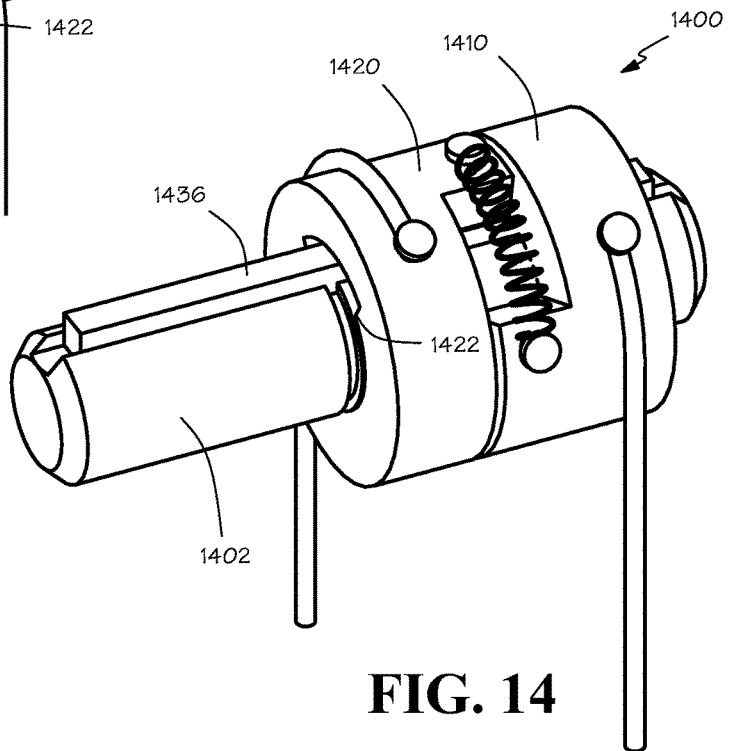


FIG. 14



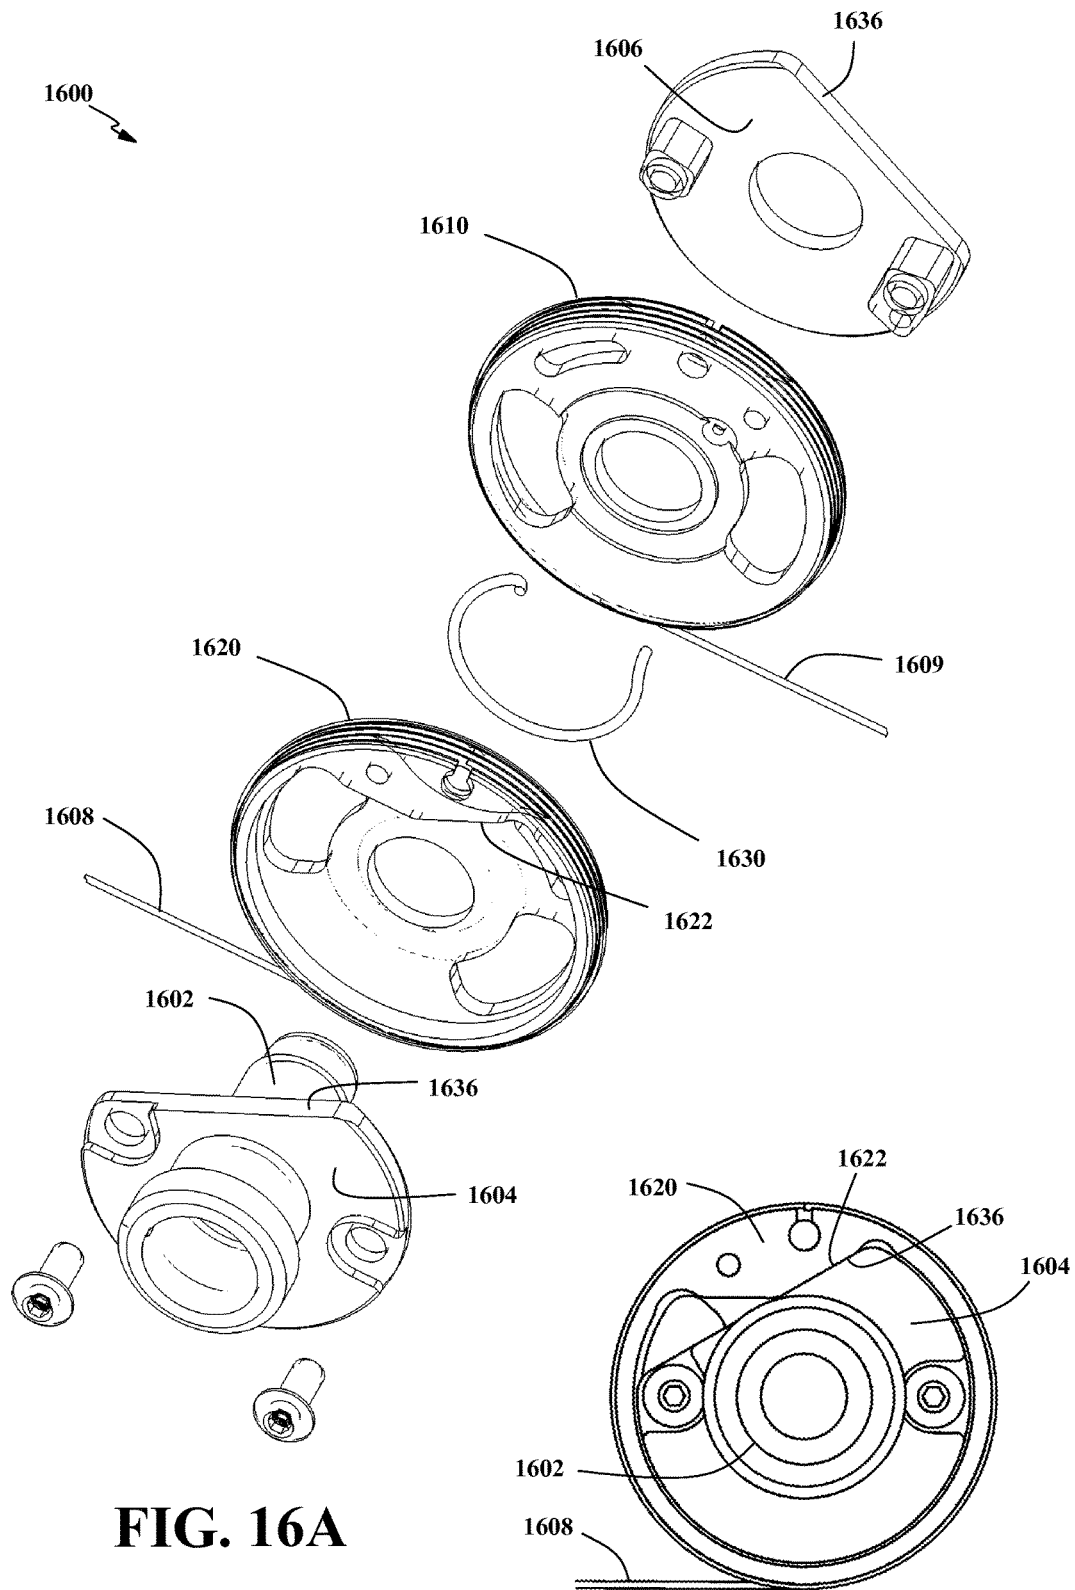


FIG. 16A

FIG. 16B

1

## COMPACT CABLE TENSION TENDER DEVICE

### CROSS REFERENCE TO RELATED APPLICATIONS

This application is a continuation of application Ser. No. 11/549,087, filed Oct. 12, 2006, which is hereby incorporated by reference in its entirety.

### BACKGROUND

Minimally invasive surgery (MIS) provides surgical techniques for operating on a patient through small incisions using a camera and elongate surgical instruments introduced to an internal surgical site, often through trocar sleeves or cannulas. The surgical site often comprises a body cavity, such as the patient's abdomen. The body cavity may optionally be distended using a clear fluid such as an insufflation gas. In traditional minimally invasive surgery, the surgeon manipulates the tissues using end effectors of the elongate surgical instruments by actuating the instrument's handles while viewing the surgical site on a video monitor.

A common form of minimally invasive surgery is endoscopy. Laparoscopy is a type of endoscopy for performing minimally invasive inspection and surgery inside the abdominal cavity. In standard laparoscopic surgery, a patient's abdomen is insufflated with gas, and cannula sleeves are passed through small (generally 1/2 inch or less) incisions to provide entry ports for laparoscopic surgical instruments. The laparoscopic surgical instruments generally include a laparoscope (for viewing the surgical field) and instruments for performing surgical functions such as gripping or cutting.

Laparoscopic surgical instruments are similar to those used in conventional (open) surgery, except that the working end or end effector of each instrument is separated from its handle by a shaft. As used herein, the term "end effector" means the actual working part of the surgical instrument and can include clamps, graspers, scissors, staplers, image capture lenses, and needle holders, for example. To perform surgical procedures, the surgeon passes these surgical instruments through the cannula sleeves to an internal surgical site and manipulates them from outside the abdomen. The surgeon monitors the procedure by means of a monitor that displays an image of the surgical site taken from the laparoscope. Similar endoscopic techniques are employed in other types of surgeries such as arthroscopy, retroperitoneoscopy, pelviscopy, nephroscopy, cystoscopy, cisternoscopy, sinoscopy, hysteroscopy, urethroscopy, and the like.

Robotic control may provide an improved control interface to the surgeon. Robotically controlled surgical instruments may be driven by servo mechanisms, such as servo motors, that are coupled to the surgical instrument by mechanical cables. Each servo mechanism may be coupled to a cable by a driving pulley that draws in and pays out the cable wound around the driving pulley. The cable may be routed to and from the driving pulley by one or more guide pulleys. As space in the surgical field over a patient where robotically controlled surgical instruments are being used is at a premium, it is desirable to have a compact mechanism to drive and control the robotically controlled surgical instruments.

The cable may rotate a driven pulley that is coupled to the robotically controlled surgical instrument to drive and control movement of the instrument. A portion of the cable may be wound around the driving and/or driven pulley more than

2

once to improve the transfer of force and motion between the cable and the pulley. The cable may be made up of two or more cable segments. The ends of segments may be attached to pulleys and these segment ends may be wound around the driving and/or driven pulley more than once to provide a larger range of motion. The driving and driven pulleys may be referred to as capstans in such configurations.

The cable may move a linearly driven mechanism, such as a carriage, rather than rotate a driven pulley. While the description will primarily discuss systems with a rotationally driven pulley, it should be understood that in many, but not all of the systems, a linearly driven mechanism may be substituted for the rotationally driven pulley.

The cable may be split at the driving and/or driven pulley with each of the cable segment ends coupled to the pulley to provide a positive connection between the cable and the pulley. It will be appreciated that the two cable segments will still continue to function as they would if the cable was wound around the pulley as a single continuous cable. References to a cable should be understood to include arrangements of two or more cable segments where the segments are operatively coupled, such as by being joined to a pulley that transfers force and motion from one segment to the other.

In a typical cable drive system for a robotically controlled surgical instrument, a cable is guided by a pulley and wound onto a pulley that is fixed to a shaft that is driven by a motor. The cable is normally adjusted to place the cable in tension. Maintaining tension in the cable may be necessary to keep the cable properly positioned on the guiding pulleys and the driving and driven pulleys.

The cable may stretch under an applied load. The stretch may be constructional and/or elastic. Constructional stretch is the result of the clearances between the individual wires and strands being reduced as the cable is loaded, allowing the cable to "stretch" in length. Elastic stretch is the actual elongation of the individual wires in a strand or cable when subjected to a load that is less than the yield point of the metal. When the load is removed from the cable it will return to its original length.

A cable can only transmit force or motion in tension. Thus the applied force must draw in the cable and pull on the driven end. In a system that uses a cable loop between the driving pulley and the driven pulley, one portion of the cable will be drawn in by the driving pulley. The tension in the drawn in portion of the cable may be increased substantially if the driven end is working against mechanical resistance. The increase in tension may cause this portion of the cable to stretch.

The other portion of the cable in a cable loop is payed out by the driving pulley and taken up by the driven pulley. The tension in the payed out portion of the cable may be reduced substantially, or even eliminated, if the driven end is working against mechanical resistance. Further, if the drawn in portion of the cable stretches, the increased length of the cable will also contribute to slack in the payed out portion of the cable.

It may be necessary to provide a mechanism to maintain tension in the payed out portion of the cable to keep the cable loop properly positioned. This may be accomplished by including an extension spring as part of the cable. However this requires that there be a portion of the cable with a distance between pulleys that is greater than the range of motion of the cable. A distance between the pulleys is necessary because the extension spring is normally substantially larger in diameter than the cable and thus cannot pass over the pulleys. Including an extension spring as part of the

3

cable may be detrimental if the cable loop is required to provide positive force and/or positioning in both directions. Including an in-line spring as part of the cable loop may greatly increase the elasticity of the cable loop and adversely affect the ability to positively transmit force and/or motion between the driving pulley and the driven pulley.

It would be desirable to provide a mechanism that can compensate for stretching of a cable loop with positive transmission of force and/or motion without requiring additional space between pulleys.

### SUMMARY

A compact cable tension tender device includes a movable member having a first stop and a second stop spaced apart from the first stop. A first attachment may be provided on the moveable member for cable that extends in a first direction. The first attachment may engage the first stop to limit the movement of the cable in the first direction relative to the movable member. A second attachment may be provided on the moveable member for cable that extends in a second direction. The second attachment may engage the second stop to limit the movement of the cable in the second direction relative to the movable member. A resilient coupler coupled to the first attachment and to the second attachment may urge the first attachment to move in the second direction and the second attachment to move in the first direction relative to each other to maintain cable tension.

Other features and advantages of the present invention will be apparent from the accompanying drawings and from the detailed description that follows below.

### BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is illustrated by way of example and not limitation in the figures of the accompanying drawings, in which like references indicate similar elements and in which:

FIG. 1 is a pictorial view of a robotic surgical tool that includes an embodiment of the invention.

FIG. 2 is a side view of a robotic surgical tool that includes an embodiment of the invention.

FIG. 3 is a pictorial view of a robotic surgical tool that includes an embodiment of the invention.

FIG. 4 is a schematic view of the robotic surgical tool of FIG. 3.

FIG. 5 is a pictorial view of a device that embodies the invention.

FIG. 6 is an end view of the device of FIG. 5.

FIG. 7 is an end view of another device that embodies the invention.

FIGS. 8A and 8B are pictorial views of another device that embodies the invention shown in two operative positions.

FIGS. 9A and 9B are end views of the device shown in FIGS. 8A and 8B.

FIG. 10 is a cross-sectional view of the device taken on section line 10-10 in FIG. 9B.

FIG. 11 is an exploded view of the device shown in FIG. 8B.

FIG. 12 is a pictorial view of another device that embodies the invention.

FIG. 13 is a pictorial view of another device that embodies the invention.

FIG. 14 is a pictorial view of another device that embodies the invention.

FIG. 15 is an end view of the device of FIG. 14.

4

FIG. 16A is an exploded view of another device that embodies the invention.

FIG. 16B is an end view of a portion of the device of FIG. 16A.

### DETAILED DESCRIPTION

Endoscopy may be performed with robotically controlled surgical instruments, such as the one shown in FIGS. 1-3. A robotic arm 102 may support and position a robotic surgical instrument 104. The surgical instrument 104 may have a head portion 200 that is coupled to a movable carriage 220 on the robotic arm 102. A spar 222 may provide a linear track for the movable carriage 220, allowing the robotic arm to change the depth of insertion of the surgical instrument 104 by moving the carriage along the spar.

The robotic arm 102 may include one or more servo motors 212 that are coupled to the movable carriage 220 to robotically move the surgical instrument 104. Each servo motor 212 may be coupled to the movable carriage by a cable loop as may be seen in FIG. 3 and represented schematically in FIG. 4.

One servo motor 212 may drive a pulley 332 that is coupled to the movable carriage 220 by a cable loop 320 to move the carriage along the spar 222 under the control of the servo motor. To move the carriage 220, one segment 430 of the cable loop 320 is drawn in by the servo motor 212 driven pulley 332 while a second cable segment 428 is payed out. A guide pulley 334 may be provided to change the direction of the cable 320 as required. It will be appreciated that only the segment 430 of the cable loop 320 being drawn in by the pulley 332 provides motive force to the movable carriage 220.

Another servo motor 212 may drive a pulley 312 that is coupled to a rotatable driver 224 on the movable carriage 220 by a cable loop 300 to rotate the driver under the control of the servo motor. The driver 224 may be coupled to the head 200 (FIG. 1) of the surgical instrument 104 to control the motion of an end effector 204 that may be located at the end of a shaft 202 connected to the head. To move the driver 224, one segment 408 of the cable loop 300 is drawn in by the servo motor 212 driven pulley 312 while a second segment 410 is payed out. A guide pulley 314 may be provided to change the direction of the cable 300 as required. It will be appreciated that only the segment 410 of the cable loop 300 being drawn in by the servo motor 212 driven pulley 312 provides motive force to the driver 224.

FIGS. 5 and 6 show a tension tender device 500 that may be coupled to a servo motor 412, 432 or a rotatable driver 224 to couple a cable loop 507 to the servo motor or rotatable driver. The tension tender device 500 may include a drive shaft 502 and a first pulley 510 that is coupled to the drive shaft. The first pulley 510 may be fixed to rotate in unison with the drive shaft 502. For example, the first pulley 510 may be fixed to a flat 504 on the drive shaft 502 by a set screw 512 in the first pulley. In other embodiments, the first pulley and the drive shaft may be a single part or may be joined by other means such as a roll pin, a key and slot, splines, or a press fit. The first pulley 510 may provide an attachment 514 for an end of a segment 509 of the cable 507.

The tension tender device 500 may include a second pulley 520 rotatably coupled to the drive shaft 502. The second pulley 520 may be constrained axially on the drive shaft 502, such as by the first pulley 510 and a snap ring (not shown) installed in a groove 506 in the drive shaft 502. The second pulley 520 may provide an attachment 524 for an end of a second segment 508 of the cable 507.

5

A resilient coupler **530**, such as an extension spring, may couple an attachment **532** on the second pulley **520** to the drive shaft **502**. In the tension tender device **500** illustrated in FIG. **5**, the resilient coupler **530** is coupled to the drive shaft **502** through an attachment **534** on the first pulley **510** which is fixed to the drive shaft. The resilient coupler **530** urges the second pulley **520** to rotate relative to the drive shaft **502**. Referring to FIG. **5** and to the left end view in FIG. **6** for example, the resilient coupler **530** urges the second pulley **520** to rotate clockwise as suggested by the arrow **526** shown on the face of the second pulley **520**.

If the tension tender **500** shown in FIGS. **5** and **6** is used as the pulley **332** shown in FIG. **4**, the cable segment **430** fixed to the drive shaft **502** corresponds to cable segment **430** that provides the motive force to the carriage **220**. The cable segment **428** being payed out corresponds to the cable segment **508** that is attached to the second pulley **520**, which can be drawn onto the second pulley by the resilient coupler **530** if slack develops in the portion of the cable **320** being payed out.

FIG. **7** is an end view of a tension tender **700** having a similar construction to the tension tender **500** shown in FIGS. **5** and **6** and as may be applied to the driver **224** as shown in FIG. **4**. It will be appreciated that this tension tender **700** operates in the opposite direction from the embodiment shown in FIGS. **5** and **6**. The tension tender device **700** may be coupled to the rotatable driver **224** to couple the cable loop **400** to the rotatable driver as shown schematically in FIG. **4**. The first cable end **408** of the cable **400** is drawn off of the driver **224** to rotate the driver counter-clockwise. The second end **410** of the cable **400** is drawn on to the driver **224**.

It will be appreciated that the servo motor **312** will increase the tension force in the first segment **408** of the cable **400** to rotate the driver **224** in the counter-clockwise direction indicated by the arrow. The tension in the second segment **410** of the cable **400** will be reduced by this action. It is possible that the second segment **410** of the cable **400** could go slack, particularly if the driver **224** is heavily loaded such as by encountering a solid obstacle. However, the resilient coupler **730** will cause the second pulley **720** rotate clockwise relative to the drive shaft **702** as suggested by the arrow **726** on the face of the second pulley. This may maintain tension in the second segment **410** of the cable **400** when tension is not applied to that segment of the cable.

The tension tender device **500** may coupled to the servo motor **432** to couple the cable loop **420** to the moving carriage **220** as shown schematically in FIG. **4**. The motor **432** may be coupled to the drive shaft **502** to rotate the drive shaft in a counter-clockwise direction as suggested by the arrow in FIG. **4**. The first cable end **509** shown in FIG. **5** would correspond to the first segment **430** of the cable **420** pulling the carriage **220** toward the servo motor **432** in FIG. **4**. The second cable end **508** shown in FIG. **5** would correspond to the second segment **428** of the cable **400** being drawn out by the carriage **220** in FIG. **4**.

It will be appreciated that the servo motor **432** will increase the tension force in the first segment **430** of the cable **420** to pull the carriage **220**. The tension in the second segment **428** of the cable **420** will be reduced by this action. It is possible that the second segment **428** of the cable **420** could go slack, particularly if the carriage **220** is heavily loaded such as by encountering a solid obstacle. However, the resilient coupler **530** will cause the second pulley **520** rotate clockwise relative to the drive shaft **502** as suggested by the arrow **526** on the face of the second pulley. This may

6

maintain tension in the second segment **428** of the cable **420** when tension is not applied to that segment of the cable.

FIGS. **8** to **11** show another embodiment of a tension tender device **800**. The tension tender device **800** may include a drive shaft **802** and a pulley **820** that is rotatably coupled to the drive shaft **802**. The drive shaft **802** may be in the form of a hub with a through bore to allow the tension tender device **800** to be mounted to another shaft to functionally extend the drive shaft **802** of the tension tender device.

As best seen in the cross section of FIG. **10**, the pulley **820** is rotatably held on the drive shaft **802**. The pulley **820** may be axially constrained. For example, the drive shaft **802** may include a flange **1004** that constrains the pulley **820** in one axial direction. A stop assembly may be formed from a screw **834**, a bushing **836**, and a washer **838** that is fixed to the flange **1004** of the drive shaft **802**. The stop assembly may pass through a slotted opening in the face of the pulley **820**. The washer **838** portion of the stop assembly may constrain the pulley **820** in a second axial direction. It will be appreciated that the pulley **820** may be axially constrained by means other than the stop assembly.

A resilient coupler **830**, such as an extension spring, may couple an attachment **832** on the pulley **820** to the drive shaft **802**. In the tension tender device **800** illustrated in FIG. **8**, the resilient coupler **830** is coupled to the drive shaft **802** through the stop assembly which is fixed to the drive shaft. The resilient coupler **530** urges the pulley **820** to rotate relative to the drive shaft **802**.

One or both faces of the pulley **820** may include a recessed portion to receive one or more of the flange **1004**, the stop assembly, and the resilient coupler **830**. This may contribute to the compactness of the tension tender device **800**. FIG. **11** shows the parts in an exploded view.

Referring to FIGS. **8A** and **8B** and to the left end views in FIGS. **9A** and **9B** for example, the resilient coupler **830** urges the pulley **820** to rotate clockwise. FIGS. **8A** and **9A** show the pulley **820** in a first position where tension is applied to a cable segment **808** that is attached to the pulley. FIGS. **8B** and **9B** show the pulley **820** in a second position where the cable segment **808** has gone slack. As suggested by the arrow **826**, the resilient coupler **830** has caused the pulley **820** to rotate clockwise relative to the drive shaft **802** and take up the slack in the attached cable segment **808**.

When tension is applied to a cable segment **808** that is attached to the pulley **820** as shown in FIGS. **8A** and **9A**, the pulley may rotate against the force of the resilient coupler **830** and cause the stop assembly to engage the pulley. For example, the bushing **836** may engage the end of the slot **822**. When the stop assembly engages the pulley **820**, the pulley will operate as though it were fixed to the drive shaft **802**. Tension in the attached cable segment **808** will be positively coupled to rotation of the drive shaft.

When tension is applied to the attached cable segment **808**, the pulley **820** of this embodiment acts in the same manner as the first pulley **510** of the embodiment of a tension tender device **500** shown in FIG. **5**. When the attached cable segment **808** goes slack, the pulley **820** of this embodiment acts in the same manner as the second pulley **520** of the embodiment shown in FIG. **5**.

As shown in FIG. **12**, two tension tender devices **800A**, **800B** of the type shown in FIGS. **8** to **11** may be assembled back to back on a supporting drive shaft **1202**. This assembly **1200** will operate to positively couple whichever of the attached cable segments **1208**, **1210** is in tension to the drive shaft **1202**. If the remaining cable segment **1208**, **1210** goes slack, the resilient coupler **830** of the tension tender device

800A, 800B to which the slack cable segment is attached will cause the pulley 820 to rotate relative to the drive shaft 1202 to maintain tension in the cable. It may be advantageous to adjust the system so that both attached cable segments 1208, 1210 are in tension such that both stop assemblies engage their respective pulleys. This may minimize lost motion when reversing the direction of motion.

FIG. 13 shows another embodiment of a tension tender device 1300. In this embodiment, the drive shaft 1302 includes drive stops in the form of pins 1336 that extend radially though the drive shaft. Two pulleys 1310, 1320 are rotatably coupled to the drive shaft 1302. The first pulley 1310 includes a first stop 1312 that engages the drive stop 1336 when the first pulley is rotated in a first direction 1314. The second pulley 1320 includes a second stop 1322 that engages the drive stop 1336 when the second pulley is rotated in a second direction 1324.

A resilient coupler 1330 is coupled to the first pulley 1310 and to the second pulley 1320. The resilient coupler 1330 urges the second pulley 1320 to rotate in the first direction when the first stop 1312 of the first pulley 1310 engages the drive stop 1336. The resilient coupler 1330 urges the first pulley 1310 to rotate in the second direction when the second stop 1322 of the second pulley 1320 engages the drive stop 1336. This configuration may allow a single spring to be used as the resilient coupler 1330 for a tension tender device 1300 that maintains cable tension in both directions of motion.

FIGS. 14 and 15 show another embodiment of a tension tender device 1400. In this embodiment, the drive shaft 1402 includes drive stops in the form of a key 1436 that extend axially along the drive shaft. The pulleys 1410, 1420 include stops in the form of a wide keyway that allows a limited range of rotation. As seen in the left end view of FIG. 15, the second pulley 1420 includes a second stop 1422 that engages the drive stop 1436 when the second pulley is rotated counter-clockwise.

FIGS. 16A and 16B show another embodiment of a tension tender device 1600. In this embodiment, the drive shaft 1602 includes a first plate 1604 that provides a first axial constraint for the pulleys 1610, 1620. The first plate 1604 is coupled to a second plate 1606 that provides a second axial constraint for the pulleys 1610, 1620.

Each of the two plates 1604, 1606 includes a drive stop 1636 in the form of a flat edge on the plate. Each of the two pulleys 1610, 1620 includes a stop 1622 in the form of a recess that includes a flat edge. As best seen in FIG. 16B, an end view of one pulley 1620, the drive stop 1636 on the plate engages the stop 1622 on the pulley when the cable segment 1608 that is attached to the pulley is in tension.

If the cable segment 1608 that is coupled to the pulley 1620 is drawn off the pulley to rotate the pulley clockwise, the pulley will rotate relative to the drive shaft 1602 until the stop 1622 on the pulley engages the drive stop 1636 that is coupled to the drive shaft. The drawing of the cable segment 1608 will then positively rotate the drive shaft 1602 clockwise. If the second cable segment 1609 coupled to the second pulley 1610 goes slack, the resilient coupler 1630 will rotate the second pulley in a clockwise direction, causing the stop 1622 on the second pulley to separate from the drive stop 1636 and maintain tension in the second cable segment.

If the drive shaft 1602 is rotated counter-clockwise, such as by a motor, the drive shaft will rotate relative to the pulley 1620 until the drive stop 1636 that is coupled to the drive shaft engages the stop 1622 on the pulley. The rotation of the drive shaft 1602 will then positively rotate the pulley 1620

counter-clockwise to wind in the cable segment 1608. If the second cable segment 1609 coupled to the second pulley 1610 goes slack, the resilient coupler 1630 will rotate the second pulley in a clockwise direction, causing the stop 1622 on the second pulley to separate from the drive stop 1636 and maintain tension in the second cable segment.

It will be appreciated that the stop assembly 1622, 1636 of the second pulley 1610 and the second plate 1606 will operate as described for the first pulley 1620 and the first plate 1604 for motion in the opposite direction.

While certain exemplary embodiments have been described and shown in the accompanying drawings, it is to be understood that such embodiments are merely illustrative of and not restrictive on the broad invention, and that this invention not be limited to the specific constructions and arrangements shown and described, since various other modifications may occur to those ordinarily skilled in the art.

What is claimed is:

1. A tension tender device comprising:

- a drive shaft;
- a first plate fixedly coupled to the drive shaft and including a first drive stop;
- a first pulley rotatably coupled to the drive shaft, the first pulley including a first recess that receives the first plate;
- a first cable coupled to the first pulley, the first cable rotating the first pulley in a first direction when the first cable is in tension and thereby causing the first recess in the first pulley to engage the first drive stop; and
- a resilient coupler coupled to the first pulley, the resilient coupler to urge the first pulley to rotate in a second direction opposite the first direction whenever the first cable is not in tension.

2. The tension tender device of claim 1 wherein the first drive stop is a surface on the periphery of the first plate that is parallel to an axis of rotation of the drive shaft.

3. The tension tender device of claim 1 further comprising a motor coupled to the drive shaft, the motor to rotate the drive shaft in the second direction to cause the drive stop to positively rotate the first pulley in the second direction and wind in the first cable.

4. A tension tender device comprising:

- a drive shaft;
- a first plate fixedly coupled to the drive shaft and including a first drive stop;
- a first pulley rotatably coupled to the drive shaft, the first pulley including a first recess that receives the first plate;
- a second plate fixedly coupled to the drive shaft and including a second drive stop;
- a second pulley rotatably coupled to the drive shaft, the second pulley including a second recess that receives the second plate;
- a first cable coupled to the first pulley, the first cable rotating the first pulley in a first direction when the first cable is in tension and thereby causing the first recess in the first pulley to engage the first drive stop;
- a second cable coupled to the second pulley, the second cable rotating the second pulley in a second direction opposite the first direction when the second cable is in tension and thereby causing the second recess in the second pulley to engage the second drive stop independently of the first recess in the first pulley engaging the first drive stop; and
- a resilient coupler coupled to the first and second pulleys, the resilient coupler urging the first pulley to rotate in the second direction whenever the first cable is not in

tension and urging the second pulley to rotate in the first direction whenever the second cable is not in tension.

5. The tension tender device of claim 4 further comprising a motor coupled to the drive shaft, the motor to rotate the drive shaft in the second direction to cause the first drive stop to positively rotate the first pulley in the second direction and wind in the first cable and to rotate the drive shaft in the first direction to cause the second drive stop to positively rotate the second pulley in the first direction and wind in the second cable, wherein the engagement of the first pulley and the first drive stop together with the engagement of the second pulley and the second drive stop minimizes lost motion when reversing the rotation of the drive shaft.

6. The tension tender device of claim 4 wherein the first and second drive stops are surfaces on the periphery of the first and second plates that are parallel to the axis of rotation of the drive shaft.

7. The tension tender device of claim 4 wherein the first and second recesses face away from each other and the first and second plates rotatably couple the first and second pulleys to the drive shaft.

- 8. A tension tender device comprising:
  - a drive shaft;
  - a first drive stop fixedly coupled to the drive shaft;
  - a second drive stop fixedly coupled to the drive shaft;
  - a first pulley rotatably coupled to the drive shaft, the first pulley including a first stop surface that is fixed to the first pulley;
  - a second pulley rotatably coupled to the drive shaft, the second pulley including a second stop surface that is fixed to the second pulley;
  - a first cable coupled to the first pulley, the first cable rotating the first pulley in a first direction when the first cable is in tension and thereby causing the first stop surface of the first pulley to engage the first drive stop;
  - a second cable coupled to the second pulley, the second cable rotating the second pulley in a second direction when the second cable is in tension and thereby causing the second stop surface of the second pulley to engage the second drive stop independently of the first stop surface of the first pulley engaging the first drive stop; and
  - means for urging the first pulley to rotate in the second direction whenever the first cable is not in tension and for urging the second pulley to rotate in the first direction whenever the second cable is not in tension.

9. The tension tender device of claim 8 further comprising means for rotating the drive shaft in the second direction to

positively rotate the first pulley in the second direction and wind in the first cable and for rotating the drive shaft in the first direction to cause the second drive stop to positively rotate the second pulley in the first direction and wind in the second cable, wherein the engagement of the first stop surface and the first drive stop together with the engagement of the second stop surface and the second drive stop minimizes lost motion when reversing the rotation of the drive shaft.

10. The tension tender device of claim 8 wherein the first drive stop and the second drive stop retain the first and second pulleys on the drive shaft.

- 11. A method of driving a cable loop, the method comprising:
  - coupling a first cable to a first pulley that includes a first stop surface that is fixed to the first pulley;
  - coupling a second cable to a second pulley that includes a second stop surface that is fixed to the second pulley;
  - adjusting the first cable to rotate the first pulley in a first direction and cause the first stop surface to engage a first drive stop fixed to a drive shaft;
  - adjusting the second cable to rotate the second pulley in a second direction opposite the first direction and cause the second stop surface to engage a second drive stop fixed to the drive shaft independently of the first stop surface engaging the first drive stop;
  - coupling the first pulley to the second pulley with a resilient coupler that urges the first pulley to rotate in the second direction whenever the first cable is not in tension and that urges the second pulley to rotate in the first direction whenever the second cable is not in tension;
  - rotating the drive shaft in the second direction to drive the cable loop by applying tension to the first cable; and
  - rotating the drive shaft in the first direction to drive the cable loop by applying tension to the second cable, wherein the engagement of the first stop surface and the first drive stop together with the engagement of the second stop surface and the second drive stop minimizes lost motion when reversing the rotation of the drive shaft.

12. The method of claim 11, wherein adjusting the first cable puts the first cable in tension and adjusting the second cable puts the second cable in tension.

13. The method of claim 11, wherein the drive shaft, the first pulley, and the second pulley are rotated about a common axis.

\* \* \* \* \*