



US009814917B2

(12) **United States Patent**  
**Gatsonides et al.**

(10) **Patent No.:** **US 9,814,917 B2**  
(45) **Date of Patent:** **\*Nov. 14, 2017**

(54) **INERT GAS SUPPRESSION SYSTEM FOR TEMPERATURE CONTROL**

(58) **Field of Classification Search**  
CPC ..... A62C 3/08; A62C 35/02; A62C 99/0018; A62C 35/645

(71) Applicant: **KIDDE TECHNOLOGIES, INC.**,  
Wilson, NC (US)

(Continued)

(72) Inventors: **Josephine Gabrielle Gatsonides**,  
Dunstable (GB); **Robert G. Dunster**,  
Slough (GB)

(56) **References Cited**

U.S. PATENT DOCUMENTS

(73) Assignee: **KIDDE TECHNOLOGIES, INC.**,  
Wilson, NC (US)

3,592,270 A 7/1971 Livingston  
4,643,260 A 2/1987 Miller  
(Continued)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 439 days.

FOREIGN PATENT DOCUMENTS

This patent is subject to a terminal disclaimer.

EP 1253077 10/2002  
GB 2473060 9/2010  
(Continued)

(21) Appl. No.: **14/258,248**

OTHER PUBLICATIONS

(22) Filed: **Apr. 22, 2014**

United Kingdom Search Report for UK Application No. GB1001869.5 May 28, 2010.

(65) **Prior Publication Data**

US 2014/0367126 A1 Dec. 18, 2014

(Continued)

**Related U.S. Application Data**

(62) Division of application No. 12/726,533, filed on Mar. 18, 2010, now Pat. No. 8,813,858.

*Primary Examiner* — Jason Boeckmann

(74) *Attorney, Agent, or Firm* — Carlson, Gaskey & Olds, P.C.

(30) **Foreign Application Priority Data**

Feb. 4, 2010 (GB) ..... 1001869.5


(57) **ABSTRACT**

(51) **Int. Cl.**  
*A62C 35/00* (2006.01)  
*A62C 37/36* (2006.01)  
(Continued)

A method of suppressing a fire includes the steps of dispensing a first inert gas in a suppression area at an initial rate, detecting an undesired temperature in the suppression area, dispensing a second inert gas at a subsequent rate in the suppression area in response to the undesired temperature and displacing a volume from the suppression area with the inert gas to achieve a temperature below the undesired temperature.

(52) **U.S. Cl.**  
CPC ..... *A62C 37/04* (2013.01); *A62C 3/07* (2013.01); *A62C 3/08* (2013.01); *A62C 35/645* (2013.01); *A62C 99/0018* (2013.01); *B25H 1/00* (2013.01)

**7 Claims, 1 Drawing Sheet**

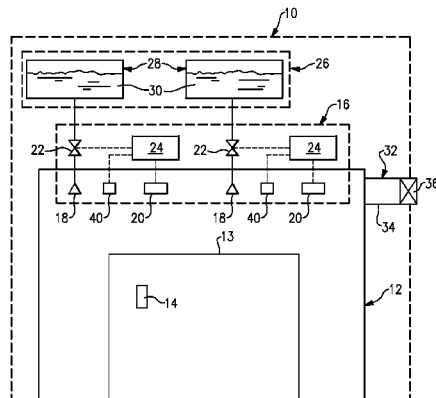

(51)	<b>Int. Cl.</b>							
	<i>A62C 3/07</i>	(2006.01)	8,336,636	B2 *	12/2012	Lade et al. ....	169/46	
	<i>A62C 3/08</i>	(2006.01)	8,813,858	B2 *	8/2014	Gatsonides et al. ....	169/11	
	<i>A62C 99/00</i>	(2010.01)	9,033,061	B2	5/2015	Chattaway et al.		
	<i>B25H 1/00</i>	(2006.01)	2002/0040940	A1	4/2002	Wagner et al.		
	<i>A62C 35/64</i>	(2006.01)	2002/0070035	A1	6/2002	Grabow et al.		
			2004/0020665	A1	2/2004	Gupta		
			2005/0183869	A1	8/2005	Lazzarini		
			2008/0290216	A1	11/2008	Lessi et al.		
(58)	<b>Field of Classification Search</b>		2009/0038811	A1 *	2/2009	Wagner .....	169/46	
	USPC .....	169/46, 11, 7, 16, 60, 62	2010/0236796	A1	9/2010	Chattaway et al.		
	See application file for complete search history.							

(56) **References Cited**  
 U.S. PATENT DOCUMENTS

6,003,608	A	12/1999	Cunningham
6,082,464	A	7/2000	Mitchell et al.
6,173,814	B1	1/2001	Herklel et al.
6,601,653	B2	8/2003	Grabow et al.
6,676,081	B2	1/2004	Grabow et al.
6,899,184	B2	5/2005	Reynolds
6,935,433	B2	8/2005	Gupta
7,066,274	B2	6/2006	Lazzarini
7,331,401	B2	2/2008	Bobenhausen
7,434,628	B2	10/2008	Scheidt
7,510,022	B2	3/2009	Lazzarini


FOREIGN PATENT DOCUMENTS

JP	9070445	3/1997
WO	93/12839	7/1993
WO	99/04860	2/1999

OTHER PUBLICATIONS

U.S. Appl. No. 12/474,354, filed May 29, 2009, "Combined Passive and Active Vehicle Fire Prevention System".  
 Extended European Search Report for Application No. EP 11 25 0082 mailed May 31, 2011.

\* cited by examiner

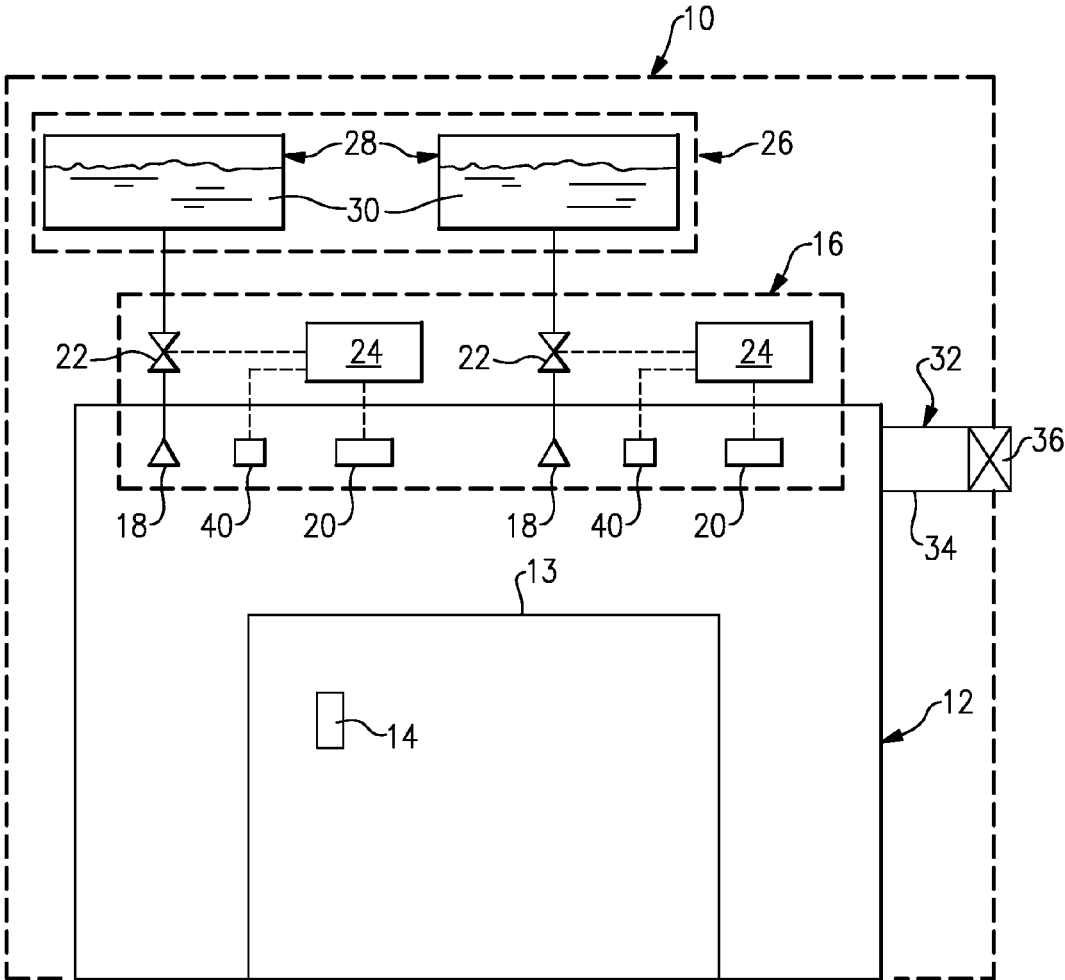

1

## INERT GAS SUPPRESSION SYSTEM FOR TEMPERATURE CONTROL

### RELATED APPLICATION

This application is a divisional of U.S. application No. 12/726,533 filed Mar. 18, 2010 which claims priority to United Kingdom Application No. GB1001869.5, filed on Feb. 4, 2010.

### BACKGROUND

This disclosure relates to a fire suppression system for a suppression area that provides temperature control in the suppression area.

Fire suppression systems are used in a variety of applications, such as aircraft, buildings and military vehicles. The goal of typical fire suppression systems is to put out or suppress a fire by reducing the available oxygen in the suppression area and prevent ingress of fresh air that could feed the fire. One fire suppression approach has included two phases. The first phase “knocks down” the fire by supplying a gaseous fire suppressant to the suppression area at a first rate, which reduces the oxygen in the suppression area to below 12% by volume, thus extinguishing the flames. In the second phase, the gaseous fire suppressant is provided to the suppression area at a second rate, which is less than the first rate, to prevent fresh air from entering the suppression area potentially permitting a smoldering fire to reignite.

Another approach utilizes water instead of a gaseous fire suppressant to extinguish/control a fire. Water is sprayed into the suppression area for a first duration. After the initial water spray, a parameter of the suppression area is monitored, such as temperature, to detect a fire flare up. Additional sprays of water may be provided to the suppression area to prevent re-ignition of the fire.

### SUMMARY

In one exemplary embodiment, a method of suppressing a fire includes the steps of dispensing a first inert gas in a suppression area at an initial rate, detecting an undesired temperature in the suppression area, dispensing a second inert gas at a subsequent rate in the suppression area in response to the undesired temperature and displacing a volume from the suppression area with the inert gas to achieve a temperature below the undesired temperature.

In a further embodiment of the above, the suppression area has a volumetric leakage rate. The subsequent rate provides an overpressure condition in the suppression area and is larger than the volumetric leakage rate.

In a further embodiment of any of the above, the suppression area is a cargo area. The leakage system includes a vent that is in fluid communication with the cargo area.

In a further embodiment of any of the above, the inert gas consists of at least 88 percent by volume of Ar, He, Ne, Xe, Kr, or mixtures thereof.

In a further embodiment of any of the above, the suppression system includes at least one valve and at least one controller, comprising the step of commanding the at least one valve to release the fire suppressant at the initial and subsequent rates.

In a further embodiment of any of the above, the initial rate provides an oxygen concentration of substantially less than 12% oxygen by volume in the suppression area.

2

In a further embodiment of any of the above, the undesired temperature corresponds to an average temperature in the suppression area of less than 250° F.

In a further embodiment of any of the above, the undesired temperature corresponds to an average temperature in the suppression area of less than 150° F.

### BRIEF DESCRIPTION OF THE DRAWINGS

The disclosure can be further understood by reference to the following detailed description when considered in connection with the accompanying drawings wherein:

FIG. 1 is a schematic view of an example fire suppression system.

### DETAILED DESCRIPTION

A fire suppression system **10** is schematically shown in FIG. 1. The fire suppression system **10** includes a suppression area **12**, which may be a room in a building, a cargo area of an aircraft, or a hull of a military vehicle, for example. The suppression area **12** includes a volume, which may include a space or container **13** having a fire source **14**, for example. It should be understood, that the fire source **14** need not be disposed within a container **13**.

An example suppression system **16** is schematically illustrated in FIG. 1. The suppression system **16** includes, for example, one or more nozzles **18**, one or more detectors **20**, one or more valves **22** and one or more controllers **24**. In the example, the valve **22** is fluidly arranged between the nozzle **18** and a suppression source **28**. The valve **22** is commanded by the controller **24** to meter the suppressant **30** from the suppression source **28** to the nozzle **18** at a desired rate. It should be understood that these components may be connected to one another in a variety of configurations and that one or more of the components may be integrated with or further separated from one another in a manner that is different than what is illustrated in FIG. 1.

A suppressant source system **26** includes one or more suppressant sources **28** that carry suppressant **30**. A different suppressant may be provided in different suppressant sources, which can be selectively provided to the suppression area **12** at different times, for example. In one example, the suppressant is an inert gas, such as N<sub>2</sub>, Ar, He, Ne, Xe, Kr, or mixtures, nitrogen enriched air (NEA) (e.g., 97% by volume N<sub>2</sub>) or argonite (e.g., 50% Ar and 50% N<sub>2</sub>). At least one of the suppressant sources may be an on-board inert gas generation system (OBIGGS) used to supply nitrogen. The OBIGGS generated suppressant may be created using a low flow of input gas through the OBIGGS that provides a high purity of NEA, or a high flow of input gas through the OBIGGS that provides a lower purity of NEA.

A suppression area **12** typically includes a leakage system **32**. The leakage system **32** permits gases, including smoke, to flow into and out of the suppression area **12** at a volumetric leakage rate. In the example of an aircraft cargo area, the leakage system **32** includes a vent **34** having a valve **36** that communicates gases from the suppression area **12** to the exterior of the aircraft. In the example of a building, the leakage system may be gaps in doors, walls and ceilings in the suppression area **12**.

One or more temperature sensors **40** are arranged in the suppression area **12** to detect an undesired temperature. In one example, the undesired temperature corresponds to a temperature at which nearby composite aircraft structures begin to weaken or delaminate, e.g. 150° F.-250° F. (66° C.-121° C.).

In operation, a detector **20** detects a fire suppression event within the suppression area **12**. The fire suppression event may be undesired light, heat or smoke in the suppression area **12**, for example. In one example, the controller **24** includes a computer readable medium providing a computer readable program code. In one example, the computer readable program code is configured to be executed to implement a method for suppressing a fire that includes dispensing a suppressant at an initial or first rate in an amount calculated to be at least 40% by volume of a suppression area **12**, and dispensing the suppressant at a subsequent or second rate that is less than the first rate.

The controller **24** commands the valve **22** to meter the suppressant **30** into the fire suppression area **12** at a first rate in response to the fire event. In one example, the first rate provides the suppressant **30**, which is an inert gas, to the suppression area **12** in an amount of at least 40% by volume of the suppression area **12**. For aircraft applications, the suppressant **30** is generally free of anything more than trace amounts of water. That is, a water mist is not injected into the suppression area **12** with the inert gas during the “knock down” phase of fire suppression.

In one example, the first rate delivers approximately 42% by volume of the fire suppression area. Thus, for a free air space volume of 100 m<sup>3</sup> and a sustained compartment leakage rate in fire mode of 2.5 m<sup>3</sup>/minute, the initial amount of expelled hazardous hot smoke will be 42 m<sup>3</sup>. Such a high flow of fire suppressant **30** reduces the oxygen concentration within the suppression area **12** to substantially less than 12% oxygen by volume, which is sufficient to control and reduce the initial temperature. Thus, a high flow of input gas through the OBIGGS that provides a lower purity of NEA is desirable. This large volume of inert gas expels a substantial amount of heat and smoke from the suppression area, for example, through the leakage system, to reduce the average temperature in the suppression area during half an hour to less than approximately 250° F. (121° C.).

In one example, the controller **24** detects the temperature within the suppression area **12** using the temperature sensors **40**. If the sensed temperature reaches an undesired temperature, then the controller commands a valve **22** to release suppressant **30** to the suppression area **12**, which displaces a volume from the suppression area through the leakage system **32**. The displaced volume contains hot gases and smoke. The second rate at which the suppressant **30** is dispensed lowers the temperature within the suppression area **12** to a temperature below the undesired temperature.

In another example, after a predetermined time, for example, controller **24** commands a valve **22** to release a continuous flow of suppressant **30** to the suppression area **12** at a second rate that is less than the first rate. In one example, the second rate is at least approximately 40% of the volumetric leakage rate. In one example aircraft application, the leakage system **32** leaks gases out of the suppression area **12** at a rate of approximately 2.5 m<sup>3</sup>/minute. Thus, for the

example in which the suppressant **30** is argonite, the second rate is approximately 1.0 m<sup>3</sup>/minute. In an example in which the fire suppressant **30** is nitrogen enriched air, the second rate is approximately 2.5 m<sup>3</sup>/minute. The second rate is sufficient to provide an over-pressure condition within the suppression area **12**, which forces gases out of the suppression area **12** through the leakage system **32**. In one example, the second rate reduces the average temperature within the suppression area **12** during half an hour to less than approximately 150° F. (66° C.).

Although an example embodiment has been disclosed, a worker of ordinary skill in this art would recognize that certain modifications would come within the scope of the claims. For that reason, the following claims should be studied to determine their true scope and content.

What is claimed is:

1. A method of suppressing a fire comprising the steps of: dispensing a first inert gas in a suppression area at an initial suppression rate; venting a first volume from the suppression area at an initial leakage rate; detecting an undesired temperature in the suppression area; dispensing a second inert gas at a subsequent suppression rate in the suppression area in response to the undesired temperature, the subsequent suppression rate less than the initial suppression rate and at least 40% of the initial leakage rate; venting a second volume of fluid from the suppression area at a subsequent leakage rate that is substantially less than the initial leakage rate to provide an over-pressure condition in the suppression area; and wherein the venting steps achieve a temperature below the undesired temperature.
2. The method according to claim 1, wherein the suppression area is a cargo area, and a vent is in fluid communication with the cargo area.
3. The method according to claim 1, wherein the inert gas consists of at least 88percent by volume of Ar, He, Ne, Xe, Kr, or mixtures thereof.
4. The method according to claim 1, wherein the suppression system includes at least one valve and at least one controller, comprising the step of commanding the at least one valve to release the fire suppressant at the initial and subsequent suppression rates.
5. The method according to claim 1, wherein the initial rate provides an oxygen concentration of substantially less than 12% oxygen by volume in the suppression area.
6. The method according to claim 1, wherein the undesired temperature corresponds to an average temperature in the suppression area of less than 250° F.
7. The method according to claim 6, wherein the undesired temperature corresponds to an average temperature in the suppression area of less than 150° F.

\* \* \* \* \*