



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
23.02.2005 Bulletin 2005/08

(51) Int Cl.7: **A61M 25/00**

(21) Application number: **04254955.0**

(22) Date of filing: **18.08.2004**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
 HU IE IT LI LU MC NL PL PT RO SE SI SK TR**
 Designated Extension States:
AL HR LT LV MK

(72) Inventors:
 • **Varma, Ashish c/o Medtronic AVE Galway
 Galway (IR)**
 • **Chaffin, Kimberly A.
 Minnesota 55447 (US)**

(30) Priority: **18.08.2003 US 495711 P**

(74) Representative: **Hughes, Andrea Michelle
 Frank B. Dehn & Co.,
 European Patent Attorneys,
 179 Queen Victoria Street
 London EC4V 4EL (GB)**

(71) Applicant: **Medtronic Vascular, Inc.
 Santa Rosa, California 95403 (US)**

(54) **A hyper-elastic, high strength dilation balloon made from multi-block copolymers**

(57) A self-wrapping dilatation balloon (402) comprising a multiblock copolymer having high elasticity and elastic recovery from nominal strains greater than about 30% is described. Also described herein, is a polymeric extrudate for making a dilatation balloon (402) comprising a multiblock copolymer having tensile strength in the range of about 50 MPa to about 450 MPa, strain at break in the range of about 50% to about 600% and substantially complete elastic recovery from nominal strains of at least about 30%. The extrudate has phase-separated

microdomains that are macroscopically aligned in parallel, perpendicular, transverse or a combination thereof. Also described herein is a process for producing a polymeric extrudate for use as a dilatation balloon. The process comprises extruding a multiblock copolymer mixture or composition to form an extrudate. The extruding is done such that the extrudate has phase-separated microdomains that are macroscopically aligned in parallel, perpendicular, transverse or a combination thereof. After extrusion, the process optionally comprises the steps of drawing and coagulating the extrudate.



FIG. 4B

Description

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application claims the benefit of U.S. Provisional Patent Application No. 60/495,711, filed August 18, 2003, which is incorporated herein in its entirety for all purposes.

BACKGROUND OF THE INVENTION

Field of the Invention

[0002] The present invention relates to the field of balloon dilatation. Specifically, the present invention relates to balloons for dilatation applications and a process for manufacturing the balloons.

Related Art

[0003] Surgical procedures employing balloons and medical devices incorporating those balloons (i.e. balloon catheters) are becoming more common and routine. These procedures, such as angioplasty procedures, are conducted when it becomes necessary to expand or open narrow or obstructed openings in blood vessels and other passageways in the body to increase the flow through the obstructed areas. For example, in the technique of Percutaneous Transluminal Coronary Angioplasty (PTCA), a dilatation balloon catheter is used to enlarge or open an occluded blood vessel which is partially restricted or obstructed due to the existence of a hardened stenosis or buildup within the vessel. This procedure requires that a balloon catheter be inserted into the patient's body and positioned within the vessel so that the balloon, when inflated, will dilate the site of the obstruction or stenosis so that the obstruction or stenosis is minimized, thereby resulting in increased blood flow through the vessel. Often, however, a stenosis requires treatment with multiple balloon inflations. Additionally, many times there are multiple stenoses within the same vessel or artery. Such conditions require that either the same dilatation balloon must be subjected to repeated inflations, or that multiple dilatation balloons must be used to treat an individual stenosis or the multiple stenoses within the same vessel or artery. Additionally, balloons and medical devices incorporating those balloons may also be used to administer drugs to patients.

[0004] Balloon catheters traditionally comprise a dilatation balloon at their distal end. Angioplasty balloons are currently produced by a combination of extrusion and stretch blow molding. The extrusion process is used to produce the balloon tubing, which essentially serves as a pre-form. This tubing is subsequently transferred to a stretch blow-molding machine capable of axially elongating the extruded tubing. U.S. Patent No. 6,328,710 B1 to Wang *et al.*, discloses such a process,

in which tubing pre-form is extruded and blown to form a balloon. U.S. Patent No. 6,210,364 B1; U.S. Patent No. 6,283,939 B1 and U.S. Patent No. 5,500,180, all to Anderson *et al.*, disclose a process of blow-molding a balloon, in which a polymeric extrudate is simultaneously stretched in both radial and axial directions. Dilatation balloons are subsequently attached to a catheter shaft and wrapped down tightly on this shaft in order to achieve a low profile at the distal end of the catheter. The low profile serves to enhance the ability of a dilatation catheter to navigate narrow lesions.

[0005] The basic design of dilatation balloons has remained, essentially, unchanged since conception. The materials used in balloons for dilatation are primarily thermoplastics and thermoplastic elastomers such as polyesters and their block co-polymers, polyamides and their block co-polymers and polyurethane block co-polymers. U.S. Patent No. 5,290,306 to Trotta *et al.*, discloses balloons made from polyesterether and polyetheresteramide copolymers. U.S. Patent No. 6,171,278 to Wang *et al.*, discloses balloons made from polyether-polyamide copolymers. U.S. Patent No. 6,210,364 B1; U.S. Patent No. 6,283,939 B1 and U.S. Patent No. 5,500,180, all to Anderson *et al.*, disclose balloons made from polyurethane block copolymers.

[0006] Traditionally, the balloons available to physicians were classified as either "compliant" or "noncompliant." This classification is based upon the operating characteristics of the individual balloon, which in turn depended upon the process used in forming the balloon, as well as the material used in the balloon forming process. Both types of balloons provide advantageous qualities, which were not available from the other.

[0007] A balloon that is classified as "noncompliant" is characterized by the balloon's inability to grow or expand appreciably beyond its rated or nominal diameter. "Noncompliant" balloons are referred to as having minimal distensibility. In balloons currently known in the art (e.g., polyamide block copolymers), this minimal distensibility results from the strength and rigidity of the molecular chains which make up the base polymer, as well as the orientation and structure of those chains resulting from the balloon formation process. The strength resulting from this highly oriented structure is so great that when the balloon is subjected to typical inflation or operating pressures (i.e., about 70 psi to over 200 psi), it will not be stressed beyond the failure point of the polymeric material.

[0008] A balloon, which is referred to as being "compliant", is characterized by the balloon's ability to grow or expand beyond its nominal or rated diameter. In balloons previously known in the art (e.g., polyethylene, polyvinylchloride), the balloon's "compliant" nature or distensibility results from the chemical structure of the polymeric material used in the formation of the balloon, as well as the balloon forming process. These polymeric materials have a relatively low yield point. Thus, the inflation pressures used in dilatation procedures are typical-

ly above the yield point of the materials used to form distensible balloons. A distensible or "compliant" balloon when inflated to normal operating pressures, which are greater than the polymer material's yield point, is subjected to stress sufficient to permanently realign the individual molecular chains of the polymeric material. The realignment of the individual polymer chains permits the balloon to expand beyond its nominal or rated diameter. However, since this realignment is permanent, the balloon will not follow its original stress-strain curve on the subsequent inflation-deflation cycles. Therefore, the balloon, upon subsequent inflations, will achieve diameters that are greater than the diameters that were originally obtained at any given pressure during the course of the balloon's initial inflation.

[0009] The yield point of a material is defined as the stress at which the individual molecular chains move in relation to one another such that when the pressure or stress is relieved there is permanent deformation of the structure. The modulus of a material, also known as the Young's modulus, is the stress per unit strain. A material, which exhibits the ability to follow the same stress-strain curve during the repeated application and relief of stress, is defined as being elastic and as having a high degree of elastic stress response.

[0010] Despite the use of high strength engineering polymers, access to highly occluded vessels and lesions in small vessels is still limited. Dilatation balloons currently available do not have a proper balance of competing properties. Balloons are needed that have low profile and are highly elastic, but also have high strengths and have high trackability to maneuver through tortuous vessels. While balloons made from polyethylene terephthalate (PET) can have lower profile than other balloons, such as polyamide copolymer balloons, the PET balloon is stiff, has a higher modulus, and therefore has inferior trackability. While balloons made from polyamide copolymers have better trackability than PET balloons due to their lower modulus, they have higher profiles thus limiting their application.

[0011] Furthermore, in attempting to produce low profile balloons by wrapping the balloon, the wrapping process often serves to reduce the burst strength of the balloon. An additional disadvantage is that dilatation balloons are not highly elastic. The initial low profile is only applicable to the first lesion that is dilated, as the balloon does not re-wrap tightly upon deflation. In the event that a patient has multiple lesions, a new catheter is used for each lesion thus adding to the cost and time of the procedure.

[0012] New dilatation balloon materials are needed that have the proper balance of these competing properties. Also, new processes are needed to produce dilatation balloons with the balanced properties. Dilatation balloons are needed that have low profile, high hoop strength, high-elasticity, high elastic recovery and high trackability.

SUMMARY OF THE INVENTION

[0013] It has been found that utilizing multiblock copolymers in solution or solutionless extrusion processes allows for the production of dilatation balloons with low profile, high hoop strength, high-elasticity, high elastic recovery and high trackability. The unique mechanical response of the balloons is due to the macroscopically aligned microdomains in the multiblock copolymers, formed during the extrusion and balloon forming process.

[0014] In an embodiment, therefore, the present invention relates to a zero-fold dilatation balloon comprising a multiblock copolymer having elasticity at nominal strains equal to or greater than about 30% 40%, 50%, 60%, 70%, 80%, 90% or 100%, where nominal strain is $[(\text{balloon o.d. at nominal pressure} - \text{preform o.d.}) / \text{preform o.d.}] \times 100$, where o.d. is outer diameter.

[0015] In another embodiment, the present invention relates to a zero-fold dilatation balloon comprising a multiblock copolymer having high elasticity and elastic recovery from nominal strains equal to or greater than about 30% 40%, 50%, 60%, 70%, 80%, 90% or 100%.

[0016] In another embodiment, the present invention relates to a self-wrapping dilatation balloon comprising a multiblock copolymer having high elasticity and elastic recovery from nominal strains equal to or greater than about 30%, 40%, 50%, 60%, 70%, 80%, 90% or 100%.

[0017] Dilatation balloons of the present invention can be used in a wide range of applications for angioplasty, stent delivery and other applications, including, but not limited to cardiovascular, neurovascular and peripheral applications.

[0018] Dilatation balloons of the present invention for use in cardiovascular applications, for example, encompass a range of balloon sizes, including but not limited to balloons having outer diameter at nominal pressures of about 0.5 mm to about 6.0 mm. One example is a 3 mm balloon. The term "3 mm balloon" is used herein to refer to dilatation balloons with an outer diameter at nominal pressures of about 3 mm. The 3 mm balloons of the present invention exemplify and illustrate the unique mechanical response of the dilatation balloons of the present invention. For example, the 3 mm balloons have hoop strengths of at least 14,000 p.s.i., elastic recovery from nominal strains greater than about 30% and high elasticities. The 3 mm balloon has a non-linear compliance curve having initial, secondary and final segments, the initial segment having a radial growth higher than the secondary segment, and the secondary segment having a radial growth higher than the final segment. The radial growth for the 3 mm balloon in mm/p.s.i. is about 0.39 for the initial segment, 0.025 for the secondary segment, and 0.017 for the final segment.

[0019] In another embodiment, the present invention relates to a polymeric extrudate for making a dilatation balloon comprising a multiblock copolymer having tensile strength in the range of about 50 MPa to about 450

MPa, strain at break in the range of about 50% to about 600% and elasticity at nominal strains of at least about 30%.

[0020] In another embodiment, the present invention relates to a polymeric extrudate for making a dilatation balloon comprising a multiblock copolymer having tensile strength in the range of about 50 MPa to about 450 MPa, strain at break in the range of about 50% to about 600% and substantially complete elastic recovery from strains of at least about 30%. One particular, non-limiting example is an extrudate for making a 3 mm balloon having tensile strength in the range of about 150 MPa to about 250 MPa, strain at break in the range of about 300% to about 500% and substantially complete elastic recovery from strains of at least about 30%. An alternative example is an extrudate having tensile strength in the range of about 50 MPa to about 150 MPa, strain at break in the range of about 50% to about 300% and substantially complete elastic recovery from strains of at least about 30%. Another example is an extrudate having tensile strength in the range of about 250 MPa to about 450 MPa, strain at break in the range of about 500% to about 600% and substantially complete elastic recovery from nominal strains of at least about 30%.

[0021] Extrudates of the present invention can have a tubular shape. Extrudates can have outer diameter of about 0.025 mm to about 13 mm and inner diameter of about 0.013 mm to about 12 mm. In one particular example, an extrudate for a 3 mm balloon, can have a tubular shape with an outer diameter of about 0.25 mm to about 2.5 mm and an inner diameter of about 0.15 mm to about 1.5 mm. The extrudates of the present invention, including, but not limited to the extrudate for the 3 mm balloon, have phase-separated microdomains that are macroscopically aligned in parallel, perpendicular, transverse, or a combination thereof. Alternatively, the extrudate can have two or more regions with different macroscopic microdomain alignment.

[0022] In another embodiment, the present invention relates to a process for producing a polymeric extrudate for use as a dilatation balloon. The process comprises contacting a multiblock copolymer with a solvent to form a multiblock copolymer mixture, extruding the multiblock copolymer mixture to form an extrudate, and drawing the extrudate, wherein the extrudate has tensile strength in the range of about 50 MPa to about 450 MPa, strain at break in the range of about 50% to about 600% and elasticity at nominal strains of at least about 30%. Optionally, the extrudate has substantially complete elastic recovery from nominal strains of at least about 30%.

[0023] In another embodiment, the present invention relates to an alternative process for producing a polymeric extrudate for use as a dilatation balloon. The process comprises extruding a multiblock copolymer composition to form an extrudate, and drawing the extrudate, wherein the extrudate has tensile strength in the range of about 50 MPa to about 450 MPa, strain at break

in the range of about 50% to about 600% and elasticity at nominal strains of at least about 30%.

[0024] In the process, the extruding is done at a constant rate such that the extrudate has phase-separated microdomains that are macroscopically aligned in parallel, perpendicular, transverse, or a combination thereof. Alternatively, the extruding is done at a variable rate such that the extrudate has two or more regions with different macroscopic microdomain alignment. The temperature of the extrusion is equal to or less than the order-disorder transition temperature for the multiblock copolymer. After extrusion, the process optionally comprises the step of coagulating the extrudate.

[0025] Additional features and advantages of the invention will be set forth in the description that follows, and in part will be apparent from the description, or may be learned by practice of the invention. The advantages of the invention will be realized and attained by the structure and particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0026] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE FIGURES

[0027] The accompanying drawings, which are included to illustrate exemplary embodiments of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention. In the drawings:

[0028] FIG. 1 shows idealized compliance curves for the dilatation balloons of the present invention as compared to a standard 3.00 mm balloon.

[0029] FIG. 2 shows the true stress vs. nominal strain curves for a cylindrical dilatation balloon of the present invention as compared to a standard polyamide copolymer balloon, both during inflation.

[0030] FIG. 3A illustrates a cross-sectional view of a traditional balloon wrapped around a catheter.

[0031] FIG. 3B illustrates a side-view of a traditional balloon wrapped around a catheter.

[0032] FIG. 4A illustrates a cross-sectional view of a zero-fold balloon mounted on a catheter, according to an embodiment of the present invention.

[0033] FIG. 4B illustrates a side-view of a zero-fold balloon mounted on a catheter, according to an embodiment of the present invention.

[0034] FIG. 5A is a flow diagram for a process for producing a polymeric extrudate for use as a dilatation balloon, according to an embodiment of the present invention.

[0035] FIG. 5B is a flow diagram for an alternative process for producing a polymeric extrudate for use as a dilatation balloon, according to an embodiment of the

present invention.

[0036] FIGS. **6A-6B** show stress vs. strain curves for a multiblock copolymer extruded according to an embodiment of the present invention.

[0037] FIG. **7A** shows stress vs. strain curves for extruded multiblock copolymer samples before straining, according to an embodiment of the present invention.

[0038] FIG. **7B** shows stress vs. strain curves for extruded multiblock copolymer samples after straining, according to an embodiment of the present invention.

[0039] The present invention will now be described with reference to the accompanying drawings. In the drawings, like reference numbers indicate identical or functionally similar elements. Additionally, the left-most digit(s) of a reference number identifies the drawing in which the reference number first appears.

DETAILED DESCRIPTION OF THE INVENTION

[0040] Reference will now be made in detail to the embodiments of the present invention, examples of which are illustrated in the accompanying drawings.

[0041] Preform is used herein to refer to the drawn, uniaxially or biaxially, tubular extrudate formed upon extruding and drawing the multiblock copolymer mixture or composition. The preform is used in the process of producing a dilatation balloon. The process of forming dilatation balloons from tubular preforms are well known to one of skill in the relevant art. The preform can be a drawn extrudate, formed upon drawing the extrudate in, for example, a balloon forming machine. Extrudate is used herein to refer to the article formed by extruding the multiblock copolymer mixture or composition. The extrudate can be used in forming a dilatation balloon preform, or optionally, can be used in forming another article, for example, a tubular extrudate for use in another medical application.

[0042] The terms "microdomain" and "microphase" are used generally to refer to the domains and phases in the multiblock copolymers. The terms "microdomain" and "microphase" should not be construed to be limiting in the size of the domain or phase. The terms "microdomain" and "microphase" are understood to include, but are not limited to nanometer-sized domains and phases such as nanodomains and nanophases, micrometer-sized domains and phases such as microdomains and microphases, and other sized domains and phases.

[0043] The term "dilatation balloon" refers generally to the types of balloons included in the present invention. Dilatation balloon, for example, includes, but is not limited to angioplasty balloons, stent delivery balloons and others. It should be understood that the term "dilatation balloon" is referred to throughout the description herein for illustrative purposes, and it is intended that the descriptions herein encompass different balloon sizes depending on the application. Although specific examples of balloons for particular applications are described for exemplary purposes, it should be understood

that the scope of the invention is not limited to the exemplified balloons. While the balloons of the present invention can vary in size, and can be used for different applications, they all exhibit the unique mechanical response described herein, namely, they exhibit low profile, high hoop strength, high-elasticity, high elastic recovery and high trackability.

[0044] One embodiment of the present invention relates to a zero-fold dilatation balloon comprising a multiblock copolymer having high hoop strength, high elasticity and high elastic recovery.

[0045] Another embodiment of the present invention relates to a self-wrapping dilatation balloon comprising a multiblock copolymer having high hoop strength, high elasticity and high elastic recovery.

[0046] The balloons of the present invention are formed from multiblock copolymers and exhibit high elasticity. For example, the 3 mm balloon exhibits high elasticity over an initial low-inflation pressure range. FIG. 1 shows an example of a compliance curve for the 3 mm balloon of the present invention compared to conventional 3 mm balloons. In zone 1 of FIG. 1, the high elasticity zone, 3 mm balloons of the present invention have a growth rate of about 0.39 mm/p.s.i., compared to about 0.08 mm/p.s.i. for the conventional balloons. The hyper-elastic characteristics of the balloons of the present invention allow for zero-fold and self-wrapping characteristics. Other sized balloons of the present invention exhibit similar, highly elastic responses.

[0047] FIG. 2 shows the corresponding true stress vs. nominal strain response for both 3 mm balloon inflations shown in FIG. 1. The response curve highlights, for the 3 mm dilatation balloons of the present invention, the initial high elasticity zone and low modulus over the initial high elasticity zone. A sharp transition can be seen to the inelastic-high strength zone. Minimal hysteresis in the dilatation balloons of the present invention ensures complete elastic recovery to the initial balloon form and dimensions. The stress-strain curve for the conventional polyamide copolymer balloon shows that materials used to manufacture conventional balloons exhibit significantly less elasticity, over the initial elasticity zone, and modulus typically higher than the 3 mm dilatation balloons of the present invention.

[0048] The term wrapping is well known to one of ordinary skill in the art and refers to how the dilatation balloon is disposed about a catheter to create a low profile during delivery of the balloon to the treatment site. Traditionally, a dilatation balloon is wrapped down tightly on a catheter shaft, in a separate manufacturing process, to achieve a low profile at the distal end. FIG. 3A shows a cross section of a traditional balloon catheter assembly **300** having a balloon **302** wrapped down tightly on a catheter shaft **304**. FIG. 3B shows a side view of wrapped balloon **302** and catheter shaft **304**. The wrapping process, however, often reduces the burst strength of the balloon. In addition, the initial low profile of the wrapped balloon is only applicable before initial inflation

and to the first lesion that is dilated, because the balloon typically does not re-wrap as tightly upon deflation. The number of lesions that can be treated with a traditional wrapped balloon is limited.

[0049] In contrast to the balloons of the prior art, the balloons of the present invention are zero-fold, have low profiles and have high elasticity. The phrase zero-fold is used herein to refer to balloons that preferably have no folds or wraps. Alternatively, balloons of the present invention have substantially no folds or wraps and have a lower profile than the balloons in the current art. For example, FIG. 4A shows a cross section of a zero-fold balloon catheter assembly **400** having a balloon **402** mounted on a catheter shaft **404**. FIG. 4B shows a side view of zero-fold balloon **402** mounted on catheter shaft **404**. Zero fold balloons of the present invention have high elasticity and high elastic recovery, which gives rise to self-wrapping characteristics. Self-wrapping refers to the characteristic of a highly elastic balloon where, after initial inflation and upon deflation, the balloon returns to a low profile over the catheter tubing. Preferably, the balloon returns to approximately the same low profile it had before the initial inflation.

[0050] In fact, before initial inflation and when deflated, the zero-fold balloons of the present invention have a much lower profile than wrapped conventional balloons, and can have essentially the same dimensions as the tubular pre-form. When inflated, balloons of the present invention transition from a low profile tube to a conventional balloon and revert to the initial tubular form when deflated, even after multiple inflations and after multiple lesions have been dilated. Balloons of the present invention have elasticity at nominal strains of at least about 30%. Alternatively, balloons of the present invention have elastic recovery from nominal strains equal to or greater than about 30%, 40%, 50%, 60%, 70%, 80%, 90% or 100%, where nominal strain is $[(\text{balloon o.d. at nominal pressure} - \text{preform o.d.}) / \text{preform o.d.}] \times 100$, where o.d. is outer diameter. The balloons of the present invention may, therefore, be used to dilate multiple lesions without compromising primary performance.

[0051] The low profile of the present invention allows a surgeon to use the balloon in very small arteries that may have a large degree of blockage or plaque build-up. Conventional 3.0 mm balloons at zero atmospheres have an outer diameter of about 2.5 mm when deflated and inflate to about 3.0 to about 3.3 mm when close to bursting. Balloons of the present invention can have much lower profile and maintain high hoop strength, allowing for their use in a wider range of applications. For example, 3 mm dilatation balloons of the present invention can have outer diameters of about 0.25 mm to about 2.5 mm when deflated and about 3.5 mm to about 4.0 mm outer diameter when inflated close to bursting. Alternatively, the balloons of the present invention can be produced to have lower profiles for other applications, for example, neurovascular applications. Alternatively,

the balloons can be produced to have lower or larger profiles for other applications, for example peripheral applications.

[0052] Dilatation or distensibility is used herein to refer to the expandability of the balloon. Balloons of the present invention are sufficiently expandable to treat various sized arteries and for stent delivery, i.e., have radial growths about 2% to about 40% between nominal and rated pressures. Preferably, the radial growth of the balloon is in the range of about 5% to about 20%.

[0053] Balloons of the present invention have sufficient hoop strengths to dilate occluded vessels without bursting and for stent delivery or other applications. Hoop strength is directly related to the maximum amount of pressure the balloon can withstand, for a given material and a given balloon wall thickness, without failing. The balloons of the present invention have hoop strengths upon dilatation of about 12,000 to about 75,000 p.s.i. Preferably, balloons of the present invention have hoop strengths greater than 14,000 p.s.i.

[0054] The unique mechanical response of the dilatation balloons of the present invention is achieved by utilizing multiblock copolymers in either a solutionless or solution extrusion process. The multiblock copolymer is extruded to form a polymeric extrudate that is a tubular pre-form. The extrudate can be further processed using methods well known to one of ordinary skill in the art to produce the dilatation balloons of the present invention. Once formed, the balloons can be attached to the distal end of a tubular elongated catheter shaft to form a balloon dilatation catheter. The distal portion of the catheter can have a profile in the range of about 0.025 mm to about 13.0 mm when the balloon is deflated. For a 3 mm balloon, the distal portion of the catheter can have a profile in the range of about 0.25 mm to about 2.5 mm when the balloon is deflated. The distal portion of the catheter can have substantially the same profile after one or more expansions of the balloon with rated pressures that result in about 5% to about 20% radial growth of the balloon.

[0055] In another embodiment, the present invention relates to a polymeric extrudate for making a dilatation balloon comprising a multiblock copolymer. Multiblock copolymers, the corresponding polymeric extrudates and dilatation balloons for use in the invention have a Young's Modulus less than about 5 GPa.

[0056] Extrudates of the present invention have tensile strength in the range of about 50 MPa to about 450 MPa, strain at break in the range of about 50% to about 600% and elasticity at nominal strains of at least about 30%. Optionally, extrudates of the present invention also have substantially complete elastic recovery from nominal strains of at least about 30%. One particular, non-limiting example is an extrudate for making a 3 mm balloon having tensile strength in the range of about 150 MPa to about 250 MPa, strain at break in the range of about 300% to about 500% and substantially complete elastic recovery from strains of at least about 30%. An

alternative example is an extrudate having tensile strength in the range of about 50 MPa to about 150 MPa, strain at break in the range of about 50% to about 300% and substantially complete elastic recovery from strains of at least about 30%. Another example is an extrudate having tensile strength in the range of about 250 MPa to about 450 MPa, strain at break in the range of about 500% to about 600% and substantially complete elastic recovery from strains of at least about 30%.

[0057] Multiblock copolymers for use in the present invention include those multiblock copolymers that microphase separate. Microphase separation is a phenomenon unique to copolymers and is well known in the art. See, e.g., Bates, F. S. and Fredrickson, G. H., *Physics Today* February, 1999, pages 32-38. Microphase separation occurs due to the incompatibility of the polymeric blocks within the multiblock copolymer. Multiblock copolymers can phase separate to form spherical, cylindrical, lamellae or other structures of one block or phase, dispersed in a different block or phase. Using techniques well known in the art, for example, reciprocal shearing, the incompatible phases can be induced to orient macroscopically, thereby inducing long-range order in separate phases. Macroscopic ordering or alignment of the separated blocks or phases can result in a variety of alignments between the phases or microdomains. The size of the microdomains can vary from about 5 nm to about 1000 nm. These alignments include, but are not limited to parallel, perpendicular and transverse alignments. The different alignments give rise to highly anisotropic mechanical responses for the resulting material. Therefore, dilatation balloons can be flexible and steerable, while having high hoop strength, high elasticity and high elastic recovery.

[0058] Any method known to one of skill in the relevant art can be used to measure the macroscopic ordering of the polymer blocks or phases, for example, X-ray crystallography or diffractometry can be used. Using X-ray diffractometry, both the type of alignment and the degree of alignment can be measured in the extrudates and the dilatation balloons of the present invention.

[0059] Examples of multiblock copolymers for use in the present invention include, but are not limited to diblock, triblock, butablock, pentablock, hexablock, heptablock, octablock, nonablock, decablock, undecablock or dodecablock copolymers. The choice of number of blocks depends on the microphase separation and mechanical response needed. As the number of blocks is increased, the level of microphase separation and the macroscopic alignment decreases with detrimental effects to the mechanical response of the dilatation balloon.

[0060] Multiblock copolymers can have two different polymer blocks, or alternatively, they can have three or more different polymer blocks. For example, a triblock copolymer can have two different polymer blocks, represented as (A-B-A), or alternatively, it can have three different polymer blocks, represented as (A-B-C). A sin-

gle multiblock copolymer can be used, or alternatively, a combination or blend of two or more of the same or different multiblock copolymers can be used. For example, a dilatation balloon of the present invention can comprise 100% triblock copolymer plus other optional additives, or alternatively, it can comprise 10% pentablock copolymer and 90% triblock copolymer plus other optional additives.

[0061] The polymer blocks can have any chemical structure, so long as the multiblock copolymer microphase separates. Examples of polymer blocks for use in the invention include, but are not limited to polyalkanes optionally substituted by alkyl, halo, ester, aryl and heteroaryl, polyhaloalkanes, polyalkenes, polyalkynes, polyarylenes, polyethers, polythioethers, polyesters, polycarbonates, polyamides, polyimides, polyurethanes, polyureas, polysulfones, polyketones, polysaccharides, polyamines, polyimines, polyphosphates, polyphosphonates, polysulfonates, polysulfonamides, polyphosphazenes and polysiloxanes. Specific examples include, but are not limited to polyethylene, polypropylene, poly(cyclohexylethylene), polyisoprene, poly(1,3-butadiene), poly(vinyl chloride), poly(vinyl fluoride), poly(chloroprene), poly(methyl acrylate), poly(methyl methacrylate), poly(acrylonitrile), polystyrene or poly(4-vinylpyridine). The polymer blocks can be of any molecular weight, as long as the resulting multiblock copolymer microphase separates. The length of each polymer block affects the orientation of the microphase separation. For example, polymer blocks can range from a single repeat unit to about one million repeat units. More specifically, polymer blocks can have molecular weights of about 10 Dalton to about 10,000,000 Dalton.

[0062] Specific examples of block copolymers for use in the present invention include but are not limited to triblock and pentablock copolymers having ABA and ABABA architectures, respectively, wherein A is a glassy phase and B is a random copolymer comprising rubber and semi-crystalline phases. Specific examples of polymers include, but are not limited to poly(vinylcyclohexane) or hydrogenated poly(styrene) for the glassy phase; hydrogenated 1,2 poly(butadiene) for the rubber phase; and hydrogenated 1,4 poly(butadiene) for the semi-crystalline phase. The physical properties of the extrudate and/or the dilatation balloon can be enhanced by tailoring one or more phases of the block copolymer. A specific example of this tailoring includes, but is not limited to increasing the linearity of the semi-crystalline phase to increase its crystallinity and thereby increase the strength of the extrudate and/or dilatation balloon.

[0063] Extrudates comprising multiblock copolymers for use in producing balloons of the present invention comprise a single layer of polymeric material. Alternatively, two or more layers of polymeric extrudate and multiblock copolymers can be used to form multilayered extrudates and multilayered dilatation balloons.

[0064] The polymeric extrudate optionally comprises

a solvent. Any solvent or fluid can be used. The solubility parameter of the solvent is preferably about equal to the solubility parameter of one polymer block in the multi-block copolymer. The solubility parameter is a numerical value that indicates the relative solvency behavior of a specific solvent. Solubility parameters for many solvents are well known in the art. The solvent is selected so that it reduces entanglement in one of the polymer block phases, preferably the most entangled phase. For example, dioctylphthalate is used in reducing the entanglement in a polyethylene phase of triblock co-polyethylene co-poly(cyclohexylethylene).

[0065] Optionally, the solvent comprises a plasticizer. Alternatively, the solvent is a plasticizer. Plasticizer is used herein to mean any material that can decrease the flexural modulus of a polymer. Preferably, the solubility parameter of the plasticizer is about equal to the solubility parameter of one polymer block in the multiblock copolymer. The plasticizer may influence the morphology of the multiblock copolymer and may affect the melting temperature, glass transition temperature and order-disorder transition temperature. Examples of plasticizers include, but are not limited to: small organic and inorganic molecules, oligomers and small molecular weight polymers (those having molecular weight less than about 50,000), highly-branched polymers and dendrimers. Specific examples include: monomeric carbonamides and sulfonamides, phenolic compounds, cyclic ketones, mixtures of phenols and esters, sulfonated esters or amides, N-alkylolarylsulfonamides, selected aliphatic diols, phosphite esters of alcohols, phthalate esters such as diethyl phthalate, dihexyl phthalate, dioctyl phthalate, didecyl phthalate, di(2-ethylhexyl) phthalate and diisononyl phthalate; alcohols such as glycerol, ethylene glycol, diethylene glycol, triethylene glycol, oligomers of ethylene glycol; 2-ethylhexanol, isononyl alcohol and isodecyl alcohol, sorbitol and mannitol; ethers such as oligomers of polyethylene glycol, including PEG-500, PEG-1000 and PEG-2000; and amines such as triethanol amine.

[0066] The extrudate optionally further comprises an additive or modifier. Additive and modifier are used herein to refer to any material added to the polymer to affect the polymer's properties. Examples of additives and modifiers for use in the invention include fillers, antioxidants, colorants, crosslinking agents, impact strength modifiers, viscosity modifiers, drugs and biologically active compounds and molecules. Specific examples include, but are not limited to the following. A cross-linking agent, such as diallyl phthalate, can be used to increase the mechanical strength of the extrudate and the resulting dilatation balloon. In another example, the additive comprises a polymer. For example, a multiblock copolymer mixture or composition comprising a pentablock copolymer can optionally further comprise a triblock copolymer to facilitate processing and modify the viscosity. In another example, a multiblock copolymer mixture or composition can comprise a

homopolymer such as a polysiloxane to facilitate processing and modify the viscosity. Polysiloxanes for use in the present invention as additives or modifiers can include any polysiloxane, for example, a polydialkylsiloxane or polydiarylsiloxane, including but not limited to polydimethylsiloxane, polydiethylsiloxane, and polydiphenylsiloxane.

[0067] Extrudates of the present invention can have a tubular shape. Tubular is used herein to mean a hollow, cylindrical-shaped article having an inner diameter, an inner circumference, an outer diameter and an outer circumference with a wall thickness between the outer and inner circumferences. Extrudates can have outer diameter of about 0.025 mm to about 13 mm and inner diameter of about 0.013 mm to about 12 mm. One particular example, an extrudate for a 3 mm balloon, can have a tubular shape with outer diameter of about 0.25 mm to about 2.5 mm and an inner diameter of about 0.15 mm to about 1.5 mm. The extrudates of the present invention, including, but not limited to the extrudate for the 3 mm balloon, have phase-separated microdomains that are macroscopically aligned in parallel, perpendicular, transverse, or a combination thereof. Alternatively, the extrudate can have two or more regions with different macroscopic microdomain alignment.

[0068] Extruders for use in the present invention include any extruder capable of forming tubular-shaped articles. Examples of extruders include, but are not limited to, single screw and double screw. The processing temperature depends on the actual multiblock copolymer system being used. Preferably, the temperature of extrusion is near the order-disorder transition temperature for the multiblock copolymer or the multiblock copolymer with optional solvent, additives or modifiers.

[0069] In another embodiment, the present invention relates to a process for producing a polymeric extrudate for use as a dilatation balloon. In one example, FIG. 5A shows a flowchart **500** showing steps for producing a polymeric extrudate for use as a dilatation balloon. Flowchart **500** begins with step **502**. In step **502**, a multiblock copolymer is contacted with a solvent to form a multiblock copolymer mixture. As discussed above, the solvent can comprise a plasticizer, or alternatively, is a plasticizer. The solvent is chosen such that it reduces the entanglement of one of the phases of the multiblock copolymer. Any solvent can be used. Preferably, the solvent or plasticizer has a solubility parameter about equal to the solubility parameter of one of the polymer block phases. Any concentration of solvent can be used. Preferably, the concentration of solvent results in microphase separation and macroscopic ordering and alignment of the microdomains during extrusion. The resulting mixture can optionally comprise additional additives and modifiers.

[0070] Referring again to FIG. 5A, in step **504**, the multiblock copolymer mixture is extruded to form an extrudate. The temperature of the extrusion process is set near the order-disorder transition temperature of the

multiblock copolymer mixture, preferably just below it. The shear rate also affects the final macroscopic ordering and alignment of the microdomains. The multiblock copolymer mixture can be extruded at a constant shear rate such that the extrudate has microdomains that are macroscopically aligned parallel, perpendicular, transverse, or a combination thereof. Alternatively, the mixture is extruded at a variable rate such that the extrudate has two or more portions with different macroscopic microdomain alignment. For example, the shear rate can be set such that the molecules are aligned perpendicular to the flow, either radially outward in a starburst pattern, or in cylinders. The extrudate can optionally be cooled as it exits the extruder. Any method of cooling can be used, preferably, some fluid, for example, water, is used to cool the extrudate.

[0071] Referring again to FIG. 5A, in step 506, the extrudate is drawn. The extrudate can be drawn after exiting the extruder. Any method known to one of ordinary skill in the art can be used to draw the extrudate. Preferably, the extrudate is drawn during balloon forming. Preferably, a stretch blow-molding or a balloon forming machine is used. The extrudate can be drawn in any one direction, or in any combination of directions, for example, uniaxially or biaxially. Biaxial drawing can be performed in the longitudinal direction and the radial direction. The extrudate can be drawn to any draw ratio, including any uniaxial or any biaxial draw ratio. In biaxial drawing, the radial and longitudinal draw ratios can vary separately. The draw ratio affects the final properties of the balloon. By way of example, for approximately a 3 mm balloon, the extrudate is drawn to about 200% to 700% in the radial direction.

[0072] Referring back to FIG. 5A, in step 508, the drawn extrudate is coagulated. The extrudate is coagulated after drawing to remove solvent from the drawn extrudate. Any method known to one skilled in the relevant art can be used to coagulate the drawn extrudate. For example, a vacuum oven is used to remove the solvent. Alternatively, the drawn extrudate is coagulated in a suitable fluid. Suitable fluids include those fluids that remove the solvent from the extrudate without dissolving the extrudate, for example a C₁-C₆ alcohol.

[0073] In another example, FIG. 5B shows flowchart 550 showing an alternative process for producing a polymeric extrudate for use as a dilatation balloon. In this example, a solventless process is used in producing the extrudate. Flowchart 550 begins with step 552. In step 552, a multiblock copolymer composition is extruded to form an extrudate. The multiblock copolymer composition comprises a multiblock copolymer. The multiblock copolymer composition can optionally further comprise other additives, modifiers or a plasticizer. As above, the temperature of extrusion is preferably set near the order-disorder transition of the composition. Also, as above, the shear rate can be constant or varied, depending on the desired final orientation of the molecules in the extrudate. Also, as above, the extrudate can be

cooled as it exits the extruder. Flowchart 550 continues with step 506. In step 506, the extrudate is drawn.

[0074] An extrudate is formed having tensile strength in the range of about 50 MPa to about 450 MPa, strain at break in the range of about 50% to about 600% and elasticity at nominal strains of at least about 30%. Optionally, extrudates have substantially complete elastic recovery from nominal strains of at least about 30%. One particular, non-limiting example is a multiblock copolymer mixture is extruded to form an extrudate for making a 3 mm balloon having tensile strength in the range of about 150 MPa to about 250 MPa, strain at break in the range of about 300% to about 500% and substantially complete elastic recovery from strains of at least about 30%. An alternative example is an extrudate having tensile strength in the range of about 50 MPa to about 150 MPa, strain at break in the range of about 50% to about 300% and substantially complete elastic recovery from strains of at least about 30%. Another example is an extrudate having tensile strength in the range of about 250 MPa to about 450 MPa, strain at break in the range of about 500% to about 600% and substantially complete elastic recovery from strains of at least about 30%.

[0075] The following examples are illustrative, but not limiting, of the method and compositions of the present invention. Other suitable modifications and adaptations of the variety of conditions and parameters normally encountered in nanocrystal synthesis and which are obvious to those skilled in the art are within the spirit and scope of the invention.

EXAMPLE 1

[0076] A polymeric extrudate was formed as a tubular preform for a dilatation balloon. A multiblock copolymer was used as the base material. A triblock copolymer was used having the structure (C-E-C), wherein C and E denote poly(cyclohexylethylene) (PCHE) and hydrogenated butadiene, respectively. The butadiene block is a mixture of 1-2 and 1-4 addition, which upon hydrogenation, results in a block of random poly(ethylene) (PE) and poly(ethylene) (PEE). The triblock copolymer is described in detail in U.S. Patent No. 6,455,656 B2; U.S. Patent No. 6,451,924 B1; U.S. Patent No. 6,426,390 B1; and U.S. Patent No. 6,376,621 B1, all of which are incorporated herein in their entireties by reference. The triblock polymer was dissolved in dioctylphthalate (DOP), where the polymer concentration was about 75 wt.%, thus creating a gel. The gel was extruded at a temperature just below the order-disorder transition temperature. The gel was subsequently drawn to 400%. The extruded and drawn samples were coagulated in a vacuum oven to extract the solvent. For Deborah numbers between 1 and 100, the macroscopic microdomain alignment was perpendicular as shown by Small Angle X-ray Scattering (SAXS) experiments and Transmission Electron Microscopy (TEM). As the Deborah number is

proportional to shear rate, increasing the shear rate increases the amount of perpendicular alignment. The size of the microdomains measured about 10-20 nm. The extrudate was found to have hoop strength in excess of 150 MPa, strain at break of 120%, and complete elastic recovery after subjecting the extrudate to strains as high as 40%.

EXAMPLE 2

[0077] Following a similar procedure, a pentablock copolymer was extruded having structure (C-E-C-E-C), wherein C and E denote poly(cyclo-hexylethylene) (PCHE) and hydrogenated butadiene, respectively. The butadiene block is a mixture of 1-2 and 1-4 addition, which upon hydrogenation, results in a block of random poly(ethylene) (PE) and poly(ethylethylene) (PEE). The polymer is described in U.S. Patent No. 6,455,656 B2; U.S. Patent No. 6,451,924 B1; U.S. Patent No. 6,426,390 B1; and U.S. Patent No. 6,376,621 B1. For Deborah numbers between 0.1 and 100, the macroscopic microdomain alignment was perpendicular, and a transverse alignment was also seen for Deborah numbers between 10 and 100. Similar mechanical responses were measured for the pentablock copolymer as the triblock copolymer, except the pentablock copolymer was found to have superior strength-elasticity balance as compared with the triblock extrudate.

[0078] Following a similar procedure, one can produce tubular preforms comprising a blend of 90% of the (C-E-C) triblock copolymer and 10% of the (C-E-C-E-C) pentablock copolymer.

[0079] One can attach the extrudates formed above to a catheter to form a low profile, self-wrapping dilatation catheter balloon for angioplasty applications.

EXAMPLE 3

[0080] Following a similar procedure as Example 1, a pentablock copolymer having molecular weight of about 65 kg/mole and comprising about 60 wt. % of the poly(cyclohexylethylene) block and about 10 wt. % of the poly(ethylethylene) block was mixed with dioctylphthalate to form a gel having about 75 wt. % polymer. The gel was extruded and the extrudate was pre-strained or aligned by hand. The elasticity and elastic recovery of the sample was studied using a tensile machine. FIGS. 6A and 6B show the stress vs. strain (hysteresis) curves. The curves show that the material is highly elastic and substantially recovers from strains of about 4, 10, 18 and 40 % without permanent deformation. FIG. 6A shows no failure of the material until strains of about 120%.

EXAMPLE 4

[0081] A series of samples were extruded comprising a pentablock copolymer and varying amounts of solvent. The pentablock copolymer had molecular weight

of about 55 kg/mol and comprised about 55 wt. % poly(cyclohexylethylene) and about 10 wt. % poly(ethylethylene). Dioctylphthalate was mixed with the pentablock copolymer to form 6 samples, having 100, 95, 90, 85, 80 and 75 wt. % polymer. The samples were extruded with a capillary rheometer. The temperature of the capillary was set at about 125°C. The capillary die was about 1 mm in diameter and about 30 mm in length. A shear rate of about 11.5 s⁻¹ was used in the extrusion. After extrusion, the extrudate was pre-strained by hand and post-strained using a tensile machine to the completion of necking. The mechanical properties of the samples were then analyzed using a tensile machine. FIG. 7A shows stress-strain curves for the six samples before straining and FIG. 7B shows stress-strain curves for the six samples after straining. The results show that the 75 wt. % gel sample had the greatest elastic response compared to the other samples.

[0082] It will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the spirit and scope of the present invention as defined in the appended claims. Thus, the breadth and scope of the present invention should not be limited by any of the above-described exemplary embodiments, but should be defined only in accordance with the following claims and their equivalents.

Claims

1. A zero fold dilatation balloon comprising a multiblock copolymer having elasticity at nominal strains greater than about 30%.
2. The balloon of claim 1, wherein said multiblock copolymer has elastic recovery from nominal strains greater than about 30%.
3. The balloon of claim 1 or 2, wherein said nominal strain is [(balloon outer diameter at nominal pressure - preform outer diameter) / preform outer diameter] x 100.
4. The balloon of claim 1, 2 or 3 having elastic recovery from nominal strains greater than about 50%.
5. The balloon of any of claims 1 to 4 having hoop strength of at least about 14,000 p.s.i..
6. The balloon of any of claims 1 to 5 having radial growth of about 5-20%.
7. The balloon of any of claims 1 to 6, further comprising a plasticizer.
8. The balloon of claim 7, wherein the solubility parameter of said plasticizer and at least one block of said multiblock copolymer are about equal.

9. The balloon of claim 7 or 8, wherein said plasticizer is a carbonamide, sulfonamide, phenolic compound, cyclic ketone, mixture of phenols and esters, sulfonated ester, sulfonated amide, N-alkylolaryl-sulfonamide, phthalate ester, amine, aliphatic diol or phosphite ester of an alcohol. 5
10. The balloon of any preceding claim, further comprising at least one of a filler, antioxidant, colorant, crosslinking agent, impact strength modifier, drug or biologically active material. 10
11. The balloon of any preceding claim, wherein said multiblock copolymer is a diblock, triblock, butablock, pentablock, hexablock, heptablock, octablock, nonablock, decablock, undecablock or dodecablock copolymer. 15
12. The balloon of claim 11, wherein at least one block of said multiblock copolymer is polyethylene, polypropylene, poly(cyclohexylethylene), polyisoprene, poly(1,3-butadiene), poly(vinyl chloride), poly(vinyl fluoride), poly(chloroprene), poly(methyl acrylate), poly(methyl methacrylate), poly(acrylonitrile), polystyrene or poly(4-vinylpyridine). 20
13. The balloon of any preceding claim, wherein said multiblock copolymer is a blend of two or more multiblock copolymers. 25
14. The balloon of any preceding claim, further comprising a homopolymer. 30
15. The balloon of any preceding claim, further comprising a viscosity modifier. 35
16. The balloon of any preceding claim, wherein said multiblock copolymer has microdomains macroscopically aligned parallel, perpendicular, transverse or a combination thereof. 40
17. A balloon dilatation catheter, comprising:
 a) a tubular elongated catheter shaft; and
 b) the dilatation balloon disposed on said shaft comprising the multiblock copolymer of claim 1. 45
18. The catheter of claim 17, wherein:
 (1) said shaft has proximal and distal portions; and
 (2) said balloon is self-wrapped over said distal portion such that it has a low profile. 50
19. The catheter of claim 18, wherein said distal portion has substantially same low profile after one or more expansions of said balloon with rated pressures that result in about 5% to about 20% radial growth of said balloon. 55
20. The catheter of claim 19, wherein said low profile is in the range of about 0.025 mm to about 13.0 mm when said balloon is deflated.
21. The catheter of claim 19, wherein said low profile is in the range of about 0.25 mm to about 2.5 mm when said balloon is deflated.
22. The balloon of any of claims 1 to 16, having a non-linear compliance curve comprising initial, secondary and final segments, the initial segment having a radial growth higher than the secondary segment, and the secondary segment having a radial growth higher than the final segment.
23. The balloon of claim 22, wherein said initial segment has modulus in the range of about 0.05 GPa to about 2 GPa.
24. The balloon of claim 22, wherein said initial segment has modulus less than about 1 GPa.
25. The balloon of claim 22, having a radial growth in mm/p.s.i. of 0.39 for said initial segment, 0.025 for said secondary segment, and 0.017 for said final segment.
26. The balloon of any preceding claim comprising two or more layers of polymeric material comprising a multiblock copolymer.
27. The balloon of any preceding claim having a Young's Modulus less than about 5 GPa.
28. A polymeric extrudate for making a dilatation balloon comprising a multiblock copolymer having tensile strength in the range of about 50 MPa to about 450 MPa, strain at break in the range of about 50% to about 600% and elasticity at nominal strains of at least about 30%.
29. The extrudate of claim 28, wherein said multiblock copolymer has substantially complete elastic recovery from nominal strains of at least about 30%.
30. The extrudate of claim 29, wherein said extrudate has tensile strength in the range of about 150 MPa to about 250 MPa, strain at break in the range of about 300% to about 500% and substantially complete elastic recovery from strains of at least about 30%.
31. The extrudate of claim 29, wherein said extrudate has tensile strength in the range of about 50 MPa to about 150 MPa, strain at break in the range of about 50% to about 300% and substantially com-

- plete elastic recovery from strains of at least about 30%.
- 32.** The extrudate of claim 29, wherein said extrudate has tensile strength in the range of about 250 MPa to about 450 MPa, strain at break in the range of about 500% to about 600% and substantially complete elastic recovery from strains of at least about 30%.
- 33.** The extrudate of claim 29, wherein said extrudate has tensile strength of at least 150 MPa, strain at break at least 120% and substantially complete elastic recovery from strains of at least about 40%.
- 34.** The extrudate of any of claims 28 to 33, wherein said multiblock copolymer is a diblock, triblock, butablock, pentablock, hexablock, heptablock, octablock, nonablock, decablock, undecablock or dodecablock copolymer.
- 35.** The extrudate of claim 34, wherein at least one block of said multiblock copolymer is polyethylene, polypropylene, poly(cyclohexylethylene), polyisoprene, poly(1,3-butadiene), poly(vinyl chloride), poly(vinyl fluoride), poly(chloroprene), poly(methyl acrylate), poly(methyl methacrylate), poly(acrylonitrile), polystyrene or poly(4-vinylpyridine).
- 36.** The extrudate of claim 34 or 35, wherein said triblock copolymer is an alternating triblock copolymer having a structure (A-B-A).
- 37.** The extrudate of claim 34 or 35, wherein said pentablock copolymer is an alternating pentablock copolymer having a structure (A-B-A-B-A).
- 38.** The extrudate of claim 34 or 35, wherein said multiblock copolymer is a blend of two or more multiblock copolymers.
- 39.** The extrudate of any of claims 28 to 38, further comprising a plasticizer.
- 40.** The extrudate of claim 39, wherein the solubility parameter of said plasticizer and at least one block of said multiblock copolymer are about equal.
- 41.** The extrudate of claim 39 or 40, wherein said plasticizer is a carbonamide, sulfonamide, phenolic compound, cyclic ketone, mixture of phenols and esters, sulfonated ester, sulfonated amide, N-alkylarylsulfonamide, phthalate ester, amine, aliphatic diol or phosphite ester of an alcohol.
- 42.** The extrudate of any of claims 28 to 41, further comprising at least one of a filler, antioxidant, colorant, crosslinking agent, impact strength modifier, drug or biologically active material.
- 43.** The extrudate of any of claims 28 to 42, further comprising a viscosity modifier.
- 44.** The extrudate of any of claims 28 to 43, further comprising a homopolymer.
- 45.** The extrudate of any of claims 28 to 44 having a tubular shape, wherein said tubular shape has outer diameter of about 0.025 mm to about 13 mm and inner diameter of about 0.013 mm to about 12 mm.
- 46.** The extrudate of any of claims 28 to 44 having a tubular shape, wherein said tubular shape has an outer diameter of about 0.25 mm to about 2.5 mm and an inner diameter of about 0.15 mm to about 1.5 mm.
- 47.** The extrudate of any of claims 28 to 46, having phase-separated microdomains that are macroscopically aligned in parallel, perpendicular, transverse, or a combination thereof.
- 48.** The extrudate of claim 47, having two or more regions with different macroscopic microdomain alignment.
- 49.** A self-wrapping dilatation balloon comprising a multiblock copolymer having high elasticity and elastic recovery from nominal strains greater than about 30%.
- 50.** A polymeric extrudate for making a dilatation balloon comprising a multiblock copolymer having tensile strength in the range of about 50 MPa to about 450 MPa, strain at break in the range of about 50% to about 600% and substantially complete elastic recovery from strains of at least about 30%.

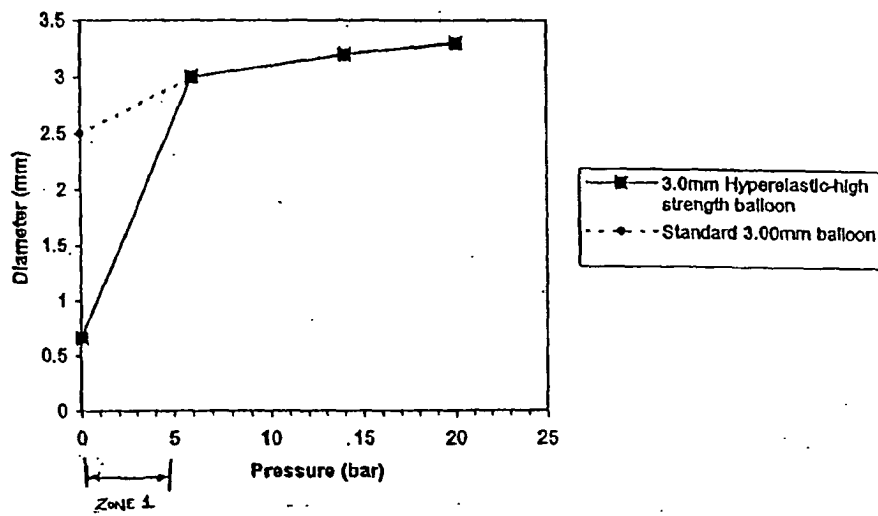


FIG. 1

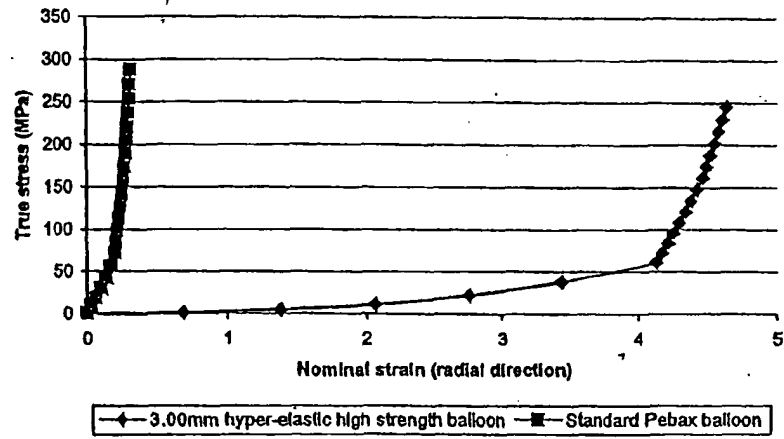


FIG. 2

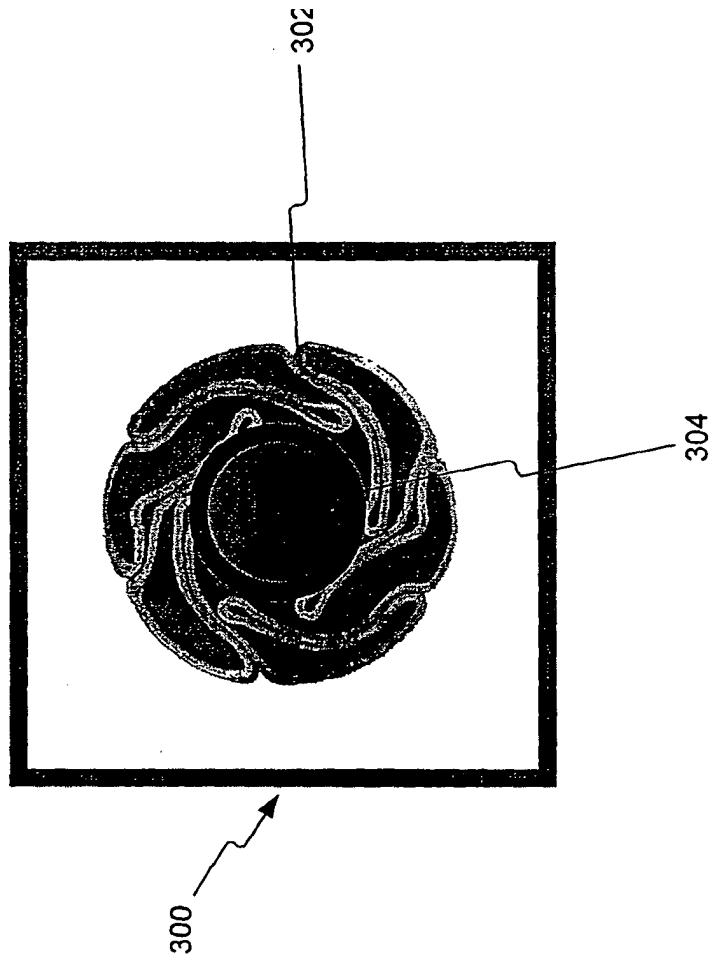


FIG. 3A

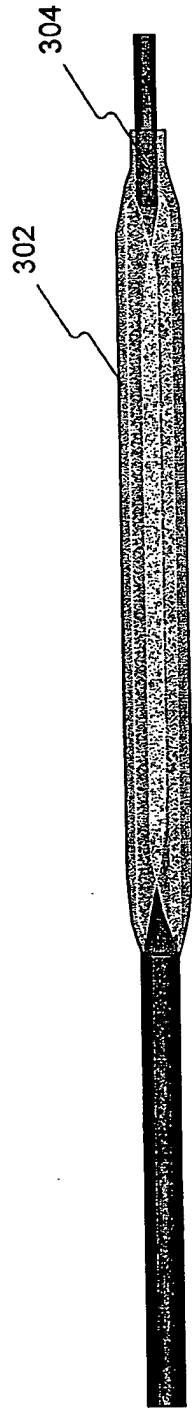


FIG. 3B

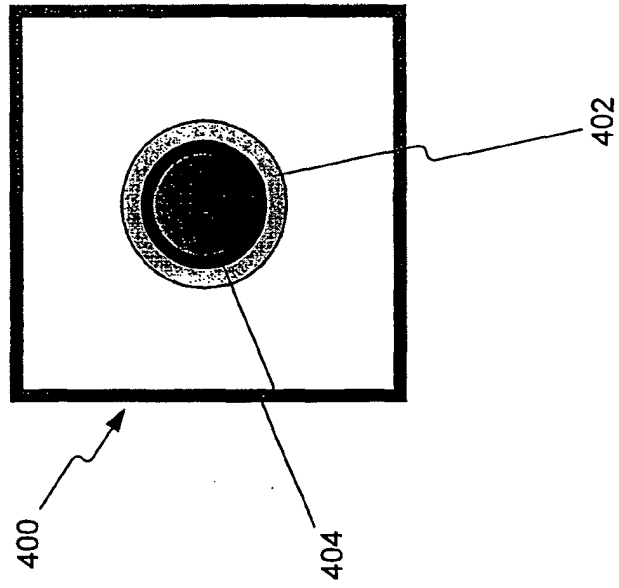


FIG. 4A

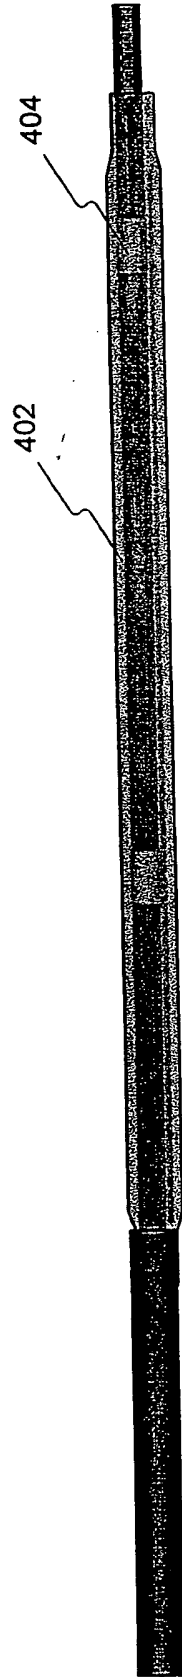


FIG. 4B

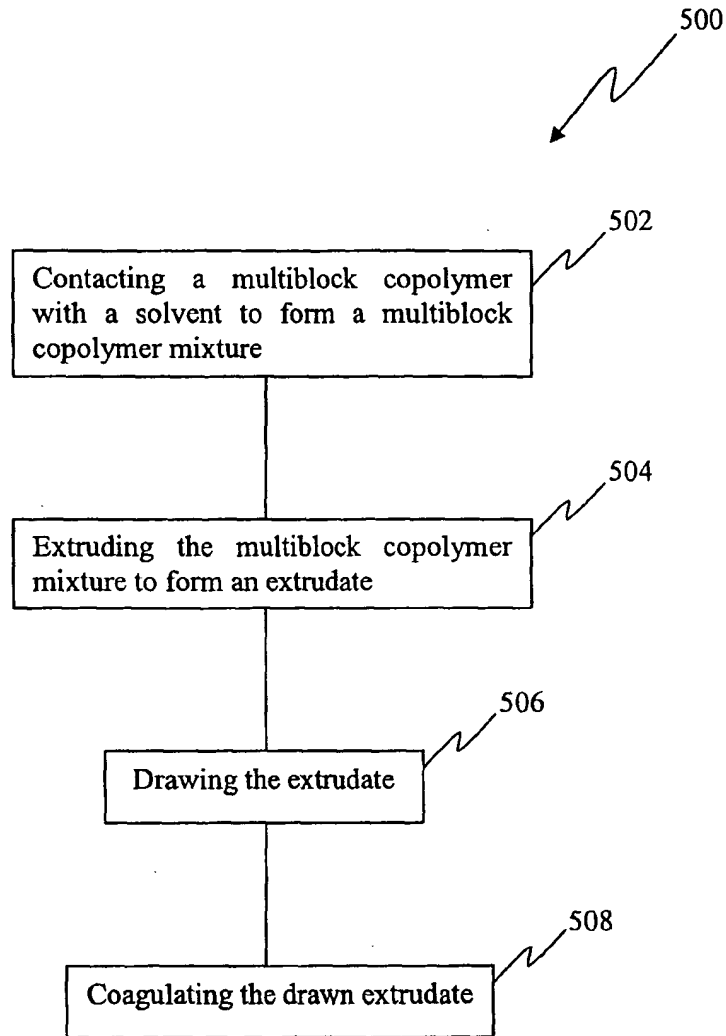


FIG. 5A

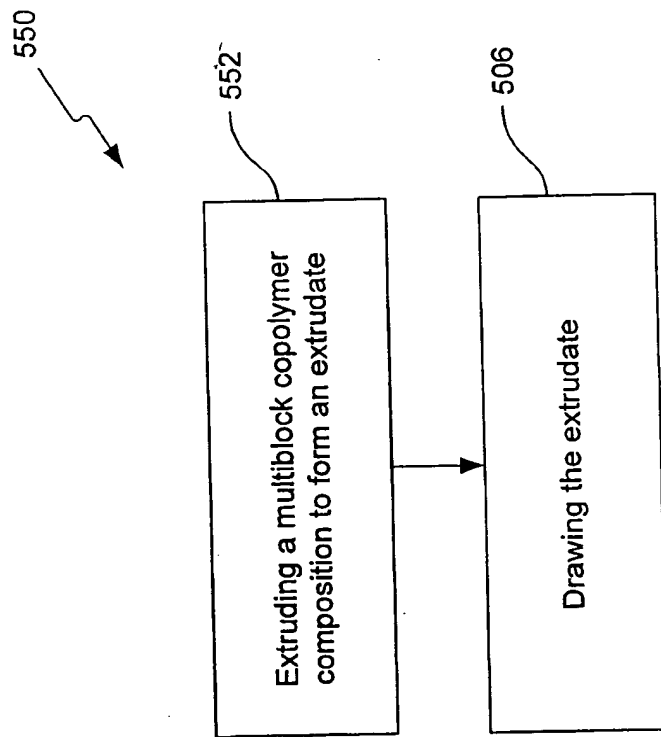


FIG. 5B

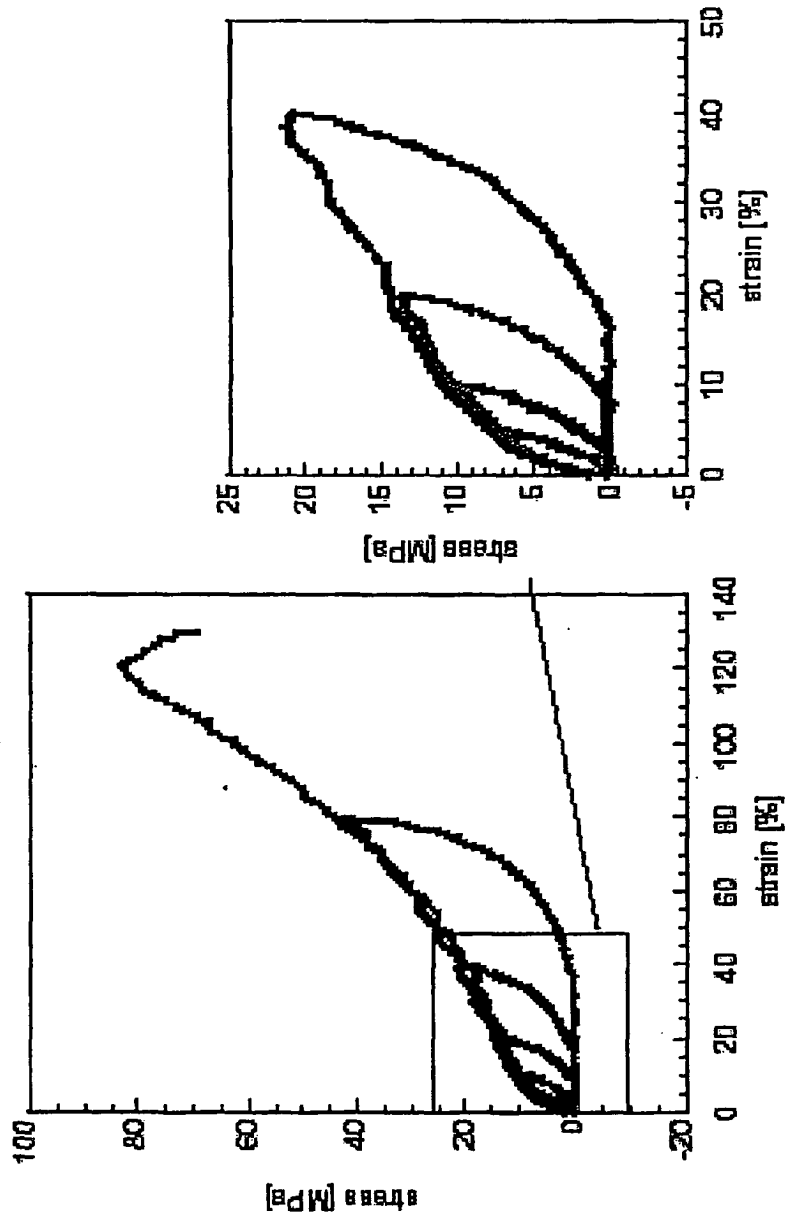


FIG. 6B

FIG. 6A

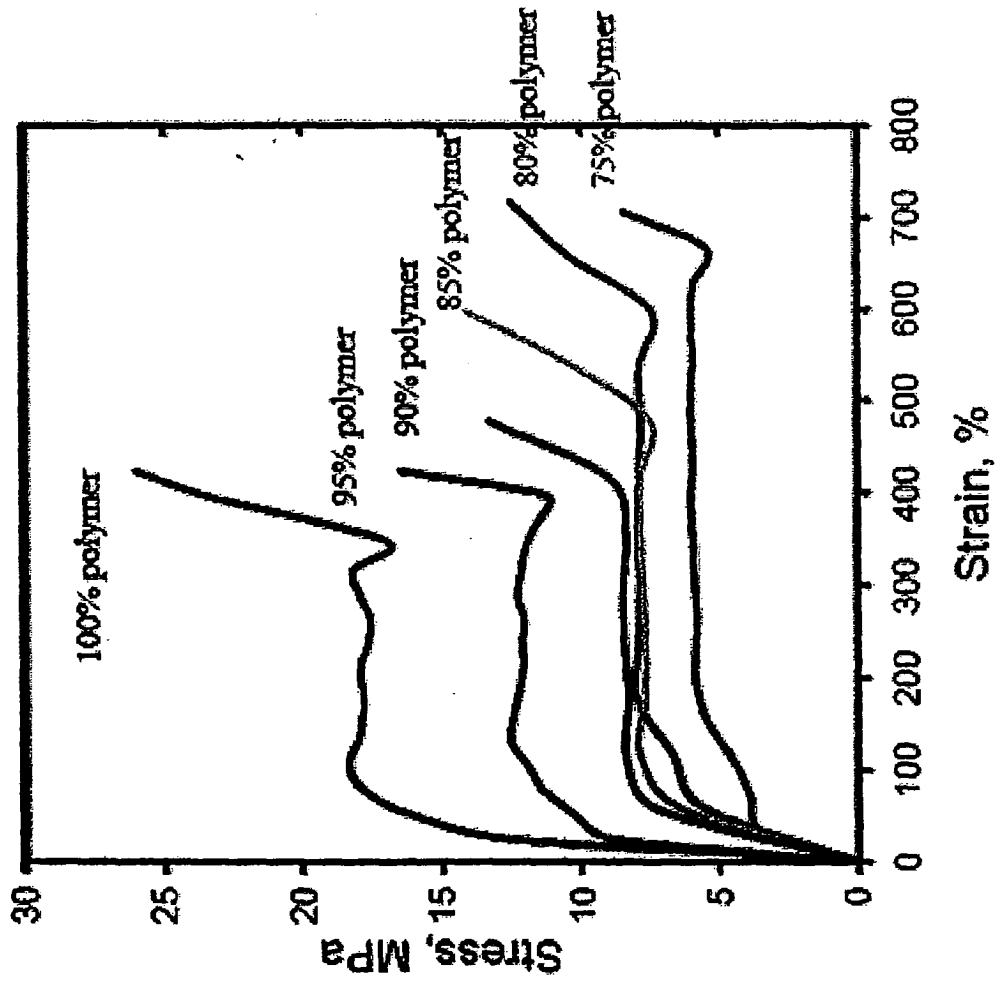


FIG. 7A

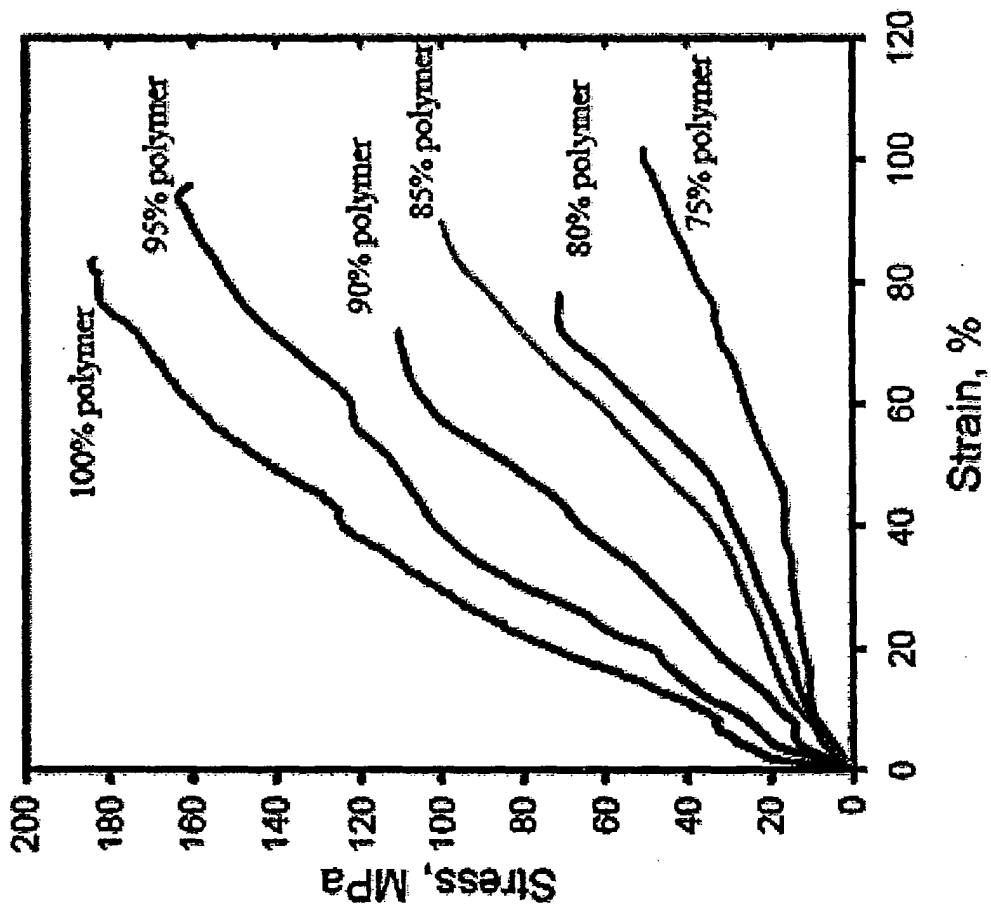


FIG. 7B



European Patent Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 25 4955

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 2002/010420 A1 (BAGAOISAN CELSO J ET AL) 24 January 2002 (2002-01-24) * paragraph [0008] - paragraph [0013] * * paragraph [0037] * * paragraph [0043] *	1-27	A61M25/00
X	US 2002/132072 A1 (WANG LIXIAO ET AL) 19 September 2002 (2002-09-19) * paragraph [0003] * * paragraph [0026] - paragraph [0027] * * paragraph [0032] - paragraph [0035]; figures *	1-27	
X	WO 99/44649 A (SCIMED LIFE SYSTEMS INC) 10 September 1999 (1999-09-10) * example 13; table 2 *	1	
X	WO 01/45784 A (ADVANCED CARDIOVASCULAR SYSTEM) 28 June 2001 (2001-06-28) * page 2, line 8 - page 4, line 20; figures *	1,28,49,50	
X	US 6 495 090 B1 (WILKINS DOUGLAS) 17 December 2002 (2002-12-17) * abstract; figures; tables *	1,28,49,50	TECHNICAL FIELDS SEARCHED (Int.Cl.7) A61M
A	EP 0 592 885 A (BARD INC C R) 20 April 1994 (1994-04-20) * page 7, line 13 - line 36 *	1-50	
A	WO 95/23619 A (SCIMED LIFE SYSTEMS INC) 8 September 1995 (1995-09-08) * the whole document *	1-50	
A	US 2002/041940 A1 (JUNG EUGENE J ET AL) 11 April 2002 (2002-04-11) * paragraph [0062] * * abstract; figure 8 *	1	
----- -/-- -----			
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 15 November 2004	Examiner Valfort, C
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1 503 03 82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 25 4955

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 6 283 939 B1 (BARBERE MICHAEL D ET AL) 4 September 2001 (2001-09-04) * column 7, line 34 - line 53 * * column 8, line 14 - line 55; figure 2 *	1	
P,X	WO 2004/028611 A (SCIMED LIFE SYSTEMS INC) 8 April 2004 (2004-04-08) * page 20, line 19 - page 21, line 12 * * page 31, line 21 - line 27 *	1,28,49, 50	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Place of search	Date of completion of the search	Examiner	
Munich	15 November 2004	Valfort, C	
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 25 4955

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-11-2004

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002010420 A1	24-01-2002	US 5868705 A	09-02-1999
		AU 6684298 A	22-09-1998
		CA 2286998 A1	11-09-1998
		EP 1023100 A2	02-08-2000
		JP 2001526559 T	18-12-2001
		WO 9839044 A2	11-09-1998
		US 6319229 B1	20-11-2001
US 2002132072 A1	19-09-2002	US 6406457 B1	18-06-2002
		US 5951941 A	14-09-1999
		US 5830182 A	03-11-1998
		US 5556383 A	17-09-1996
		US 6146356 A	14-11-2000
		US 6171278 B1	09-01-2001
		US 6168748 B1	02-01-2001
		AT 189402 T	15-02-2000
		CA 2184383 A1	08-09-1995
		DE 29522041 U1	10-06-1999
		DE 69514910 D1	09-03-2000
		DE 69514910 T2	29-06-2000
		DK 748232 T3	01-05-2000
		EP 0748232 A1	18-12-1996
		ES 2141928 T3	01-04-2000
		GR 3033196 T3	31-08-2000
		JP 3494654 B2	09-02-2004
		JP 9509860 T	07-10-1997
		PT 748232 T	31-07-2000
		WO 9523619 A1	08-09-1995
WO 9944649 A	10-09-1999	AT 259668 T	15-03-2004
		DE 69914882 D1	25-03-2004
		EP 1059948 A1	20-12-2000
		WO 9944649 A1	10-09-1999
		US 2003030189 A1	13-02-2003
		US 6465067 B1	15-10-2002
WO 0145784 A	28-06-2001	US 6270522 B1	07-08-2001
		AU 2276101 A	03-07-2001
		CA 2393833 A1	28-06-2001
		EP 1239912 A1	18-09-2002
		JP 2003517899 T	03-06-2003
		WO 0145784 A1	28-06-2001
		US 2001027329 A1	04-10-2001
US 6495090 B1	17-12-2002	US 6416494 B1	09-07-2002
		EP 1083961 A1	21-03-2001

EPO FORM P0469

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 04 25 4955

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-11-2004

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
US 6495090	B1	WO 9964101 A1	16-12-1999	
		US 2002150707 A1	17-10-2002	
EP 0592885	A	20-04-1994	US 5500180 A	19-03-1996
			CA 2107378 A1	31-03-1994
			EP 0592885 A2	20-04-1994
			JP 6304920 A	01-11-1994
			US 6283939 B1	04-09-2001
			US 2004097878 A1	20-05-2004
			US 6210364 B1	03-04-2001
			US 2002053349 A1	09-05-2002
WO 9523619	A	08-09-1995	AT 189402 T	15-02-2000
			CA 2184383 A1	08-09-1995
			DE 29522041 U1	10-06-1999
			DE 69514910 D1	09-03-2000
			DE 69514910 T2	29-06-2000
			DK 748232 T3	01-05-2000
			EP 0748232 A1	18-12-1996
			ES 2141928 T3	01-04-2000
			GR 3033196 T3	31-08-2000
			JP 3494654 B2	09-02-2004
			JP 9509860 T	07-10-1997
			PT 748232 T	31-07-2000
			US 2002132072 A1	19-09-2002
			WO 9523619 A1	08-09-1995
			US 5951941 A	14-09-1999
			US 6146356 A	14-11-2000
			US 6406457 B1	18-06-2002
US 5556383 A	17-09-1996			
US 5830182 A	03-11-1998			
US 6171278 B1	09-01-2001			
US 2002041940	A1	11-04-2002	US 2001008661 A1	19-07-2001
			US 2002041059 A1	11-04-2002
			CA 2232250 A1	14-11-1998
			DE 69812466 D1	30-04-2003
			DE 69812466 T2	11-09-2003
			EP 0878209 A2	18-11-1998
JP 10314311 A	02-12-1998			
US 6283939	B1	04-09-2001	US 6210364 B1	03-04-2001
			US 5500180 A	19-03-1996
			US 2004097878 A1	20-05-2004
			US 2002053349 A1	09-05-2002
			CA 2107378 A1	31-03-1994

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 25 4955

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-11-2004

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6283939	B1	EP 0592885 A2 JP 6304920 A	20-04-1994 01-11-1994
WO 2004028611	A	US 2004062891 A1 WO 2004028611 A1 US 2004131808 A1	01-04-2004 08-04-2004 08-07-2004

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82