



US009767949B2

(12) **United States Patent**  
**Bengtsson et al.**

(10) **Patent No.:** **US 9,767,949 B2**  
(45) **Date of Patent:** **Sep. 19, 2017**

(54) **CONTROLLING OF A MAGNETIC CONNECTION BETWEEN AN ELECTRICAL DEVICE AND A CABLE**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **Sony Mobile Communications Inc.**, Tokyo (JP)

5,812,356 A	9/1998	O'Connor	
9,153,983 B2 *	10/2015	Sakai	H02J 7/0042
2007/0072442 A1	3/2007	DiFonzo et al.	
2007/0250981 A1	11/2007	Seibert	
2008/0164934 A1	7/2008	Hankey et al.	
2010/0233889 A1	9/2010	Kiani	

(Continued)

(72) Inventors: **Erik Bengtsson**, Eslov (SE); **Ola Thorn**, Limhamn (SE); **Kare Agardh**, Rydeback (SE)

(73) Assignees: **Sony Corporation**, Tokyo (JP); **Sony Mobile Communications Inc.**, Tokyo (JP)

FOREIGN PATENT DOCUMENTS

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 147 days.

WO	2008058562 A	5/2008
WO	2013075847 A	5/2013
WO	2014198324 A	12/2014

OTHER PUBLICATIONS

(21) Appl. No.: **14/739,913**

International Search Report and Written Opinion from corresponding International Application No. PCT/IB2015/059613, dated May 3, 2016.

(22) Filed: **Jun. 15, 2015**

(65) **Prior Publication Data**

US 2016/0365185 A1 Dec. 15, 2016

*Primary Examiner* — Danny Nguyen

(74) *Attorney, Agent, or Firm* — Tucker Ellis LLP

(51) **Int. Cl.**

<b>H01H 47/00</b>	(2006.01)
<b>H01F 7/06</b>	(2006.01)
<b>H02N 15/00</b>	(2006.01)
<b>H01F 38/14</b>	(2006.01)
<b>H01R 13/62</b>	(2006.01)
<b>G06F 1/16</b>	(2006.01)

(57) **ABSTRACT**

The present invention relates to an electrical device comprising: a first connector (102) being magnetically connectable to a second connector (202) of an accessory (200) for forming a magnetic connection between the first and second connectors, wherein at least one of the first and second connectors comprises an electromagnet; a sensor (120) comprising at least one of a motion sensor, a proximity sensor and a microphone, wherein the sensor is arranged to output a sensor signal (121); and a electromagnetic controller (108) connected to the electromagnet and arranged to control the magnetic field of the electromagnet based on the sensor signal.


(52) **U.S. Cl.**

CPC ..... **H01F 7/064** (2013.01); **G06F 1/1633** (2013.01); **H01F 38/14** (2013.01); **H01R 13/6205** (2013.01); **H02N 15/00** (2013.01); **G06F 1/1677** (2013.01); **H01F 2038/143** (2013.01); **H01R 2201/16** (2013.01)

(58) **Field of Classification Search**

USPC ..... 361/139, 144, 160  
See application file for complete search history.

**9 Claims, 1 Drawing Sheet**

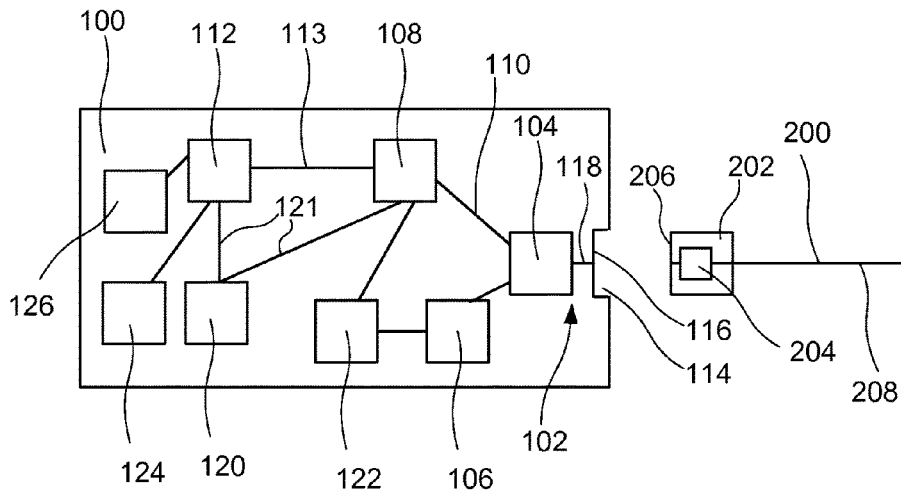


(56)

**References Cited**


U.S. PATENT DOCUMENTS

2011/0181238	A1	7/2011	Soar	
2012/0021619	A1	1/2012	Bilbrey	
2013/0094680	A1	4/2013	Allen	
2014/0204021	A1	7/2014	Sugihara et al.	
2016/0020557	A1*	1/2016	Daoura .....	H01R 13/6205 439/38
2016/0266214	A1*	9/2016	Nomura .....	G01R 33/02
2016/0284497	A1*	9/2016	Stryker .....	H01H 50/16

\* cited by examiner

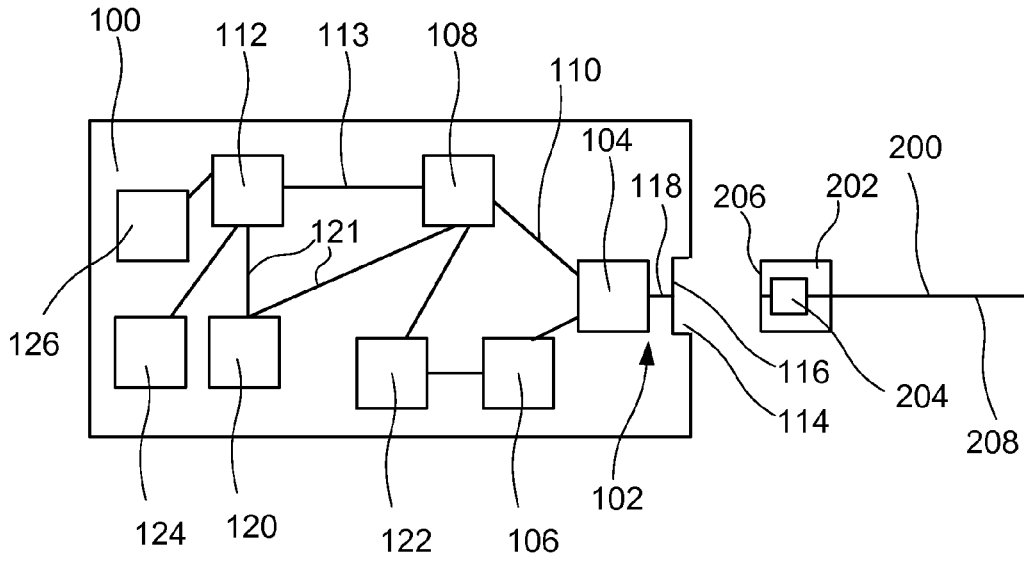

**FIG. 1**

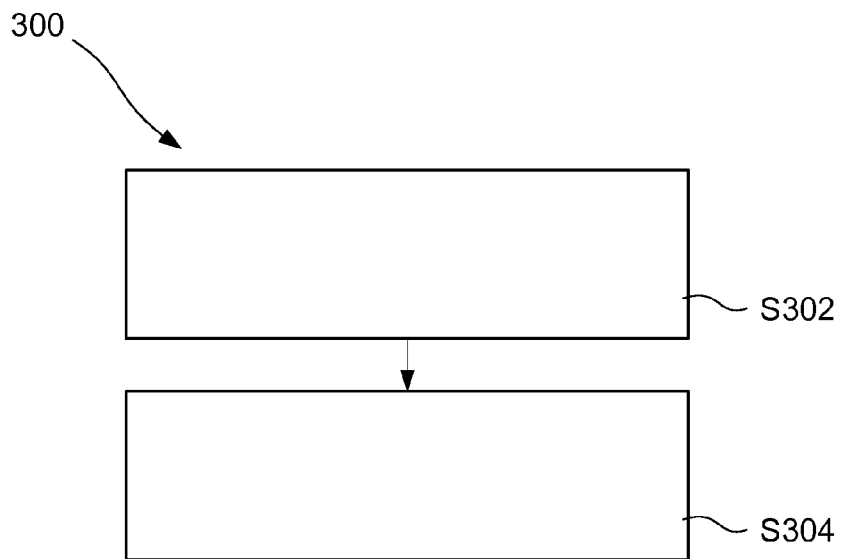

**FIG. 2**

1

## CONTROLLING OF A MAGNETIC CONNECTION BETWEEN AN ELECTRICAL DEVICE AND A CABLE

### TECHNICAL FIELD

The present invention relates to a magnetic connection between an electrical device and an accessory. The accessory may e.g. a cable.

### BACKGROUND

In modern electrical devices an important feature is to connect the electrical device to any kind of accessory for transferring data to and/or from the electrical device and/or charging a battery of the electrical device.

Typically when connecting an accessory to the electrical device a first connector of the accessory is paired with a second connector of the electrical device such that a galvanic connection between the accessory and the electrical device is established. Data may thereafter be transferred to and/or from the electrical device via the connection. Alternatively, or in combination the battery of the electrical device may be charged via the connection. In case of charging the charging current is transferred via pogo pins of the first and second connectors. Typically the first and second connectors have corresponding contact surfaces. The contact surfaces are configured to ensure that the first connector stays connected to the second connector while e.g. charging the battery. Another way to ensure that the first connector stays connected to the second connector is to utilize some mechanical means such as a spring or a hook to keep the connectors together. Further, another way to ensure that the first connector stays connected to second connector is to utilize a magnetic force. A magnet at the first connector and a magnet at the second connector may be used for establishing a magnetic connection between the electrical device and the accessory. Alternatively, one of the magnets may be replaced by any kind of magnetic material, e.g. a metal plate. Hence, the accessory is magnetically connected to the electronic device.

Non-limiting examples of an accessory are a cable, an external battery and an additional device arranged to be connected to the electrical device. Non-limiting examples of an additional device are a loudspeaker, a microphone, a modem and a camera.

A common drawback for both magnetic and mechanical systems is that the force used for securing the connection must be overcome by the user when disconnecting the accessory from the electrical device. Thus, there is a design tradeoff between a good secure connection when the accessory is attached, and an easy way for the user to release the accessory with minimum force.

### SUMMARY OF THE INVENTION

In view of the above, it is an object of the present invention to provide an improved controlling of a magnetic connection between an electrical device and an accessory.

According to a first aspect a method for controlling a magnetic connection between a first connector of an electrical device and a second connector of an accessory arranged to be connected to the electrical device, wherein at least one of the first and second connectors comprises an electromagnet, is provided. The method comprises: receiving a sensor signal from at least one of a motion sensor, a proximity sensor and a microphone of the electrical device,

2

and controlling the magnetic field of the electromagnetic connector based on the sensor signal.

It shall be noticed that the first and second connectors are not limited to connectors for establishing a galvanic connection between the cable and the electrical device. The first and second connectors may for example also be utilized in combination with couplers for short range wireless technologies.

By controlling the magnetic field the electromagnetic connector based on the sensor signal disconnection of a cable connected to the electrical device may be facilitated. At the same time a secure connection between the accessory and the electrical device is also achieved. Moreover, power consumption of the electromagnet may be reduced. The magnetic field of the electromagnet may e.g. be reduced once the magnetic contact has been established and the electrical device is not moving. Furthermore, by the above magnetic connection ejection and/or attraction boost may be implemented.

The controlling may comprise weakening the magnetic field of the electromagnet.

The controlling may comprise strengthening the magnetic field of the electromagnet.

The controlling may comprise controlling the magnetic field of the electromagnet such that the magnetic connection between the electrical device and the accessory is released.

The accessory may be a cable used to connect the electrical device to a power source for charging a battery of the electrical device, wherein the method further may comprise checking a battery level of the battery, and wherein when the battery level is below a predetermined threshold the controlling does not comprise weakening the magnetic field of the electromagnet.

When the sensor signal corresponds to a falling movement of the electrical device, the controlling may comprise strengthening the magnetic field of the electromagnetic connector.

When the sensor signal corresponds to a lifting movement of the electrical device, the controlling may comprise weakening the magnetic field of the electromagnetic connector.

When the sensor signal corresponds to a user holding the electrical device, the controlling may comprise weakening the magnetic field of the electromagnetic connector.

According to a second aspect a non-transitory computer-readable recording medium is provided. The non-transitory computer-readable recording medium having recorded thereon software code portions for implementing the method according to the above when executed on a device having processing capabilities.

The above mentioned features of the method, when applicable, apply to this second aspect as well. In order to avoid undue repetition, reference is made to the above.

According to a third aspect an electrical device is provided. The electrical device comprises: a first connector being magnetically connectable to a second connector of an accessory for forming a magnetic connection between the first and second connectors, wherein at least one of the first and second connectors comprises an electromagnet; a sensor comprising at least one of a motion sensor, a proximity sensor and a microphone, wherein the sensor is arranged to output a sensor signal; and an electromagnetic controller connected to the electromagnet and arranged to control the magnetic field of the electromagnet based on the sensor signal.

The motion sensor may comprise at least one of an accelerometer, gyroscope and a magnetometer. Alternatively or in combination, the motion sensor may comprise a

relative positioning function utilizing wireless technologies such as Bluetooth or WLAN for determining motion of the electrical device.

The proximity sensor comprises at least one of, an Infra-red, IR, sensor, a capacitive and/or resistive sensor and an ultrasonic sensor. Alternatively or in combination, the proximity sensor may comprise a ranging function utilizing wireless technologies such as Bluetooth and WLAN for determining range between different objects.

Alternatively or in combination, the proximity sensor may comprise a Body Area Network, BAN, transceiver used in BAN-network utilizing body transferred signals being capacitively coupled to the body to and/or from the transceiver. The electrical device may further comprise a battery and a battery level sensor arranged to check a battery level of the battery and to output a battery level signal to the electromagnetic controller.

The electromagnetic controller may be arranged to, when the battery level is below a predetermined threshold, not weakening the magnetic field of the electromagnetic connector.

The above mentioned features of the method, when applicable, apply to this third aspect as well. In order to avoid undue repetition, reference is made to the above.

A further scope of applicability of the present invention will become apparent from the detailed description given below. However, it should be understood that the detailed description and specific examples, while indicating preferred embodiments of the invention, are given by way of illustration only, since various changes and modifications within the scope of the invention will become apparent to those skilled in the art from this detailed description.

Hence, it is to be understood that this invention is not limited to the particular component parts of the device described or steps of the methods described as such device and method may vary. It is also to be understood that the terminology used herein is for purpose of describing particular embodiments only, and is not intended to be limiting. It must be noted that, as used in the specification and the appended claim, the articles "a," "an," "the," and "said" are intended to mean that there are one or more of the elements unless the context clearly dictates otherwise. Thus, for example, reference to "a unit" or "the unit" may include several devices, and the like. Furthermore, the words "comprising", "including", "containing" and similar wordings does not exclude other elements or steps.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The above and other aspects of the present invention will now be described in more detail, with reference to appended drawings showing embodiments of the invention. The figures should not be considered limiting the invention to the specific embodiment; instead they are used for explaining and understanding the invention.

As illustrated in the figures, the sizes of layers and regions are exaggerated for illustrative purposes and, thus, are provided to illustrate the general structures of embodiments of the present invention. Like reference numerals refer to like elements throughout.

FIG. 1 is a schematic block diagram of an electrical device and an accessory in the form of a cable.

FIG. 2 is a block diagram of a method for controlling a magnetic connection between a first connector of an elec-

trical device and a second connector of an accessory arranged to be connected to the electrical device.

#### DETAILED DESCRIPTION

The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which currently preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided for thoroughness and completeness, and to fully convey the scope of the invention to the skilled person.

FIG. 1 illustrates an electrical device **100** having a first connector **102** connectable to a second connector **202** of an accessory **200**. In the following description the accessory **200** is a cable. However, the accessory **200** may be implemented in many different ways known to a person skilled in the art. Non-limiting examples of an accessory are a cable, an external battery and an additional device arranged to be connected to the electrical device. Non-limiting examples of an additional device are a loudspeaker, a microphone, a modem and a camera. The additional device may also be another electrical device just as the electrical device. Hence, in case the electrical device is a mobile phone, the additional device may also be a mobile phone.

The first connector **102** of the electrical device **100** comprises an electromagnet **104** adapted to generate a magnetic field when supplied with electrical power. The electromagnet **104** may be supplied with electrical power from a battery **106** or any other kind of power source.

The electromagnet **104** is further connected to an electromagnet controller **108** in the electrical device **100**. The electromagnet controller **108** is adapted to control the power supply to the electromagnet **104** via an electromagnet control signal **110**. The electromagnet controller **108** is arranged to control the magnetic field generated by the electromagnet **104** by altering the electromagnet control signal **110**. The magnetic field may be increased or decreased.

The second connector **202** of the accessory **200** comprises a magnet **204**. The magnet **204** may be an electromagnet, a permanent magnet or any kind of magnetic material, e.g. a metal plate.

The second connector **202** is arranged to be connectable to the electrical device **100** at the first connector **102** of the same. The portion of the electrical device **100** where the second connector **202** is arranged to be connected to the electrical device **100** is called a socket **114**. The socket **114** may be a flat surface or any other mechanical coupling according to prior art. Hence, the first connector **102** of the electrical device **100** comprises a socket **114**. The socket **114** has a contact surface **116** at which the second connector **202** of the accessory **200** is connectable to the electrical device **100**. The second connector **202** of the accessory **200** has a contact surface **206** where the second connector **202** may connect to the contact surface **116** of the socket **114** of the electrical device **100**. The second connector **202** of the accessory **200** also comprises a wire **208** adapted to connect to a corresponding wire **118** of the electrical device **100** at the socket **114**. For simplicity only one wire of the accessory **200** being arranged connect to a corresponding wire of the electrical device **100** is shown, however, it shall be understood that there may be connection between a plurality of wires at the connection between the accessory **200** and the electrical device **100**.

When supplied with electrical power, the electromagnet **104** is magnetically connectable to the magnet **204** of the

5

second connector 202. Hence, the electromagnet 104 of the electrical device 100 is capable of magnetically connect to the magnet 204 of the accessory 200, and keep the second connector 202 of the accessory 200 connected to the first connector 102 of the electrical device 100 when supplied with electrical power.

The accessory 200, in the form of a cable, arranged to be connected to the electrical device 100, may be any kind of cable. Non-limiting examples of cables are: a cable of a charger for charging the battery 106 of the electrical device 100, a signal cable such as a High-Definition Multimedia Interface (HDMI) or Universal Serial Bus (USB) cable, and a cable to an external speaker or headphones. It should be understood that by the term “connector” is meant an end part of the cable, which end part comprises the contact surface that is configured to be brought in contact with a contact surface of the electrical device 100.

The electromagnet controller 108 is connected to or is a part of a device controller 112 of the electrical device 100. The device controller 112 may be any kind of Central Processing Unit (CPU) or any other logic within the electrical device 100. The device controller 112 is adapted to control the electrical device 100.

The electrical device 100 further comprises a sensor 120. The sensor 120 comprises at least one of a motion sensor, a proximity sensor and a microphone.

According to non-limiting examples the motion sensor may comprise an accelerometer, a gyroscope and/or a magnetometer. Alternatively or in combination, the motion sensor may comprise a relative positioning function utilizing wireless technologies such as Bluetooth or WLAN for determining motion of the electrical device. The motion sensor is arranged to sense movement of the electrical device 100. The motion sensor may be arranged to sense a falling movement of the electrical device 100. Additionally or in combination the motion sensor may be arranged to sense a lifting movement of the electrical device 100.

According to non-limiting examples the proximity sensor may comprise an Infrared, IR, sensor, a capacitive and/or resistive sensor or an ultrasonic sensor. Alternatively or in combination, the proximity sensor may comprise a ranging function utilizing wireless technologies such as Bluetooth and WLAN for determining range between different objects.

Alternatively or in combination, the proximity sensor may comprise a Body Area Network, BAN, transceiver used in BAN-network utilizing body transferred signals being capacitively coupled to the body to and/or from the transceiver. The proximity sensor is arranged to sense a user holding the electrical device 100.

The microphone is arranged to sense sounds generated in the vicinity of the electrical device. A non-limiting example of such a sound a user telling the electrical device 100 to release or eject a cable connected to the electrical device.

The sensor 120 is arranged to register events. The sensor 120 is arranged to register events using at least one of the motion sensor, the proximity sensor and the microphone. According to the above, the event may be an event generated internally in the electrical device or by input from the user of the electrical device. The sensor 120 is in response to a registered event arranged to output a sensor signal 121. The sensor 120 is arranged to send the sensor signal 121 to the electromagnet controller 108 and/or the device controller 112.

The electromagnet controller 108 and/or the device controller 112 is arranged to send an electromagnet control signal 110 to the electromagnet 104 for controlling the electromagnet 104. The electromagnet control signal 110 is

6

based on the sensor signal 121. Hence, the electromagnet 104 may be controlled based on the registered event. Information about the event may be sent to the electromagnet controller 108 with the device control signal 113. Accordingly, the electromagnet controller 108 is adapted to control the power supply to the electromagnet 104 in dependence of a registered event.

The electromagnet controller 108 may be adapted to control the power supply to the electromagnet 104 such that the magnetic field of the electromagnet is weakened. Hence, the electromagnet controller 108 may be adapted to control the power supply to the electromagnet 104 such that the magnetic connection between an electrical device 100 and the accessory 200 is weakened. Additionally or in combination, the electromagnet controller 108 may be adapted to control the power supply to the electromagnet 104 such that the magnetic connection between an electrical device 100 and the accessory 200 is released. Non-limiting examples of registered events wherein the electromagnet controller 108 may be adapted to control the power supply to the electromagnet 104 such that the magnetic field of the electromagnet is weakened are when the sensor signal corresponds to a lifting movement of the electrical device and/or when the sensor signal corresponds to a user holding the electrical device.

The electromagnet controller 108 may be adapted to control the power supply to the electromagnet 104 such that the magnetic field of the electromagnet is strengthened. Hence, the electromagnet controller 108 may be adapted to control the power supply to the electromagnet 104 such that the magnetic connection between an electrical device 100 and the accessory 200 is strengthened. A non-limiting example of a registered event wherein the electromagnet controller 108 may be adapted to control the power supply to the electromagnet 104 such that the magnetic field of the electromagnet strengthened is when the sensor signal corresponds to a falling movement of the electrical device.

The electrical device 100 may further comprise a battery level sensor 122 arranged to check a battery level of the battery 106. The battery level sensor 122 is also arranged to output a battery level signal to the electromagnetic controller 108 and/or the device controller 112.

According to one embodiment the electromagnetic controller 108 is arranged to, when the battery level is below a predetermined threshold, not weakening the magnetic field of the electromagnetic connector. This may be exemplified by the following non-limiting example. Accordant to this non-limiting example the accessory 200 in the form of a cable is a charging cable used to connect the electrical device 100 to a power source for charging the battery 106 of the electrical device 100. The battery level sensor 122 is arranged to check the battery level of the battery 106. When the battery level is below a predetermined threshold the electromagnetic controller 108 is arranged not to weaken the magnetic field of the electromagnet 104.

FIG. 2 illustrates a method 300 for controlling a magnetic connection between a first connector of an electrical device and a second connector of a cable arranged to be connected to the electrical device. The method 300 may be performed in the electrical device. The method comprises the following actions, which actions may be carried out in another suitable order than described below.

Receiving S302 a sensor signal from at least one of a motion sensor, a proximity sensor and a microphone of the electrical device.

Controlling S304 the magnetic field of the electromagnetic connector based on the sensor signal. The controlling

may comprise weakening the magnetic field of the electromagnet. For example, the controlling may comprise controlling the magnetic field of the electromagnet such that the magnetic connection between the electrical device and the cable is released. Alternatively, the controlling may comprise strengthening the magnetic field of the electromagnet.

The above method may be exemplified by the below non-limiting examples.

In the following examples the electrical device **100** is a mobile phone, smart phone, tablet, a wearable such as a smart watch or wristlet, or the like, having the ability to receive an incoming call. Moreover the accessory **200** is magnetically connected to the electrical device **100** in accordance with what is described above.

According to one embodiment, the electrical device **100** receives the incoming call and signals this to the user by a sound signal and/or a tactile movement using a loudspeaker **124** and/or a vibrator **126**. When the user moves the electrical device **100**, the magnetic connection is weakened by controlling the electromagnet **104**. The user moving the electronic device **100** is registered as an event by the sensor **120** of the electrical device **100**. The movement induced by the user may be registered by means of the motion sensor and/or the proximity sensor of the sensor **120**. The movement may e.g. be registered as a lifting movement of the electrical device **100**. That the user is interacting with the electrical device **100** may be registered by the proximity sensor. According to another embodiment the accessory **200** may be ejected from the electrical device **100** by controlling the electromagnet **104** when the user moves the electrical device **100**.

According to another embodiment the battery level sensor **122** is arranged to check the battery level of the battery **106** in the electrical device **100** before a decision to weakening the magnetic field of the electromagnet **104** is taken. Hence, when the battery level of the battery **106** in the electrical device **100** is below a predetermined value/threshold the electromagnet controller **108** and/or the device controller **112** is arranged not to weakening the magnetic field of the electromagnet **104**.

It is to be understood that the above examples is not only valid in case of the electrical device is receiving an incoming call. Another example of an events occurring may e.g. be that an alarm of the electrical device is set to start. Yet another event occurring may e.g. be that the user is moving the device.

On the other hand, in case the sensor **120** of the electrical device registers an event in the form of that the electrical device **100** is falling the electromagnet controller **108** and/or the device controller **112** may be arranged to strengthen the magnetic field of the electromagnet **104**.

According to other embodiment the weakening and/or strengthening of the magnetic field of the electromagnet **104** may be decided on as a result of an event registered by the microphone of the sensor **120**. The user might e.g. tell the electrical device to eject the accessory **200**.

A non-transitory computer-readable recording medium is also provided. The non-transitory computer-readable recording medium may have recorded thereon software code portions for implementing one or more of the actions described above. Additionally or in combination the non-transitory computer-readable recording medium may have recorded thereon software code portions for implementing one or more of the features relating to the electrical device **100**.

The person skilled in the art realizes that the present invention by no means is limited to the preferred embodi-

ments described above. On the contrary, many modifications and variations are possible within the scope of the appended claims.

For example, according to some aspect of embodiments herein, the object is achieved by an electrical device comprising a first connector which is able to connect to a second connector of a cable. The second connector comprises an electromagnet. The electrical device comprises a magnet that is able to connect magnetically to the electromagnet of the second connector. The electrical device further comprises an electromagnet controller which when connected to the electromagnet of the second connector is able to control power supply of the electromagnet in dependence of a registered event.

Moreover, the magnetic connection between the first connector **102** of the electrical device **100** and the second connector **202** of the accessory **200** may be used in combination with couplers for short range wireless technologies. Such an embodiment may simplify waterproof integration.

Furthermore, the magnetic connection between the first connector **102** of the electrical device **100** and the second connector **202** of the accessory **200** may also be used in combination with optical connection between the electrical device and the accessory.

Moreover, the electrical device **100** may further comprise a permanent magnet adapted to give a guiding force to a user when connecting the second connector **202** of the accessory **200** to the electrical device **100**. The permanent magnet should preferably be small enough to not introduce any interference in the electrical device or its surroundings.

Additionally, variations to the disclosed embodiments can be understood and effected by the skilled person in practicing the claimed invention, from a study of the drawings, the disclosure, and the appended claims.

The invention claimed is:

1. A method for controlling a magnetic connection between a first connector of an electrical device and a second connector of a cable used to connect the electrical device to a power source for charging a battery of the electrical device, wherein at least one of the first and second connectors comprises an electromagnet, the method comprising:

checking a battery level of the battery;  
receiving a sensor signal from at least one of a motion sensor, a proximity sensor and a microphone of the electrical device; and  
controlling the magnetic field of the electromagnetic connector based on the sensor signal;  
wherein when the battery level is below a predetermined threshold the controlling does not comprise weakening the magnetic field of the electromagnet.

2. A method for controlling a magnetic connection between a first connector of an electrical device and a second connector of an accessory arranged to be connected to the electrical device, wherein at least one of the first and second connectors comprises an electromagnet, the method comprising:

receiving a sensor signal from at least one of a motion sensor, a proximity sensor and a microphone of the electrical device; and  
controlling the magnetic field of the electromagnetic connector based on the sensor signal,  
wherein, at least one of:  
when the sensor signal corresponds to a falling movement of the electrical device, the controlling comprises strengthening the magnetic field of the electromagnetic connector, or

- when the sensor signal corresponds to a lifting movement of the electrical device, the controlling comprises weakening the magnetic field of the electromagnetic connector, or
- when the sensor signal corresponds to a user holding the electrical device, the controlling comprises weakening the magnetic field of the electromagnetic connector.
3. An electrical device comprising:
- a first connector being magnetically connectable to a second connector of an accessory for forming a magnetic connection between the first and second connectors, wherein at least one of the first and second connectors comprises an electromagnet;
  - a sensor comprising at least one of a motion sensor, a proximity sensor and a microphone, wherein the sensor is arranged to output a sensor signal; and
  - an electromagnetic controller connected to the electromagnet and arranged to control the magnetic field of the electromagnet based on the sensor signal;
  - a battery; and
  - a battery level sensor arranged to check a battery level of the battery and to output a battery level signal to the electromagnetic controller.
4. The electrical device according to claim 3, wherein the electromagnetic controller is arranged to, when the battery level is below a predetermined threshold, not weakening the magnetic field of the electromagnetic connector.
5. A non-transitory computer-readable recording medium having recorded thereon software code portions for implementing a method when executed on a device having processing capabilities, the computer-readable recording medium including:
- instructions to control a magnetic connection between a first connector of an electrical device and a second connector of a cable used to connect the electrical device to a power source for charging a battery of the electrical device, wherein at least one of the first and second connectors comprises an electromagnet;
  - instructions to check a battery level of the battery;
  - instructions to receive a sensor signal from at least one of a motion sensor, a proximity sensor and a microphone of the electrical device; and
  - instructions to control the magnetic field of the electromagnetic connector based on the sensor signal, wherein when the battery level is below a predetermined threshold the instructions to control the magnetic field are to not weaken the magnetic field of the electromagnet.
6. A non-transitory computer-readable recording medium having recorded thereon software code portions for implementing a method when executed on a device having processing capabilities, the computer-readable recording medium including:

- instructions to control a magnetic connection between a first connector of an electrical device and a second connector of an accessory arranged to be connected to the electrical device, wherein at least one of the first and second connectors comprises an electromagnet;
  - instructions to receive a sensor signal from at least one of a motion sensor, a proximity sensor and a microphone of the electrical device; and
  - instructions to control the magnetic field of the electromagnetic connector based on the sensor signal, wherein, at least one of:
    - when the sensor signal corresponds to a falling movement of the electrical device, the instructions to control the magnetic field are to strengthen the magnetic field of the electromagnetic connector, or
    - when the sensor signal corresponds to a lifting movement of the electrical device, the instructions to control the magnetic field are to weaken the magnetic field of the electromagnetic connector, or
    - when the sensor signal corresponds to a user holding the electrical device, the instructions to control are to weaken the magnetic field of the electromagnetic connector.
7. An electrical device comprising:
- a first connector being magnetically connectable to a second connector of an accessory for forming a magnetic connection between the first and second connectors, wherein at least one of the first and second connectors comprises an electromagnet;
  - a battery;
  - a battery level sensor arranged to check a battery level of the battery and to output a battery level signal to the electromagnetic controller; and
  - an electromagnetic controller connected to the electromagnet and arranged to control the magnetic field of the electromagnet based on the battery level signal.
8. The electrical device according to claim 7, wherein the electromagnetic controller is arranged to, when the battery level is below a predetermined threshold, not weaken the magnetic field of the electromagnetic connector.
9. A method for controlling a magnetic connection between a first connector of an electrical device and a second connector of a cable used to connect the electrical device to a power source for charging a battery of the electrical device, wherein at least one of the first and second connectors comprises an electromagnet, the method comprising:
- checking a battery level of the battery; and
  - controlling the magnetic field of the electromagnetic connector based on the battery level, wherein when the battery level is below a predetermined threshold the controlling does not comprise weakening the magnetic field of the electromagnet.

\* \* \* \* \*