



(12) **United States Patent**
Adams et al.

(10) **Patent No.:** **US 9,734,308 B2**
(45) **Date of Patent:** ***Aug. 15, 2017**

(54) **PRIVILEGE MANAGEMENT AND REVOCATION**

(56) **References Cited**

(71) Applicant: **BlackBerry Limited**, Waterloo, Ontario (CA)

U.S. PATENT DOCUMENTS
4,815,128 A 3/1989 Malek
4,837,812 A 6/1989 Takahashi et al.
(Continued)

(72) Inventors: **Neil Patrick Adams**, Waterloo (CA);
Herbert Anthony Little, Waterloo (CA)

FOREIGN PATENT DOCUMENTS

(73) Assignee: **BlackBerry Limited**, Waterloo (CA)

CA 2505343 6/2010
CA 2547708 7/2010
(Continued)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

OTHER PUBLICATIONS

This patent is subject to a terminal disclaimer.

A Secure Execution Framework for Java.Hauswirth et al. ACM(2000).*
(Continued)

(21) Appl. No.: **15/063,019**

Primary Examiner — Venkat Perungavoor
(74) *Attorney, Agent, or Firm* — Integral IP; Miriam Paton; Amy Scouten

(22) Filed: **Mar. 7, 2016**

(65) **Prior Publication Data**

(57) **ABSTRACT**

US 2016/0188847 A1 Jun. 30, 2016

Related U.S. Application Data

(60) Division of application No. 13/960,214, filed on Aug. 6, 2013, now Pat. No. 9,282,099, which is a (Continued)


This disclosure relates to management of privileges associated with applications accessible by users of electronic devices. In one aspect, an electronic device detects that a privilege has been revoked, shuts down any application running on the electronic device that has previously accessed the privilege, and restarts any application that was shut down, the restarted application no longer having any access to the revoked privilege. In another aspect, an electronic device keeps a log of which applications have previously accessed which privileges, receives a new set of privileges associated with applications, determines that a privilege has been revoked, and if the log indicates that an application previously accessed the privilege, resets the electronic device. In a further aspect, a method sets privileges associated with applications, records which electronic devices have which applications, revokes a privilege, and instructs those electronic devices having applications to which the privilege is associated to reset themselves.

(51) **Int. Cl.**
G06F 21/62 (2013.01)
G06F 21/12 (2013.01)
(Continued)

(52) **U.S. Cl.**
CPC **G06F 21/121** (2013.01); **G06F 21/6218** (2013.01); **H04L 63/10** (2013.01);
(Continued)

(58) **Field of Classification Search**
None
See application file for complete search history.

19 Claims, 5 Drawing Sheets

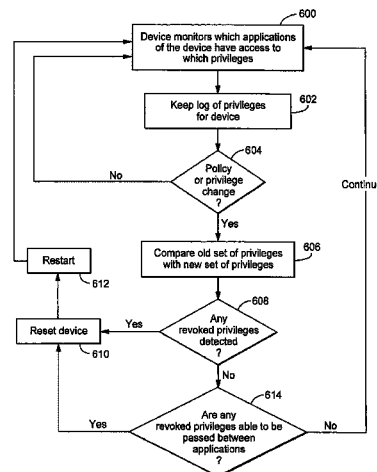

Related U.S. Application Data

continuation of application No. 12/561,370, filed on Sep. 17, 2009, now Pat. No. 8,522,321, which is a continuation of application No. 11/169,302, filed on Jun. 29, 2005, now Pat. No. 7,614,082.

- (51) **Int. Cl.**
H04L 29/06 (2006.01)
H04L 29/12 (2006.01)
- (52) **U.S. Cl.**
 CPC *H04L 63/105* (2013.01); *H04L 63/1408* (2013.01); *H04L 63/20* (2013.01)

- (56) **References Cited**

U.S. PATENT DOCUMENTS

4,945,556	A	7/1990	Namekawa	7,400,878	B2	7/2008	Hassan et al.
4,972,457	A	11/1990	O'Sullivan	7,546,956	B2	6/2009	Adams et al.
4,991,197	A	2/1991	Morris	7,574,200	B2	8/2009	Hassan et al.
5,220,604	A	6/1993	Gasser et al.	7,603,466	B2	10/2009	Kilian-Kehr et al.
5,327,560	A	7/1994	Hirata et al.	7,721,087	B1	5/2010	DiPasquo et al.
5,398,233	A	3/1995	Balmer et al.	7,734,284	B2	6/2010	Adams et al.
5,408,520	A	4/1995	Clark et al.	7,751,331	B1	7/2010	Blair et al.
5,606,594	A	2/1997	Register et al.	7,765,185	B2	7/2010	Rangadass
5,675,782	A	10/1997	Montague et al.	7,793,355	B2	9/2010	Little et al.
5,774,551	A	6/1998	Wu et al.	7,869,789	B2	1/2011	Hassan et al.
5,802,483	A	9/1998	Morris	7,886,053	B1	2/2011	Newstadt et al.
5,826,265	A	10/1998	Van Huben et al.	7,921,452	B2	4/2011	Ridlon et al.
5,850,515	A	12/1998	Lo et al.	8,074,078	B2	12/2011	Brown et al.
5,864,765	A	1/1999	Barvesten	8,208,900	B2	6/2012	Adler et al.
5,881,225	A	3/1999	Worth	8,495,700	B2	7/2013	Shahbazi
5,924,094	A	7/1999	Sutter	8,495,731	B1	7/2013	Mar et al.
5,987,440	A	11/1999	O'Neil et al.	8,503,340	B1	8/2013	Xu
5,987,611	A	11/1999	Freund	8,620,297	B2	12/2013	Kirkup et al.
6,052,735	A	4/2000	Ulrich et al.	2001/0047485	A1	11/2001	Brown et al.
6,105,132	A	8/2000	Fritch et al.	2001/0056549	A1	12/2001	Pinault et al.
6,125,447	A	9/2000	Gong	2002/0001288	A1	1/2002	Fukunaga et al.
6,131,136	A	10/2000	Liebenow et al.	2002/0013815	A1	1/2002	Obradovich et al.
6,219,694	B1	4/2001	Lazaridis et al.	2002/0019944	A1	2/2002	Kou
6,233,446	B1	5/2001	Do	2002/0031230	A1	3/2002	Yu et al.
6,243,756	B1	6/2001	Whitmire et al.	2002/0087880	A1	7/2002	Rhoades
6,253,326	B1	6/2001	Lincke et al.	2002/0095414	A1	7/2002	Barnett et al.
6,285,889	B1	9/2001	Nykanen et al.	2002/0095497	A1	7/2002	Satagopan et al.
6,292,798	B1	9/2001	Dockter et al.	2002/0107943	A1	8/2002	Heath et al.
6,321,334	B1	11/2001	Jerger et al.	2002/0112155	A1	8/2002	Martherus et al.
6,343,313	B1	1/2002	Salesky et al.	2002/0184398	A1	12/2002	Orenshteyn
6,351,816	B1	2/2002	Mueller	2003/0005317	A1	1/2003	Audebert et al.
6,360,322	B1	3/2002	Grawrock	2003/0014521	A1	1/2003	Elson et al.
6,405,202	B1	6/2002	Britton et al.	2003/0026220	A1	2/2003	Uhlik et al.
6,412,070	B1	6/2002	Van Dyke et al.	2003/0031184	A1	2/2003	Cunetto et al.
6,490,289	B1	12/2002	Zhang et al.	2003/0035397	A1	2/2003	Haller et al.
6,516,421	B1	2/2003	Peters	2003/0037237	A1	2/2003	Abgrall et al.
6,647,388	B2	11/2003	Numao et al.	2003/0054860	A1	3/2003	Chen
6,668,323	B1	12/2003	Challener et al.	2003/0061087	A1	3/2003	Srimuang
6,745,047	B1	6/2004	Karstens et al.	2003/0065676	A1	4/2003	Gbadegesin et al.
6,748,543	B1	6/2004	Vilhuber	2003/0070091	A1	4/2003	Loveland
6,757,821	B1	6/2004	Akiyama et al.	2003/0087629	A1	5/2003	Juitt et al.
6,772,350	B1	8/2004	Belani et al.	2003/0093698	A1	5/2003	Challener et al.
6,775,536	B1	8/2004	Geiger et al.	2003/0120948	A1	6/2003	Schmidt et al.
6,785,810	B1	8/2004	Lirov et al.	2003/0126437	A1	7/2003	Wheeler et al.
6,795,688	B1	9/2004	Plasson et al.	2003/0163685	A1	8/2003	Paatero
6,795,967	B1	9/2004	Evans et al.	2003/0167405	A1	9/2003	Freund et al.
6,886,038	B1	4/2005	Tabbara et al.	2003/0177389	A1	9/2003	Albert et al.
6,895,502	B1	5/2005	Fraser	2003/0226015	A1	12/2003	Neufeld et al.
6,901,429	B2	5/2005	Dowling	2003/0233410	A1	12/2003	Gusler et al.
6,957,330	B1	10/2005	Hughes	2003/0236983	A1	12/2003	Mihm, Jr.
6,976,241	B2	12/2005	Cruz et al.	2004/0001101	A1	1/2004	Trajkovic et al.
6,978,385	B1	12/2005	Cheston et al.	2004/0083382	A1	4/2004	Markham et al.
6,999,562	B2	2/2006	Winick	2004/0097217	A1	5/2004	McClain
7,076,239	B2	7/2006	Kirkup et al.	2004/0098610	A1	5/2004	Hrastar
7,146,638	B2	12/2006	Malcolm	2004/0100983	A1	5/2004	Suzuki
7,246,374	B1	7/2007	Simon et al.	2004/0121802	A1	6/2004	Kim et al.
7,315,750	B2	1/2008	Chou et al.	2004/0132449	A1	7/2004	Kowarsch
7,330,712	B2	2/2008	Kirkup et al.	2004/0139206	A1	7/2004	Claudatos et al.
7,331,058	B1	2/2008	Gladney	2004/0177073	A1	9/2004	Snyder et al.
				2004/0187029	A1	9/2004	Ting
				2004/0193738	A1	9/2004	Natu et al.
				2004/0209608	A1	10/2004	Kouznetsov et al.
				2004/0260710	A1	12/2004	Marston et al.
				2005/0154935	A1	7/2005	Jin
				2005/0164687	A1	7/2005	DiFazio
				2005/0182832	A1	8/2005	Chen
				2005/0192008	A1	9/2005	Desai et al.
				2005/0193080	A1	9/2005	Gold et al.
				2005/0210270	A1	9/2005	Rohatgi et al.
				2005/0213763	A1	9/2005	Owen et al.
				2005/0245272	A1	11/2005	Spaur et al.
				2005/0288903	A1	12/2005	Jackson et al.
				2006/0059556	A1	3/2006	Royer
				2006/0070114	A1	3/2006	Wood et al.
				2006/0090136	A1	4/2006	Miller et al.
				2006/0120526	A1	6/2006	Boucher et al.
				2006/0129848	A1	6/2006	Paksoy et al.
				2006/0129948	A1	6/2006	Hamzy et al.
				2006/0149846	A1	7/2006	Schuba

(56)

References Cited

U.S. PATENT DOCUMENTS

2006/0156026 A1 7/2006 Utin
 2006/0168259 A1 7/2006 Spilotro et al.
 2006/0168395 A1 7/2006 Deng et al.
 2006/0206931 A1 9/2006 Dillaway et al.
 2006/0212589 A1 9/2006 Hayer et al.
 2006/0274750 A1 12/2006 Babbar et al.
 2007/0019643 A1 1/2007 Shaheen
 2007/0050854 A1 3/2007 Cooperstein et al.
 2007/0073694 A1 3/2007 Picault et al.
 2007/0156766 A1 7/2007 Hoang et al.
 2007/0204153 A1 8/2007 Tome et al.
 2007/0204166 A1 8/2007 Tome et al.
 2007/0254631 A1 11/2007 Spooner
 2007/0277127 A1 11/2007 Carlson et al.
 2008/0002726 A1 1/2008 Haung et al.
 2008/0081609 A1 4/2008 Burgan et al.
 2008/0098237 A1 4/2008 Dung et al.
 2008/0125146 A1 5/2008 Bainbridge
 2008/0130524 A1 6/2008 Volach et al.
 2008/0132202 A1 6/2008 Kirkup et al.
 2008/0134347 A1 6/2008 Goyal et al.
 2008/0137593 A1 6/2008 Laudermilch et al.
 2008/0222711 A1 9/2008 Michaelis
 2008/0235041 A1 9/2008 Cashdollar et al.
 2008/0318616 A1 12/2008 Chipalkatti et al.
 2009/0031393 A1 1/2009 Denner et al.
 2009/0070181 A1 3/2009 Loeffen
 2009/0094668 A1 4/2009 Corbin et al.
 2009/0178107 A1 7/2009 Karjoth et al.
 2009/0181662 A1 7/2009 Fleischman et al.
 2009/0254753 A1 10/2009 De Atley et al.
 2009/0260052 A1 10/2009 Bathula et al.
 2010/0024016 A1 1/2010 Violleau et al.
 2010/0024020 A1 1/2010 Baugher et al.
 2010/0081417 A1 4/2010 Hickie
 2010/0088753 A1 4/2010 Ayres et al.
 2010/0107215 A1 4/2010 Bechtel et al.
 2010/0153969 A1 6/2010 Dyba et al.
 2010/0175104 A1 7/2010 Khalid
 2010/0184440 A1 7/2010 Mao et al.
 2010/0222097 A1 9/2010 Gisby et al.
 2010/0242086 A1 9/2010 Adams et al.
 2010/0278162 A1 11/2010 Groux et al.
 2010/0281487 A1 11/2010 Schneider et al.
 2010/0299376 A1 11/2010 Batchu et al.
 2010/0299394 A1 11/2010 Jania et al.
 2010/0319053 A1 12/2010 Gharabally
 2010/0325221 A1 12/2010 Cohen et al.
 2010/0325430 A1 12/2010 Denninghoff
 2010/0325710 A1 12/2010 Etchegoyen
 2011/0010699 A1 1/2011 Cooper et al.
 2011/0082808 A1 4/2011 Beykpour et al.
 2011/0099605 A1 4/2011 Cha et al.
 2011/0126214 A1 5/2011 O'Farrell et al.
 2011/0145833 A1 6/2011 De Los Reyes et al.
 2011/0179083 A1 7/2011 Galloway et al.
 2011/0195698 A1 8/2011 Pearce
 2011/0210171 A1 9/2011 Brown et al.
 2011/0252240 A1 10/2011 Freedman et al.
 2011/0270963 A1 11/2011 Saito et al.
 2011/0314467 A1 12/2011 Pearson
 2012/0005477 A1 1/2012 Wei et al.
 2012/0005723 A1 1/2012 Chaturvedi et al.
 2012/0023573 A1 1/2012 Shi
 2012/0054853 A1 3/2012 Gupta et al.
 2012/0079110 A1 3/2012 Brown et al.
 2012/0079586 A1 3/2012 Brown et al.
 2012/0079609 A1 3/2012 Bender et al.
 2012/0109826 A1 5/2012 Kobres
 2012/0124640 A1 5/2012 Bender et al.
 2012/0144196 A1 6/2012 Owen et al.
 2012/0202527 A1 8/2012 Obradovich et al.
 2012/0210443 A1 8/2012 Blaisdell et al.
 2012/0214442 A1 8/2012 Crawford et al.
 2012/0214503 A1 8/2012 Liu et al.

2012/0278863 A1 11/2012 Wallace et al.
 2012/0278904 A1 11/2012 Perez et al.
 2012/0291140 A1 11/2012 Robert et al.
 2012/0309344 A1 12/2012 Ferrazzini et al.
 2012/0324067 A1 12/2012 Hari et al.
 2013/0074142 A1 3/2013 Brennan et al.
 2013/0097657 A1 4/2013 Cardamore et al.
 2013/0125198 A1 5/2013 Ferguson et al.
 2013/0174222 A1 7/2013 Ogle
 2013/0219465 A1 8/2013 Tse et al.
 2013/0346606 A1 12/2013 Ryerson et al.

FOREIGN PATENT DOCUMENTS

CN 100466547 C 3/2009
 CN 101523878 9/2009
 EP 605106 7/1994
 EP 973350 1/2000
 EP 1043648 A2 10/2000
 EP 1168141 1/2002
 EP 1471691 10/2004
 EP 1596410 11/2005
 EP 1624428 2/2006
 EP 1739518 A1 1/2007
 EP 1806674 7/2007
 EP 1868135 A1 12/2007
 EP 1563663 10/2008
 EP 2337300 6/2011
 GB 2378780 2/2003
 GB 2408179 5/2005
 GB 2440015 1/2008
 JP 2000253241 9/2000
 JP 2001077811 3/2001
 JP 2001203761 7/2001
 JP 2002288087 10/2002
 SG 128561 A1 1/2007
 WO 9625828 8/1996
 WO 9905814 2/1999
 WO 0059225 10/2000
 WO 0060434 10/2000
 WO 2004017592 2/2004
 WO 2004043031 5/2004
 WO 2005045550 5/2005
 WO 2006130807 12/2006
 WO 2007048251 5/2007
 WO 2009012329 1/2009
 WO 2009014975 1/2009
 WO 2009021200 2/2009
 WO 2012037656 3/2012
 WO 2012037657 3/2012
 WO 2012037658 3/2012
 WO 2012109497 8/2012

OTHER PUBLICATIONS

Chakravorty, "Architecture and Implementation of a remote management framework for dynamically reconfigurable device", ICON, 2002.
 Hedbom et al., "Analysis of the Security of Windows NT", XP002364916, Chalmers University of Technology, Goteborg, Sweden, p. 1-97, Mar. 1, 1999.
 "Using Software Restriction Policies in Windows XP and Windows, NET server to Protect Against Unauthorized Software", XP0029559638, Microsoft XP and Windows Net Technical Article, p. 1-52, Jan. 2002.
 Bellavista et al., "Dynamic Binding in Mobile Applications a Middleware Approach", IEEE Internet Computing, Mar.-Apr. 2003.
 Red Hat: "Red Hat Linux 7.2—The Official Red Hat Linux Reference Guide" Red Hat Linux Manuals, 'Online!' Oct. 22, 2001, XP002276029, pp. 145-155.
 Sygate: "Sygate Personal Firewall PRO User Guide" Sygate Personal Firewall Pro User Guide, XX, XX, 2001, pp. 1-77 XP002248366.
 A Technical Overview of the Lucent VPN Firewall White Paper Lucent Technologies, XX, XX, Aug. 2002. pp. 1-35, XP002271173, Chapter 1.

(56)

References Cited

OTHER PUBLICATIONS

View messages with restricted permission sent by using IRM; Support/Outlook/Outlook2007 Help and How-to. <http://office.microsoft.com/en-us/outlook-help/view-messages-with-restricted-permission-sent-by-using-irm-HA01246115.as> . . . , pp. 1-2, retrieved on Feb. 12, 2010.

Send an e-mail message with restricted permission by using IRM; Support/Outlook/Outlook 2007 Help and How-to. <http://office.microsoft.com/en-us/outlook-help/send-an-e-mail-message-with-restricted-permission-by-using-irm-HA01024780> . . . , pp. 1-4, retrieved on Feb. 12, 2010.

Introduction to using IRM for e-mail messages; Support/Outlook/Outlook 2007 Help and How-to. <http://office.microsoft.com/en-us/outlook-help/introduction-to-using-irm-for-a-email-message-HA0100366.aspx?CTT=5> . . . , pp. 1-6, retrieved on Feb. 12, 2012.

Smartphone Security Beyond Lock and Wipe (Jun. 10, 2010): <http://www.enterprisemobiletoday.com/article.php/3887006>.

Basic Access Authentication (Jan. 23, 2010): http://en.wikipedia.org/wiki/Basic_access_authentication.

Digital Access Authentication (Dec. 23, 2009): http://en.wikipedia.org/wiki/Digital_access_authentication.

Cross-site request forgery (Nov. 30, 2008): http://en.wikipedia.org/wiki/cross-site_request_forgery.

“Customizing User Interaction in Smart Phones”, Pervasive Computing, IEEE CS (2006) pp. 81-90 (<http://www.idi.ntnu.no/grupperlsu/bibliography/pdf/2006/Korpipaa2006pc.pdf>).

“Supporting Mobile Privacy and Security through Sensor-Based Context Detection”. Julian Seifert, Second International Workshop on Security and Privacy in Spontaneous Interaction and Mobile Phone Use, May 17, 2010, Finland (<http://www.medien.ifi.lmu.de/iwssi2010/papers/iwssi-spmu2010-O-seifert.pdf>).

EagleVision: A Pervasive Mobile Device Protection System, Ka Yang, Nalin Subramanian, Daji Ziao, and Wen Sheng Zhang, Iowa State University (<http://www.cs.iastate.edu/~wzhang/papers/eagleVision.pdf>).

“Using context-profiling to aid access control decisions in mobile devices”, Gupta et al., Nokia Research Center (<http://www.cerias.purdue.edu/assets/symposium/2011-posters/1372-C48.pdf>) Please refer to the 1-page file named 372-C48.pdf.

XP002167366; Chen, Zhigun; “Java Card Technology for Smart Cards: Architecture and Programmer’s Guide”; “Applet Firewall and Object Sharing;” Internet citation: Jun. 2, 2000; (<http://developer.java.sun.com/developer/books/consumerproducts/javacard/ch09.pdf>).

Google Inc.; Android 2.3.4 User’s Guide; May 20, 2011; 384 pages. Microsoft Corp.; Microsoft Outlook 2010; Released Jul. 15, 2010; 27 pages.

Microsoft Office: Microsoft Outlook 2010 Product Guide; Microsoft Corp. 2010; published in 2010; 65 pages.

Windows 7 Product Guide; Microsoft Corp. 2009; published in 2009; 140 pages.

Research in Motion, “BlackBerry Bridge App 2.1 and BlackBerry PlayBook Tablet 2.1, Security Technical Overview”; Version: 6.1; Sep. 17, 2012; 90 pages.

Research in Motion, “BlackBerry Device Service 6.1 and BlackBerry PlayBook Tablet 2.1, Security Technical Overview”; Version: 6.1; Sep. 17, 2012; 90 pages.

IETF RFC 3530; “Network File System (NFS) Version 4 Protocol”; Apr. 2003.

“Secure Inter-Process Communication”; Apr. 4, 2004. Retrieved on Jan. 20, 2014. <https://web.archive.org/web/20040404015137/http://cr.yip.to/docs/secureipc.html>.

* cited by examiner

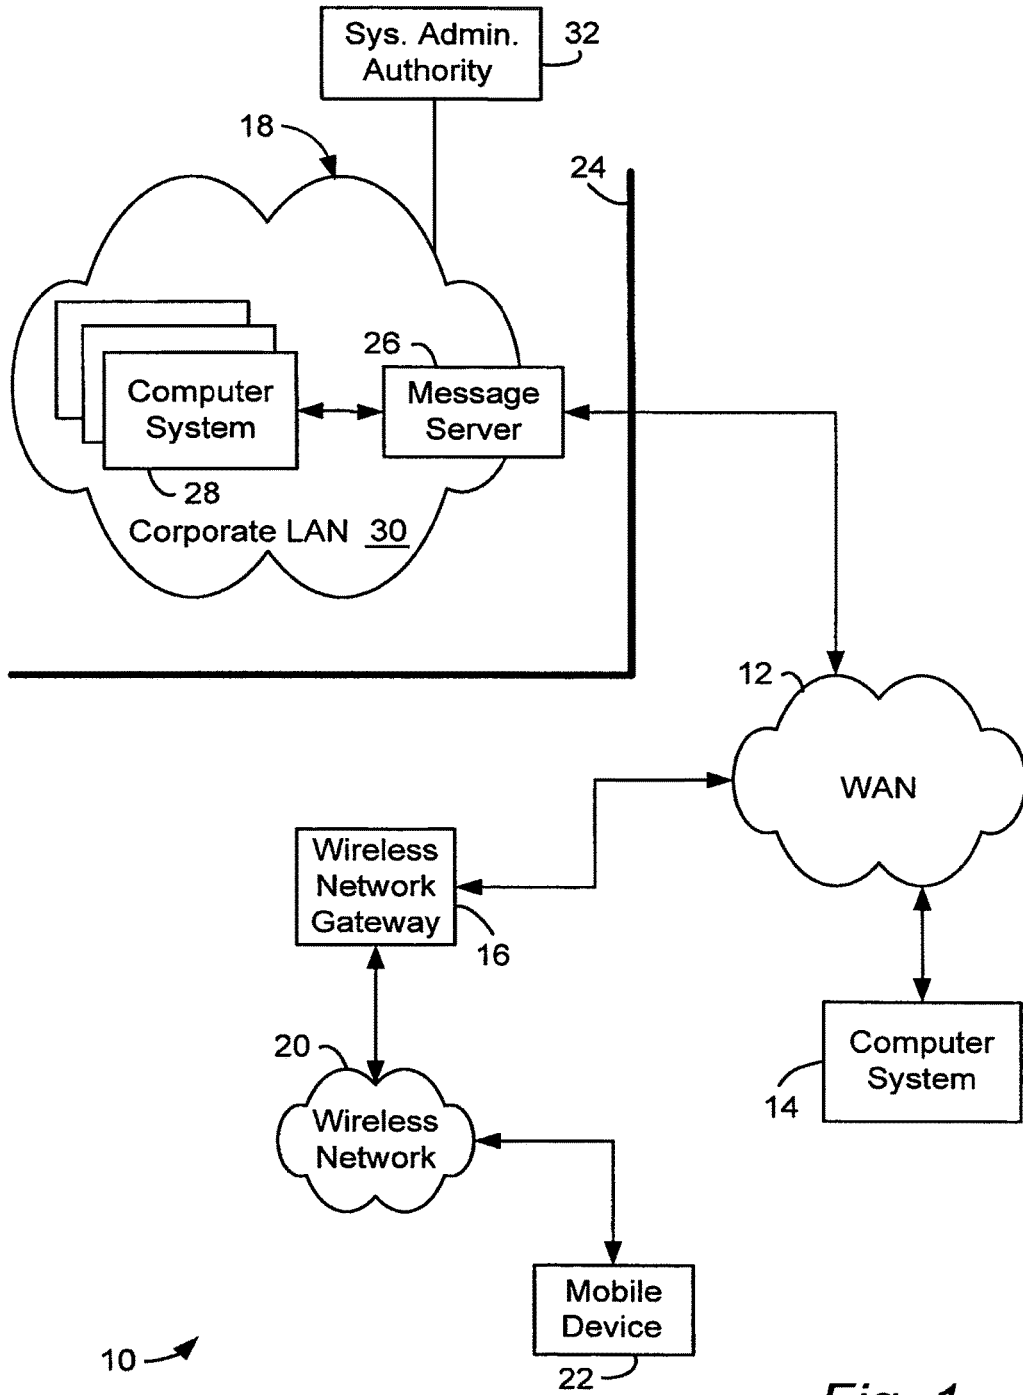


Fig. 1

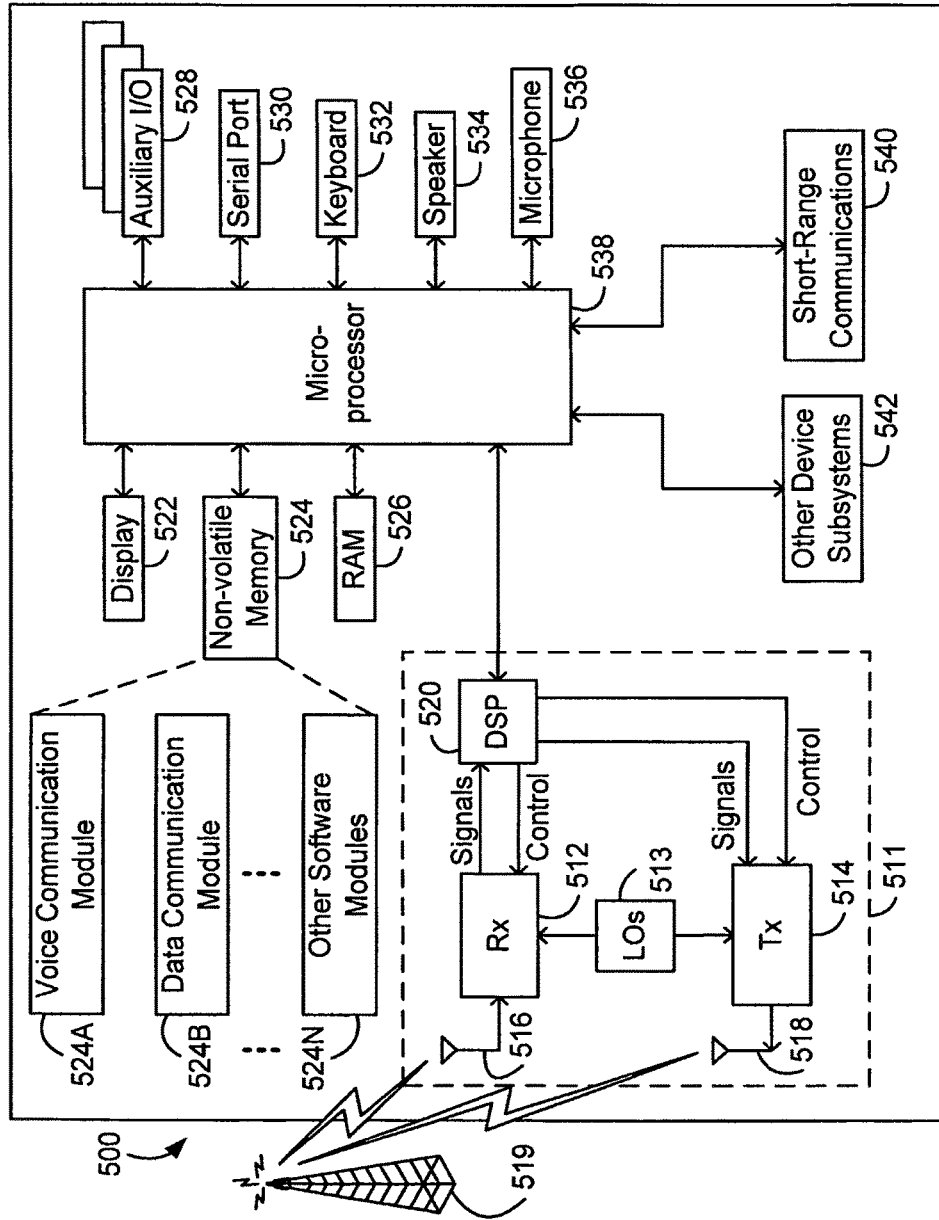


Fig. 2

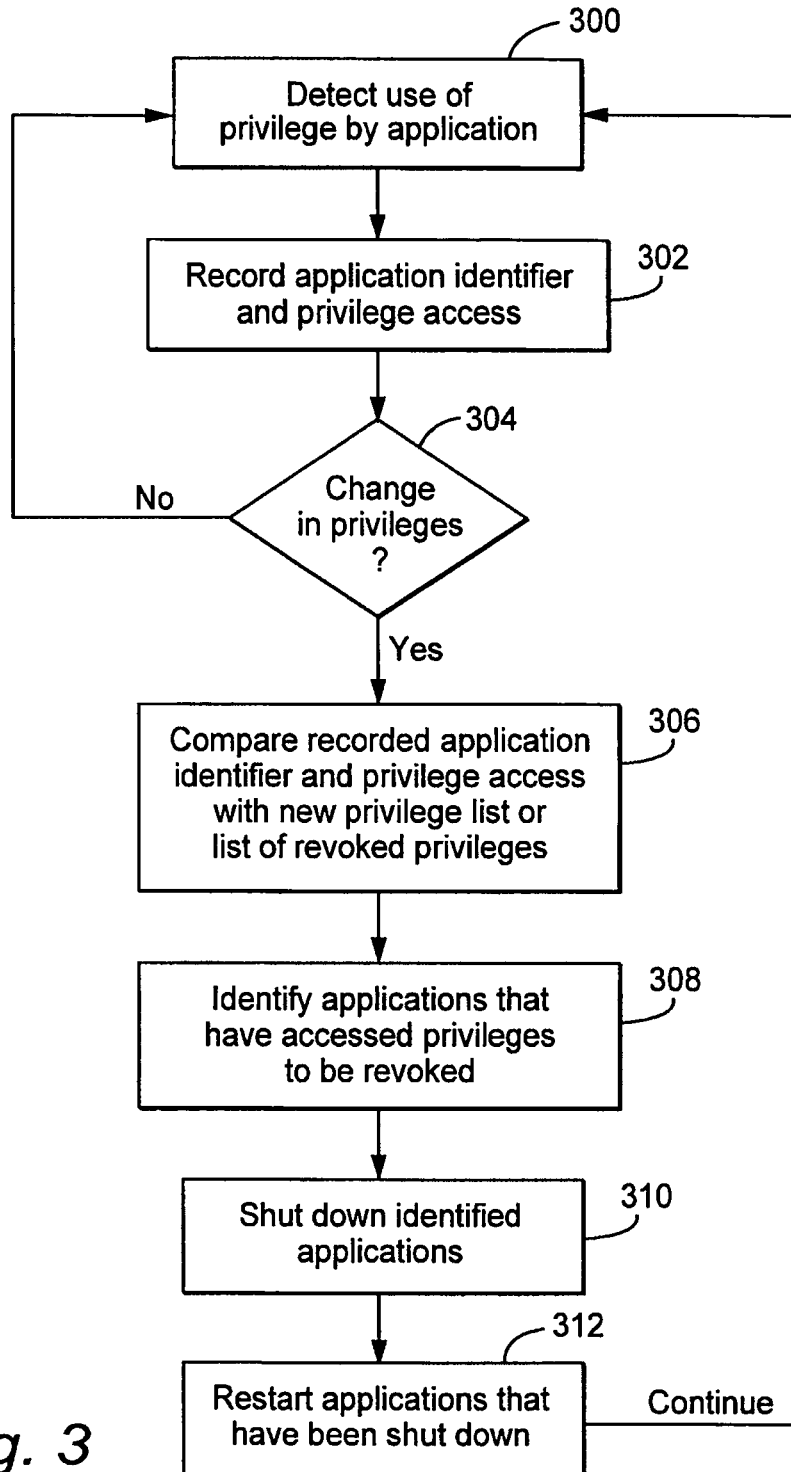


Fig. 3

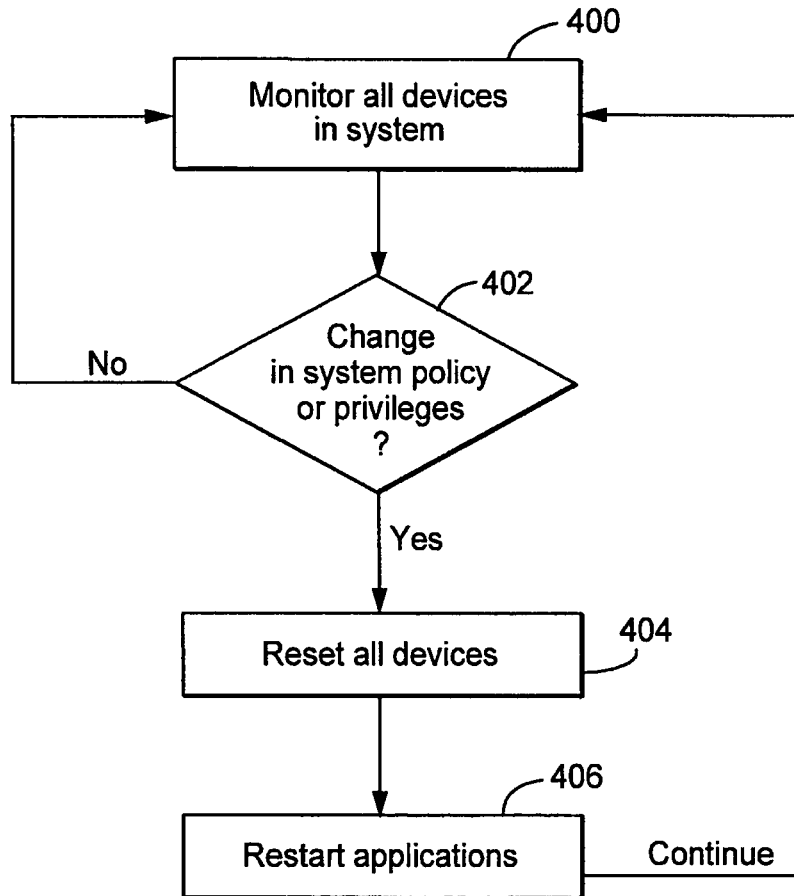


Fig. 4

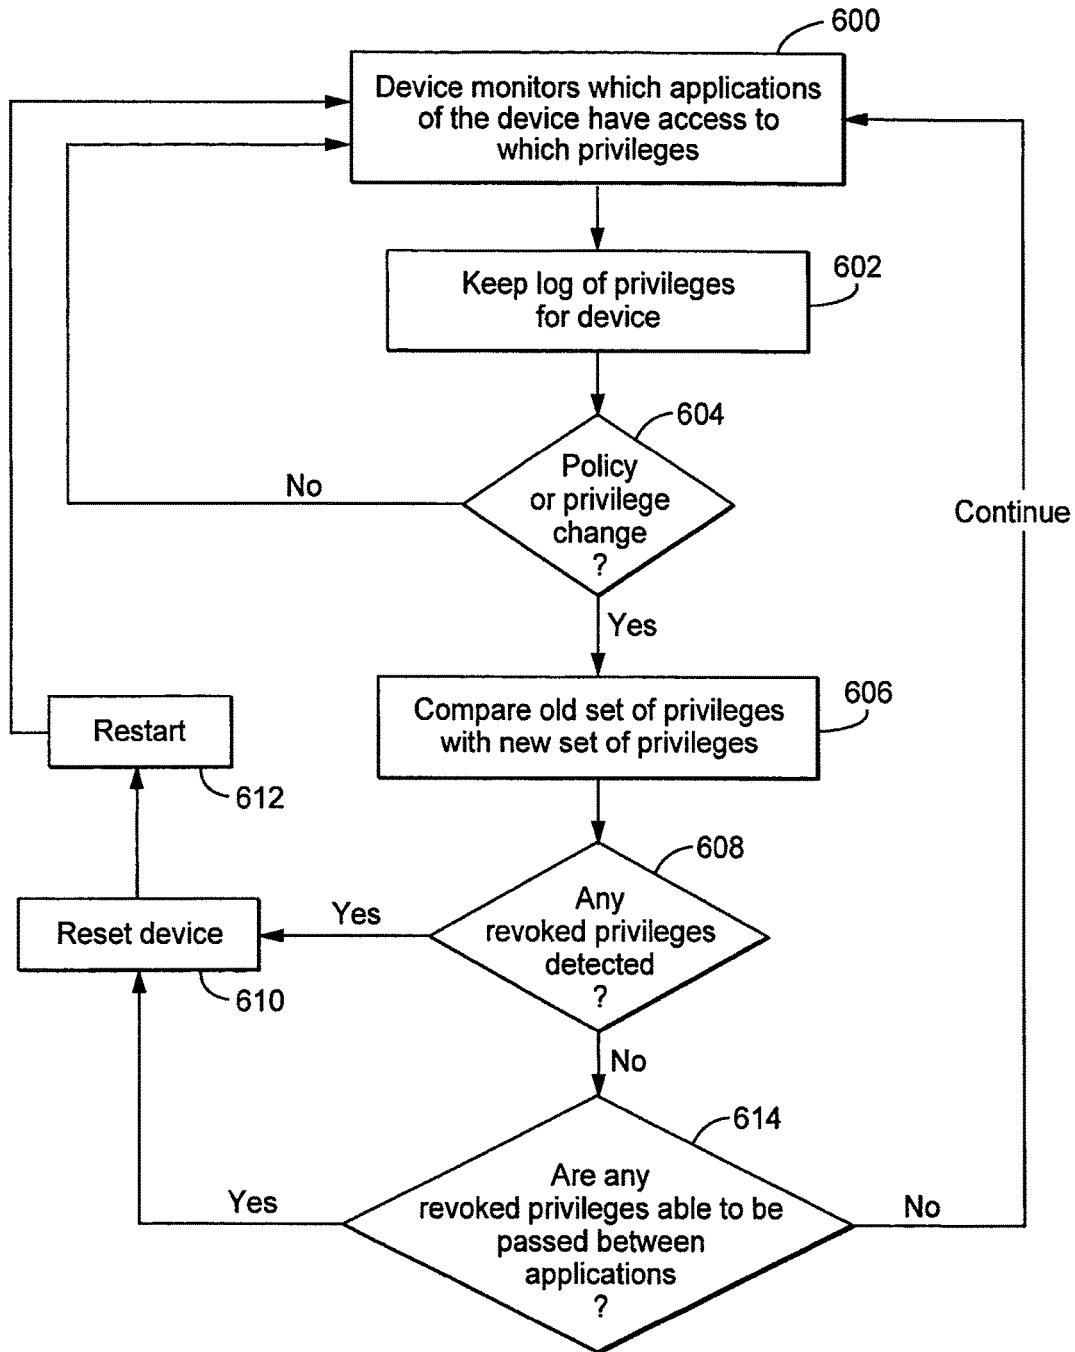


Fig. 5

PRIVILEGE MANAGEMENT AND REVOCATION

FIELD OF THE INVENTION

The present invention relates generally to the management of privileges associated with certain applications that are accessible by users of electronic equipment, such as, for example, networked computers, mobile wireless communications devices, and the like. In particular, the disclosure is directed to systems and methods for managing privileges associated with particular applications and for revoking these privileges in a timely and robust manner.

RELATED ART

It is well known that certain electronic equipment, such as, for example, networked computers, mobile wireless communications devices, and the like, include applications resident on such equipment that may have access to certain privileges that enable the applications to perform various functions. Typically, a system administrator may use IT policy and application control to set the privileges associated with various applications present on the equipment that is subject to the administrator's control. Examples of privileges may include, for example, allowing an application to use inter-process communication (IPC), enabling the opening of internal and external connections, enabling the injection of browser filters, enabling Bluetooth™ functionality, enabling use of e-mail, enabling the use of personal information management (PIM) functionality, use of application program interface (API), etc. It is important for the system administrator be able to track which applications have access to which privileges, and to be able to revoke privileges on an as needed basis.

For example, if an application has access to a privilege, and the system administrator revokes that privilege, the application should immediately, or within a small window of time, be denied access to that privilege. In other words, the privilege should be revoked as soon as possible. Events that might trigger a revocation of privileges may include, for example, an application being loaded before the IT administrator/application control data is present on the device, an application is discovered to be a rogue application, or company policy changes, resulting in limiting the use or availability of certain applications and/or privileges associated therewith.

Regardless of the reason for privilege revocation, such revocation must be accomplished in a secure manner and in a manner that prevents possible work arounds by malicious applications or individuals. In general, according to current privilege revocation schemes, privilege checking is typically performed on the first access to a privilege. For example, applications communicate with IPC using the application registry. Once an application has a reference (e.g., pointer) to the application registry, it is difficult to take this reference away from the application. In another example, if an application has passed some of its privileges to another application using IPC, conventional systems can detect that the first application has access to IPC, but there is no way to detect that the other application has been passed the privilege(s).

Therefore, there remains a need for a system and method for effectively managing privileges associated with applications, and in particular, when privilege revocation is required, to revoke these privileges in a timely and robust manner.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other embodiments along with their attendant advantages are described herein with reference to the following drawings in which like reference numerals refer to like elements, and wherein:

FIG. 1 is a block diagram showing a computer network and communication system in which electronic devices running applications having access to associated privileges are used;

FIG. 2 is a block diagram of a wireless mobile communication device as an example of an electronic device running applications having access to associated privileges;

FIG. 3 is a flow diagram illustrating a method of revoking privileges according to an exemplary embodiment;

FIG. 4 is a flow diagram illustrating a method of revoking privileges according to another exemplary embodiment; and

FIG. 5 is a flow diagram illustrating yet another method of revoking privileges according to another exemplary embodiment.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

In view of the foregoing, we have now identified an efficient, accurate, robust and easy to implement system and method for managing privileges associated with particular applications and for revoking these privileges in a timely and reliable manner

According to an exemplary embodiment an application having privileges that are to be revoked may be shut down. When this application is restarted, access to revoked privileges will be denied. In order to keep track of which applications need to be shut down and reset, the system must keep track of which applications have accessed which privileges. To enable monitoring of the privileges accessed by applications, each time an application uses a privilege, the system records the application identifier and which privilege has been accessed. This may be done in any of a number of conventional methods, such as, for example, a data table listing the application identifier and corresponding accessed privilege(s) associated with the application identifier. When the system administrator, or any other authority, institutes a change in privileges, the system accesses the record of which applications have accessed which privileges. A comparison of accessed privileges with the privileges to be revoked is performed. Each application that has accessed a privilege that is to be revoked is identified by the system and then shut down. When the application is restarted, the application will not have access to any of the revoked privileges.

In another embodiment, a device reset may be performed. By resetting a device, the system is brought to a known state. According to this embodiment, a system administrator, or any other authority, specifies that a device must be reset when a new policy that revokes (or changes) privileges is instituted. A device reset may be instituted at any time the administrator or authority deems it necessary to do so. For example, a device reset may be done whenever a new policy that includes privilege revocation is instituted. However, this may result in numerous unnecessary device reset events that are potentially inconvenient to the user and may interfere with use of the device. Alternatively, the system may keep track of which devices include which applications, and use this information to determine a less intrusive device reset

schedule. For example, resetting only those devices having applications that may potentially be affected by the policy change.

In yet another advantageous embodiment, aspects of previously described embodiments are combined to provide effective privilege management and revocation. According to this exemplary embodiment, the system administrator or other authority has no actual control over when a device is reset. The administrator merely manages the privileges of the system and particular applications. The device itself is responsible for resetting when necessary. In this embodiment, the device keeps track of which applications get access to which privileges. When policies or application control changes, the system detects which privileges have been revoked for which applications. This can be accomplished by simply comparing the old set of privileges with the new set of privileges. For each revoked privilege for a given application, the system determines if the application has ever accessed that privilege in the past. As noted above, the system has been keeping track of these since the system was first started up. If an application has accessed a privilege that is now revoked at any time in the past, the device is reset. For some privileges (e.g., IPC), it still cannot be determined whether a privilege has been used as a result of being passed from another application. To overcome the potential for missing a revocation of privileges when applications pass privileges between themselves, if, for example, IPC (or any other privilege that is able to be passed between applications) is revoked from any application, regardless of if the system has detected that the application has accessed the privilege, the device must be reset. This reset will bring the device back to a known state. Device reset will only be done when necessary, thus limiting the number of resets and solving the problem associated with privileges that have been passed between applications.

Each of these embodiments is useful in a variety of privilege management environments ranging from a low-level low-priority where a modest level of privilege revocation security is needed, resulting in a less robust system, to a highly important ultra-robust environment where user inconvenience is secondary to the need for absolute certainty of privilege revocation.

FIG. 1 is a block diagram showing a computer network and communication system in which electronic devices running applications having access to associated privileges are used. The computer network 18 includes, for example, various networked computers 28 and, optionally, a message server 26, all linked via a Local Area Network (LAN) 30. The communication system includes a Wide Area Network (WAN) 12 coupled to a computer system 14, a wireless network gateway 16 and the LAN 30 of the computer network 18. The wireless network gateway 16 is also connected to a wireless communication network 20 in which a wireless mobile communication device 22 (hereinafter "mobile device"), is configured to operate. The entire system 10 is typically managed by, among others, a system administrator or like authority 32.

The computer system 14 may be a desktop or laptop personal computer that is configured to communicate with the WAN 12 or any other suitable network, such as, for example, the Internet. Personal computers, such as the computer system 14, typically access the Internet via an Internet Service Provider (ISP), Application Service Provider (ASP), or the like.

The LAN 30 is an example of a typical working computer network environment, in which multiple computers 28 are connected in a network. The computer network 18 is typi-

cally located behind a security firewall 24. Within the LAN 30, a message server 26, operating on a computer behind the firewall 24 may act as the primary interface for the owner of the computer network 18 to exchange messages both within the LAN 30 and with other external messaging clients via the WAN 12. Known message servers include, for example, Microsoft Outlook®, Lotus Notes®, Yahoo!® Messenger®, AOL Instant Messenger®, or any other client-server or peer-to-peer, or similar messaging clients with various architectures. Messages received by the message server 26 are distributed to mailboxes for user accounts addressed in the received messages, and are then accessed by a user through a messaging client operating on a computer system 28. The foregoing is merely an exemplary description illustrating a client-server architecture, and in no way implies that such architecture is necessary, as other suitable architectures known to those skilled in the art may be used.

Although only a message server 26 is shown in the LAN 30, those skilled in the art will appreciate that a LAN may include other types of servers supporting resources that are shared between the networked computer systems 28, and that the message server 26 may also provide additional functionality, such as dynamic database storage for data such as, but not limited to, calendars, to-do lists, task lists, e-mail and documentation. The message server 26 and electronic messaging are described for illustrative purposes only. Systems and methods for managing and revoking privileges are applicable to a wide range of electronic devices, and are in no way limited to electronic devices with messaging capabilities.

The wireless gateway 16 provides an interface to a wireless network 20, through which messages may be exchanged with a mobile device 22. Such functions as addressing of the mobile device 22, encoding or otherwise transforming messages for wireless transmission, and any other interface functions are performed by the wireless gateway 16. The wireless gateway 16 may be configured to operate with more than one wireless network 20, in which case the wireless gateway 16 also determines a most likely network for locating a given mobile device 22 and possibly track mobile devices as users roam between countries or networks.

The mobile device 22 is, for example, a data communication device, a voice communication device, a dual-mode communication device such as many modern cellular telephones having both data and voice communications functionality, a multiple-mode device capable of voice, data and other types of communications, a personal digital assistant (PDA) enabled for wireless communications, or a laptop or desktop computer system with a wireless modem.

Any computer system with access to the WAN 12 may exchange messages with the mobile device 22 through the wireless network gateway 16. Alternatively, private wireless network gateways such as wireless Virtual Private Network (VPN) routers could be implemented to provide a private interface to a wireless network. A wireless VPN router implemented in the LAN 30 provides a private interface from the LAN 30 to one or more mobile devices such as 22 through the wireless network 20. A private interface to a mobile device 22 may also effectively be extended to entities outside the LAN 30 by providing a message forwarding or redirection system that operates with the message server 26. Such a message redirection system is disclosed in U.S. Pat. No. 6,219,694, which is hereby incorporated into this application by reference. In this type of system, incoming messages received by the message server 26 and addressed to a user of a mobile device 22 are sent through the wireless

network interface, either a wireless VPN router, the wireless gateway **16**, or another interface, for example, to the wireless network **20** and to the user's mobile device **22**. Another alternate interface to a user's mailbox on a message server **26** may be a Wireless Application Protocol (WAP) gateway. Through a WAP gateway, a list of messages in a user's mailbox on the message server **26**, and possibly each message or a portion of each message, may be sent to the mobile device **22**. A wireless network **20** normally delivers messages to and from communication devices such as the mobile device **22** via RF transmissions between base stations and devices. The wireless network **20** may, for example, be a data-centric wireless network, a voice-centric wireless network, or a dual-mode network that can support both voice and data communications over the same infrastructure. Recently developed networks include Code Division Multiple Access (CDMA) networks and General Packet Radio Service (GPRS) networks. So-called third-generation (3G) networks like Enhanced Data rates for Global Evolution (EDGE) and Universal Mobile Telecommunications Systems (UMTS) are currently under development. Older data-centric networks include, but are not limited to, the Mobitex™ Radio Network ("Mobitex"), and the DataTAC™ Radio Network ("DataTAC"). Voice-centric data networks such as Personal Communication System (PCS) networks, including Global System for Mobile Communications (GSM) and Time Division Multiple Access (TDMA) systems, have been available in North America and world-wide for several years.

FIG. **2** is a block diagram of an exemplary wireless mobile communication device as an example of an electronic device. However, it should be understood that the systems and methods disclosed herein may be used with many different types of devices, such as personal digital assistants (PDAs), desktop computers, or the like.

The mobile device **500** is preferably a two-way communication device having at least voice and data communication capabilities. The mobile device **500** preferably has the capability to communicate with other computer systems on the Internet. Depending on the functionality provided by the mobile device, the mobile device may be referred to as a data messaging device, a two-way pager, a cellular telephone with data messaging capabilities, a wireless Internet appliance, or a data communication device (with or without telephony capabilities). As mentioned above, such devices are referred to generally herein as mobile devices.

The mobile device **500** includes a transceiver **511**, a microprocessor **538**, a display **522**, non-volatile memory **524**, random access memory (RAM) **526**, auxiliary input/output (I/O) devices **528**, a serial port **530**, a keyboard **532**, a speaker **534**, a microphone **536**, a short-range wireless communications sub-system **540**, and may also include other device sub-systems **542**. The transceiver **511** preferably includes transmit and receive antennas **516**, **518**, a receiver (Rx) **512**, a transmitter (Tx) **514**, one or more local oscillators (LOs) **513**, and a digital signal processor (DSP) **520**. Within the non-volatile memory **524**, the mobile device **500** includes a plurality of software modules **524A-524N** that can be executed by the microprocessor **538** (and/or the DSP **520**), including a voice communication module **524A**, a data communication module **524B**, and a plurality of other operational modules **524N** for carrying out a plurality of other functions.

The mobile device **500** is preferably a two-way communication device having voice and data communication capabilities. Thus, for example, the mobile device **500** may communicate over a voice network, such as any of the

analog or digital cellular networks, and may also communicate over a data network. The voice and data networks are depicted in FIG. **2** by the communication tower **519**. These voice and data networks may be separate communication networks using separate infrastructure, such as base stations, network controllers, etc., or they may be integrated into a single wireless network. References to the network **519** should therefore be interpreted as encompassing both a single voice and data network and separate networks.

The communication subsystem **511** is used to communicate with the network **519**. The DSP **520** is used to send and receive communication signals to and from the transmitter **514** and receiver **512**, and also exchange control information with the transmitter **514** and receiver **512**. If the voice and data communications occur at a single frequency, or closely-spaced set of frequencies, then a single LO **513** may be used in conjunction with the transmitter **514** and receiver **512**. Alternatively, if different frequencies are utilized for voice communications versus data communications or the mobile device **500** is enabled for communications on more than one network **519**, then a plurality of LOs **513** can be used to generate frequencies corresponding to those used in the network **519**. Although two antennas **516**, **518** are depicted in FIG. **2**, the mobile device **500** could be used with a single antenna structure. Information, which includes both voice and data information, is communicated to and from the communication module **511** via a link between the DSP **520** and the microprocessor **538**.

The detailed design of the communication subsystem **511**, such as frequency band, component selection, power level, etc., is dependent upon the communication network **519** in which the mobile device **500** is intended to operate. For example, a mobile device **500** intended to operate in a North American market may include a communication subsystem **511** designed to operate with the Mobitex or DataTAC mobile data communication networks and also designed to operate with any of a variety of voice communication networks, such as AMPS, TDMA, CDMA, PCS, etc., whereas a mobile device **500** intended for use in Europe may be configured to operate with the GPRS data communication network and the GSM voice communication network. Other types of data and voice networks, both separate and integrated, may also be utilized with the mobile device **500**.

Communication network access requirements for the mobile device **500** also vary depending upon the type of network **519**. For example, in the Mobitex and DataTAC data networks, mobile devices are registered on the network using a unique identification number associated with each device. In GPRS data networks, however, network access is associated with a subscriber or user of the mobile device **500**. A GPRS device typically requires a subscriber identity module ("SIM"), which is required in order to operate the mobile device **500** on a GPRS network. Local or non-network communication functions (if any) may be operable, without the SIM, but the mobile device **500** is unable to carry out functions involving communications over the network **519**, other than any legally required operations, such as '911' emergency calling.

After any required network registration or activation procedures have been completed, the mobile device **500** is able to send and receive communication signals, preferably including both voice and data signals, over the network **519**. Signals received by the antenna **516** from the communication network **519** are routed to the receiver **512**, which provides for signal amplification, frequency down conversion, filtering, channel selection, etc., and may also provide analog to digital conversion. Analog to digital conversion of

the received signal allows more complex communication functions, such as digital demodulation and decoding, to be performed using the DSP 520. In a similar manner, signals to be transmitted to the network 519 are processed, including modulation and encoding, for example, by the DSP 520 and are then provided to the transmitter 514 for digital to analog conversion, frequency up conversion, filtering, amplification and transmission to the communication network 519 via the antenna 518. Although a single transceiver 511 is shown for both voice and data communications, in alternative embodiments, the mobile device 500 may include multiple distinct transceivers, such as a first transceiver for transmitting and receiving voice signals, and a second transceiver for transmitting and receiving data signals, or a first transceiver configured to operate within a first frequency band, and a second transceiver configured to operate within a second frequency band.

In addition to processing the communication signals, the DSP 520 also provides for receiver and transmitter control. For example, the gain levels applied to communication signals in the receiver 512 and transmitter 514 may be adaptively controlled through automatic gain control algorithms implemented in the DSP 520. Other transceiver control algorithms could also be implemented in the DSP 520 in order to provide more sophisticated control of the transceiver 511.

The microprocessor 538 preferably manages and controls the overall operation of the mobile device 500. Many types of microprocessors or microcontrollers could be used here, or, alternatively, a single DSP 520 could be used to carry out the functions of the microprocessor 538. Low-level communication functions, including at least data and voice communications, are performed through the DSP 520 in the transceiver 511. High-level communication applications, including the voice communication application 524A, and the data communication application 524B are stored in the non-volatile memory 524 for execution by the microprocessor 538. For example, the voice communication module 524A may provide a high-level user interface operable to transmit and receive voice calls between the mobile device 500 and a plurality of other voice devices via the network 519. Similarly, the data communication module 524B may provide a high-level user interface operable for sending and receiving data, such as e-mail messages, files, organizer information, short text messages, etc., between the mobile device 500 and a plurality of other data devices via the network 519.

The microprocessor 538 also interacts with other device subsystems, such as the display 522, RAM 526, auxiliary I/O devices 528, serial port 530, keyboard 532, speaker 534, microphone 536, a short-range communications subsystem 540 and any other device subsystems generally designated as 542. For example, the modules 524A-N are executed by the microprocessor 538 and may provide a high-level interface between a user of the mobile device and the mobile device. This interface typically includes a graphical component provided through the display 522, and an input/output component provided through the auxiliary I/O devices 528, keyboard 532, speaker 534, or microphone 536. Additionally, the microprocessor 538 is capable of running a variety of applications that may be present in the device non-volatile memory 524, including applications that have access to various privileges, as will be described in more detail herein.

Some of the subsystems shown in FIG. 2 perform communication-related functions, whereas other subsystems may provide "resident" or on-device functions. Notably,

some subsystems, such as keyboard 532 and display 522 may be used for both communication-related functions, such as entering a text message for transmission over a data communication network, and device-resident functions such as a calculator or task list or other PDA type functions.

Operating system software used by the microprocessor 538 is preferably stored in a persistent store such as the non-volatile memory 524. In addition to the operating system and communication modules 524A-N, the non-volatile memory 524 may include a file system for storing data. The non-volatile memory 524 may also include data stores for owner information and owner control information. The operating system, specific device applications or modules, or parts thereof, may be temporarily loaded into a volatile store, such as RAM 526 for faster operation. Moreover, received communication signals may also be temporarily stored to RAM 526, before permanently writing them to a file system located in the non-volatile memory 524. The non-volatile memory 524 may be implemented, for example, with Flash memory, non-volatile RAM, or battery backed-up RAM.

An exemplary application module 524N that may be loaded onto the mobile device 500 is a PIM application providing PDA functionality, such as calendar events, appointments, and task items. This module 524N may also interact with the voice communication module 524A for managing phone calls, voice mails, etc., and may also interact with the data communication module 524B for managing e-mail communications and other data transmissions. Alternatively, all of the functionality of the voice communication module 524A and the data communication module 524B may be integrated into the PIM module.

The non-volatile memory 524 preferably provides a file system to facilitate storage of PIM data items on the device. The PIM application preferably includes the ability to send and receive data items, either by itself, or in conjunction with the voice and data communication modules 524A, 524B, via the wireless network 519. The PIM data items are preferably seamlessly integrated, synchronized and updated, via the wireless network 519, with a corresponding set of data items stored or associated with a host computer system, thereby creating a mirrored system for data items associated with a particular user.

The mobile device 500 is manually synchronized with a host system by placing the mobile device 500 in an interface cradle, which couples the serial port 530 of the mobile device 500 to a serial port of the host system. The serial port 530 may also be used to insert owner information and owner control information onto the mobile device 500 and to download other application modules 524N for installation on the mobile device 500. This wired download path may further be used to load an encryption key onto the mobile device 500 for use in secure communications, which is a more secure method than exchanging encryption information via the wireless network 519.

Owner information, owner control information and additional application modules 524N may be loaded onto the mobile device 500 through the network 519, through an auxiliary I/O subsystem 528, through the short-range communications subsystem 540, or through any other suitable subsystem 542, and installed by a user in the non-volatile memory 524 or RAM 526. Such flexibility in application installation increases the functionality of the mobile device 500 and may provide enhanced on-device functions, communication-related functions, or both. For example, secure communication applications may enable electronic com-

merce functions and other such financial transactions to be performed using the mobile device **500**.

When the mobile device **500** is operating in a data communication mode, a received signal, such as a text message or a web page download, will be processed by the transceiver **511** and provided to the microprocessor **538**, which preferably further processes the received signal for output to the display **522**, or, alternatively, to an auxiliary I/O device **528**. Owner information, owner control information, commands or requests related to owner information or owner control information, and software applications received by the transceiver **511** are processed as described above. A user of mobile device **500** may also compose data items, such as email messages, using the keyboard **532**, which is preferably a complete alphanumeric keyboard laid out in the QWERTY style, although other styles of complete alphanumeric keyboards such as the known DVORAK style may also be used. User input to the mobile device **500** is further enhanced with the plurality of auxiliary I/O devices **528**, which may include a thumbwheel input device, a touchpad, a variety of switches, a rocker input switch, etc. The composed data items input by the user are then transmitted over the communication network **519** via the transceiver **511**.

When the mobile device **500** is operating in a voice communication mode, the overall operation of the mobile device **500** is substantially similar to the data mode, except that received signals are output to the speaker **534** and voice signals for transmission are generated by a microphone **536**. In addition, the secure messaging techniques described above might not necessarily be applied to voice communications. Alternative voice or audio I/O devices, such as a voice message recording subsystem, may also be implemented on the mobile device **500**. Although voice or audio signal output is accomplished through the speaker **534**, the display **522** may also be used to provide an indication of the identity of a calling party, the duration of a voice call, or other voice call related information. For example, the microprocessor **538**, in conjunction with the voice communication module **524A** and the operating system software, may detect the caller identification information of an incoming voice call and display it on the display **522**.

A short-range communications subsystem **540** is also included in the mobile device **500**. For example, the subsystem **540** may include an infrared device and associated circuits and components, or a Bluetooth or 802.11 short-range wireless communication module to provide for communication with similarly-enabled systems and devices. Thus, owner information insertion, owner control information insertion, and application loading operations as described above may be enabled on the mobile device **500** via the serial port **530** or other short-range communications subsystem **540**.

FIG. **2** represents a specific example of an electronic device in which owner control systems and methods described herein may be implemented. Implementation of such systems and methods in other electronic devices having further, fewer, or different components than those shown in FIG. **2** would occur to one skilled in the art to which this application pertains and are therefore considered to be within the scope of the present application.

FIG. **3** is a flow diagram illustrating a method of revoking privileges according to an exemplary embodiment. In this example, an application having privileges that are to be revoked may be shut down. When the application is restarted, access to revoked privileges will be denied. In order to keep track of which applications need to be shut

down and reset, the system must keep track of which applications have access to which privileges. To accomplish this, for example, the system monitors and detects use of privileges by applications **300**. The system may record an application identifier associated with a particular application and which privilege has been accessed by the application **302**. This may be accomplished in any number of conventional methods that are readily apparent to those skilled in the art. For example, a data table listing the application identifier and having pointers directed to privilege(s) accessed by the application or associated with the application identifier. The system then continues to monitor the system for any change, for example, a change in IT policy, that might result in a revocation of privileges **304**. So long as no such change is detected in decision block **304**, the system continues to monitor and keep track of applications and associated privileges.

Upon a detection of a change that would result in revocation of privileges being accessed by applications in the system by the decision block **304**, such as, for example, a change in IT policy, a comparison of the recorded data relating to the accessed privileges with a listing of the new privileges is performed **306**. For example, the application identifiers and associated accessed privileges recorded in step **302** are compared to the new privilege list, or to a list of revoked privileges **306**. The changes discussed herein are typically instituted and administered by a system administrator or other authority who has responsibility for operation and management of the system.

As a result of the comparison **306**, each application that has accessed a privilege(s) to be revoked is identified **308** by the system. Upon identification of these applications, the system implements a shut down of these identified applications **310**. When these applications are restarted **312**, the applications will not have access to any of the revoked privileges. The system will continue to monitor and detect the accessing of privileges and associated applications as described above.

In another embodiment, as illustrated in the flow diagram of FIG. **4**, a device reset may be performed. According to this example, all devices in the system are monitored **400**. A system administrator or other authority specifies, for example, that whenever there is a change in system policy that requires revocation or changes in privileges **402**, all devices in the system must be reset **404**. Resetting the devices brings the system to a known state, i.e., a state in which the system knows which applications have access to which privileges throughout the system. Upon restarting these applications **406** after the device reset **404**, the applications will no longer have access to any of the revoked privileges. According to this example, a device reset may be instituted any time the system administrator or authority deems it necessary to do so. For example, a device reset may be done whenever a new policy that includes privilege revocation is instituted. As a result, this solution may invoke numerous (potentially unnecessary) device reset events that may be intrusive and inconvenient for the users. However, this embodiment provides very robust and timely privilege revocation, and is thus suitable to highly secure systems where privilege management is more important than user convenience.

Turning now to FIG. **5**, another advantageous embodiment implementing features of both embodiments described above with respect to FIGS. **3** and **4** is illustrated. According to this example, aspects of the previously described embodiments are combined to provide highly effective and timely privilege management and revocation. In this example, the

11

system administrator or authority has no actual control over when a device is reset. The administrator or authority merely manages the privileges of the system and of particular applications. The device itself is responsible for resetting as needed.

In this example, the device monitors which applications of the device have access to which privileges **600**, and a log of privileges for the device is kept **602**. The device monitors whether policies or application control changes are made in the system **604**. If there is no change detected **604**, the device continues to monitor applications and keep a log of privileges for the device **600**, **602**. If a change in policy or application control is detected in step **604**, the system determines which privileges have been revoked for which applications by comparing the old set of privileges in the log with the new set of privileges received from the system administrator **606**. The device then determines if any revoked privileges are present on the device **608**. If revoked privileges are detected, e.g., if an application has accessed a privilege at any time in the past that has now been revoked, the device will reset **610**. As described above, resetting the device brings the system to a known state in which all applications and privileges are known. After the device is reset **610**, it is restarted **612**. Upon restart **612**, the device applications will have access to the correct privileges. Advantageously, if no revoked privileges are detected in step **608**, the device performs another check to ensure that no privileges that have been passed between application have been missed. As explained above, for some privileges, e.g., IPC, it cannot be determined whether a privilege has been used as a result of being passed from another application. To overcome the potential for missing revocation of privileges when applications pass privileges between themselves, the system checks for privileges that are able to be passed between applications (e.g., IPC) **614**. If a privilege that is able to be passed between applications is revoked from any application, regardless of if the system has detected that the application has accessed the privilege **614**, the device must be reset **610** to bring the system to a known state. After resetting, the device is restarted **612**, and will now have the only have access to the correct privileges. In this manner, device reset will only be performed when necessary, thus limiting the number of resets and solving the problem associated with privileges that go undetected due to their ability to be passed between applications.

While this disclosure describes specific exemplary embodiments, it is evident that many alternatives, modifications and variations will be apparent to those skilled in the art. Accordingly, the exemplary embodiments described herein, are intended to be illustrative, not limiting. Various changes may be made without departing from the true spirit and full scope of the invention, as defined in the following claims.

What is claimed is:

1. A method performed by an electronic device, the method comprising:

tracking which applications on the electronic device have previously accessed which privileges;

detecting at the electronic device that a privilege has been revoked;

automatically shutting down any application running on the electronic device that has previously accessed the privilege, responsive to detecting that the privilege has been revoked; and

automatically restarting any application that was shut down, the restarted application no longer having any access to the revoked privilege.

12

2. The method as recited in claim 1, wherein detecting that the privilege has been revoked comprises receiving via a communication interface of the electronic device an information technology (IT) policy specifying that the privilege has been revoked.

3. The method as recited by claim 1, wherein the privilege comprises allowing an application to use inter-process communication.

4. The method as recited by claim 1, wherein the privilege comprises enabling opening of internal and external connections.

5. The method as recited by claim 1, wherein the privilege comprises enabling use of communication tools.

6. The method as recited by claim 1, wherein the privilege comprises enabling use of personal information management functionality.

7. The method as recited by claim 1, wherein the privilege comprises enabling use of an application program interface.

8. An electronic device comprising a processor configured to:

track which applications on the electronic device have previously accessed which privileges;

detect at the electronic device that a privilege has been revoked;

automatically shut down any application running on the electronic device that has previously accessed the privilege, responsive to detecting that the privilege has been revoked; and

automatically restart any application that was shut down, the restarted application no longer having any access to the revoked privilege.

9. A non-transitory computer-readable medium storing instructions which, when executed by a processor of an electronic device, result in:

tracking which applications on the electronic device have accessed which privileges;

detecting at the electronic device that a privilege has been revoked;

automatically shutting down any application running on the electronic device that has previously accessed the privilege, responsive to detecting that the privilege has been revoked; and

automatically restarting any application that was shut down, the restarted application no longer having any access to the revoked privilege.

10. The electronic device as recited in claim 8, wherein the privilege comprises allowing an application to use inter-process communication.

11. The electronic device as recited in claim 8, wherein the privilege comprises enabling opening of internal and external connections.

12. The electronic device as recited in claim 8, wherein the privilege comprises enabling use of communication tools.

13. The electronic device as recited in claim 8, wherein the privilege comprises enabling use of personal information management functionality.

14. The electronic device as recited in claim 8, wherein the privilege comprises enabling use of an application program interface.

15. The non-transitory computer-readable medium as recited in claim 9, wherein the privilege comprises allowing an application to use inter-process communication.

16. The non-transitory computer-readable medium as recited in claim 9, wherein the privilege comprises enabling opening of internal and external connections.

17. The non-transitory computer-readable medium as recited in claim 9, wherein the privilege comprises enabling use of communication tools.

18. The non-transitory computer-readable medium as recited in claim 9, wherein the privilege comprises enabling use of personal information management functionality. 5

19. The non-transitory computer-readable medium as recited in claim 9, wherein the privilege comprises enabling use of an application program interface.

* * * * *