



US009617747B2

(12) **United States Patent**
Seto et al.

(10) **Patent No.:** **US 9,617,747 B2**
(45) **Date of Patent:** **Apr. 11, 2017**

(54) **FOLDING GUARD RAIL METHOD AND APPARATUS**

(71) Applicants: **John Seto**, Orlando, FL (US); **Ronnie J. Jones**, Windermere, FL (US)

(72) Inventors: **John Seto**, Orlando, FL (US); **Ronnie J. Jones**, Windermere, FL (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 875 days.

(21) Appl. No.: **13/943,946**

(22) Filed: **Jul. 17, 2013**

(65) **Prior Publication Data**

US 2015/0023774 A1 Jan. 22, 2015

(51) **Int. Cl.**
E04G 21/32 (2006.01)

(52) **U.S. Cl.**
CPC **E04G 21/3228** (2013.01)

(58) **Field of Classification Search**
CPC .. E04G 1/34; E04G 5/04; E04G 5/041; E04G 21/3228; E04G 21/3223; E04H 17/22
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,084,277 A * 4/1978 Conrad et al. G03B 42/025
5/100
4,123,882 A * 11/1978 Case et al. E04G 21/142
294/15

4,520,898 A 6/1985 Allemane
5,732,911 A * 3/1998 Kulp et al. G09F 15/0056
248/158

5,749,436 A 5/1998 Satchwell, III
6,053,281 A 4/2000 Murray
7,028,990 B2 4/2006 Shorey et al.
7,243,450 B2 * 7/2007 Dicke et al. G09F 15/0056
248/167

8,689,938 B2 * 4/2014 Kenton et al. E04G 21/3233
182/113

2006/0278472 A1 12/2006 Kenton et al.

FOREIGN PATENT DOCUMENTS

DE 295 00 048 * 4/1995 E04G 3/08
FR 2 600 102 * 12/1987 E04G 3/08
WO WO 2009/118667 * 10/2009 E04G 21/32

* cited by examiner


Primary Examiner — Michael P Ferguson

(74) *Attorney, Agent, or Firm* — William M. Hobby, III

(57) **ABSTRACT**

The present invention is for a safety guard rail system having folding guard rails designed to be raised or lowered at their base by a single individual from an acceptable safe distance from the edge of a precipice, such as the edge of a building roof. A sliding sleeve hinge lock locks each folding rail in an erect position and can be remotely unlocked for folding the rail. An elongated grappling tool has a hook-like end for grabbing the sliding sleeve hinge lock handle for locking and unlocking the hinge lock from a distance when erecting or folding a guard rail.

14 Claims, 4 Drawing Sheets

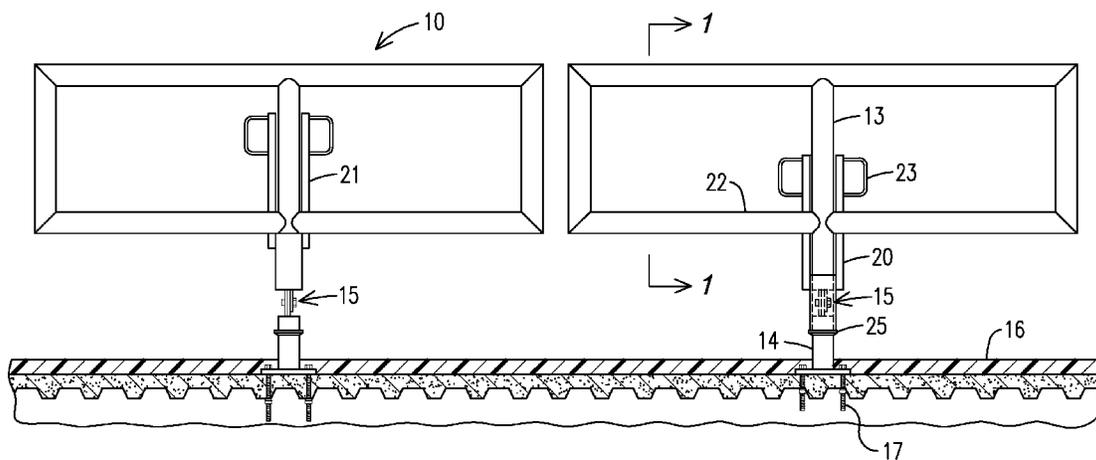

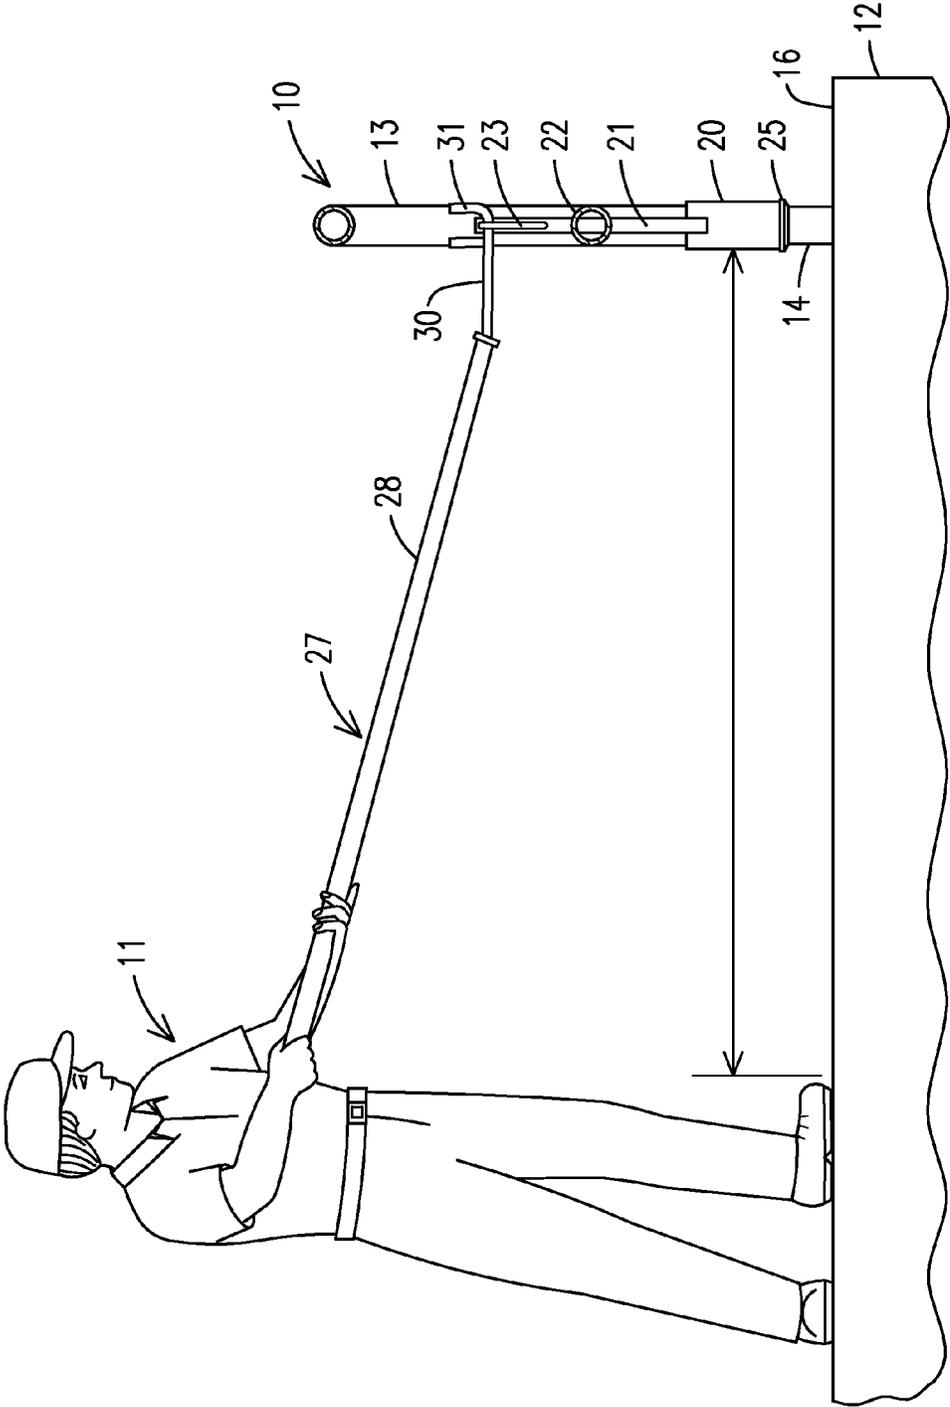


FIG. 1

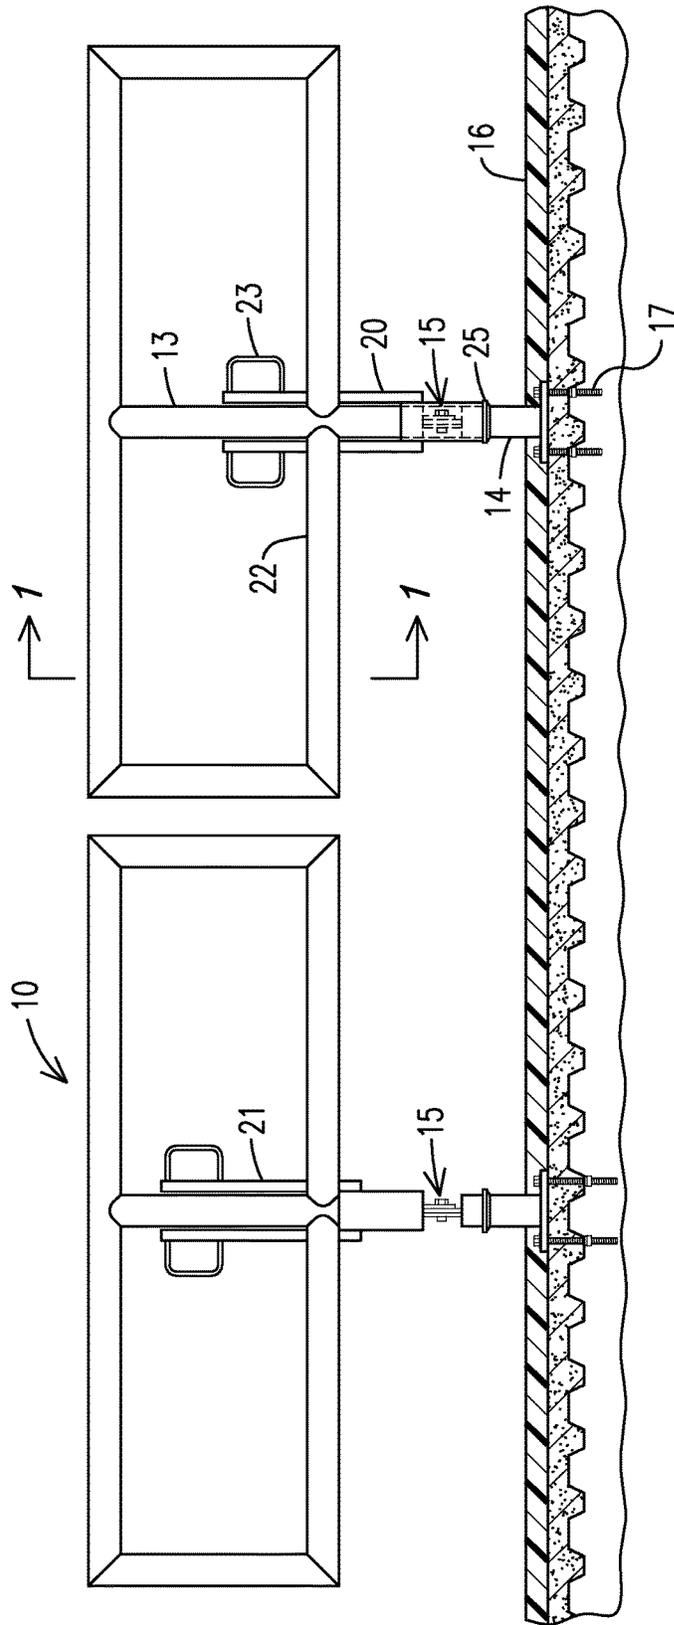


FIG. 2

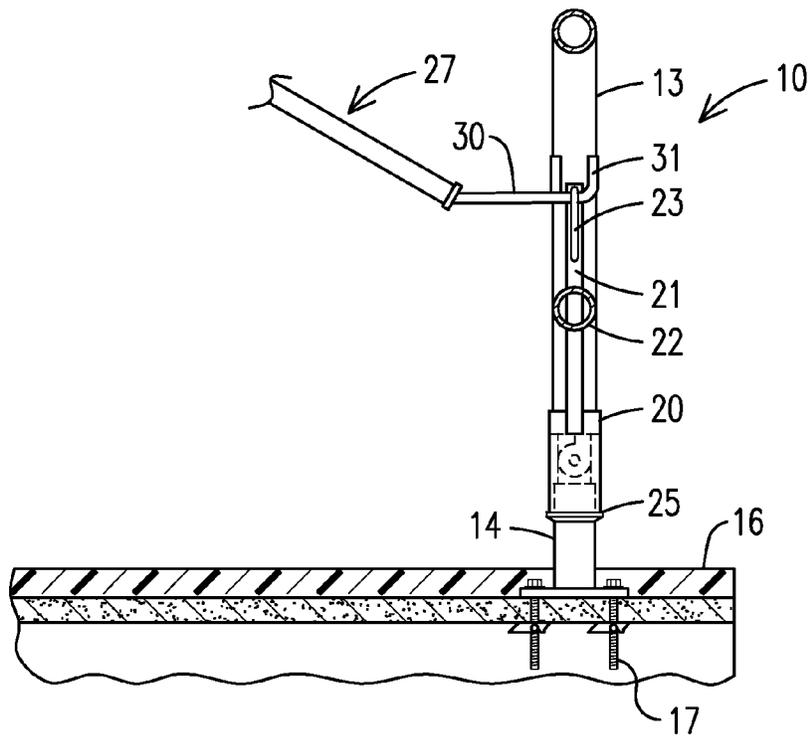


FIG. 3

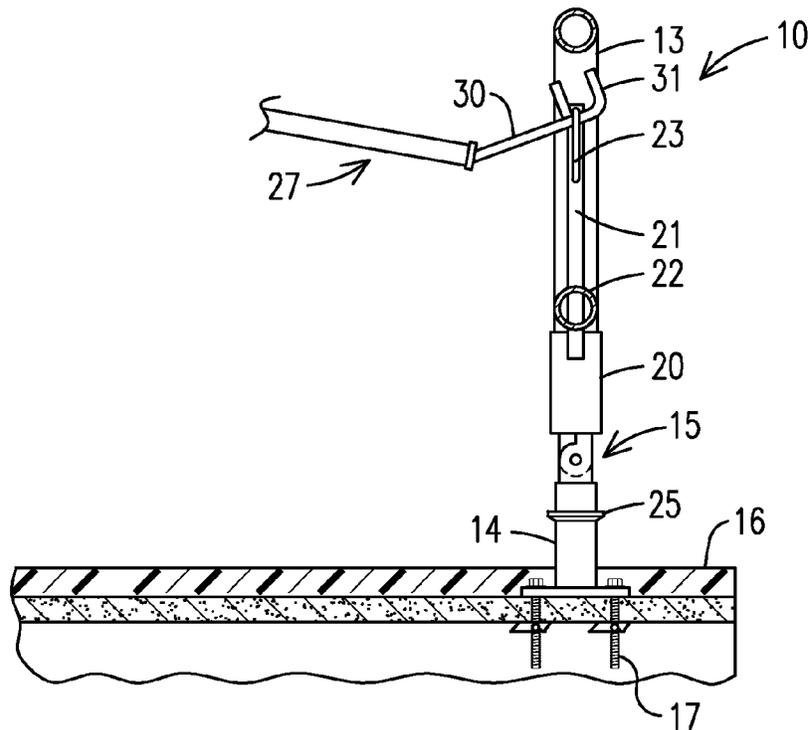


FIG. 4

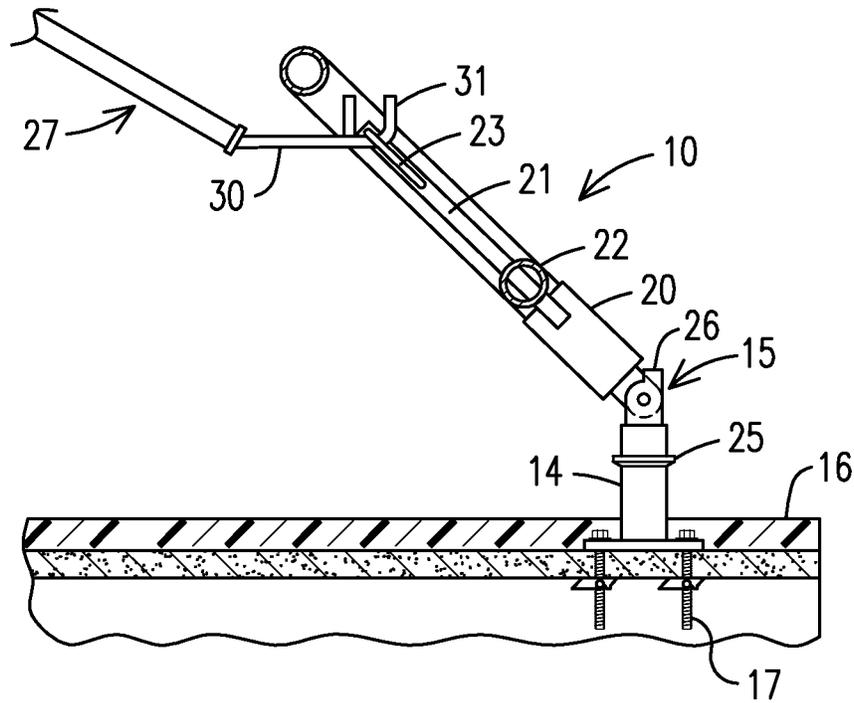


FIG. 5

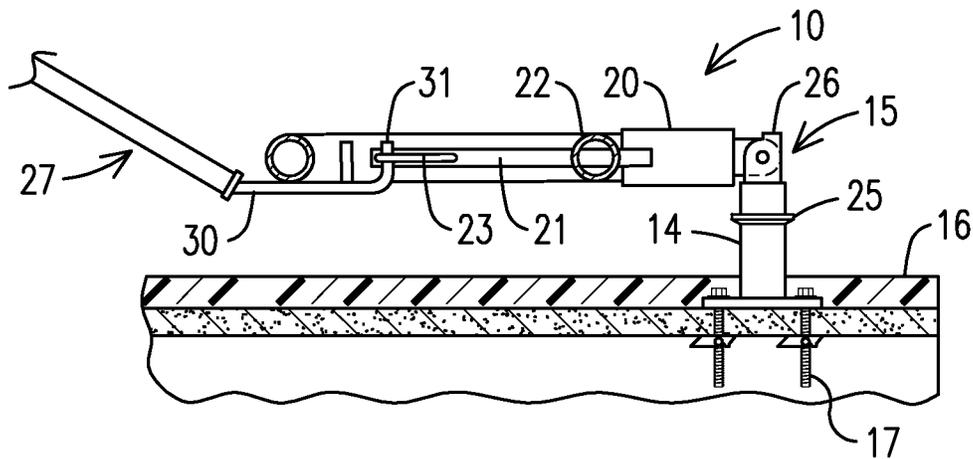


FIG. 6

1

FOLDING GUARD RAIL METHOD AND APPARATUS

FIELD OF THE INVENTION

This invention is related to a guard rail system and especially to a remotely collapsible guard rail system to form a protective safety barrier for fall prevention which rail system can be collapsed and erected remotely.

BACKGROUND OF THE INVENTION

Guard rails are installations that prevent passage in hazardous areas where a fall or other harmful conditions exist. Guard or safety rail systems have been commonly used in the past to prevent workers or other persons from falling from elevated areas such as roofs. Some fall prevention systems are temporary, such as those used during construction of a building to prevent workers from falling from the rooftop during construction. Permanent safety rails on building roofs are often not considered to be aesthetically pleasing and to detract from the beauty of the building. Safety rails are thus sometimes made to be removed when not in use so as to be out of sight except when someone is using a roof or elevated area. Some workers on a new construction job are required to wear a harness having a safety line when working close to the edge of elevated surfaces. New safety requirements require that workers or other persons on a roof not be within six feet of a building precipice or edge as a safety precaution which makes it difficult to remove and replace safety rails especially on short notice.

A collapsible rail fall prevention system such as taught by the present invention allows the rails to be collapsed and out of view until needed at which time they can be remotely raised or lowered without being within six feet of the edge of the building roof.

In the prior U.S. Patent Application Publication No. US 2006/0278472 to Kenton et al., a collapsible safety rail system is provided for a portable or permanent protective barrier to provide for fall prevention from an elevated work area. This collapsible safety rail requires a workman to unpin a detent pin and fold each hinged rail. This in turn requires a workman to be adjacent the edge of the roof in order to raise or lower the safety rail which places the workman in the danger area for a fall.

In U.S. Pat. No. 5,749,436 to Satchwell, III, a collapsible railing for mounting on a vehicle roof is provided which has a railing and a plurality of collapsible stanchions.

The Murray U.S. Pat. No. 6,053,281, is for a roof perimeter safety rail system for installation about the perimeter of a rooftop work site. The rail system has removable stanchions for connecting a cable therebetween. The Allemane U.S. Pat. No. 4,520,898 is for a folding guard rail for a platform. The rails can be erect and can be folded down over the platform and has a key to immobilize the guard rail either in its normal position or in it folded position.

The Shorey et al. U.S. Pat. No. 7,028,990 is for a temporary rooftop and stairway safety rail safety system adapted to prevent workers from falling from a work surface at a height. The pitch of the vertical extending support members can be adjusted to the slope of the work surface with removable pins.

The present invention is for a folding guard rail designed to be raised or lowered at its base by a single individual from an acceptable safe distance to comply with OSHA or related safety regulations. The individual who is raising or lowering the assembly is protected from being exposed to the hazard

2

that the guard rail, when raised, is designed to eliminate. The rail system can be remotely collapsed and erected remotely by a worker without the worker working in or entering into the danger area adjacent the edge of the elevated area. A protective safety barrier is easily erected and collapsed remotely from several feet away from the safety rail edge of the roof or work surface.

SUMMARY OF THE INVENTION

This invention relates to a remotely folding guard rail having a safety rail having a supporting post. A base post may be fixedly attached to a building structure and has a hinge attached therebetween to allow for the folding and erecting of the safety rail between upright and folded positions. A locking sleeve is slidably mounted to the safety rail supporting post and has a handle attached thereto. The locking sleeve is adapted to slide on the safety rail supporting post and over the hinge when the safety rail is in a generally upright position to lock the rail supporting post in an upright position. An elongated grappling tool has a locking sleeve handle engaging end portion shaped for remotely engaging and lifting the locking sleeve and folding the safety rail from an erect to a folded position. A safety rail is thus held in an upright position and may be remotely lowered to a folded position.

A method of remotely folding a guard rail includes selecting a guard rail in accordance with the apparatus and selecting an elongated grappling tool having a sliding hinge lock handle engaging end portion shaped for engaging and lifting the sliding hinge lock. Then grasping and raising the sliding hinge lock handle from a distance with the elongated grappling tool to unlock the hinged rail supporting post from the base post and folding the guard rail from an erect to a folded position. A guard rail can thus be remotely moved from a locked erect position to a folded position. The process also includes the grasping of the sliding hinge lock handle of a folded guard rail with the grappling tool and raising the guard rail to an upright position where the sliding hinge lock is released to slide and lock the guard rail in an upright position.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide further understanding of the invention are incorporated in and constitute a part of the specification, and illustrate an embodiment of the invention and together with the description serve to explain the principles of the invention.

In the drawings:

FIG. 1 is a side elevation of the guard rail system of the present invention being remotely operated by a worker;

FIG. 2 is a front sectional view of the guard rails of FIG. 1 mounted to the edge of a building;

FIG. 3 is a side sectional view of the guard rail of FIGS. 1 and 2 with the grappling tool being positioned in the lock handle;

FIG. 4 is a side sectional view of the guard rail of FIG. 3 having the lock handle being raised;

FIG. 5 is a side sectional view of the guard rail of FIGS. 3 and 4 having the grapple tool collapsing the guard rail; and

FIG. 6 is a side sectional view of the guard rail of FIGS. 3, 4, and 5 with the guard rail fully collapsed.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENT

The present invention is for a safety guard rail system having folding guard rails 10 designed to be raised or

3

lowered at their base by a single individual **11** from an acceptable safe distance from the edge of a precipice, such as the edge of a building roof **12**.

As seen in FIGS. 1 and 2, the safety or guard rails **10** have a center supporting post **13** which is hinged to a base post **14** with a hinge **15**. The base post **14** is fixedly attached to the roof **15** with bolts **17** or in any fashion desired but may also be removably attached as desired, such as with a ballast or counterweight that does not require any attachment. A post locking sleeve **18** slides on the post **13** and is sized to slide over the hinge **15** and over the top portion of the base post **14**. The locking sleeve **20** has a pair of elongated handle bars **21** extending from the sleeve **20** and passing through openings in the horizontal rails **22** on either side of the supporting post **13**. Each elongated handle rod **21** has a handle **23** attached thereto. Each handle **23** is in a generally C-shape and fixedly attached to one of the rods **20**. Gripping the handle **23** and lifting the locking sleeve **20** will raise the sleeve above the hinge **15** and allow the rail **10** to be folded on the hinge **15**.

In setting up a folded safety rail **10**, the sleeve **20** can be raised while raising the post **13** and rail **10** allows the rail to be erected so that when the handles are released, the sleeve **20** will fall of its own weight to cover the hinge **15** and over the top portion of the base post **14**. It will of course be clear that the sleeve **20** can be spring biased without departing from the spirit and scope of the invention. A stop ring **25** stops the sliding sleeve **20** at a predetermined point to lock the hinged post **13** erect. A stop ledge **26** extending from the base post **14**, as seen in FIG. 6, will guide the locking sleeve **20** over the hinge **15**.

An elongated grappling tool has an elongated pole **28** having a locking sleeve handle engaging end portion **30** shaped for remotely engaging and lifting the unlocking sleeve **20** handle **23**, as seen in FIG. 1. The locking sleeve handle engaging end portion **30** has a generally U-shaped end **31** sized to fit within the handle **23** for lifting the handle **23** and locking sleeve **20** and then folding the safety rail **10** on the hinge **15** from an erect to a folded position. The grappling tool **27** can also be used to grip the handle **23** when the rail **10** is folded to lift the folded rail **10** to an upright position where the handle can be lowered to lock the post **13** and safety rail **10** in an upright or erect position.

The process of the present invention can be more clearly seen in connection with FIGS. 3 through 6 where the base post **14** is fixedly attached to a roof **16** with bolts **17**. The base post can also be removably mounted to the roof such as with a ballast or counterweights. The base post **14** has a stop ring **25** attached thereto. The hinge **15** hingedly attaches the base post **14** to the center supporting post **13**. In FIG. 3, the grapple tool **27** has the U-shaped or hooked end **31** of the locking sleeve handle engaging end portion **30** engaging the handle **23** of the locking sleeve **20** rods **21**. The locking sleeve **20** extends over the hinge **15** and over the top of the base post **14** and abuts the stop ring **25** to lock the center support post **13** and rail **10** in an upright position as a safety guard rail. The extending handle bars **21** slide through the rails **22**.

In FIG. 4 the safety rail **10** is being lifted by the worker **11** of FIG. 1 and has raised the locking sleeve **20** above the hinge **15** to free the support post **13** for folding the safety rail **10**. The worker then pulls the grapple tool **27** to pull on the handle **23** and to start folding the support post **13** and rail **10**, as seen in FIG. 5. The safety rail **10** is then let down into a completely folded position as seen in FIG. 6.

It should also be clear that the rail **10** can be raised by the reverse sequence of grabbing the handle **23** in the folded

4

position as shown in FIG. 6 and raising the rail **10** as in FIGS. 5 and 4 to an erect position and then lowering the handle **23** and locking sleeve **20** as in FIG. 3 to lock the rail **10** in an upright guard rail position. This operation takes place with the worker **11** spaced at a safe distance from the edge **12** of the roof **16** which may be 5 or 6 feet away from the edge **12** or as required by current regulations.

It should be clear at this time that a safety guard rail system having folding guard rails designed to be raised or lowered at their base by a single individual from an acceptable safe distance from the edge of a precipice has been provided. However the present invention is not to be considered limited to the forms shown which are to be considered illustrative rather than restrictive.

We claim:

1. A remotely folding guard rail system comprising:
 - a safety rail having at least one horizontal rail and a vertical rail supporting post;
 - a base post attached to a building structure and having a hinge attached between an upper end of said base post and a lower end of said safety rail supporting post for folding said safety rail between an upright position and a folded position;
 - a locking sleeve slidably mounted to said safety rail supporting post, said locking sleeve having a handle attached thereon and being adapted to slide on said safety rail supporting post and over said hinge when said safety rail is in a generally upright position in which said rail supporting post is aligned with said base post to lock said rail supporting post in said upright position; and
 - an elongated grappling tool having a locking sleeve handle engaging end portion shaped for remotely engaging said handle and lifting said locking sleeve above said hinge to allow said safety rail to be folded about said hinge from said upright position to said folded position;
- whereby the safety rail held in the upright position may be remotely lowered to the folded position.
2. The remotely folded guard rail system in accordance with claim 1 in which said locking sleeve has an elongated handle bar extending therefrom having said handle attached thereto.
3. The remotely folding guard rail system in accordance with claim 2 in which said locking sleeve has two elongated handle bars extending therefrom each having a handle attached thereto.
4. The remotely folding guard rail system in accordance with claim 2 in which said handle is a generally C-shaped handle attached to the elongated handle bar of said locking sleeve.
5. The remotely folding guard rail system in accordance with claim 1 in which said base post has a stop ring thereon for limiting the sliding movement of said locking sleeve over said hinge and base post when said rail is in said upright position.
6. The remotely folding guard rail system in accordance with claim 1 in which said elongated grappling tool locking sleeve handle engaging end portion includes a generally U-shaped handle engaging portion.
7. The remotely folding guard rail system in accordance with claim 1 in which said base post has a supporting post stop for positioning said supporting post in a predetermined upright position.
8. The remotely folding guard rail system in accordance with claim 1 in which said elongated grappling tool is at least five feet in length.

5

9. The remotely folding guard rail system in accordance with claim 1 in which said base post is fixedly attached to a building structure.

10. The remotely folding guard rail system in accordance with claim 1 in which the locking sleeve is spring biased to slide on said rail supporting post.

11. A method of remotely folding a guard rail comprising the steps of:

selecting a guard rail having at least one horizontal rail and a vertical rail supporting post and having a base post attached to a building structure, a lower end of said rail supporting post being hingedly attached to an upper end of said base post via a hinge and said rail supporting post having a sliding hinge lock having a handle thereon and being adapted to slide on said rail supporting post and over said hinge when said guard rail is in a generally upright position in which said rail supporting post is aligned with said base post to lock said rail supporting post in said upright position;

selecting an elongated grappling tool having a sliding hinge lock handle engaging end portion shaped for engaging and lifting said sliding hinge lock;

6

grasping and raising said sliding hinge lock handle from a distance with said elongated grappling tool to lift said sliding hinge lock above said hinge to unlock said hinged rail supporting post from said base post to allow said guard rail to be folded about said hinge; and folding said guard rail from said upright position to a folded position;

whereby the guard rail is remotely moved from the locked upright position to the folded position.

12. The method of remotely folding a guard rail in accordance with claim 11 including the step of grasping said sliding hinge lock handle with said grappling tool and raising said guard rail to said upright position.

13. The method of remotely folding a guard rail in accordance with claim 12 including the step of releasing said sliding hinge lock of said raised guard rail to lock the raised guard rail in said upright position.

14. The method of remotely folding a guard rail in accordance with claim 13 in which said selected guard rail base post is fixedly attached to a building structure.

* * * * *