



US009466167B2

(12) **United States Patent**
Razzaboni et al.

(10) **Patent No.:** **US 9,466,167 B2**
(45) **Date of Patent:** **Oct. 11, 2016**

(54) **DEVICE FOR FILLING AND CLOSING DISPOSABLE BAGS FOR CONTAINING BANKNOTES**

B65B 35/40; B65B 35/50; B65B 39/06;
B65B 39/08; B65B 43/54; B65B 63/02;
B65B 63/026; B65H 29/46; B65H 31/10;
B65H 31/14; B65H 2405/311; G07D
11/0009; G07D 11/0096

(71) Applicant: **Cima S.p.A.**, Mirandola (MO) (IT)

USPC 53/116, 117, 120, 528, 530, 540, 567,
53/570, 576, 577, 258, 284.7; 232/43.2,
232/43.3; 271/180

(72) Inventors: **Nicoletta Razzaboni**, Mirandola (IT);
Vittorio Razzaboni, Mirandola (IT)

See application file for complete search history.

(73) Assignee: **CIMA S.P.A.**, Mirandola (MO) (IT)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,173,742 A * 3/1965 Simjian G07D 11/0096
232/43.3
3,655,186 A * 4/1972 Bayha B65H 29/46
271/180

(Continued)

FOREIGN PATENT DOCUMENTS

DE 4141830 A1 * 6/1993 B65B 5/067
DE 10 2009 053 155 A1 5/2011

(Continued)

Primary Examiner — Stephen F Gerrity

(74) *Attorney, Agent, or Firm* — Jacobson Holman, PLLC.

(21) Appl. No.: **14/889,060**

(22) PCT Filed: **May 8, 2014**

(86) PCT No.: **PCT/IB2014/061298**

§ 371 (c)(1),

(2) Date: **Nov. 4, 2015**

(87) PCT Pub. No.: **WO2014/181286**

PCT Pub. Date: **Nov. 13, 2014**

(65) **Prior Publication Data**

US 2016/0086416 A1 Mar. 24, 2016

(30) **Foreign Application Priority Data**

May 9, 2013 (IT) MI2013A0751

(51) **Int. Cl.**

G07D 11/00 (2006.01)

B65B 5/06 (2006.01)

(Continued)

(52) **U.S. Cl.**

CPC **G07D 11/0096** (2013.01); **B65B 5/067**

(2013.01); **B65B 5/106** (2013.01);

(Continued)



(58) **Field of Classification Search**

CPC B65B 5/067; B65B 5/106; B65B 25/14;

(57) **ABSTRACT**

A device for filling and closing disposable bags for containing banknotes includes a container for the temporary housing of one or more banknotes. The container has side walls and a bottom with an opening for the exit of the one or more banknotes from the container. A piston for pushing the one or more banknotes towards the bottom of the container. A bag made of flexible material intended to be filled with the banknotes temporarily housed in the container is wrapped around the side walls and the bottom of the container. A plate, placed below the container, is vertically movable through controlled lowering of a device, such as a spring. Sealing elements for heat sealing the filled bag are placed between the container and the plate.

10 Claims, 3 Drawing Sheets

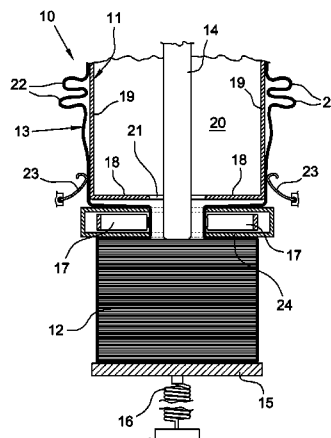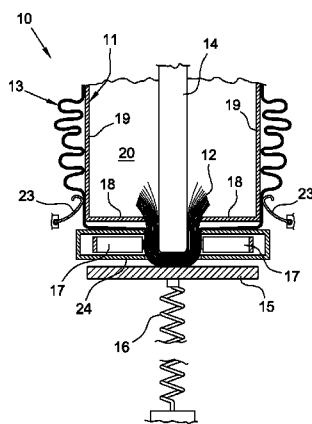

(51)	Int. Cl.							
	<i>B65B 5/10</i>	(2006.01)	4,027,460	A *	6/1977	Orr	B65B 9/13 53/535
	<i>B65B 25/14</i>	(2006.01)	4,472,923	A *	9/1984	Herrington	B65B 25/145 53/120
	<i>B65H 29/46</i>	(2006.01)	5,148,655	A *	9/1992	Salinas	B65B 5/067 53/245
	<i>B65H 31/04</i>	(2006.01)	5,595,129	A *	1/1997	Grobe	G07D 11/0012 109/22
	<i>B65B 35/50</i>	(2006.01)	5,899,452	A *	5/1999	Walsh	B65B 29/46 271/180
	<i>B65B 39/08</i>	(2006.01)						
	<i>B65B 43/54</i>	(2006.01)						
(52)	U.S. Cl.							
	CPC	<i>B65B 25/14</i> (2013.01); <i>B65B 35/50</i> (2013.01); <i>B65B 39/08</i> (2013.01); <i>B65B 43/54</i> (2013.01); <i>B65H 29/46</i> (2013.01); <i>B65H</i> <i>31/04</i> (2013.01); <i>B65H 31/10</i> (2013.01); <i>G07D 11/0009</i> (2013.01); <i>B65H 2405/311</i> (2013.01)						
			2003/0180131	A1 *	9/2003	Lewis	G07D 11/0009 414/411
			2007/0145064	A1 *	6/2007	Clouser et al.	G07D 11/0009 221/197
			2011/0052363	A1	3/2011	Brexel et al.		
			2012/0167529	A1	7/2012	Langhuber et al.		
			2015/0000230	A1 *	1/2015	Wright	B65B 5/067 53/459

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,805,482	A *	4/1974	O'Shea et al.	B65B 25/145 53/120
3,919,827	A *	11/1975	Larson et al.	B65B 25/145 493/451

FOREIGN PATENT DOCUMENTS

EP		2648165	A1 *	10/2013	G07D 11/0009
JP		02295852	A *	12/1990		
WO		02/19289		3/2002		

* cited by examiner

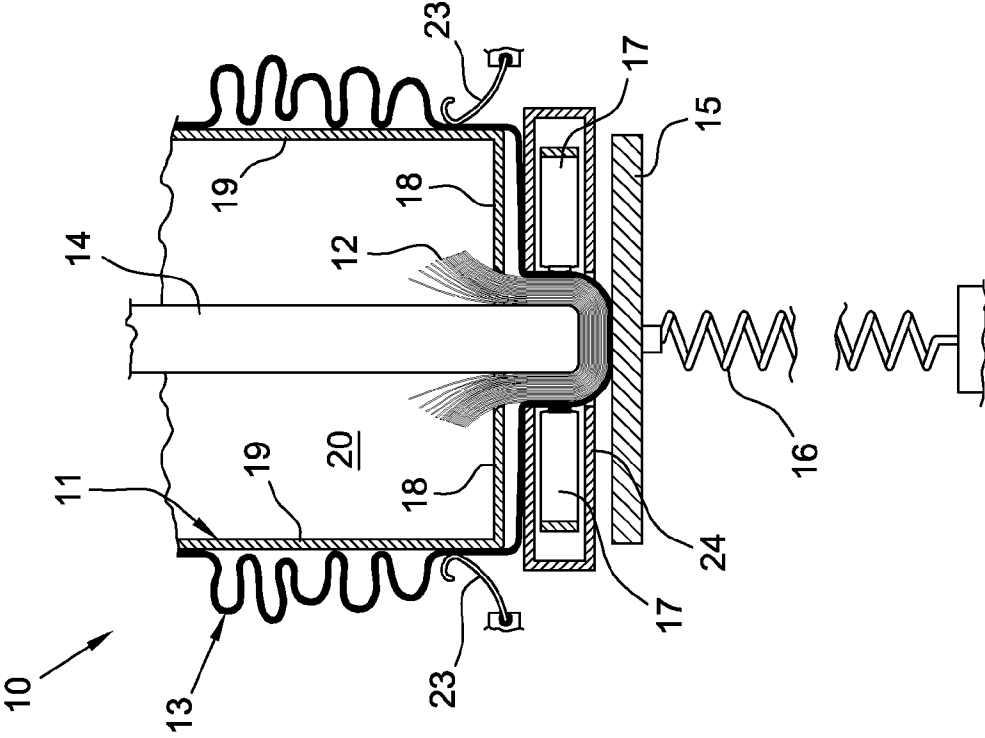


Fig. 2

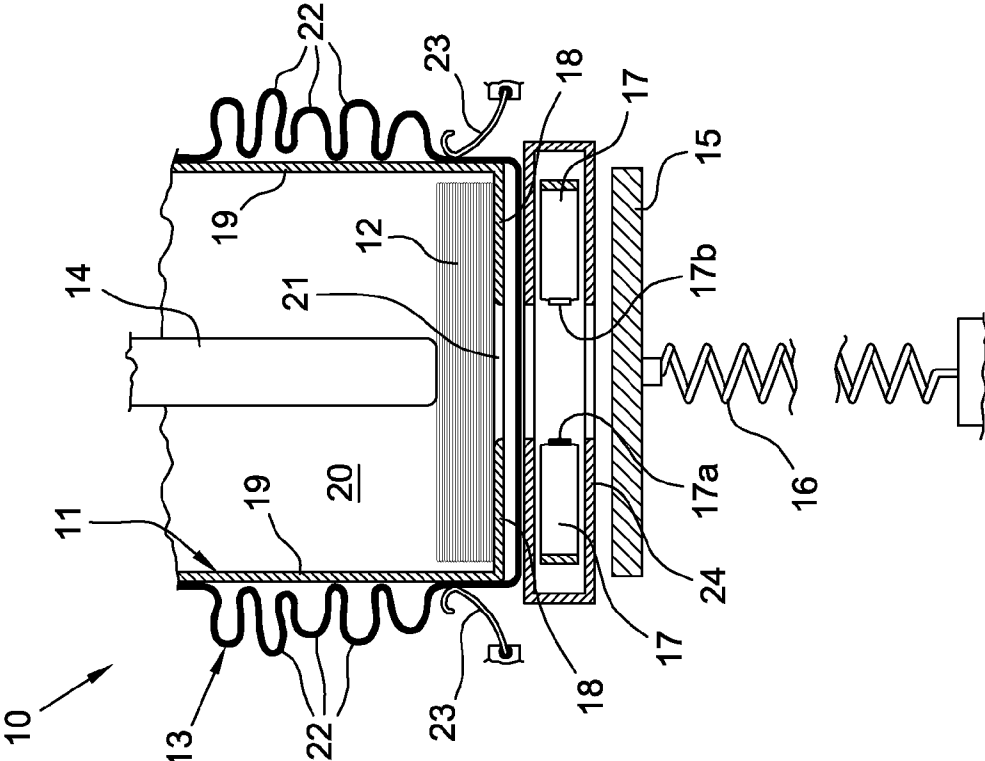


Fig. 1

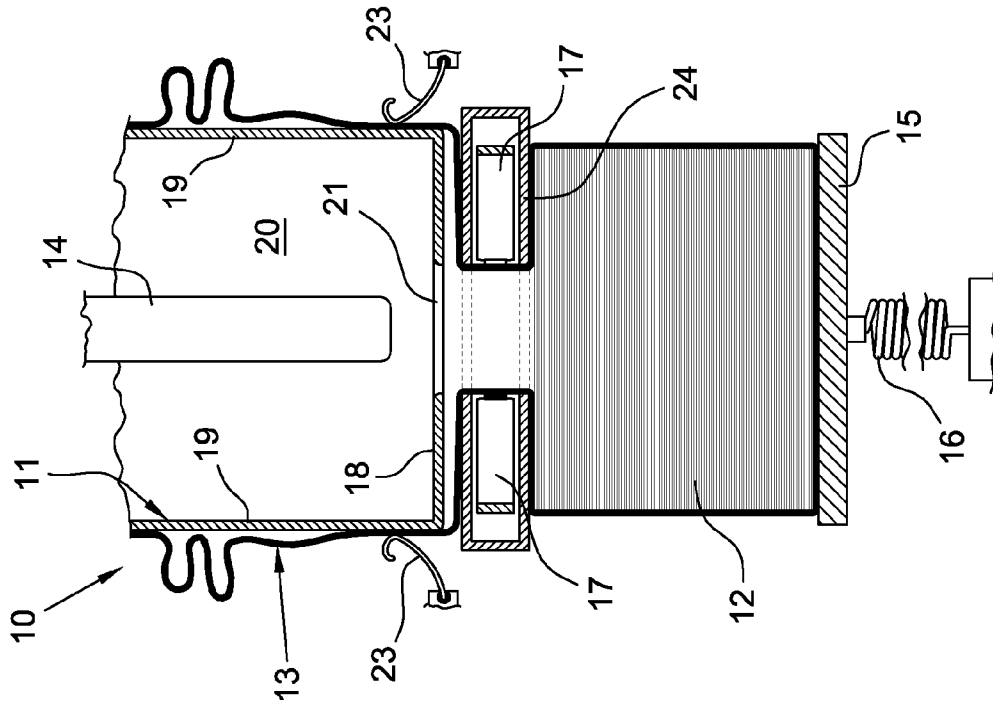


Fig. 4

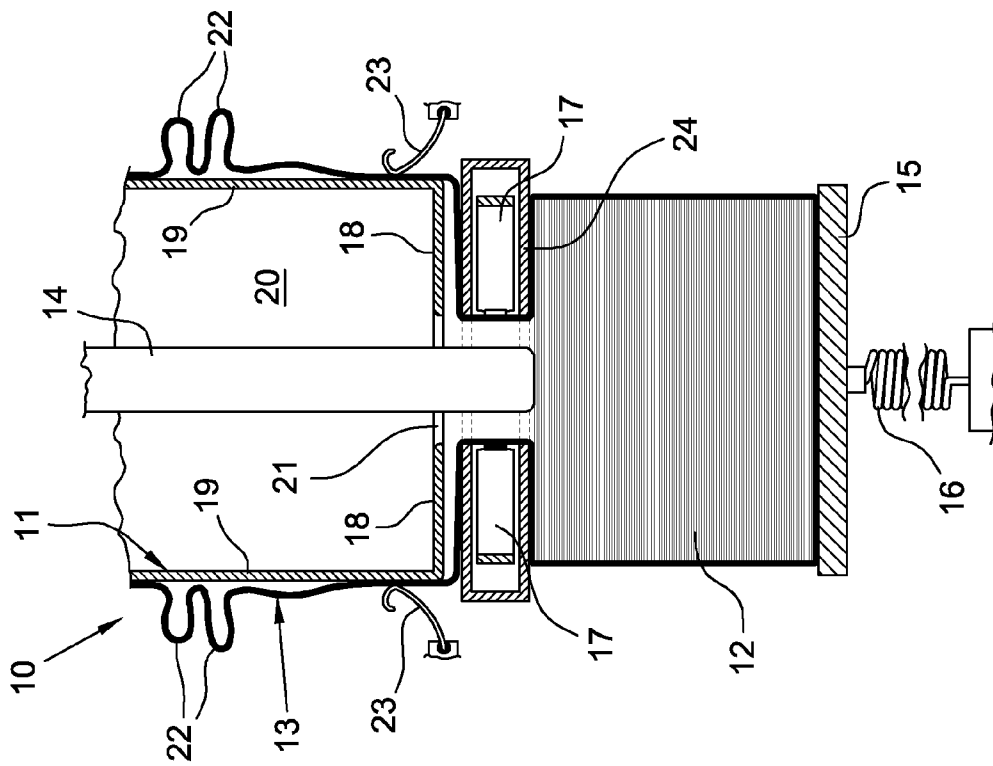


Fig. 3

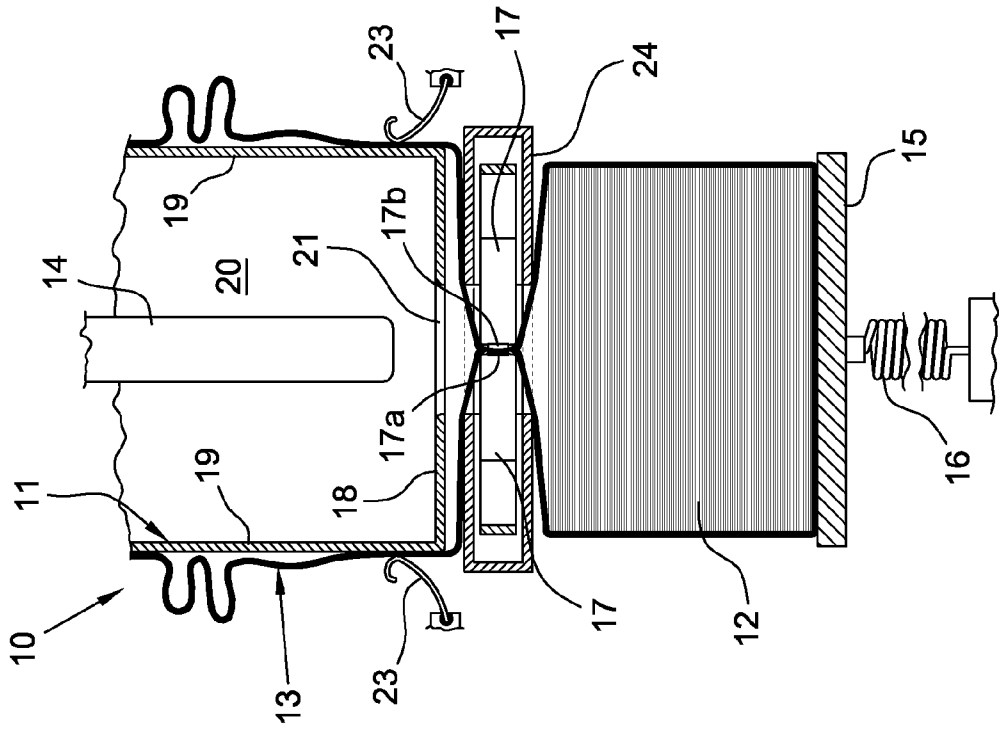


Fig. 5

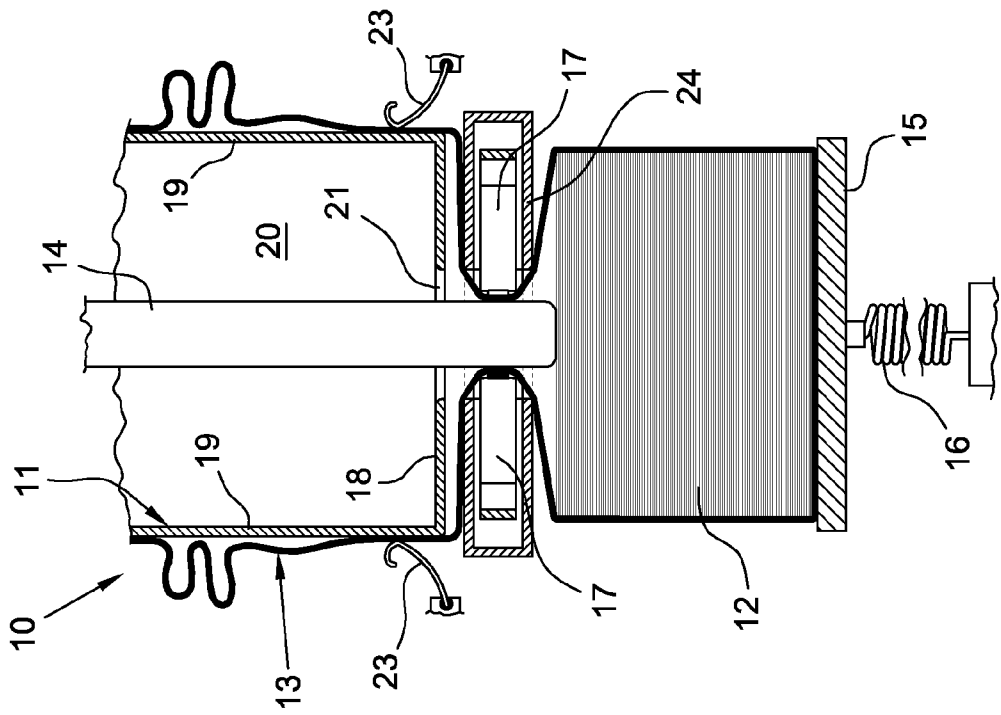


Fig. 6

1

**DEVICE FOR FILLING AND CLOSING
DISPOSABLE BAGS FOR CONTAINING
BANKNOTES**

BACKGROUND OF THE INVENTION

The present invention refers to a device for filling and closing disposable bags for containing paper documents, in particular banknotes.

Such device is intended to be used in machines for storing banknotes, usually present in banks, supermarkets, shopping malls or the like.

In the prior art, the banknotes are introduced into these machines through an inlet port and then they are inserted into boxes or into plastic bags removably housed in the machine.

In case of use of plastic bags, these can advantageously be of the disposable type, i.e. bags which, after filling, are sealed by appropriate sealing blades at the edges of their mouth so that, once opened, they cannot be used again.

Obviously, the use of plastic bags instead of rigid boxes implies various difficulties both as regards fixing the bag to the machine and introducing the banknotes into the bag up to its correct filling, these difficulties essentially being due to lack of rigidity of the bag and in particular to the flexibility of its walls. On the other hand, the disposable plastic bags are simple and inexpensive to be made, they are light and easy to be handled and they do not require any maintenance.

US-A-2011/0052363 discloses a system in which a banknote is introduced one at a time, through a roller feeding device, into the bag, which is placed horizontally and fixed to a support frame provided with a seat within which the bag is initially rolled. Each banknote is introduced into the bag oriented vertically and, as the banknotes are progressively introduced into the bag, the pack that is thus formed is translated horizontally along a conveyor belt which supports it, thus causing an extension of the bag which unrolls from its seat. The pack of banknotes is laterally accompanied by a support plate at the bottom of the bag, while a pressing element on the opposed side of the pack with respect to the aforementioned, support contributes to keep the banknotes constantly compact in the bag.

The solution described in this prior art document however implies a considerable structural complexity and, thus, even high implementation costs.

Document WO-A-02/19289 provides for a piston for facilitating the entry of the banknotes into the box or into a bag.

BRIEF SUMMARY OF THE INVENTION

The general object of the present invention is to overcome the aforementioned drawbacks by providing a device for filling and closing disposable bags for containing paper documents, in particular banknotes, capable of allowing an orderly depositing of the banknotes into the bag and that is simple and inexpensive to be obtained and easy to be used, without requiring complex and cumbersome mechanisms for moving the banknotes and the bag.

With the aim of attaining such object according to the invention it was conceived to provide a device for filling and closing disposable bags for containing banknotes, comprising:

- a container for the temporary housing of one or more banknotes, having side walls and a bottom with an opening for the exit of said one or more banknotes from the container,

2

- a pushing piston for pushing said one or more banknotes towards the bottom of the container,
- a bag made of flexible material intended to be filled with the banknotes temporarily housed in the container, which is wrapped around the side walls and the bottom of the container,
- a plate for supporting the bag containing the banknotes which is vertically movable through means for the controlled lowering of said plate and placed below the container, and
- sealing elements placed between the container and the plate.

BRIEF DESCRIPTION OF THE SEVERAL
VIEWS OF THE DRAWING(S)

With the aim of providing a better description of the innovative principles and advantages of the present invention in the following there is a description of a possible embodiment applying such principles, with reference to the attached drawings, wherein;

FIGS. 1-6 schematically illustrate, partially sectioned, a device according to the invention, represented in subsequent operating steps, starting from the beginning of the loading of the banknotes up to the sealing of the bag.

DETAILED DESCRIPTION OF THE
INVENTION

The device is intended to be contained in known machines (not shown in the drawings attached herein) for storing banknotes, usually present in banks, supermarkets, shopping malls or the like. For the sake of description simplicity, herein reference shall be made to banknotes, but the device according to the invention may be equally used for treating and handling other paper documents in form of sheets.

In the figures it is schematically illustrated, partially sectioned, a device **10** consisting essentially of a container **11** within which the banknotes **12**, intended to be introduced into a bag **13**, are temporarily housed, of a pushing piston **14** for pushing the banknotes towards the bottom of the container **11**, of a plate **15** for supporting the bag containing the banknotes, placed below the container **11** and which is vertically movable through controlled lowering means **16**, and of sealing elements **17**, placed between the container **11** and the plate **15** and intended to seal the inlet of the bag once filling is completed.

Advantageously, according to a particularly simple and inexpensive embodiment, the means **16** for the controlled lowering of the plate **15** consists of a compression spring.

The container **11** comprises a fixed bottom **18** and side walls **10**, so as to define an inner space **20** adapted to receive the banknotes before they are introduced into the bag.

The banknotes, coming from a storage compartment inside the machine or directly from the entry port from outside, may be introduced into the space **20** singularly or by groups of several banknotes, using feeding means well known to the person skilled in the art and thus not shown in the drawings.

The bottom **18** of the container **11** is provided with an opening **21** aligned with the piston **14**. The opening **21** has a passage section smaller than the surface of the banknotes, so that the banknotes not pushed by the piston **14** are held in the space **20** by resting the peripheral portions thereof at the sides of the opening **21**.

According to the invention, the bag **13** (advantageously made of flexible plastic film) is wrapped externally to the

container **11** around its side walls **19** and its bottom **18** and it initially (FIG. 1) covers below and closes the opening **21** of the bottom **18** of the container.

Advantageously, the plastic film forming the bag is wrapped loose around the side walls **19** of the container **11** with a plurality of bends **22** which constitute a reserve for the lengthening and distension of the bag during the subsequent steps of filling with the banknotes, as will be described in detail hereinafter. The device **10** also comprises pressing elements **23** (for example elastic leafs) for keeping the bag **13** fitted on the container **11** in proximity of the lower end of the latter, thus below the bends **22**, to allow a correct slipping off of the bag itself due to the action of the weight of the banknotes contained therein and due to the force exerted by the piston **14** moving the banknotes downwards.

FIG. 1 illustrates the device according to the invention in a first operating step, in which a bundle of banknotes **12** is temporarily received at the bottom, of the space **20** of the container **11**, resting on the fixed bottom **18** of the container.

Though the operations of introducing the banknotes into the bag are herein described with reference to several banknotes stacked in bundles in the container **11**, the same operating principles may also apply in cases where a single banknote is handled at a time so as to be introduced into the bag **13**.

In the condition of FIG. 1 the plate **15** is unloaded and it is held in position of maximum lift by the force of the spring **16**. The piston **14** is instead advantageously pushed downwards to hold the banknotes pressed against the bottom of the container **11**.

FIG. 2 illustrates a subsequent operating step of the device according to the invention, in which the piston **14** exerts on the banknotes **12** a greater downward pressure, such to push the banknotes to be introduced with a central portion thereof into the opening **21** of the bottom **18** of the container **11** up to coming into contact with the plate **15**, with the plastic film of the bottom portion of the bag interposed between the banknotes and the plate. In this step, the banknotes are deformed as illustrated in the figure so as to exit from the container **11** through the opening **21**.

As observable from the figures, the piston **14** has a transversal dimension smaller than the passage section of the opening **21**, so as to be able to be inserted therein to accompanying the banknotes towards the plate **15**.

FIG. 3 illustrates a subsequent operating step, in which a plurality of bundles (or single banknotes) is passed from the container **11** to the bag **13** through a sequence of operations like those described regarding FIG. 2. As the banknotes enter into the bag **13** their weight, alongside the thrust against them exerted by the piston **14**, lowers the plate **15** against the action of the spring **16** and simultaneously unrolls the bag **13** (in particular, its bends **22**) from the side walls **19** of the container **11** against, the elastic holding force exerted by the pressing elements **23**.

In particular, FIG. 3 shows the device in the moment when the piston **14** accompanies the last banknote (or bundle of banknotes) into the bag **13**.

The lowering of the plate **15** can advantageously occur along appropriate guides, as can be imagined by a person skilled in the art and thus not shown in the figures.

FIG. 4 illustrates an operating step of the device in the rest condition, immediately subsequent to the introduction of the last banknote into the bag **13**, where the piston **14** is receded upwards without exerting pressure on the banknotes in the bag any more. In this condition, the upward pressure of the plate **15** pushed by the spring **16** keeps the banknotes in the bag **13** compacted against the sealing elements **17** (still with

the interposition of the plastic film which constitutes the bag) or against appropriate sheets **24** for protecting the sealing elements, if provided for as shown by way of example in the present FIGS. 1-6).

From a static point of view, the rest condition illustrated in FIG. 4 is the same that occurs in intermediate loading steps, awaiting the new banknotes to reach the container **11** so as to be introduced into the bag.

FIG. 5 illustrates the device **10** at the beginning of the operation of closing the bag. The piston **14** is lowered so as to move the banknotes away from the sealing elements **17** (or from their protection sheets **24**, if provided for), with a corresponding lowering of the plate **15** against the action of the spring **16**. Simultaneously, the sealing elements **17** are brought close to the piston **14**.

FIG. 6 illustrates the final step of sealing the bag. While the piston **14** is lifted to move away from the sealing area, the sealing elements **17**, horizontally moveable, are drawn up close together and brought to mutual contact, with the plastic film which forms the bag interposed therebetween.

The heat sealing may be advantageously obtained by passing electrical, current in the sealing bar **17a** present on one of the two sealing elements while it is pressed against the counter-bar **17b** present on the other sealing element.

Then, the sealing elements **17** are moved away and the bag containing the banknotes can be picked up.

At this point it is clear that, according to the invention, it has been possible to obtain a device for filling a bag with banknotes and its sealing, the device not being cumbersome, being easy and inexpensive to be obtained as well as easy to be used.

Obviously, the above description outlining an embodiment applying the innovative principles of the present invention is provided by way of exemplifying such innovative principles and thus shall not be deemed to be a restriction of the scope of protection claimed herein.

For example, the elastic means **16** for opposing the lowering of the plate **15** could also be obtained by a traction spring or by a gas spring.

Lastly, instead of wrapping a single bag **13** on the container **11** one at a time, there could be provided for a continuous supply of a tube of plastic film wrapped around the container **11** (advantageously coming from above with reference to the figures). In this case, the bottom of the bag positioned below the opening **21** in the bottom of the container **11** would be obtained due to the sealing of the mouth of the previously filled bag. This solution would allow to minimise the waste particles, in particular in cases where a bag is filled only partly and thus there is a considerable extension of the film downstream of the sealing that is applied.

The invention claimed is:

1. A device for filling and closing disposable bags for containing banknotes, comprising:

- a container for the temporary housing of one or more banknotes, having side walls and a bottom with an opening for the exit of said one or more banknotes from the container, said bottom and side walls defining an inner space of the container for reception of the banknotes before their introduction into the bag,
- a pushing piston for pushing said one or more banknotes towards the bottom of the container,
- a bag made of flexible material intended to be filled with the banknotes temporarily housed in the container, which is wrapped externally to the container around the side walls and bottom of the container,

5

a plate for supporting the bag containing the banknotes which is vertically movable through means for the controlled lowering of said plate and placed below the container, and

sealing elements placed between the container and the plate.

2. The device according to claim 1, wherein said means for the controlled lowering consists of a spring and the plate is vertically movable against the pushing action of said spring.

3. The device according to claim 1, wherein the bottom of the bag is placed between the bottom of the container and the plate.

4. The device according to claim 1, wherein the bag is wrapped around the side walls of the container with a plurality of bends suitable for creating a reserve for the lengthening and distension of the bag while it becomes filled with banknotes.

6

5. The device according to claim 4, wherein the device comprises pressing elements acting against the bag and the side walls of the container below the bends of the bag.

6. The device according to claim 5, wherein the pressing elements are placed close to the lower end of the container.

7. The device according to claim 1, wherein the opening for the exit of said one or more banknotes from the container is aligned with the piston.

8. The device according to claim 7, wherein the opening has a passage section smaller than the surface of the banknotes.

9. The device according to claim 8, wherein the piston has a transversal, dimension smaller than the passage section of the opening.

10. The device according to claim 1, wherein the sealing elements are horizontally movable towards each other to carry out a heat sealing of the mouth of the bag.

* * * * *