



US009460954B2

(12) **United States Patent**  
**De Jong et al.**

(10) **Patent No.:** **US 9,460,954 B2**  
(45) **Date of Patent:** **Oct. 4, 2016**

(54) **METHOD OF CLAMPING A SUBSTRATE AND CLAMP PREPARATION UNIT USING CAPILLARY CLAMPING FORCE**

(58) **Field of Classification Search**  
CPC G03F 7/707; H01L 21/6838; H01L 21/6875  
USPC ..... 355/73, 72, 74-76, 53  
See application file for complete search history.

(75) Inventors: **Hendrik Jan De Jong**, Den Haag (NL); **Marco Jan-Jaco Wieland**, Delft (NL)

(56) **References Cited**

U.S. PATENT DOCUMENTS

(73) Assignee: **MAPPER LITHOGRAPHY IP B.V.**, Delft (NL)

5,914,493 A	6/1999	Morita et al.	
6,045,433 A *	4/2000	Dvir et al.	451/6
6,174,366 B1	1/2001	Ihantola	
7,158,211 B2 *	1/2007	Straaijer	355/53
2002/0034886 A1	3/2002	Kurita et al.	
2002/0067585 A1	6/2002	Fujiwara	
2003/0073309 A1	4/2003	Emami	
2005/0259236 A1	11/2005	Straaijer	
2006/0077367 A1	4/2006	Koayashi et al.	

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 805 days.

(Continued)

(21) Appl. No.: **12/708,543**

FOREIGN PATENT DOCUMENTS

(22) Filed: **Feb. 19, 2010**

CN	1957443 A	5/2007
CN	101174101 A	5/2008

(65) **Prior Publication Data**

US 2010/0265486 A1 Oct. 21, 2010

(Continued)

**Related U.S. Application Data**

*Primary Examiner* — Chia-How Michael Liu

(60) Provisional application No. 61/154,411, filed on Feb. 22, 2009.

(74) *Attorney, Agent, or Firm* — Hoynng Rock Monegier LLP; David P. Owen

(30) **Foreign Application Priority Data**

(57) **ABSTRACT**

Apr. 3, 2009 (GB) ..... 0905786.0

The invention relates to a method of clamping a substrate on a surface of a substrate support structure. First, a liquid is applied on a surface of the substrate support structure. The surface is provided with a plurality of contact elements. The liquid is applied such that the contact elements are fully covered by a liquid layer. Then the substrate is provided and placed onto the liquid layer. Finally, liquid underneath the substrate is removed such that the substrate rests on the plurality of contact elements and is clamped by means of a capillary clamping force exerted by a capillary layer of the liquid between the substrate and the surface of the substrate support structure.


(51) **Int. Cl.**

<b>H01L 21/687</b>	(2006.01)
<b>G03F 7/20</b>	(2006.01)
<b>H01L 21/683</b>	(2006.01)

**37 Claims, 8 Drawing Sheets**

(52) **U.S. Cl.**

CPC ..... **H01L 21/6875** (2013.01); **G03F 7/707** (2013.01); **H01L 21/6838** (2013.01); **Y10T 29/49815** (2015.01); **Y10T 29/49998** (2015.01); **Y10T 29/53** (2015.01)

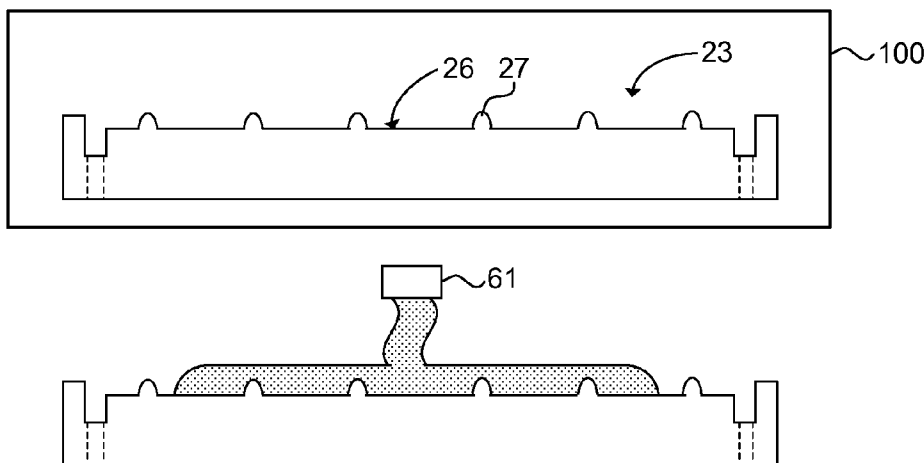

(56)

**References Cited**

U.S. PATENT DOCUMENTS

2008/0106715 A1 5/2008 Lin et al.  
2008/0165330 A1 7/2008 Mizutani  
2008/0286947 A1 11/2008 Coenen  
2009/0027649 A1 1/2009 De Boer  
2010/0265486 A1 10/2010 De Jong et al.

FOREIGN PATENT DOCUMENTS

EP 1 843 386 A1 10/2007  
EP 1860684 A1 11/2007  
JP 59-174286 A 10/1984  
JP 60043841 A 3/1985

JP 07-029787 1/1995  
JP 07-282993 A 10/1995  
JP 2001 291688 A2 10/2001  
JP 2001 332487 A2 11/2001  
JP 2006 066690 3/2006  
JP 2006 310483 A2 9/2006  
JP 2007 059929 A2 3/2007  
WO 9620583 A1 7/1996  
WO WO 2004 021411 3/2004  
WO WO 2005 113853 12/2005  
WO WO 2006 077859 A1 7/2006  
WO 2007054525 A1 5/2007  
WO 2009011574 A1 1/2009  
WO WO 2010 094800 A1 8/2010

\* cited by examiner

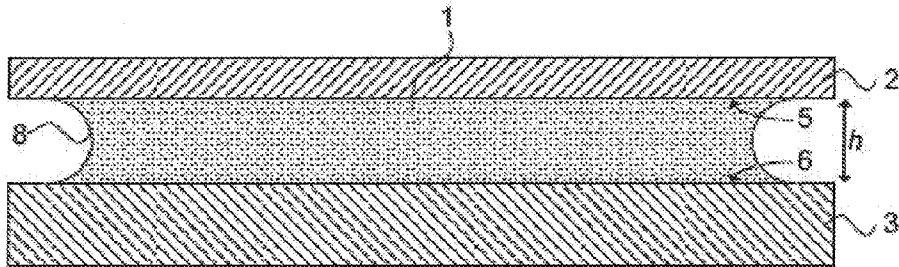


FIG. 1

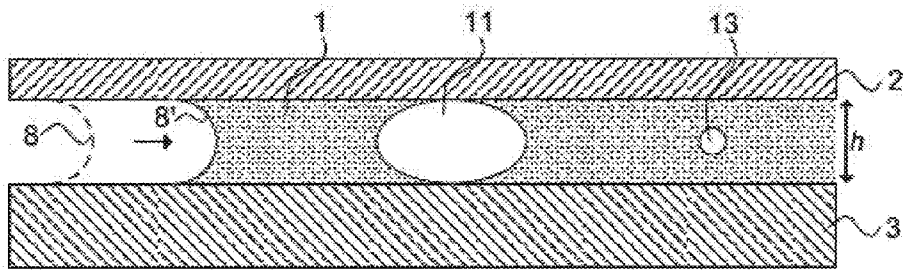


FIG. 2

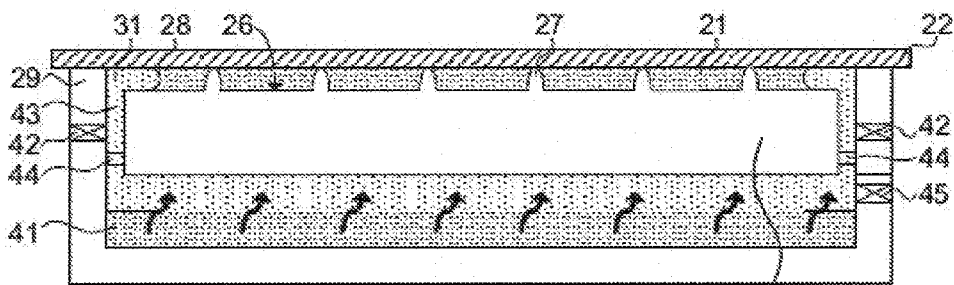


FIG. 3A

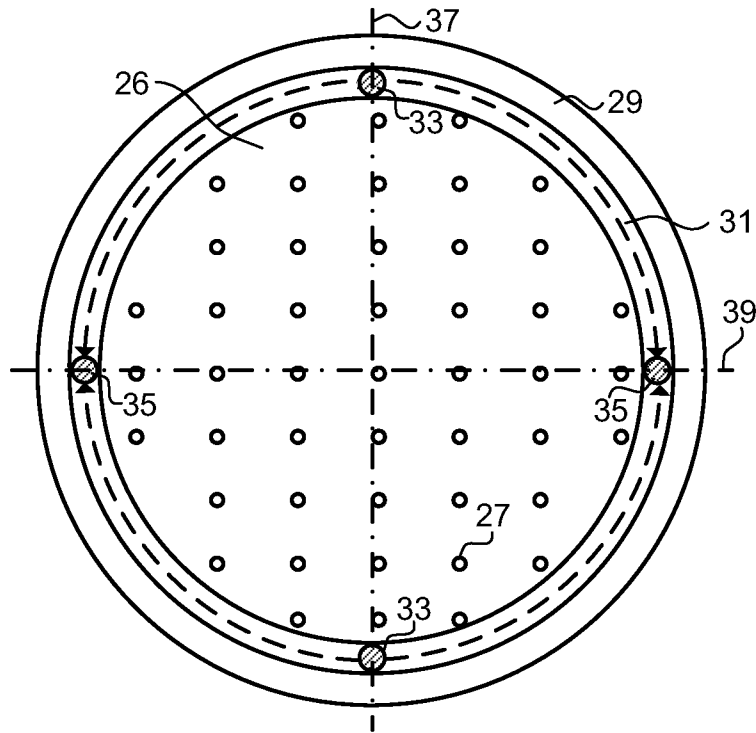


FIG. 3B

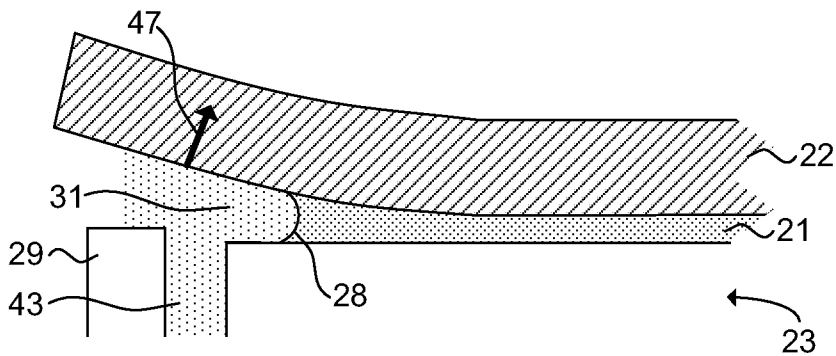


FIG. 4

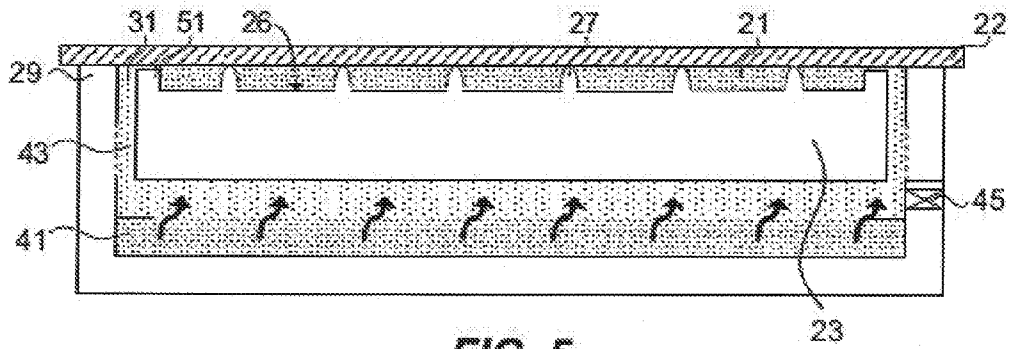


FIG. 5

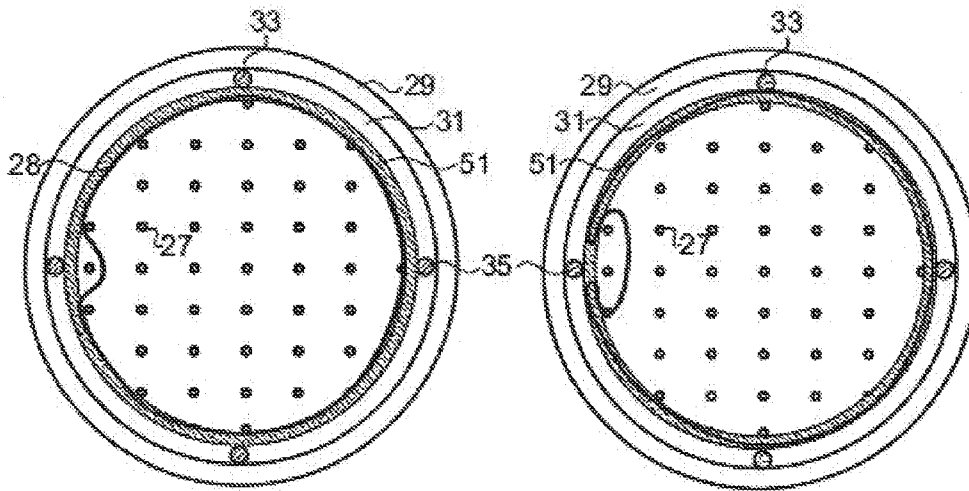


FIG. 6A

FIG. 6B

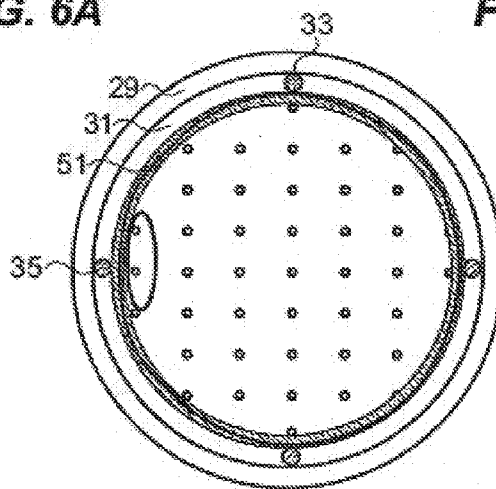


FIG. 6C

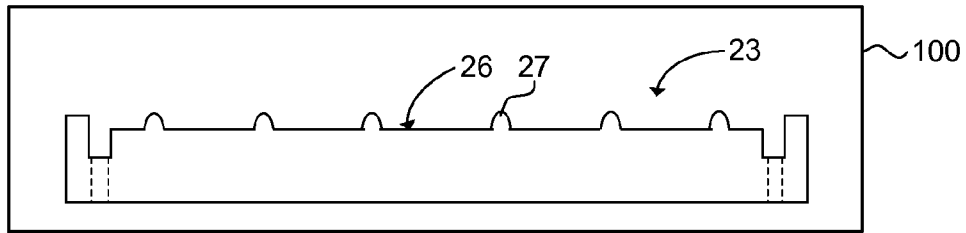


FIG. 7A

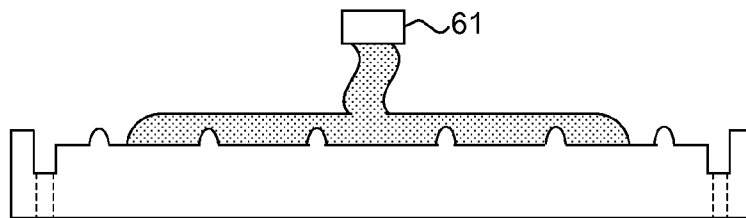


FIG. 7B

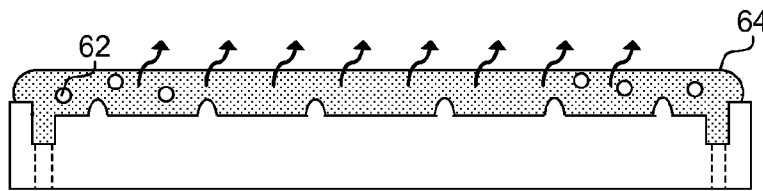


FIG. 7C

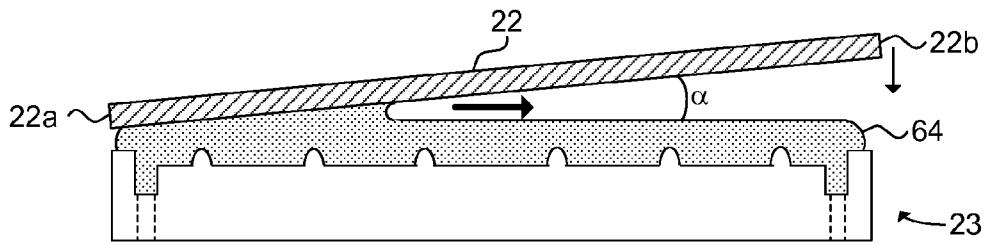


FIG. 7D

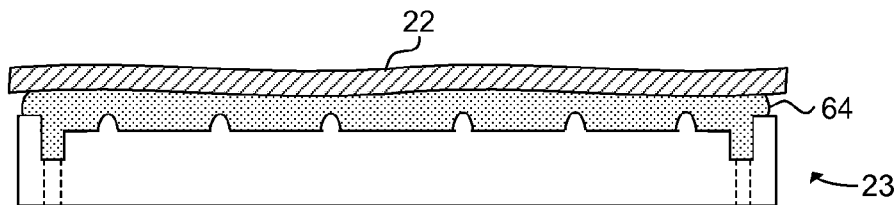
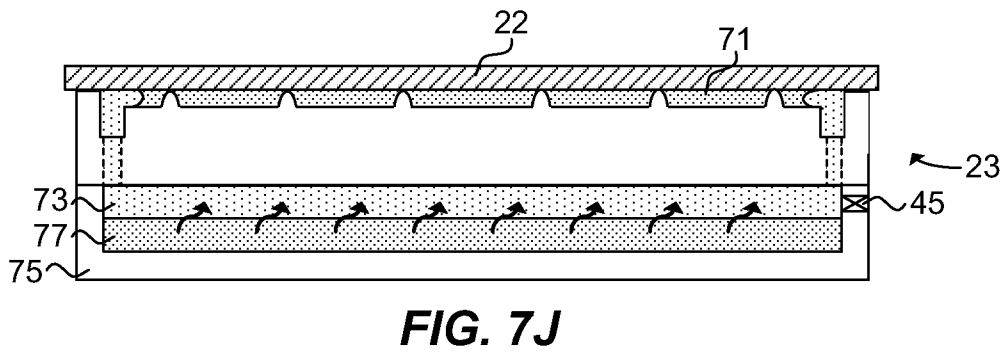
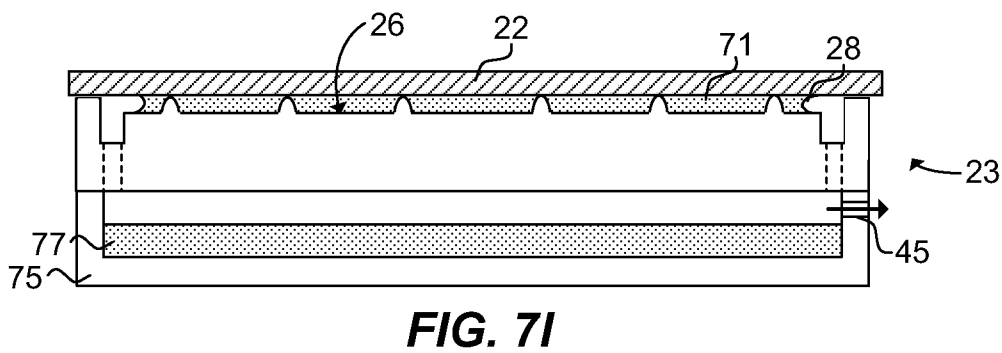
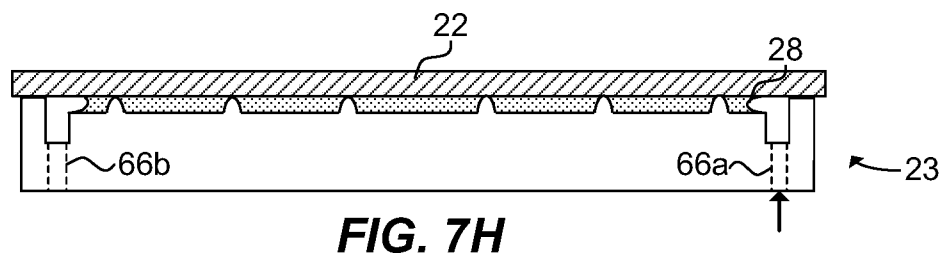
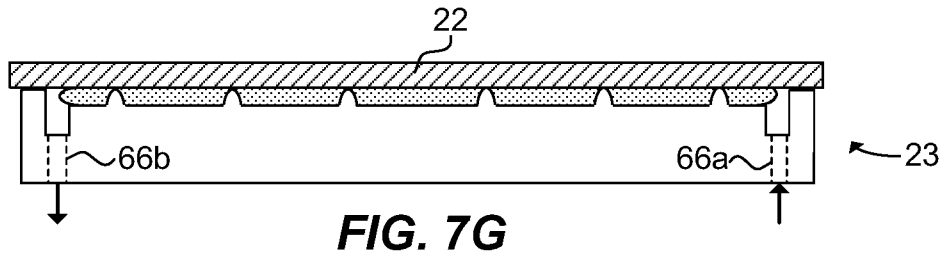
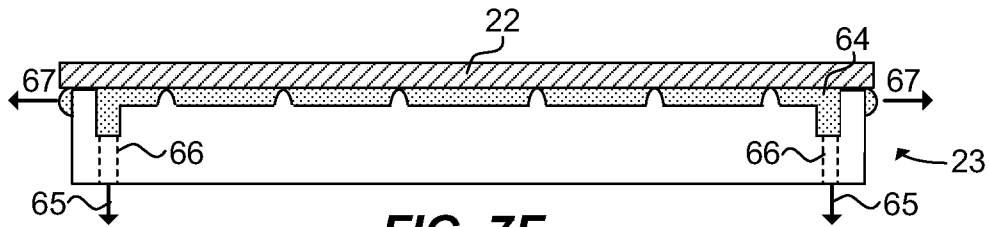


FIG. 7E



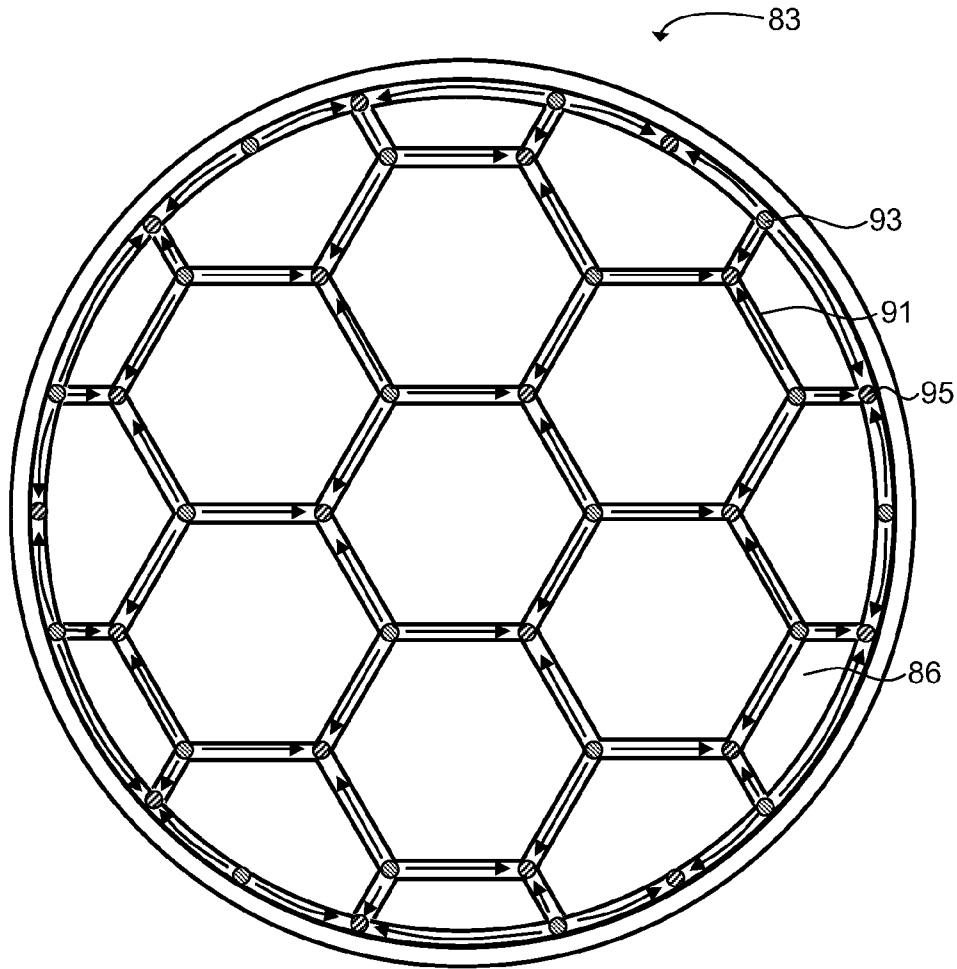


FIG. 8A

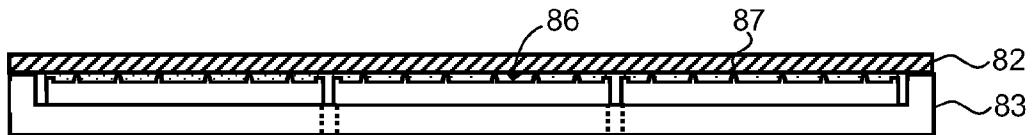


FIG. 8B



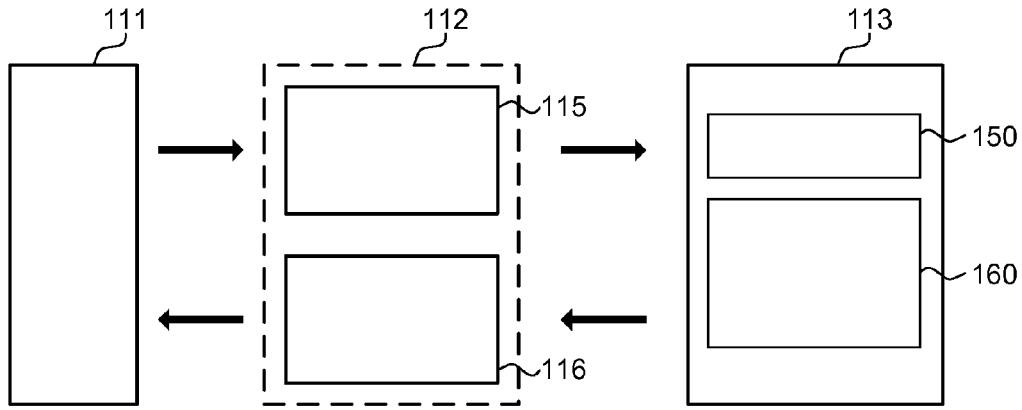


FIG. 9

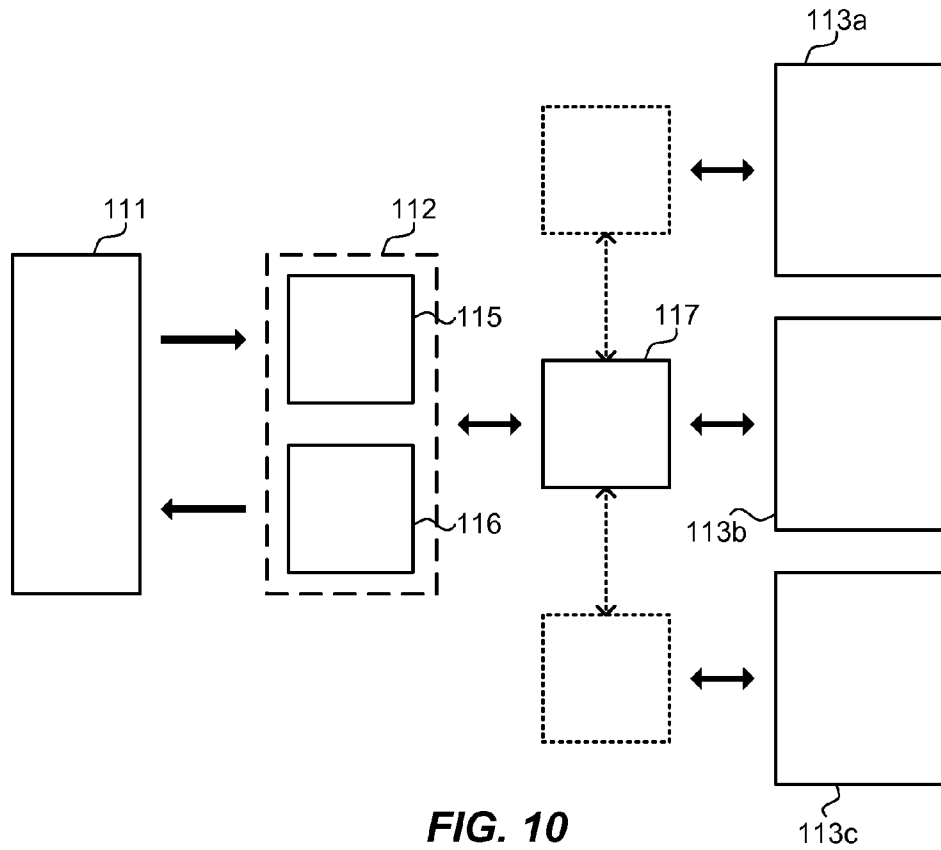


FIG. 10

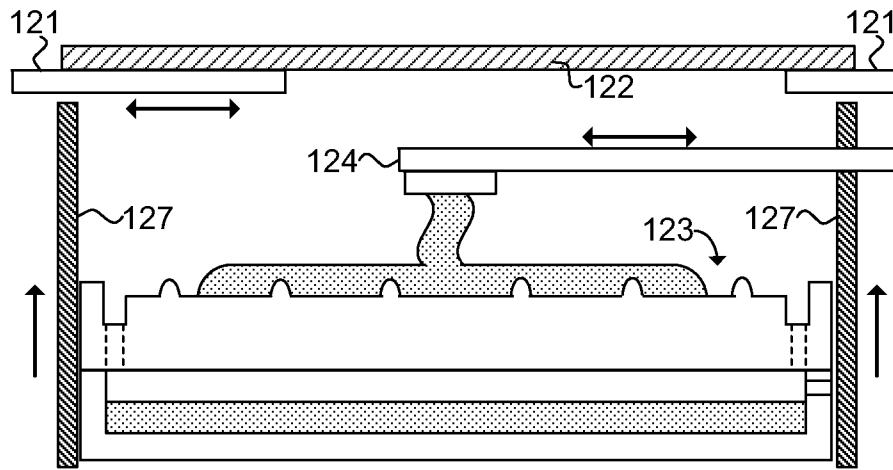


FIG. 11A

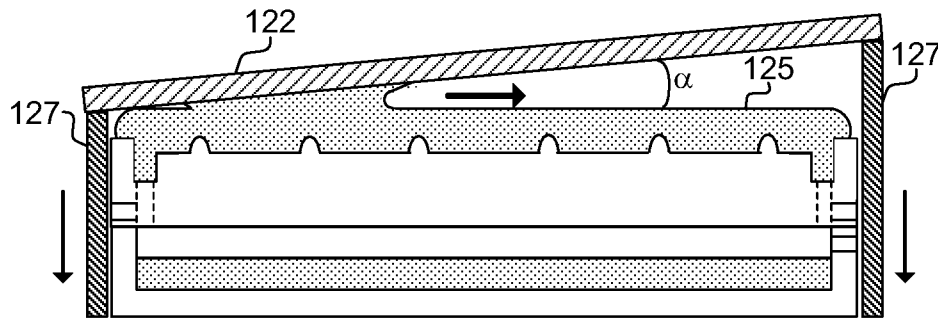


FIG. 11B

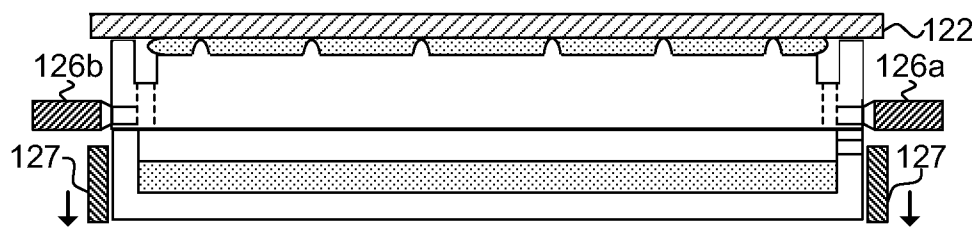


FIG. 11C

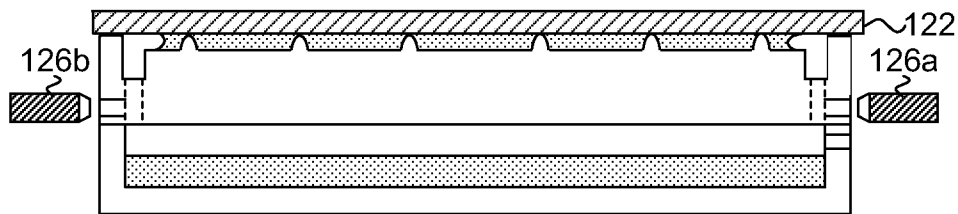


FIG. 11D

**METHOD OF CLAMPING A SUBSTRATE  
AND CLAMP PREPARATION UNIT USING  
CAPILLARY CLAMPING FORCE**

**CROSS REFERENCE TO RELATED  
APPLICATIONS**

This application claims priority to U.S. provisional application No. 61/154,411 filed on Feb. 22, 2009, and British application No. GB 0905786.0 filed on Apr. 3, 2009. Both applications are hereby incorporated by reference in their entirety.

**BACKGROUND OF THE INVENTION**

**1. Field of the Invention**

The present invention relates to a method of clamping a substrate on a surface of a substrate support structure, a clamp preparation unit configured to clamp a substrate to a substrate support structure, and a lithography system comprising such a clamp preparation unit.

**2. Description of the Related Art**

Clamping of a substrate, for example a wafer, onto a surface of a substrate support structure, for example a wafer table, is well known in the semiconductor industry, and in particular in lithography systems. In such lithography systems, the clamped substrate is to be patterned by means of subjection to incident photons or charged particles like ions and/or electrons. The clamping ensures the realization of high precision patterning of a target portion of the substrate surface. Preferably, position control by using clamping is not only used during exposure, but also during handling of the substrate, for example during insertion into and/or removal from the exposure chamber within the lithographic system.

Clamping may be achieved by sucking away air between the substrate and the substrate support structure, i.e. by creating a vacuum in between. However, if aforementioned position control is required in a vacuum environment, such a clamping mechanism will not be effective. Various solutions exist for clamping a substrate in a vacuum environment, for example by means of electromechanical clamping. It will be understood that such a solution is not very suitable for use in combination with one or more beams of charged particles like electrons and/or ions.

International application WO2009/011574 filed by the Applicant, describes a lithography system with a substrate support structure for clamping a substrate by means of a layer of stationary liquid, hereafter referred to as capillary layer. The thickness of the capillary layer is such that between the substrate surface and the surface of the substrate support structure a pressure drop arises. As explained in WO2009/011574, adhesion of the liquid to the surfaces of the substrate on the one hand and the substrate support structure on the other hand causes a circumferentially extending liquid surface, concavely extending between the two surfaces. The so-formed concave liquid surface tends to maintain its shape, even if forces are applied to remove the substrate from the substrate support structure surface.

Under some special circumstances, the substrate clamping mechanism described in WO2009/011574 does not perform in an optimal manner, e.g. due to the presence of voids in the capillary layer. Furthermore, due to evaporation processes, the capillary layer will be present for a limited period of time. As a result, the clamping mechanism may only be useful for a selection of devices to be patterned.

**BRIEF SUMMARY OF THE INVENTION**

It is an object of the invention to provide a substrate support structure for clamping a substrate on a surface

thereof by means of a capillary layer as well as a method of clamping a substrate on a surface of a substrate support structure with improved performance. This object has been achieved by providing a method of clamping a substrate on a surface of a substrate support structure, the method comprising applying a liquid on a surface of the substrate support structure, the surface being provided with a plurality of contact elements, so that the liquid forms a layer covering the contact elements; providing the substrate and placing the substrate onto the liquid layer; and removing a portion of the liquid from under the substrate so that the substrate rests on the plurality of contact elements and is clamped by means of a capillary clamping force exerted by a capillary layer of the liquid between the substrate and the surface of the substrate support structure.

According to another aspect of the invention, a clamp preparation unit for clamping a substrate comprises: a substrate support structure having a surface provided with a plurality of contact elements; a liquid dispensing unit for applying a liquid on to the surface of the substrate support structure, so that the contact elements are covered by a liquid layer; a substrate transfer unit for placing the substrate on to the liquid layer; and a liquid removal system for removing a portion of the liquid from under the substrate so that the substrate rests on the plurality of contact elements and is clamped by means of a capillary clamping force exerted by a capillary layer of the liquid between the substrate and the surface of the substrate support structure.

According to yet another aspect of the invention, a method of unclamping a substrate from a substrate support structure is provided, where the substrate is clamped by means of a capillary clamping force exerted by a capillary layer of liquid between the substrate and a surface of the substrate support structure. The method comprises: providing additional liquid to the capillary layer at an outer circumferential surface of the capillary layer; and lifting the substrate from the liquid.

According to yet another aspect of the invention, an unclamping unit comprises: a substrate support structure having a substrate clamped on a surface of the substrate support structure by means of a capillary layer; a liquid removal system for providing additional liquid to the capillary layer under the substrate at an outer circumferential surface of the capillary layer; and a substrate transfer unit for removing the substrate from the liquid layer.

According to yet another aspect of the invention, a lithography system including a lithographic apparatus comprises: a radiation system to provide a patterned beam of radiation; an optical system to project the patterned beam of radiation onto a target portion of a substrate; and a clamp preparation unit for clamping the substrate to a surface of a substrate support structure. The lithography system may also include an unclamping unit.

It will be evident that the presently invented principle may be set into practice in various manners.

**BRIEF DESCRIPTION OF THE DRAWINGS**

Various aspects of the invention will be further explained with reference to embodiments shown in the drawings wherein:

FIG. 1 is a sectional view schematically illustrating a capillary layer between two structures;

FIG. 2 is a sectional view schematically illustrating processes with a negative impact on the clamp stability of the capillary layer of FIG. 1;

FIG. 3A is a sectional view of a substrate support structure according to a first embodiment of the invention;

FIG. 3B is a top view of the substrate support structure of FIG. 3A;

FIG. 4 schematically illustrates the concept of substrate peeling;

FIG. 5 is a sectional view of a substrate support structure supporting a substrate according to a second embodiment of the invention;

FIGS. 6A-6C are top views of the substrate support structure of FIG. 5 further schematically illustrating the concept of reclamping;

FIGS. 7A-7J schematically show execution of a method of clamping a substrate on a surface of a substrate support according to an embodiment of the invention;

FIG. 8A schematically shows a top view of a substrate support structure according to a third embodiment of the invention;

FIG. 8B schematically shows a sectional view of a clamp formed by a combination of the substrate support structure of FIG. 8A and a substrate;

FIG. 9 schematically shows a substrate handling and exposure arrangement which may be used in conjunction with embodiments of the substrate support structure;

FIG. 10 schematically shows a different substrate handling and exposure arrangement that may be used in conjunction with embodiments of the substrate support structure.

FIGS. 11A-11D schematically show operation of an exemplary clamp preparation unit to be used in the substrate handling and exposure arrangement of FIG. 9 or FIG. 10.

In the figures, corresponding structural features, i.e. at least functionally, are referred to by identical reference numbers.

#### DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

The following is a description of various embodiments of the invention, given by way of example only and with reference to the drawings.

FIG. 1 is a sectional view schematically illustrating a capillary liquid layer 1 of a capillary liquid, e.g. water, between a first substrate 2, e.g. a wafer, and a second substrate 3, e.g. a substrate support structure like a wafer table. The first and second substrates 2, 3 have a substantially flat surface 5, 6 respectively. The nominal distance between the opposing surfaces 5, 6 of the first and second substrates 2, 3 is given by height  $h$ . The capillary liquid layer 1 has an outer liquid surface 8, which is generally concavely shaped due to adhesive connection of the liquid to the first substrate 2 and the second substrate 3.

The concave liquid surface 8 tends to maintain its shape if the first substrate 2 and the second substrate 3 are subject to forces in a direction substantially perpendicular to the opposing surfaces 5, 6. The concaveness of the outer liquid surface 8 depends on the contact angle between the capillary layer 1 and the surface 5 of the first substrate 2, and on the contact angle between the capillary layer 1 and the surface 6 of the second substrate 3. The respective contact angles depend on the liquid used in the capillary layer 1 as well as on the material properties of the two substrates 2, 3. More details with respect to a capillary layer holding together two structures with substantially flat opposing surface is provided in international patent application WO2009/011574, which is incorporated herein in its entirety.

FIG. 2 is a sectional view schematically illustrating processes with a negative impact on the stability of the clamping action performed by means of the capillary liquid layer 1 of FIG. 1. Hereafter, the expression "clamp" will be used for the arrangement where the substrate 2 is clamped to the substrate support structure 3 by means of the capillary layer 1.

If pre-existing bubbles are present in the liquid, introduction of the clamp into a vacuum environment will lead to expansion of such bubbles within the capillary layer. The size of initially small bubbles can grow by several orders of magnitude if ambient pressure decreases, e.g. from 1 bar to  $10^{-6}$  mbar. As can be readily seen in FIG. 2, a bubble of the size of bubble 11 may seriously influence the clamping strength, at least locally, and may have a negative influence on the stability of the clamp.

Another mechanism that may lead to clamp instability is spontaneous void formation, for example caused by cavitation of or dissolved gas precipitation in the capillary liquid layer. An example of such a void has been denoted by reference numeral 13 in FIG. 2. Voids formed by cavitation may grow in a similar way as discussed before with respect to pre-existing bubbles if the clamp is brought into a vacuum environment. The resulting voids may have a negative influence on the clamp stability.

Besides decrease of the clamp stability due to the presence of bubbles and/or voids, the clamp stability will also be negatively affected by evaporation of liquid at the capillary layer interface, i.e. evaporation at the concave liquid surface. FIG. 2 schematically shows the effect of such evaporation. Due to evaporation, the position of the outer liquid surface 8 has shifted towards a new position to form outer liquid surface 8'. As a result of that shift, the surface area covered by the capillary layer, and thus the stability of the clamp, has decreased.

FIGS. 3A and 3B are a sectional view and a top view of a substrate support structure 23 supporting a substrate according to a first embodiment of the invention respectively. The support structure is equipped to clamp a substrate 22 by means of a capillary layer 21. The surface 26 of the substrate support structure 23 is provided with a plurality of contact elements 27 in the form of burls. The substrate support structure 23 further comprises a sealing structure 29 and a liquid removal system.

In addition to or instead of using burls as contact elements 27, a plurality of spacers, e.g. glass grains,  $\text{SiO}_2$  grains or the like may be dispersed uniformly over the surface 26 of the substrate support structure 23. The presence of contact elements like burls may reduce the influence of contamination by particles on the backside of the substrate 22. Furthermore, the contact elements serve the purpose of keeping the substrate 22 substantially flat by withstanding the clamping force of the capillary layer to prevent the occurrence of substrate bow.

The maximum pitch of contact elements 27 is determined by the requirements set for the maximum deflection of the substrate between adjacent contact elements caused by the clamping force of the capillary layer. The contact surface per contact element is such that it is sufficient to withstand deformation and/or destruction under the applied clamping pressure. Preferably, edges of a contact element are rounded to reduce the possibility of particle contamination, e.g. during cleaning operations. A typical value for the diameter of a burl 27 with a circular contact area would be in the range of 10-500 microns. A typical value for the pitch of a plurality of burls 27 would be in the range of 1-5 mm.

The nominal height of the contact elements determines the distance between the substrate 22 and the surface 26 of the substrate support structure 23, and thus the clamping pressure. Other parameters that may be varied to obtain a desired clamping pressure include material properties of the substrate 22, material properties of the surface 26 of the substrate support structure 23, surface area of the surface 26, contact element shape, contact element pitch, and the type of liquid used to form a capillary layer 21.

The sealing structure 29 circumscribes the surface 26 of the substrate support structure 23 facing the substrate 22 to be clamped. The sealing structure 29 may limit leakage of liquid evaporating from the capillary layer 21, when present. Preferably, the top side of the sealing structure 29 has a level corresponding in height with the nominal height of the plurality of burls 27. Such an arrangement increases the efficiency of vapor leakage prevention, which is in particular an issue in a vacuum environment.

The sealing structure 29 may comprise one or more elastically deformable elements like O-rings, e.g. made of viton or rubber. Such O-rings may be inserted in a part of the substrate support structure 23 with reduced height such that the top side of the O-ring is set to the level mentioned above. The O-ring may be provided with an incision at a radial side, e.g. the radial side facing the center of the substrate support structure 23, such that the O-ring can be compressed between substrate support structure 23 and substrate 22 without undue force requirement, but sufficient to prevent leakage of vapor.

Alternatively, as in FIG. 3A, the sealing structure 29 may comprise a vapor limiting ring, supported by an outer rim of the substrate support structure 23. The vapor limiting ring closes off the circumferential opening facing the capillary liquid surface, only leaving a very small vertical distance between the ring and the substrate 22 supported by the plurality of burls 27 on the surface 26 of the substrate support structure 23.

The liquid removal system is configured to remove liquid underneath the substrate to enable formation of a capillary layer 21. Further details regarding the formation of a capillary layer 21 by using a liquid removal system will be discussed with reference to FIG. 7.

The liquid removal system is configured to remove excess water from the surface 26 of the substrate support structure 23. In FIG. 3A, the liquid removal system comprises a gas distribution system, an embodiment of which is partly shown in FIG. 3B. The gas distribution system may comprise a moat 31 in circumference of the surface 26, one or more gas inlets 33 for allowing gas into the moat 31 and one or more gas outlets 35 for removing gas from the moat 31 respectively. If a sealing structure 29 is present, a gas flow may be established between the surface 26 provided with a liquid layer and the sealing structure 29, thus forming a channel flow as shown in FIG. 3B by the dashed arrows.

The one or more gas inlets 33 and the one or more gas outlets 35 may be provided along the moat 31 in a symmetrical fashion. In the embodiment of FIG. 3B, there are two gas inlets 33 and two gas outlets 35. The gas inlets 33 and gas outlets 35 are positioned in such a way that a first virtual line 37 formed by connecting the two gas inlets 33, and a second virtual line 39 formed by connecting the two gas outlets 35 are substantially perpendicular with respect to each other.

The substrate support structure 23 shown in FIG. 3A further comprises a liquid reservoir 41. The liquid reservoir 41 is configured to accommodate a certain volume of liquid, for example water, and further to store vapor of that liquid.

Furthermore, the liquid reservoir is arranged to provide vapor to the capillary layer 21 when present, for example via one or more channels 43. The reservoir may be referred to as liquid reservoir 41. Preferably, the liquid in the liquid reservoir 41, reservoir liquid, is the same as the liquid within the capillary layer 21, i.e. capillary liquid. A suitable liquid for both reservoir liquid and capillary liquid would be water.

The presence of a liquid reservoir provides a way to further decrease evaporation of liquid from the capillary layer 21 when present. The free surface area of the liquid in the reservoir is preferably larger than the free surface area of the concave outer surface 28 of the capillary layer 21. The larger free surface area of the liquid stored in the reservoir ensures that a sufficient amount of vapor is available to moisturize the environment of surface 28, resulting in less vaporization within the capillary layer 21.

The vapor may be transported from the liquid reservoir 41 towards the outer liquid surface 28 of the capillary layer 21 by means of the one or more gas inlets 33 and/or the one or more gas outlets 35. In such a case, the gas for use in the gas distribution system may be provided to the substrate support structure via a valve 45 that is also used to provide liquid to the liquid reservoir 41.

Alternatively, gas may be provided via one or more separate gas connection units 42. If such gas connection units 42 are configured to provide the gas flow via the one or more channels 43 used to provide vapor to the capillary layer, the one or more channels 43 may be provided with a flow control unit 44. Such a flow control unit 44 is configured to separate gas flow via the gas connection unit from vapor originating from the reservoir 41.

In yet another alternative embodiment, the gas distribution system is entirely separate from the one or more elements to provide the vapor from the vapor reservoir 41 to the clamp.

As mentioned earlier with reference to FIG. 2, the layer of capillary liquid evaporates in a vacuum environment. Experiments have shown that the remaining volume of the capillary liquid tends to accumulate at one side of the clamp. Due to this asymmetric distribution of the capillary layer, one side of the substrate "peels off" the table. Hereafter, the effect will be referred to as substrate peeling.

FIG. 4 schematically illustrates the concept of substrate peeling. Without wishing to be bound by theory, it is believed that due to unavoidable random instabilities the edge of the substrate 22 starts to lift away from the substrate support structure 23 at a location where the substrate 22 happens to be less strongly clamped. The movement of lifting is schematically represented in FIG. 4 by the arrow 47. Due to the peeling, vapor may more easily leak away from the capillary layer 21. Additionally, the outer liquid surface 28 of the capillary layer 21 increases, which leads to an increase in evaporation rate. Furthermore, the local peeling causes the capillary layer 21 to shift away from the area in which the peeling occurs. This leads to further unclamping. Thus, local peeling may limit the lifetime of the clamp significantly.

FIG. 5 is a sectional view of a substrate support structure 23 supporting a substrate 22 according to a second embodiment of the invention. The embodiment of the substrate support structure 23 of FIG. 5 further comprises a circumferential rim 51. The circumferential rim 51 provides a smaller distance between the substrate support structure 23 and the substrate 22. While the nominal distance between the substrate support structure 23 and the substrate 22, in FIGS. 1 and 2 referred to as height  $h$ , typically is about 3-10 microns, the distance between the circumferential rim 51

and the substrate **22** typically would lie in the range of 500 nm to 1.5 microns. Preferably, the circumferential rim **51** has a height being less than 1 micron smaller than the nominal height of contact elements provided on the surface **26** of the substrate support structure **23**.

Without wishing to be bound by theory, the circumferential rim **51** is believed to limit substrate peeling in a way described with reference to FIGS. 6A-6C showing top views of the substrate support provided with a capillary layer. Although the presence of a circumferential rim **51** has been discussed with reference to FIG. 5, the use of such circumferential rim **51** is not limited to this embodiment. For example, a circumferential rim **51** may also be applied to the embodiment schematically depicted in FIG. 3A, and embodiments discussed in international patent application WO2009/011574.

First, as liquid evaporates from the outer capillary surface **28**, it will recede into the small gap between the circumferential rim **51** and the substrate **22**. Due to non-uniform evaporation, the outer capillary surface **28** may locally recede further inwards as schematically shown in FIG. 6A. The capillary pressure jump over the smaller gap between the circumferential rim **51** and the substrate **22** is much larger than the pressure jump would be in the main clamping area, e.g. about 1 bar versus about 200 mbar respectively. When the outer capillary surface **28** reaches the inner side surface of the circumferential rim **51** due to evaporation, the surface encounters the larger distance between substrate **22** and substrate support structure **23**. The lower capillary pressure jump in this region causes a small amount of liquid to flow into the gap between the circumferential rim **51** and the substrate **22** as is schematically shown in FIG. 6B. The flow will continue until the gap between the circumferential rim **51** and the substrate **22** is completely filled as shown in FIG. 6C. A void will be left in the main clamping region. The void is entirely surrounded by a liquid layer. Effectively, the lost capillary clamping area due to evaporation has been moved inwardly. The outer capillary surface remains at the same position. As a result, the substrate edge will not peel off.

Embodiments of the substrate support structure **23** like the ones shown in FIGS. 3A and 5, may be designed in such a way that cavitation effects are minimized or non-existing. Without wishing to be bound by theory, it is understood that there is a critical radius for cavities. If the radius of a cavity becomes larger than this critical radius, the cavity may grow extensively. By using a substrate support structure that enables the formation of a capillary layer with a smallest dimension, i.e. a thickness  $h$ , that is very small, and preferably smaller than, the critical radius, cavitation will be largely limited or not occur. Experiments have shown that a capillary layer of water with a thickness  $h$  in the order of 3-10 microns does not experience cavitation.

As a specific measure, one or both of the contacting surfaces of the substrate **22** and the substrate support structure **23** may be surface treated, or coated with a material for influencing a contacting angle between the liquid forming the capillary layer **21** and the relevant contacting surface.

FIGS. 7A-7J schematically show execution of an embodiment of a method of clamping a substrate on a surface of a substrate support structure according to an embodiment of the invention. The method may be executed in a clamp preparation unit, which allows automation of a method of clamping a substrate on a substrate support structure.

The clamp preparation unit comprises a vacuum system that is able to provide a controlled pressure environment. Furthermore, the clamp preparation unit comprises a liquid

dispensing unit for applying liquid, one or more gas connection units for providing and removing gas, and one or more liquid connection units for providing and removing liquid.

As shown in FIG. 7A, first, a substrate support structure **23** is placed in a vacuum chamber, for example a housing within the vacuum system of a clamp preparation unit. After placement of a substrate support structure **23** in a vacuum chamber, a liquid is applied on a surface **26** thereof, schematically shown in FIG. 7B. Application of liquid on surface **26** of the substrate support structure **23** may be performed by means of a liquid dispensing unit **61**. The gas pressure in the vacuum chamber may be lowered in the vacuum chamber before applying the liquid to the surface of the substrate support structure.

In FIGS. 7A-7J, the surface **26** of the substrate support structure **23** is provided with contact elements, e.g. burls **27**. In one embodiment, applying the liquid continues at least until the contact elements are covered by a liquid layer **64**. A typical thickness of the liquid layer **64** after the applying of liquid is in the range of 2-5 mm. Applying the liquid is preferably performed at a pressure level substantially equal to the vapor pressure of the liquid in the liquid layer **64**. Applying the liquid at such pressure reduces the chance of dissolving of gases and/or entrainment of bubbles in the liquid.

Optionally, after applying the liquid, a pausing action is performed. This action is schematically shown in FIG. 7C. The pausing allows diffusion of dissolved gases and/or entrained bubbles **62** out of the liquid layer **64**. The removal of dissolved gases and/or entrained bubbles **62** reduces the chance of formation of voids as discussed with reference to FIG. 2.

Then, a substrate **22** is placed on top of the liquid layer **64**. Preferably, as schematically shown in FIG. 7D, the substrate is placed such that an edge at a first end portion **22a** of the substrate **22** contacts the liquid layer **64** first at an initial angle, hereafter referred to as the tilt angle. After the first contact, the non-contacting end portion **22b** of the substrate **22** is lowered until the substrate **22** fully rests on the liquid layer **64** as shown in FIG. 7E.

In FIG. 7D, the substrate **22** is placed at an initial angle  $\alpha$ . The liquid contacts the bottom surface of the substrate **22** and adheres to it due to capillary effects. In one embodiment, after first contact of one end portion **22a** of the substrate **22**, the other end portion **22b** of the substrate **22** is lowered such that the water-substrate contact line moves along the bottom surface of the substrate **22** in the direction of the other end portion **22b**, in FIG. 7D a movement to the right schematically illustrated by the arrow. Placement of the substrate **22** at a tilt angle reduces the chance of capturing air or gas between the substrate **22** and the substrate support structure **23**, which improves the stability of the clamp to be established. The tilt angle  $\alpha$  is an acute angle, preferably smaller than 10 degrees, and preferably greater than 5 degrees. Experiments have shown that such a tilt angle provides satisfactory results.

FIG. 7E shows the substrate **22** after placement onto the liquid layer **64**. The substrate **22** floats on the liquid layer **64**.

After placement of the substrate on top of the liquid layer, excess liquid is removed. The removal of excess liquid may comprise lowering a pressure underneath the substrate **22** to a pressure level substantially below the pressure level of the pressure surrounding the substrate support structure **23**. This may be achieved by connecting the area underneath the substrate **22** with a low pressure environment, in FIG. 7F, schematically represented by arrows **65**.

Due to the resulting difference between a pressure level above the liquid layer **64** and a pressure level below the liquid layer **64**, the substrate **22** is pulled towards the substrate support structure **23**. As a result, excess liquid is either sucked away via one or more channels **66**, for example channels **33** and **35** of the gas distribution system depicted FIG. **3B**, and/or squeezed out of the edge of the substrate support structure **23**, schematically represented in FIG. **7F** by arrows **67**. After some time, the substrate **22** rests on the contact elements **27** of the substrate support structure surface **26**.

The removal of excess liquid may further, or alternatively, comprise providing a gas flow along a circumference of the surface **26**. The gas flow is provided at a pressure that is lower than the pressure above the substrate **22** so that the substrate **22** remains in contact with the contact elements. Suitable gases to be used in the gas flow include nitrogen, oxygen and helium.

The gas flow may remove excess liquid in one or more ways. For example, liquid may be swept away by the flow. Additionally, remaining droplets may evaporate in the gas flow. Evaporation of remaining droplets may be enhanced by providing dehumidified or "dry" gas, i.e. gas having a vapor content of less than 50%, preferably less than 10%, of its vapor saturation value.

The providing of a gas flow is schematically shown in FIGS. **7G** and **7H**. Gas is allowed to enter the substrate support structure **23** via channel **66a**, while gas is allowed to exit via channel **66b**. Channel **66a** and channel **66b** may correspond to gas inlet **33** and gas inlet **35** in FIG. **3B** respectively. The gas flow is preferably maintained until a capillary layer **71** is formed, i.e. a thin layer of liquid with a concave outer surface **28** having a pressure below the pressure of its surroundings. Such a capillary layer has been discussed with reference to FIGS. **1** and **2**.

After formation of the capillary layer due to the removal of excess liquid, the ambient pressure may be lowered. In order to be sure that the substrate **22** remains clamped, excess gas, if present, may be removed underneath the substrate **22**, for example via valve **45** as schematically shown in FIG. **7I**.

In embodiments of the invention, after formation of the capillary layer **71**, vapor may be provided to the capillary layer. The vapor **73** may be provided by a reservoir **75** at least partly filled with reservoir liquid **77**. The reservoir **75** may be part of the substrate support structure **23** as shown in FIGS. **7I** and **7J**. Alternatively, the reservoir **75** may be an external reservoir. The vapor **73** may then be provided via a transfer system connectable to both the external reservoir and the substrate support structure **23**.

It must be noted that the liquid vapor reservoir **75** may be provided as a separate module that can be connected to the substrate support structure **23**. The provided vapor limits evaporation of liquid from the capillary layer **71**. This may lead to a longer lifetime of the clamp.

FIG. **8** schematically shows a top view of a substrate support structure **83** according to a third embodiment of the invention. The substrate support structure **83** comprises a surface **86** for clamping a substrate. Preferably, the surface is provided with contact elements **87**. Additionally, the substrate support structure comprises a gas distribution system including a moat **91**, gas inlets **93**, and gas outlets **95**. Functions of these components have been discussed with reference to FIG. **3A** and equally apply for this embodiment. The substrate support structure **83** may be used in embodi-

ments of the method of clamping in a similar way as discussed with respect to substrate support structure **23** with reference to FIGS. **7A-7J**.

In contrast to embodiments of the substrate support structure **23** shown in FIGS. **3A** and **5**, substrate support structure **83** comprises a surface **86** which is divided in a plurality of sub-surfaces. The sub-surfaces may take the form of tiles, for example of hexagonal shape, and be arranged in a tessellated pattern. Each tile may be provided with a circumferential rim (not shown), similar to the circumferential rim **51** discussed with reference to FIG. **5**. The use of a surface **86** divided in a plurality of sub-surfaces may be beneficial if relatively large substrates need to be clamped, for example 300 mm wafers.

FIG. **8B** schematically shows a sectional view of a clamp formed by a combination of the substrate support structure **83** of FIG. **8A** and a substrate **82** for illustrative purposes.

FIGS. **9** and **10** schematically show different substrate handling and exposure arrangements which may be used in conjunction with embodiments of the substrate support structures discussed earlier. FIGS. **9** and **10** will be explained with reference to an example related to lithographic processing of wafers. It must be understood that the arrangements are not limited to such an application. FIG. **11** schematically shows an embodiment of a clamp preparation unit that may be used to automate embodiments of a method of clamping a substrate on a substrate support structure, for example embodiments explained with reference to FIGS. **7A-7J**.

Now referring to FIG. **9**, in the substrate handling and exposure arrangement, a clamp preparation unit **112** is used to automate a method of clamping a wafer on a wafer support structure. The clamp preparation unit **112** accepts a wafer to be clamped from a substrate distribution facility, in this example a so-called wafer track **111**. In the clamp preparation unit **112**, the clamp is prepared, e.g. by using the method outlined with respect to FIGS. **7A-7J**. After preparation of the clamp, the clamp is forwarded to a substrate processing unit, in this example a lithographic apparatus **113**. The lithographic apparatus may comprise a radiation system **150** to provide a patterned beam of radiation, a substrate support structure to support a substrate, and an optical system **160** to project the patterned beam of radiation onto a target portion of the substrate as will be understood by a person skilled in the art. Further details regarding operation of an exemplary clamp preparation unit will be explained with reference to FIGS. **11A-11D**.

In FIG. **9**, the clamping procedure is schematically denoted by reference number **115**. Further details regarding operation of an exemplary clamp preparation unit will be explained with reference to FIGS. **11A-11D**. The clamp preparation unit **112** comprises a vacuum system for providing a controlled pressure environment. The clamping procedure may start with the introduction of a wafer **122** into the vacuum system of the clamp preparation unit **112**, for example by means of a robot arm provided with a wafer support **121** as shown in FIG. **11A**.

The wafer **122** may be introduced via a vacuum tight door or a load lock chamber. The wafer support structure **123** may already be present in the clamp preparation unit **112**. Alternatively, the wafer support structure **123** may be introduced in a similar way as the wafer **122**.

Then, liquid may be applied onto the surface of the wafer support structure **123** by means of the liquid dispensing unit **124** as shown in FIG. **11A**. The liquid dispensing unit **124** provides a liquid flow until a liquid layer of sufficient "thickness" is provided, and then shuts off the liquid flow.

Preferably, the liquid dispensing unit **124** is moveable within the clamp preparation unit **112** such that applying of liquid is performed in an efficient manner without disturbing earlier and subsequent actions in the clamping procedure. Preferably, the pressure in the clamp preparation unit **112** during applying the liquid onto the surface of the wafer support structure **123** is below ambient pressure, for example substantially equal to the vapor pressure of the liquid in the liquid layer. Alternatively, the pressure in the clamp preparation unit may be reduced after applying the liquid but before clamping the wafer.

The wafer **122** and wafer support structure **123** are then moved with respect to each other to allow placement of the wafer on the liquid layer **125**. For this purpose, the wafer **122** is lowered onto the liquid layer **125** by means of a substrate transfer unit, for example moveable support pins **127** as shown in FIG. **11B**. As discussed earlier with reference to FIG. **7D**, the first contact between the wafer **122** and the liquid layer **125** may be made at an initial tilt angle  $\alpha$  ( $\alpha$ ), preferably less than 10 degrees and preferably greater than 5 degrees. Such tilted placement may be achieved by lowering one side of the wafer **122** before lowering the other side of the wafer **122**, for example by separate controlled movement of the support pins **127**. Each side of the wafer **122** is lowered until contact is made with the liquid layer **125**, and the support pins **127** may then be lowered further and moved out of the way. Placement of the wafer **122** on the liquid layer **125** may be performed at ambient pressure, i.e. about 1 bar. However, placement at low pressure is preferred, for example a pressure substantially equal to the vapor pressure of the liquid in the liquid layer.

The wafer support structure **123** may now be connected to one or more liquid connection units connectable to the wafer support structure **123** for removing liquid away from the wafer support structure. In an embodiment, connectors **126a**, **126b** as shown in FIG. **11C** may be used for this purpose. Alternatively, connecting of these one or more liquid connection units has been established earlier. Excess liquid is removed via the one or more liquid connection units. Removal of liquid may be performed at ambient pressure, i.e. about 1 bar.

Furthermore, the wafer support structure **123** may comprise one or more gas connection units for connecting the wafer support structure **123** with a gas supply, for example connectors **126a**, **126b** in FIG. **11C**. The gas connection units may establish a low pressure by "connection" to a vacuum. Additionally and/or alternatively, the gas connection units may provide a gas flow for enabling formation of a capillary layer between the wafer **122** and the wafer support structure **123** as discussed earlier with reference to FIGS. **7A-7J**. Providing a gas flow may be performed at ambient pressure, i.e. about 1 bar. Note that the pressure provided by the gas flow needs to be lower than the ambient pressure to ensure that the wafer **122** keeps its position with respect to the wafer support structure **123**.

Before forwarding the clamp to the lithographic apparatus **113**, as schematically shown in FIG. **11D**, the connections **126a**, **126b** are removed. Forwarding the clamp may be performed by means of a robot arm via a vacuum tight door or a load lock chamber.

After processing in the lithographic apparatus **113**, the clamp may be transferred back to the clamp preparation unit **112** or to a separate unclamping unit for unclamping, i.e. removing the wafer from the wafer support structure. In FIG. **9**, the process of unclamping is schematically denoted by reference number **116**. Unclamping may be performed by

introducing the clamp into the clamp preparation unit **112**, connecting the one or more liquid connectors to the wafer support structure **123**. Via the one or more liquid connectors, additional liquid may be provided to the capillary liquid layer to increase the thickness of the liquid layer. Additional liquid may be added so that the wafer **122** starts to float on top of a liquid layer. The introduction of additional liquid may be applied in such a way that liquid pressure is substantially homogeneously distributed so that the wafer **122** will not deform or break.

At that stage, the wafer **122** may be lifted from the liquid layer on the wafer substrate support surface **123**, e.g. by means of support pins **127**. The wafer may be lifted at an initial tilt angle, in the reverse of the process described above of placing the wafer onto the liquid layer. The initial tilt angle during lifting of the wafer is preferably less than 10 degrees and preferably greater than 5 degrees, which may be achieved by lifting one side of the wafer before lifting the other side, for example by separate controlled movement of the support pins. Finally, the wafer **122** may be extracted from the clamp preparation unit **112**, for example by using a robot arm provided with wafer support **121**, and transferred towards the wafer track **111**.

In FIG. **9**, the clamp preparation unit **112** and the lithographic apparatus **113** are depicted as separate units. However, it must be understood that it is also possible to integrate the clamp preparation unit **112** into a lithographic apparatus **113**, for example by including the required functionality of the clamp preparation unit **112** in a load lock of the lithographic apparatus **113**. In such a case, wafers will be clamped and unclamped as they enter and exit the lithographic apparatus respectively.

FIG. **10** schematically shows a different substrate handling and exposure arrangement that may be used in conjunction with embodiments of the substrate support structure. In the arrangement of FIG. **10**, instead of a single lithographic apparatus **113** more lithographic apparatus **113a**, **113b**, **113c** are used. The functionality of the wafer track **111** and the clamp preparation unit **112** is the same as described with reference to FIG. **9**.

In FIG. **10**, a clamp ready to be transferred to a lithographic apparatus for processing may be transferred towards three different lithographic apparatus **113a**, **113b**, **113c** via an additional wafer track **117**. The configuration of FIG. **10** may be more efficient if the typical duration of the clamping method to be performed within the clamp preparation unit **112** is faster than the typical duration of a lithographic process to be performed in any one of the lithographic apparatus **113a**, **113b**, **113c**.

Throughout the description, reference has been made to the expression "capillary layer". The expression "capillary layer" should be understood to refer to a thin layer of liquid with a concave meniscus shape having a pressure below the pressure of its surrounding.

Additional aspects of the present invention are further defined in a substrate support structure for clamping a substrate on a surface thereof, where the substrate support structure comprises a surface for receiving a substrate to be clamped by means of a capillary layer of a liquid, a liquid reservoir for storing reservoir liquid and vapor of the reservoir liquid, and a vapor transfer system connecting the reservoir with the receiving surface such that vapor of the reservoir liquid can be provided to the capillary layer when present. The reservoir may extend underneath the receiving surface. Preferably, the reservoir comprises a cavity having a greater portion located underneath the receiving surface and a lesser portion extending out from a circumference of



the receiving surface. The volume for storage of the reservoir liquid in the reservoir may be greater than a volume of the capillary layer of liquid. The reservoir may be detachable from the receiving surface. In use, the capillary layer may have a concavely shaped outer surface, and a free surface area of the liquid in the reservoir is larger than a free surface area of said concavely shaped outer surface. The substrate support structure may further comprise a liquid removal system for removing liquid circumferential to said surface. The liquid removal system may comprise a gas distribution system. The gas distribution system may comprise at least one gas inlet for providing gas, and at least one gas outlet for removing gas. Alternatively, the gas distribution system may have a plurality of gas inlets and a plurality of gas outlets at equidistant positions with respect to each other. The substrate support structure may further comprise a gas connection unit for connecting the substrate support structure with a gas supply. The gas connection unit may be connected to the vapor transfer system. The vapor transfer system may comprise a flow control unit for separating gas flow via the gas connection unit from vapor originating from the reservoir. The flow control unit may be a valve or flap. The reservoir of the substrate support structure may be located in a removable portion of the substrate support structure. The reservoir and the vapor transfer system may be located in a removable portion of the substrate support structure. The substrate support structure may further comprise a sealing structure circumscribing the receiving surface such that gas provided by the gas distribution system can flow between the receiving surface and the sealing structure. The receiving surface may be provided with a plurality of contact elements, and wherein the sealing structure has a height corresponding to the height of the plurality of contact elements. Alternatively, the receiving surface may further comprise a raised circumferential rim, such that gas provided by the gas distribution system can flow between the circumferential rim and the sealing structure. In such embodiment, the receiving surface may be provided with a plurality of contact elements, and wherein the circumferential rim has a height smaller than the height of the plurality of contact elements. The receiving surface may be divided into a plurality of sub-surfaces. The liquid removal system may then be configured to remove liquid circumferential to each sub-surface. In case of a plurality of sub-surfaces, at least one sub-surface may have a substantially hexagonal shape.

An additional aspect of the present invention is further defined in a method for maintaining a substrate clamped to a substrate support structure, where the method comprises providing a substrate support structure having a surface on which a substrate has been clamped by means of a capillary layer, providing a reservoir storing reservoir liquid and vapor of the reservoir liquid, and enabling transfer of the vapor of the reservoir liquid from the reservoir to the capillary layer to limit evaporation from the capillary layer. The substrate support structure may be any substrate support structure described earlier.

The invention has been described by reference to certain embodiments discussed above. It will be recognized that these embodiments are susceptible to various modifications and alternative forms well known to those of skill in the art without departing from the spirit and scope of the invention. Accordingly, although specific embodiments have been described, these are examples only and are not limiting upon the scope of the invention, which is defined in the accompanying claims.

What is claimed is:

1. A method of preparing an arrangement of a substrate clamped on a surface of a substrate support structure, the method comprising:

applying a liquid on the surface of the substrate support structure, the surface being provided with a plurality of contact elements, so that the liquid forms a layer having a layer thickness greater than a height of the contact elements so that the liquid layer covers the contact elements;

providing the substrate and placing the substrate onto the liquid layer such that the substrate is placed on top of the liquid layer and is not completely immersed in the liquid; and

subsequently lowering the substrate towards the surface of the substrate support structure by removing an excess portion of the liquid from underneath the substrate so that the substrate rests on the plurality of contact elements and is not completely immersed in the liquid, such that the substrate is clamped by a capillary clamping force exerted by a capillary layer of the liquid between the substrate and the surface of the substrate support structure, the capillary layer having an outer liquid surface defining a first contact angle between the liquid capillary layer and the substrate and a second contact angle between the capillary layer and the substrate support structure,

wherein the removing an excess portion of the liquid comprises providing a gas flow along a circumference of the surface from a first position on the circumference to a second position on the circumference.

2. The method of claim 1, wherein the gas flow is provided at a pressure below the pressure surrounding the substrate support structure.

3. The method of claim 1, wherein the gas comprises a gas with a vapor content of less than 50%, the vapor being of a same substance as the liquid of the capillary layer.

4. The method of claim 1, wherein the method further comprises placing the substrate support structure in a vacuum chamber and lowering the gas pressure in the vacuum chamber before the step of applying the liquid.

5. The method of the claim 4, wherein the gas pressure is lowered to a pressure substantially equal to the vapor pressure of the liquid in the liquid layer.

6. The method of claim 4, wherein the method further comprises pausing for a predetermined period of time after applying the liquid on the surface of the substrate support structure and before placing the substrate onto the liquid layer, to allow dissolved gases and/or entrained bubbles to diffuse out of the applied liquid layer.

7. The method of claim 1, wherein the substrate is placed onto the liquid layer at an initial angle to the top surface of the liquid layer so that the bottom surface of the substrate and the top surface of the liquid layer are not parallel.

8. The method of claim 7, wherein the initial angle is an acute angle larger than 5 degrees.

9. The method of claim 7, wherein the placing at the angle is performed by individual control of substrate support pins.

10. The method of claim 1, wherein the method further comprises reducing evaporation from the capillary layer by providing a vapor to the capillary layer.

11. A clamp preparation unit for preparing an arrangement of a substrate clamped on a surface of a substrate support structure, the unit comprising:

the substrate support structure, the surface of which is provided with a plurality of contact elements;

a liquid dispensing unit for applying a liquid from above on to the surface of the substrate support structure, so

15

that the liquid forms a layer having a layer thickness greater than a height of the contact elements so that the contact elements are covered by the liquid layer;

a substrate transfer unit for placing the substrate onto the liquid layer, such that the substrate is not completely immersed in the liquid,

a liquid removal system for removing an excess portion of the liquid from under the substrate, thereby lowering the substrate towards the surface of the substrate support structure so that the substrate rests on the plurality of contact elements and is not completely immersed in the liquid, such that the substrate is clamped by means of a capillary clamping force exerted by a capillary layer of the liquid between the substrate and the surface of the substrate support structure, the capillary layer having an outer liquid surface defining a first contact angle between the capillary layer and the substrate and a second contact angle between the capillary layer and the substrate support structure, wherein the liquid removal system comprises a gas distribution system for providing a gas flow along a circumference of the outer liquid surface.

12. The clamp preparation unit of claim 11, wherein the liquid removal system is adapted for removing the excess portion of the liquid circumferentially to the surface.

13. The clamp preparation unit of claim 12, wherein the gas distribution system comprises at least one gas inlet at a first position on a circumference of the surface for providing gas, and at least one gas outlet for removing gas at a second position on the circumference,

wherein the inlet and the outlet are arranged to provide a gas flow along the circumference of the surface from the first position to the second position.

14. The clamp preparation unit of claim 13, wherein the gas distribution system has a plurality of gas inlets and a plurality of gas outlets at approximately equidistant positions with respect to each other.

15. The clamp preparation unit of claim 12, wherein the substrate support structure further comprises a sealing structure circumscribing the surface such that gas provided by the gas distribution system can flow between the surface and the sealing structure.

16. The clamp preparation unit of claim 15, wherein the sealing structure has a height corresponding to the height of the plurality of contact elements of the substrate support structure.

17. The clamp preparation unit of claim 11, wherein the substrate transfer unit is adapted for placing the substrate onto the liquid layer at an initial angle to the top surface of the liquid layer so that the bottom surface of the substrate and the top surface of the liquid layer are not parallel.

18. The clamp preparation unit of claim 17, wherein the initial angle is an acute angle larger than 5 degrees.

19. The clamp preparation unit of claim 17, wherein the substrate transfer unit comprises substrate support pins and the placing at the initial angle is performed by individual control of the substrate support pins.

20. The clamp preparation unit of claim 11, wherein the surface of the substrate support structure is divided into a plurality of sub-surfaces.

21. The clamp preparation unit of claim 20, wherein the liquid removal system is configured to remove liquid circumferentially to each sub-surface.

22. The clamp preparation unit of claim 20, wherein at least one sub-surface has a substantially hexagonal shape.

23. The clamp preparation unit of claim 11, wherein the substrate support structure further comprises:

16

a reservoir for storing reservoir liquid and vapor of the reservoir liquid;

a vapor transfer system connecting the reservoir with the receiving surface such that the vapor of the reservoir liquid can be provided to the capillary layer when present.

24. The clamp preparation unit of claim 23, wherein the reservoir extends underneath the receiving surface.

25. The clamp preparation unit of claim 23, wherein the reservoir is detachable from the receiving surface.

26. The clamp preparation unit of claim 23, wherein, in use, the capillary layer has a concavely shaped outer surface, and a free surface area of the liquid in the reservoir is larger than a free surface area of the concavely shaped outer surface.

27. The clamp preparation unit of claim 23, further comprising a gas connection unit for connecting the substrate support structure with a gas supply.

28. The clamp preparation unit of claim 27, wherein the gas connection unit is connected to the vapor transfer system.

29. The clamp preparation unit of claim 28, wherein the vapor transfer system comprises a flow control unit for separating gas flow via the gas connection unit from vapor originating from the reservoir.

30. The clamp preparation unit of claim 23, wherein the surface of the substrate support structure further comprises a raised circumferential rim.

31. The clamp preparation unit of claim 30, wherein the circumferential rim has a height corresponding to or smaller than the height of the plurality of contact elements of the substrate support structure.

32. A lithography system comprising a lithographic apparatus comprising:

a radiation system to provide a patterned beam of radiation;

an optical system to project the patterned beam of radiation onto a target portion of a substrate; and

a clamp preparation unit according to claim 11, for clamping the substrate to a surface of a substrate support structure.

33. The lithography system of claim 32, further comprising an unclamping unit comprising:

a substrate support structure having a substrate clamped on a surface of the substrate support structure by means of a capillary layer;

a liquid removal system for providing additional liquid to the capillary layer under the substrate at an outer circumferential surface of the capillary layer; and

a substrate transfer unit for removing the substrate from the liquid layer.

34. A method of preparing an arrangement of a substrate clamped on a surface of a substrate support structure, the method comprising:

applying a liquid on the surface of the substrate support structure, the surface being provided with a plurality of contact elements, so that the liquid forms a layer covering the contact elements;

placing the substrate on top of the liquid layer such that the substrate is not completely immersed in the liquid, wherein the substrate is placed on top of the liquid layer by placing the substrate such that an edge at a first end portion of the substrate contacts the liquid layer at an initial angle to the top surface of the liquid layer so that the bottom surface of the substrate and the top surface of the liquid layer are not parallel, and subsequently lowering a portion of the substrate not initially con-

17

tacting the liquid layer by decreasing the angle until the substrate fully rests on top of the liquid layer, and subsequently lowering the substrate towards the surface of the substrate support structure by removing an excess portion of the liquid from underneath the substrate, so that the substrate rests on the plurality of contact elements and is not completely immersed in the liquid, such that the substrate is clamped by a capillary clamping force exerted by a capillary layer of the liquid between the substrate and the surface of the substrate support structure, the capillary layer having an outer liquid surface defining a first contact angle between the capillary layer and the substrate and a second contact angle between the capillary layer and the substrate support structure.

35. The method of claim 34, wherein the placing of the substrate at the initial angle is performed by substrate support pins.

36. A clamp preparation unit for preparing an arrangement of a substrate clamped on a surface of a substrate support structure, the unit comprising:

- the substrate support structure, the surface of which is provided with a plurality of contact elements;
- a liquid dispensing unit for applying a liquid on to the surface of the substrate support structure so that the contact elements are covered by a liquid layer;
- a substrate transfer unit for placing the substrate onto the liquid layer; and

18

a liquid removal system for removing an excess portion of the liquid from under the substrate, thereby lowering the substrate towards the surface of the substrate support structure until the substrate rests on the plurality of contact elements and is not completely immersed in the liquid, such that the substrate is clamped by means of a capillary clamping force exerted by a capillary layer of the liquid between the substrate and the surface of the substrate support structure, the capillary layer having an outer liquid surface defining a first contact angle between the capillary layer and the substrate and a second contact angle between the capillary layer and the substrate support structure;

wherein the substrate transfer unit is adapted for placing the substrate on top of the liquid layer by placing the substrate such that an edge at a first end portion of the substrate contacts the liquid layer at an initial angle to the top surface of the liquid layer so that the bottom surface of the substrate and the top surface of the liquid layer are not parallel, and subsequently lowering a portion of the substrate not initially contacting the liquid layer by decreasing the angle with respect to the top surface of the liquid layer until the substrate fully rests on top of the liquid layer such that the substrate is not completely immersed in the liquid.

37. The clamp preparation unit of claim 36, wherein the substrate transfer unit comprises substrate support pins for placing the substrate at the initial angle.

\* \* \* \* \*