



US009429092B2

(12) **United States Patent**  
**Rosero**

(10) **Patent No.:** **US 9,429,092 B2**  
(45) **Date of Patent:** **Aug. 30, 2016**

(54) **FAULT DETECTION AND RESPONSE TECHNIQUES**

4,590,804 A 5/1986 Brull  
4,975,855 A 12/1990 Miller et al.

(75) Inventor: **Carlos A. Rosero**, Buenos Aires (AR)

(Continued)

(73) Assignee: **Cummins Inc.**, Columbus, IN (US)

FOREIGN PATENT DOCUMENTS

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1231 days.

EP 1 018 640 B1 5/2008  
WO WO 2006/007056 1/2006

OTHER PUBLICATIONS

(21) Appl. No.: **13/184,843**

FAG OEM, FAG Rolling Bearings, Weppert GmbH & Co., 1997.\*

(22) Filed: **Jul. 18, 2011**

(Continued)

(65) **Prior Publication Data**

US 2012/0022762 A1 Jan. 26, 2012

**Related U.S. Application Data**

(60) Provisional application No. 61/399,776, filed on Jul. 16, 2010.

*Primary Examiner* — John Breene

*Assistant Examiner* — Raymond Nimox

(74) *Attorney, Agent, or Firm* — Taft Stettinius & Hollister LLP

(51) **Int. Cl.**

**G01M 15/12** (2006.01)  
**F02D 41/22** (2006.01)  
**F02B 77/08** (2006.01)  
**F02D 41/14** (2006.01)

(57) **ABSTRACT**

Systems and methods for detecting, predicting and/or responding to faults are disclosed. In one form, a sensor can be operatively coupled to an engine system having a component and a control system is coupled to the sensor. The sensor can be structured to monitor the engine system and generate corresponding sensor information. The control system can be structured to: generate an operational signature based on the sensor information, estimate whether a fault (e.g., a mechanical fault of the component and/or a performance fault of the engine system) exists based on the operational signature, determine an engine operating mode adjustment if the fault exists and output the engine operating mode adjustment to an output device. Systems and methods for increasing the accuracy by which faults are detected and/or predicted are also disclosed. The engine operating mode adjustment can be applied to protect engine system components from being undesirably damaged to faults.

(52) **U.S. Cl.**

CPC ..... **F02D 41/22** (2013.01); **F02B 77/08** (2013.01); **G01M 15/12** (2013.01); **F02D 41/1498** (2013.01); **Y02T 10/40** (2013.01)

(58) **Field of Classification Search**


CPC ..... F02B 77/08; G01M 15/12; F02D 41/22  
USPC ..... 702/183  
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,380,172 A \* 4/1983 Imam ..... G01H 1/003  
702/35  
4,520,694 A \* 6/1985 Eschrich ..... B60W 30/18  
477/109

**39 Claims, 5 Drawing Sheets**

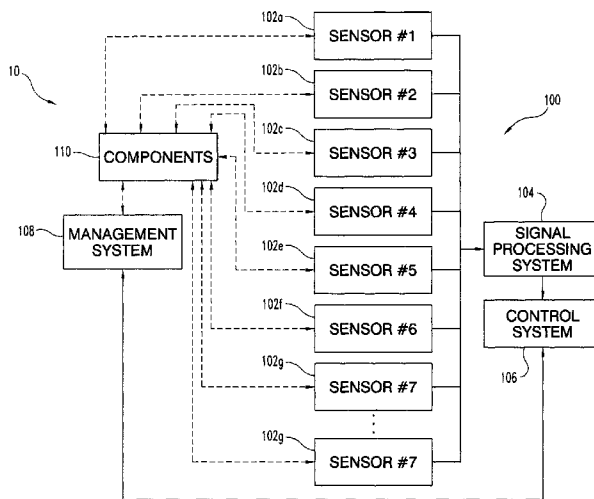

(56)

**References Cited**

U.S. PATENT DOCUMENTS

5,070,832 A \* 12/1991 Hapka ..... F01M 1/22  
123/198 D  
5,159,563 A 10/1992 Miller et al.  
5,381,692 A \* 1/1995 Winslow ..... G01M 13/045  
340/682  
5,390,545 A 2/1995 Doan  
5,613,586 A \* 3/1997 Schilling ..... F01P 7/085  
192/48.3  
5,949,676 A \* 9/1999 Elsley ..... G05B 23/024  
700/79  
6,370,957 B1 4/2002 Filippenko et al.  
6,449,564 B1 9/2002 Kliman et al.  
6,687,654 B2 2/2004 Smith, Jr. et al.  
6,756,908 B2 6/2004 Gass et al.  
6,763,312 B1 \* 7/2004 Judd ..... 702/56  
6,795,779 B2 9/2004 Delvaux et al.  
6,813,581 B1 11/2004 Snyder  
6,880,784 B1 \* 4/2005 Wilkinson ..... B64D 31/06  
244/195  
6,889,553 B2 5/2005 Robinson et al.  
7,006,953 B2 2/2006 Takemura et al.  
7,040,295 B2 5/2006 Karem

7,103,507 B2 9/2006 Gorinevsky et al.  
7,124,637 B2 10/2006 Singhal et al.  
7,222,002 B2 \* 5/2007 Maine ..... G01M 15/12  
701/100  
7,222,027 B2 5/2007 Gorinevsky et al.  
7,343,265 B2 3/2008 Andarawis et al.  
7,366,627 B2 4/2008 Gordon et al.  
7,379,845 B2 5/2008 Gorinevsky et al.  
7,413,919 B2 8/2008 Qing et al.  
7,458,266 B2 12/2008 Beard et al.  
2002/0138217 A1 \* 9/2002 Shen ..... G01H 1/003  
702/56  
2005/0096873 A1 5/2005 Klein  
2006/0122809 A1 \* 6/2006 Clarke ..... G01M 15/12  
702/185  
2008/0284575 A1 11/2008 Breed  
2009/0322373 A1 12/2009 Dooley  
2010/0281843 A1 \* 11/2010 Smith ..... F01D 17/08  
60/39.091

OTHER PUBLICATIONS

International Search Report and Written Opinion, PCT/US2011/  
04436821, ISR/US, Cummins Inc., Dec. 12, 2011.

\* cited by examiner

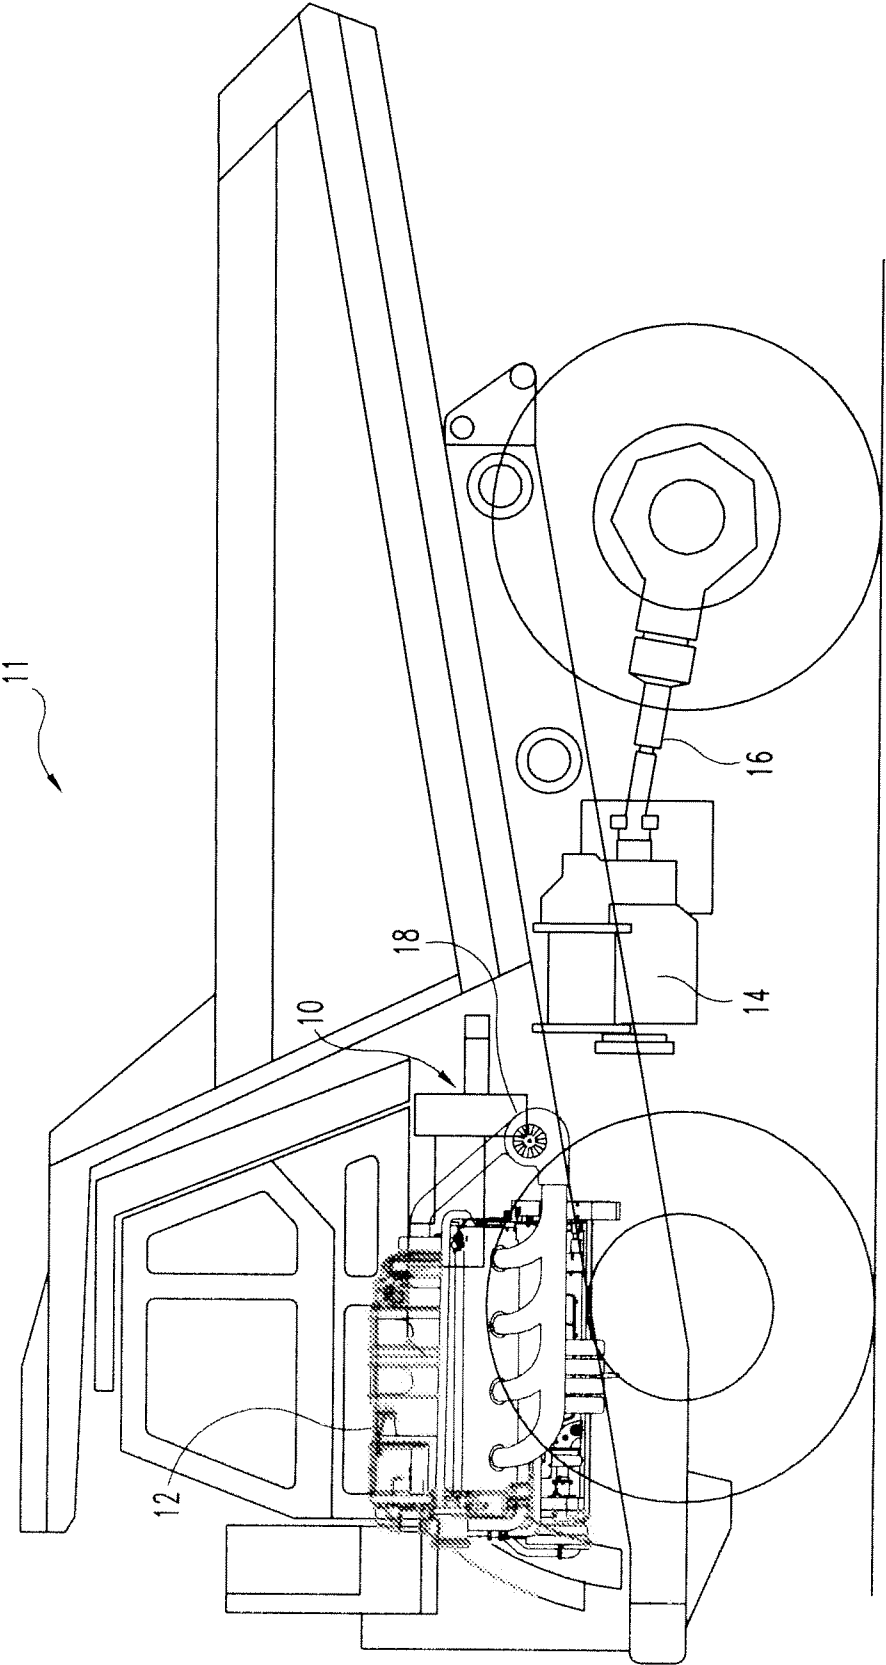


Fig. 1

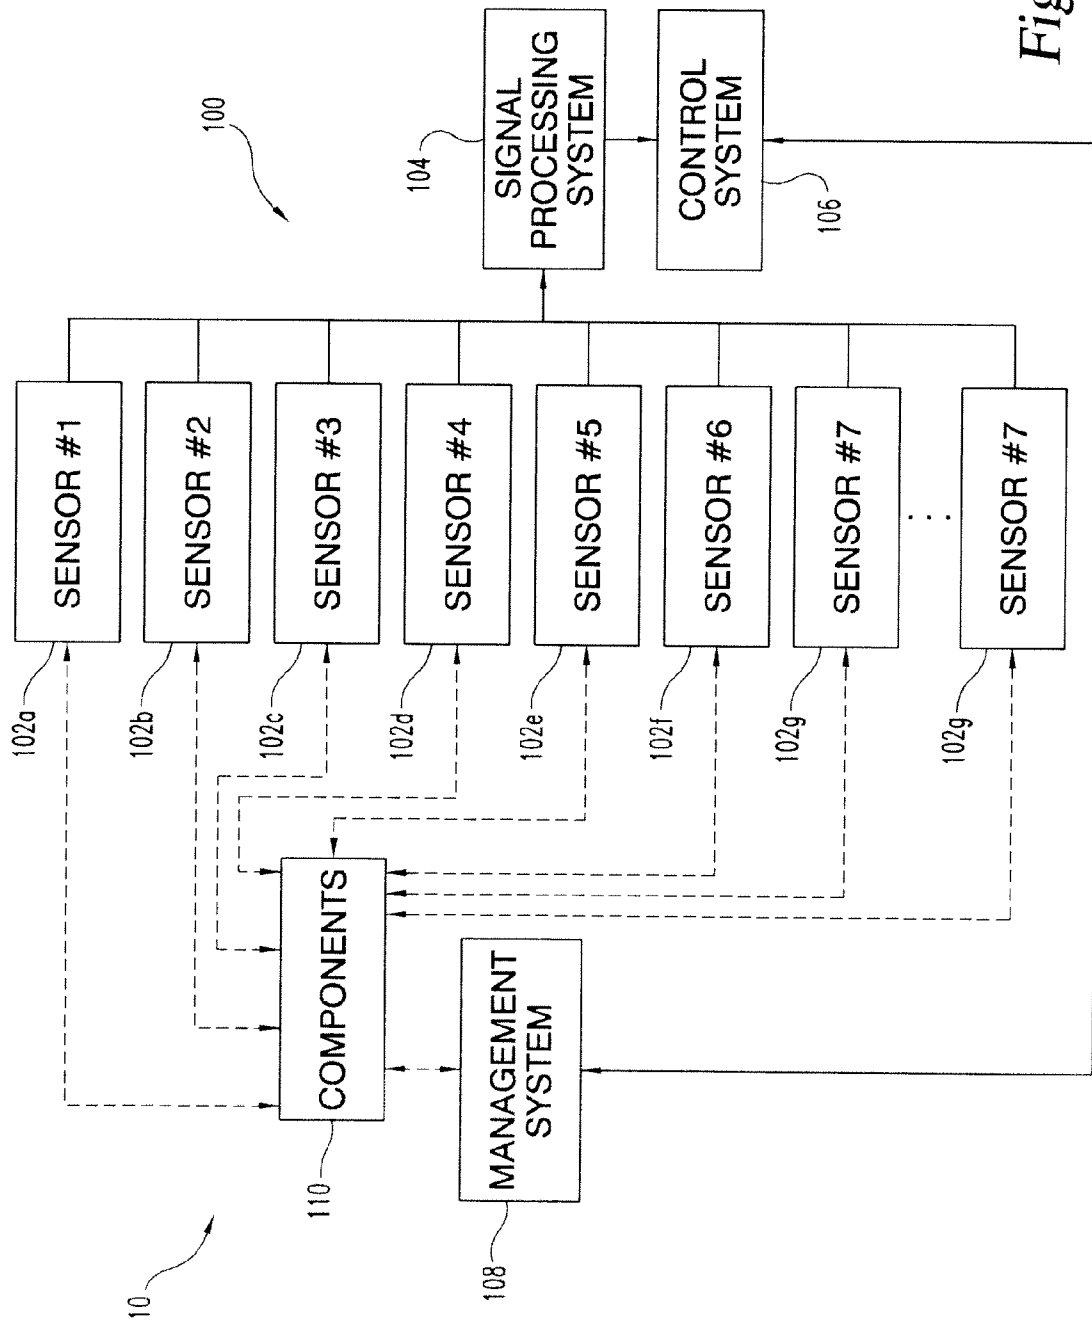


Fig. 2

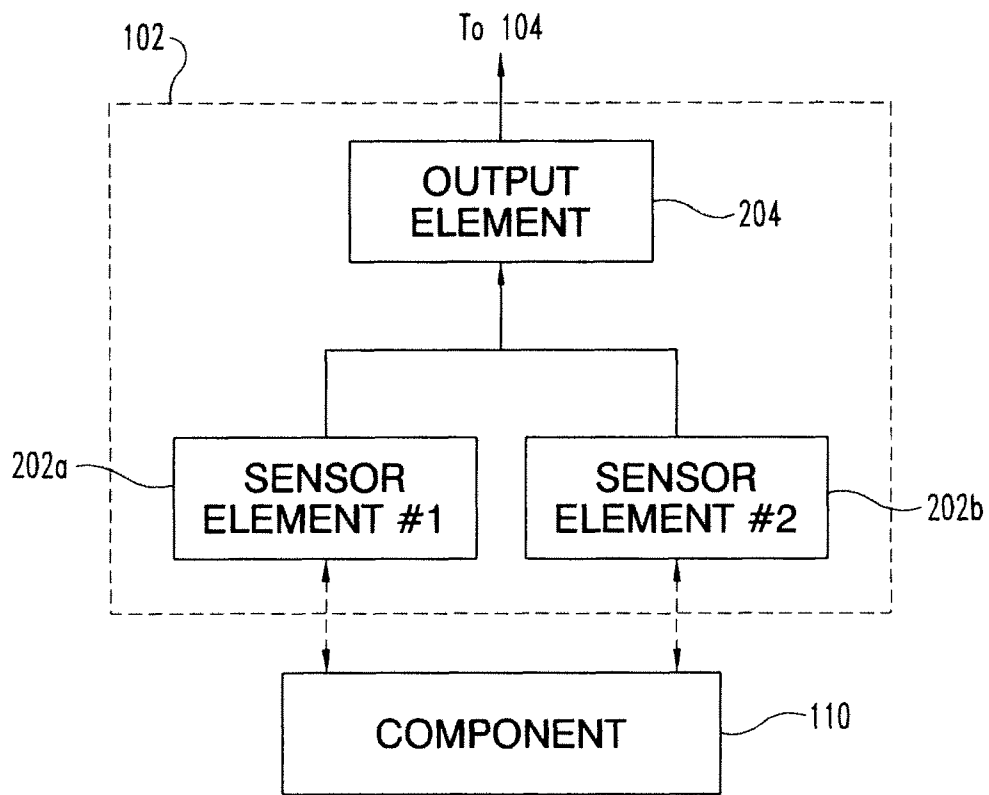


Fig. 3

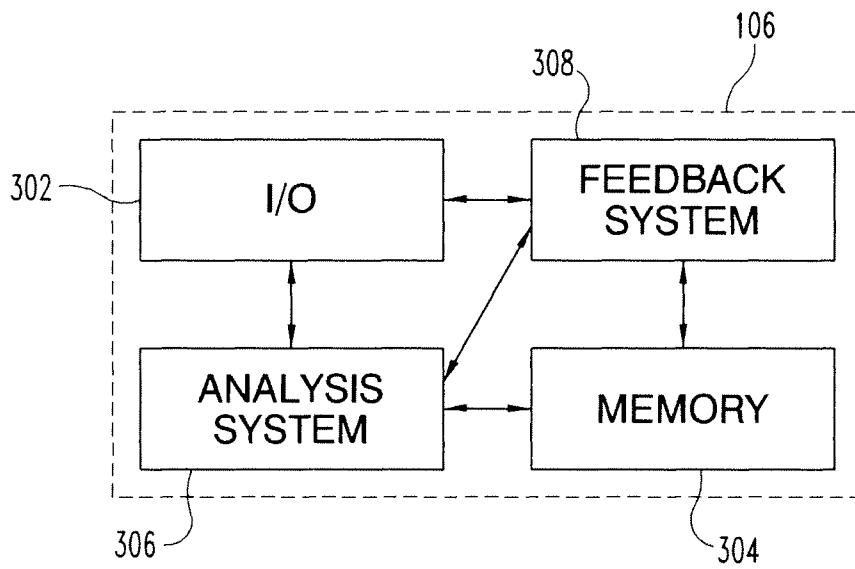


Fig. 4

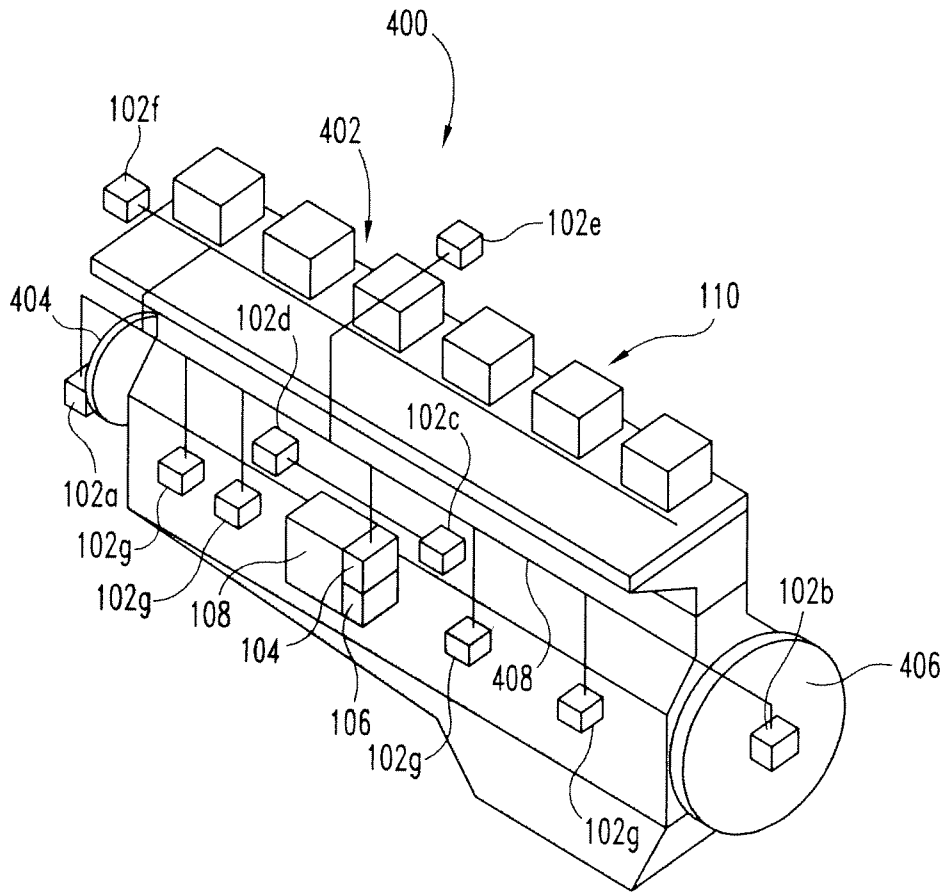


Fig. 5

# 1

## FAULT DETECTION AND RESPONSE TECHNIQUES

### CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of U.S. Provisional Application No. 61/399,776, filed Jul. 16, 2010, which is incorporated herein by reference in its entirety.

### BACKGROUND

Embodiments exemplarily disclosed herein relate generally to detection of faults within components of complex machinery, and more particularly, but not exclusively to, the detection of mechanical faults, performance faults, or a combination thereof, and control of engine systems based on the same.

Early detection of mechanical faults associated with engine systems may provide for more efficient operation, control, and repair of such systems and may prevent not only high cost system level failures, but also catastrophic failures which may be threatening or dangerous to the environment (such as oil well pump engine failures, coal mining truck spills, fuel truck spills, or the like). Repairs for rotating and/or reciprocating components, such as crankshaft-related warranty repairs, may reach costs in the millions each year for an individual supplier. Components are therefore typically over-designed creating additional cost for the supplier and the customer as well as possible compromises in design efficiency.

Routine monitoring of the components may provide indications relating to potential failure before the failure reaches the catastrophic level. However, this approach often involves significant loss of service time and/or increased labor costs. Unfortunately, current “in situ” detection of mechanical failures such as cracks in components internal to a given system like a reciprocating and/or rotating machine becomes limited. Indeed, these approaches can be unreliable due to inconsistency and error. Moreover, under certain circumstances, the detection of a potential failure well in advance of it posing a problem may be desirable—creating an opportunity for preventative action. Thus, there remains a need for further contributions in this area of technology.

### SUMMARY

One embodiment of the present application includes a unique technique to detect and/or predict faults. Another embodiment of the present invention is an automatic fault detection system. Other embodiments include unique methods, systems, devices, and apparatus involving fault detection in reciprocating and/or rotating machinery. Still other embodiments include unique methods, systems, devices, and apparatus for detecting the presence and/or severity of mechanical and/or performance faults; controlling an operation of an engine system based upon detection of mechanical and/or performance faults; differentiating operational signatures of components based on a condition of an engine system, an amount of wear acquired by the engine, and an application for which the engine system is being used; and adjusting the manner in which the engine system is controlled. Still other embodiments include unique methods, systems, devices, and apparatus having a learning capability, artificial intelligence, or the like, for increasing the accuracy by which faults are detected and/or predicted. Further

# 2

embodiments, forms, objects, aspects, features, benefits, and advantages of the present application shall become apparent from the figures and description provided herewith.

### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic view of an engine system incorporated within a vehicle.

FIG. 2 is a schematic view of a fault detection and response system according to one embodiment.

FIG. 3 is a schematic view of the sensor shown in FIG. 1, according to one embodiment.

FIG. 4 is a schematic view of the control system shown in FIG. 1, according to one embodiment.

FIG. 5 is a somewhat schematic view of one embodiment of a fault detection and response system coupled to an engine system.

### DETAILED DESCRIPTION OF REPRESENTATIVE EMBODIMENTS

For the purposes of promoting an understanding of the principles of the invention, reference will now be made to the embodiments illustrated in the drawings and specific language will be used to describe the same. It will nevertheless be understood that no limitation of the scope of the invention is thereby intended. Any alterations and further modifications in the described embodiments, and any further applications of the principles of the invention as described herein are contemplated as would normally occur to one skilled in the art to which the invention relates.

FIG. 1 is a schematic view of an engine system 10 incorporated within a vehicle 11. The engine system 10 may include one or more components and a management system. Generally, the components include any mechanical components disposed in a cooperative arrangement to generate power suitable for use in a desired application, in addition to any other components supporting the function of the mechanical components, and in addition to any other components that are structured to perform some task or function associated with the desired application. This last group of components may, for example, be driven by a component such as an engine of the engine system 10 to perform one or more tasks or functions associated with the desired application. The management system is structured to control engine system 10 by controlling an operation of one or more of the components. Examples of components are provided below. Generally, the management system may include one or more sensors, one or more actuators, an Engine Control Module (ECM), or the like or a combination thereof, to monitor and control an operation of one or more of the components.

In the illustrated embodiment, the engine system 10 is provided as an internal combustion system structured to generate power for a vehicle such as a mining truck or a heavy-duty truck or any other application. Accordingly, the engine system 10 may include a component such as an engine 12. As exemplarily illustrated, the engine 12 may be provided as an internal combustion engine (e.g., a diesel internal combustion engine). It will nevertheless be appreciated that the engine could be provided as any type of internal combustion engine (e.g., a diesel internal combustion engine, a gasoline internal combustion engine, any type of a gas internal combustion engine (e.g., CNG, LNG, LPG, etc.), an ethanol internal combustion engine, or the like or a combination thereof), a hybrid fuel/electric engine, an external combustion engine, an electric motor, a Stirling engine,



a turbine engine, a reaction engine, or the like or a combination thereof. Alternatively or additionally, other components may, for example, include a transmission **14**, an alternator, a drive axle **16**, a turbocharger **18** or the like or a combination thereof. Although not necessarily labeled, other components may, for example, include a power unit (e.g., a compressor, a pump, a water pump, a fuel pump, an oil pump, or the like or a combination thereof), a turbocharger, supercharger, a clutch, an exhaust gas recirculation device, a heat exchanger, a fuel injector, an accessory drive device, a cooling subsystem, a lubrication subsystem, an engine application attachment, mining equipment, drilling equipment, excavating equipment, material conveying equipment, or the like or a combination thereof. It will also be appreciated that a component may also include one or more constituent components of any of the above-mentioned components, and may therefore include a damper, a flywheel, a connecting rod, a camshaft, a cylinder, a push rod, a rocker arm, an engine block, an engine head, a cylinder head, a crankshaft, one or more counterweights of a crankshaft (also referred to herein as a “crankshaft counterweight” or “crankshaft counterweights”), a piston rod, a piston, a bearing (e.g., a journal bearing), a bushing, a sprocket, a chain, a sleeve, a gear, a rod, a shaft (e.g., a rotatable shaft), a housing, a bracket, a bolt, a clamp, a cam, an axle, or the like or a combination thereof.

Referring to FIG. 2, a fault detection and response system, such as fault detection and response system **100**, may be coupled to the engine system **10**. In one embodiment, the fault detection and response system **100** may be structured to control an operation of the engine system **10** based on the presence and/or severity of a detected mechanical or performance fault. One example of a mechanical fault that can be detected by the fault detection and response system **100** is a crack within a component (e.g., which can be detected due to a change in a torsional response of a given component). Another example of a mechanical fault that be detected is a physical displacement of a component. In embodiments where the mechanical fault is a crack in the component, the existence of the predefined relationship may further indicate the propagation speed of the crack within the component. In another embodiment, the fault detection and response system **100** may be structured to estimate the severity of the mechanical fault of the component of the engine system **10** and control an operation of the engine system **10** based on the estimated severity of the mechanical fault. By controlling an operation of the engine system **10**, in some instances, complete mechanical failure of the component can be prevented or otherwise delayed to allow the operator to shutdown the engine **12** at a safer condition, depending on the particular application. Alternatively or additionally, a warning can be provided to prompt discontinued use until a repair is made, a “limp-home” operating mode can be provided, and/or an estimate until the time of complete failure can be provided.

As exemplarily illustrated, the fault detection and response system **100** includes a first sensor **102a**, a second sensor **102b**, a third sensor **102c**, a fourth sensor **102d**, a fifth sensor **102e**, a sixth sensor **102f** and a group of seventh sensors **102g**. The first through seventh sensors may be generically referred to as “sensors **102**.” The fault detection and response system **100** further includes a signal processing system **104** having an input coupled to the output of each sensor **102**, and a control system **106** having an input coupled to an output of the signal processing system **104** and an output coupled to the engine system **10** (e.g., an input of a component of the management system **108** such as an

ECM, an actuator, or the like). The sensors **102**, the signal processing system **104**, the control system **106** and the engine system **10** can be communicatively coupled to each other via wired or wireless connections.

The sensors **102** are operatively coupled to the engine system **10** and are structured to monitor one or more operational aspects of the engine system **10** (e.g., during operation of the engine system **10**) and generate sensor signals based on the monitoring. In one embodiment, the sensor signals generated contain sensor information representing a property of one or more components **110** (also referred to herein as a “component **110**” or “components **110**”) of the engine system **10**. In one embodiment, the sensor information represents a change in a property of a component **110** of the engine system **10**.

As used herein, an “operational aspect” of the engine system **10** may, for example, include the vibration frequency of a component **110** in the engine system **10**, a vibration pattern of a component **110** of the engine system **10**, a temperature of a component **110**, a temperature of a fluid (e.g., intake air, water, oil, exhaust gas, etc.) within the engine system **10**; a pressure of a fluid within the engine system **10**, or the like or a combination thereof. Examples of properties of a component **110** that can be represented by sensor information include vibration of the component (e.g., torsional vibration, linear vibration etc.), displacement of the component, vibration frequency of the component (a drop in vibration frequency can indicate a drop in component stiffness), velocity (e.g., crack propagation, stiffness drop, rotational velocity, etc.) of the component, temperature of the component (and/or temperature of a fluid within the component), pressure of the component (and/or pressure of a fluid within the component), or the like or a combination thereof.

In one embodiment, one or more of the sensors **102** include a sensing element structured to monitor an operational aspect of the engine system **10**. Examples of a sensing element that can be included within the sensor **102** include an accelerometer, a strain gauge, and the like. The sensor **102** can include a single sensing element to monitor one or more operational aspects of the engine system **10**, or multiple sensing elements (e.g., as a delta sensor) to monitor one or more operational aspects of the engine system **10**. Although FIG. 2 illustrates the sensors **102** as separate from the management system **108**, one or more of the sensors **102** may be included as part of the management system **108**.

In one embodiment, the first sensor **102a** may be structured to monitor vibration (e.g., torsional vibration) of a component such as a damper on an internal combustion engine and the second sensor **102b** may be structured to monitor vibration (e.g., torsional vibration) of a component such as a flywheel on the internal combustion engine. Accordingly, the first and second sensors **102a** and **102b** can be used to monitor the difference (delta) in the torsional vibration of the damper and the flywheel. The third sensor **102c** may be structured to monitor oil temperature within the internal combustion engine, the fourth sensor **102d** may be structured to monitor oil pressure within the internal combustion engine, the fifth sensor **102e** may be structured to monitor exhaust gas temperature of the internal combustion engine, the sixth sensor **102f** may be structured to monitor intake air pressure of the internal combustion engine and the group of seventh sensors **102g** may be structured to monitor vibration of a group of components such as crankshaft counterweights. Collectively, the damper, flywheel and crankshaft counterweights are identified as “components” at **110**. Similarly, the components where the oil temperature,

oil pressure, exhaust gas temperature and intake air pressure are monitored are collectively identified as “components” at **110**.

Although the embodiment illustrated in FIG. 2 depicts all sensors **102a-102g** within the fault detection and response system **100** as being coupled to the same signal processing system **104**, it will be appreciated that multiple signal processing systems **104** can be provided, and that some or each of the sensors **102a-102g** can be coupled to a unique signal processing system **104**. It will also be appreciated that the fault detection and response system **100** may include any number of sensors, and may even include one sensor. It will also be appreciated that the fault detection and response system **100** may include any type of sensor.

Referring to FIG. 3, one embodiment of the sensor **102** shown in FIG. 2 includes a first sensor element **202a**, a second sensor element **202b** and an output element **204**. The first sensor element **202a** and the second sensor element **202b** are spaced apart from each other by any desired distance so as to be operatively coupled to different portions of the same component **110**. Each of the first sensor element **202a** and the second sensor element **202b** generate signals corresponding to the operational aspect monitored at their respective locations relative to the component **110**. The output element **204** receives the signals from the first sensor element **202a** and the second sensor element **202b**, performs an operation on the signals, and outputs the result of that operation as the aforementioned sensor signal of the sensor information. In one embodiment, the output element **204** performs a delta operation on the signals, and outputs the result of that operation (i.e., the difference between the signals) as the aforementioned sensor signal. Although FIG. 3 illustrates an embodiment in which the output element **204** is part of the sensor **102**, the output element **204** may be partially or completely included within operating logic of the signal processing system **104**, the control system **106**, or an ECM of the management system **108** or a combination thereof.

Referring back to FIG. 2, the signal processing system **104** is structured to receive and process the sensor signal generated by the sensor **102**. In one embodiment, the signal processing system **104** can include an amplifier structured to amplify the sensor signal generated by the sensor **102**. Exemplary amplifiers that may be used include an analog amplifier, a digital amplifier, or a combination thereof. In another embodiment, the signal processing system **104** can include a filter structured to eliminate or otherwise reduce a signal-to-noise ratio in the sensor signal. Exemplary filters that may be used include passive electronic filters, digital filters, mechanical filters, or the like or a combination thereof. In one embodiment, an input of the filter may be coupled to the output of the amplifier. Although FIG. 2 illustrates an embodiment in which the fault detection and response system **100** includes the signal processing system **104**, it will be appreciated that the signal processing system **104** may be omitted. Although FIG. 2 illustrates an embodiment in which the signal processing system **104** is separate from the sensor **102** and the control system **106**, it will be appreciated that the signal processing system **104** may be completely or partially included within the sensor **102**, within operating logic of the control system **106**, or a combination thereof. In various embodiments, the signal processing system **104** may be completely or partially included in the operating logic (such as programming instructions) of an Engine Control Module (ECM), or separate therefrom.

The control system **106** is structured to generate an operational signature of a component **110** based on the sensor information. Accordingly, the operational signature can be characterized as a correlation of a property of the component **110** with operational aspects of the engine system **10** that are monitored by the sensors **102** during operation of the engine system **10**. The control system **106** is further structured to estimate whether a component **110** of the engine system **10** has a mechanical fault based on the operational signature. If the component **110** is estimated to have a mechanical fault, the control system can control an operation of the engine system **10**. In one embodiment, the control system **106** can control an operation of the engine system **10** to reduce a power output of the engine system **10** and/or take any other action. In one embodiment, the control system **106** can control an operation of the engine system **10** by, for example, determining an engine operating mode adjustment and outputting the engine operating mode adjustment to one or more output devices. In some embodiments, an output device can be an ECM of the management system **108**, a database, a datalink of an on-board diagnostic system, a dashboard that is local to or remote from the engine system **10**, or the like or a combination thereof. In one embodiment, an output device is a device (such as the ECM of the management system **108**) structured to control the operation of one or more of the aforementioned components **110** of the engine system **10**. In one embodiment, the engine operating mode adjustment, when received by an output device, is configured to cause the output device to adjust an operation of one or more components of the engine system **10** (e.g., the engine **12**, a pump, equipment such as mining equipment, etc.), generate an operator alarm, or the like or a combination thereof. By determining and outputting an engine operating mode adjustment, one or more of the aforementioned components **110** of the engine system **10** can be protected from being undesirably damaged due to mechanical and/or performance faults detected by the fault detection and response system **100**. In one embodiment, the engine operating mode adjustment can be output by generating a control signal and transmitting the control signal to an output device such as the management system **108** (e.g., the ECM of the management system). The power output of the engine system **10** can be reduced by, for example, de-rating the engine system **10**, idling the engine system **10**, or shutting the engine system **10** down. In one example, the control system **106** can control the engine system **10** to operate in a “limp home” mode.

Referring to FIG. 4, one embodiment of the control system **106** shown in FIG. 2 can include an input/output or I/O interface **302** (also referred to herein as an “interface module”), a memory **304** and an analysis system **306** (also referred to herein as an “analysis module”) coupled to the I/O interface **302**, the memory **304** and a feedback system **308** (also referred to herein as a “feedback module”). The I/O interface **302**, the memory **304**, the analysis system **306** and the feedback system **308** can be communicatively coupled to each other via wired or wireless connections.

The I/O interface **302** may be provided as any device suitable for receiving sensor signals from the signal processing system **104** and transmitting control signals to an output device (e.g., the management system **108**). In one embodiment, the I/O interface **302** may further be structured to transmit and receive information to and from other devices such as diagnostic computers, and the like.

Generally, the memory **304** is structured to store a plurality of standard or “reference” signatures associated with the component **110** in engine system **10**. The memory **304**

can be provided as one or more components and can be of any volatile or nonvolatile type, including the solid state variety, the optical media variety, the magnetic variety, any combination of these, or such different arrangement as would occur to those skilled in the art. Similar to the operational signature, each reference signature correlates a previously-monitored or previously-modeled property of a reference component with a value within a range of values for one or more operational aspects of the engine system **10** under which the engine system **10** was designed to operate. The reference component is generally structured in the same manner as the actual component **110** within the engine system **10**, but is known to not have a mechanical fault. Thus, the reference signature contains reference information corresponding to the component **110** when the component **110** is known to be without a mechanical fault.

In one embodiment, one or more of the reference signatures may further correlate the reference information with engine condition information describing one or more conditions in which the engine system **10** can operate. For example, the engine condition information may indicate an engine system in a new condition, an engine system in a repaired condition, or the like. In another embodiment, one or more of the reference signatures may further correlate the reference information with engine wear information describing an amount of wear (e.g., on a scale from 0 to 10; 0 representing no wear and 10 representing a significant amount of wear) acquired by the engine system **10**. In yet another embodiment, one or more of the reference signatures may further correlate the reference information with engine application information describing the application for which the engine system is being used. For example, the engine application information may indicate that an engine system can be used in a mining application, an automotive application, a power unit application (e.g., a pump application, a compressor application, etc.), a marine application, an aviation application, a power generation application, (e.g., base load generation, prime, peak power generation, peaking power generation, etc.), an agriculture application, a construction application, an oil and gas application, or the like or a combination thereof. It will be appreciated that one or more of the reference signatures may correlate the reference information with engine condition information, engine wear information, engine application information, or the like or any combination thereof.

The analysis system **306** is structured to perform a comparison between the operational signature and the reference signature and determine whether the operational signature has a predefined relationship with the reference signature based on the comparison. If the operational signature is determined to have a predefined relationship with the reference signature, the analysis system **306** estimates that the component **110** has a mechanical fault, determines an engine operating mode adjustment and outputs the engine operating mode adjustment to an output device.

Generally, the predefined relationship represents a discrepancy between the operational signature and the reference signature. When there is a discrepancy between the operational signature and the reference signature, it can be estimated that the component **110** has a mechanical fault. As will be appreciated, the magnitude and propagation speed of the discrepancy between the operational signature and the reference signature can vary. Therefore the severity of the mechanical fault of the component **110** can be estimated to increase with increasing discrepancy between the operational signature and the reference signature. For example, on a scale of 1 to 10, a discrepancy between 1 and 3 could

represent a minimally severe mechanical fault, a discrepancy between 4 and 7 could represent a moderately severe mechanical fault and a discrepancy between 8 and 10 could represent an extremely severe mechanical fault.

In one embodiment, the analysis system **306** can be structured to compare the operational signature and the reference signature to determine whether one of many predefined relationships selected from a group of predefined relationships exists between the operational signature and the reference signature. In this embodiment, the group of predefined relationships can, for example, include a first predefined relationship representing a first discrepancy, a second predefined relationship representing a second discrepancy greater than the first discrepancy, a third predefined relationship representing a third discrepancy greater than the second discrepancy, and so on. Thus, the existence of a predefined relationship not only indicates the estimated presence of a mechanical fault within a component **110**, but also indicates the estimated severity of the mechanical fault of the component **110**.

In one embodiment, the analysis system **306** can generate a control signal based on the specific predefined relationship that exists between the operational signature and the reference signature. For example, when the first predefined relationship exists between the operational signature and the reference signature, the analysis system **306** can generate a control signal that simply causes an alarm to be generated to inform an operator and/or to a remote dashboard. When the second predefined relationship exists, the analysis system **306** can, for example, generate a control signal configured to reduce a power output by the engine system **10** to a reduced power output level (e.g., to idle the engine system **10**). When the third predefined relationship exists, the analysis system **306** can, for example, generate a control signal configured to shut the engine system **10** down. It will be appreciated that the control signal can be configured to reduce the power output by the engine system **10** in any manner to, for example, de-rate the engine system **10**, idle the engine system **10**, or shut the engine system **10** down. To minimize the risk of an adverse consequence to shutdown of the engine system **10** (e.g., a mining truck unexpectedly stopping, a marine vessel not being able to maneuver, etc.), the control signal can, in some embodiments, be configured to permit the engine system **10** to be shut down automatically or manually. In the case of automatic shutdown, control signal can be configured to shut the engine system **10** down after a certain period of time or "delay period" has elapsed after the second predefined relationship was determined to exist. The delay period may be any period of time (e.g., 90 seconds, 150 seconds, 180 seconds, or the like) and may be set by a user interfacing with the control system **106**, with an ECM of the management system **108**, or the like or a combination thereof. In another embodiment, the delay period may be preset within the control system **106**, the ECM of the management system **108**, or the like or a combination thereof. In one embodiment, the delay period may correspond to an application for which the engine system **10** is being used.

Further because reference information in the reference signature can be correlated with other information such as engine condition information, engine wear information, and engine application information, the analysis system **306** can be structured to determine whether the engine system **10** is a new engine system or a repaired engine system, whether the engine system **10** has a relatively high amount of wear or has a relatively low amount of wear, whether the engine

system **10** is used in one application as opposed to any other application, or the like or a combination thereof.

In one embodiment, the analysis system **306** may be structured to adjust or update any reference signature stored in memory **304** based on a standard calibration (e.g., as implemented with a service tool for loading programs into the control system **106**), through a standard adaptive learning routine (such as those including an initial learning trial) or other artificial intelligence routine, or the like or a combination thereof. In one embodiment, the analysis system **306** may update an initially-stored reference signature based upon, for example, an application for which the engine system **10** is being used and as one or more components **110** in the engine system **10** (e.g., the engine **12**) accumulate wear, undergo repairs, experience load cycle effects, etc. The reference signature is continuously corrected by the analysis system **306**. By continuously correcting an initially-stored reference signature, the likelihood that the control system **106** will generate erroneous engine operation mode adjustments can be reduced.

In one embodiment, the analysis system **306** may be structured to detect performance failures or faults of the engine system **10** (e.g., misfiring, low power, over injection, etc.) based on the relationship between the operational signature and the reference signature. Such detection of performance failures or faults can be accomplished in a manner similar to that described above with respect to the detection of mechanical faults.

The feedback system **308** is structured to receive feedback information indicating whether the operational signature incorrectly indicates the presence of a mechanical and/or performance fault. The feedback information can be received via the I/O interface **302**, the analysis system **306**, the memory **304**, or the like or a combination thereof. In one embodiment, the feedback system **308** is further structured to adjust the predefined relationship based on the feedback information (e.g., such that a subsequent comparison between the operational signature and the reference signature will at least be more likely to correctly indicate the presence of a mechanical and/or performance fault). Accordingly, the feedback system **308** can be used to eliminate or otherwise reduce the number of false alarms generated by the fault detection and response system **100**. In one embodiment, the feedback system **308** adjusts the predefined relationship by generating and transmitting an adjustment signal to the analysis system **306**. Accordingly, the feedback system **308** and analysis system **306** are structured to impart a learning capability or artificial intelligence to the fault detection and response system **100** to eliminate or otherwise reduce the number of false alarms generated by the fault detection and response system **100**. Although FIG. 4 illustrates an embodiment in which the control system **106** includes the feedback system **308**, it will be appreciated that the feedback system **308** may be omitted from the control system **106**.

Although FIG. 2 illustrates the control system **106** as separate from the management system **108**, it will be appreciated that one or more of the components of the control system **106**, or the functions performed by one or more of the components of the control system **106**, may be included as part of, or be performed by, the management system **108**. For example, in embodiments where the management system **108** includes an ECM, one or more of the I/O interface **302**, the memory **304**, the analysis system **306** and the feedback system **308** can be included as part of the ECM. In another example, the functions performed by one or more of

the I/O interface **302**, the memory **304**, the analysis system **306** and the feedback system **308** may be performed by the ECM.

The fault detection and response system **100**, exemplarily described with respect to the numerous embodiments herein, can be structured to operate automatically (e.g., without instruction from a user) to control an operation of the engine system **10** based on the presence and/or severity of a detected mechanical and/or performance fault. In one embodiment, automatic operation of the fault detection and response system **100** is accomplished by operating the fault detection and response system **100** continuously (e.g., while the engine system **10** is in operation). In another embodiment, automatic operation is accomplished by operating the fault detection and response system **100** whenever a predefined event occurs. Examples of a predefined event include: the generation of a periodic signal generated by the control system **106** or an ECM in the management system **108**; the generation of a signal generated by the ECM in the management system **108** indicating that the engine system **10** has been operating for a particular amount of time, under a particular load, at a particular temperature, or the like or a combination thereof; or the like or a combination thereof.

One or more components such as the output element **204**, the signal processing system **104**, the analysis system **306**, the feedback system **308** and the ECM in the management system **108** may, for example, include a processor (not shown) that is structured to execute operating logic defining various control, determining, comparing, storing and/or adjusting functions. This operating logic may be in the form of dedicated hardware, such as a hardwired state machine, programming instructions, and/or a different form as would occur to those skilled in the art. The processor may be provided as a single component, or a collection of operatively coupled components; and may be comprised of digital circuitry, analog circuitry, or a hybrid combination of both of these types. When of a multi-component form, the processor may have one or more components remotely located relative to the others. The processor can include multiple processing units arranged to operate independently, in a pipeline processing arrangement, in a parallel processing arrangement, and/or such different arrangement as would occur to those skilled in the art. In one embodiment, the processor is a programmable microprocessing device of a solid-state, integrated circuit type that includes one or more processing units and memory. The processor can include one or more signal conditioners, modulators, demodulators, Arithmetic Logic Units (ALUs), Central Processing Units (CPUs), limiters, oscillators, control clocks, amplifiers, signal conditioners, filters, format converters, communication ports, clamps, delay devices, memory devices, and/or different circuitry or functional components as would occur to those skilled in the art to perform the desired control, management, and/or regulation functions. The memory devices can be comprised of one or more components and can be of any volatile or nonvolatile type, including the solid state variety, the optical media variety, the magnetic variety, any combination of these, or such different arrangement as would occur to those skilled in the art. In one form, the processor includes a computer network interface to facilitate communications using the Controller Area Network (CAN) standard among various components of the fault detection and response system **100** and/or components not included in the depicted system, as desired.

Referring to FIG. 5, an engine system, such as engine system **400**, may include a management system **108** and a component **110**. As exemplarily illustrated, the management

system **108** includes an ECM and the component **110** includes an internal combustion engine **402** and constituent components such as a damper **404** and a flywheel **406** connected to opposite ends of a crankshaft (not labeled). FIG. **5** also illustrates a fault detection and response system structured to detect the presence of a mechanical fault (e.g., a crack) within a component (e.g., the crankshaft) of the internal combustion engine **402** and output an engine operation mode adjustment to the ECM of the management system **108**. In view of the discussion above, it will also be appreciated that the fault detection and response system shown in FIG. **5** may also be structured to detect the presence of a performance fault of the internal combustion engine **402**. Accordingly, the fault detection and response system can include the aforementioned first to seventh sensors **102a-102g**, the signal processing system **104** and the control system **106**. Although the fault response system is illustrated as including the second sensor **102b**, it will be appreciated that this component may be omitted depending on the specific configuration of the engine **402**.

As exemplarily shown, the first sensor **102a** is operatively coupled to the damper **404**, the second sensor **102b** is operatively coupled to the flywheel **406**, the third sensor **102c** is operatively coupled to a structure (e.g., an oil gallery at a cylinder block of the internal combustion engine **402**) where the oil temperature for the internal combustion engine **402** can be measured, the fourth sensor **102d** is operatively coupled to a structure (e.g., an oil gallery at cylinder block of the cylinder block of the internal combustion engine **402**) where the oil pressure for the internal combustion engine **402** can be measured, the fifth sensor **102e** is operatively coupled to a structure (e.g., an exhaust manifold of the internal combustion engine **402**) where the exhaust gas temperature for the internal combustion engine **402** can be measured, the sixth sensor **102f** is operatively coupled to the a structure (e.g., the intake air manifold) of the internal combustion engine **402** and the group of seventh sensors **102g** are operatively coupled to the crankshaft counterweights (not shown) attached to the internal combustion engine **402**.

In one embodiment, the first sensor **102a** may be provided as a delta sensor (e.g., as described above with respect to FIG. **3**) and be structured to monitor a vibration property of the damper **404**. Similarly, the second sensor **102b** may be provided as a delta sensor (e.g., as described above with respect to FIG. **3**) and be structured to monitor a vibration property of the flywheel **406**. The third and fifth sensors **102c** and **102e** may be provided as temperature sensors whereas the fourth and sixth sensors **102d** and **102f** may be provided as pressure sensors. The seventh sensors **102g** may be provided as any suitable type of vibration sensor. The signal processing system **104** is structured to process (e.g., amplify and/or filter) sensor signals generated by the first to seventh sensors **102a-102g** and thereafter transmit the sensor signals to the control system **106** (e.g., via wired connections **408**) as sensor information. In one embodiment, the control system **106** is structured to generate an operational signature based on sensor information generated by one or more of the sensors **102a-102g**. For example, the operational signature can be generated based on sensor information generated by sensors **102a-102g**, sensor information generated by sensors **102a** and **102c-102g**, sensor information generated by sensors **102a** and **102b**, or sensor information generated by sensor **102a**. In one embodiment, the accuracy of the operational signature generated can be increased by increasing the number of sensors used.

Many different embodiments of the present application are envisioned. For example, in a first of such other embodiments, a system can include an engine system having a component; a sensor operatively coupled to the engine system, the sensor being structured to generate sensor information; a control system coupled to the sensor and the engine system. The control system can be structured to: generate an operational signature of the component based on the sensor information; estimate whether the component has a mechanical fault based on the operational signature; determine an engine operating mode adjustment based on the operational signature if the component is estimated to have a mechanical fault; and output the engine operating mode adjustment to an output device.

In the aforementioned first embodiment, the sensor can be structured to monitor a vibration of the component during operation of the engine system. In the aforementioned first embodiment, the sensor can include an accelerometer. In the aforementioned first embodiment, the sensor can include a delta sensor. In the aforementioned first embodiment, the sensor information can represent a change in a vibration characteristic of the component.

In the aforementioned first embodiment, the control system can include: a memory structured to store a reference signature containing information corresponding to the component when the component does not have a mechanical fault; and an analysis system coupled to the memory. The analysis system may be structured to: perform a comparison between the operational signature and the reference signature; determine whether the operational signature has a predefined relationship with the reference signature based on the comparison; and estimate that the component has the mechanical fault if the operational signature has the predefined relationship with the reference signature.

In the aforementioned first embodiment, the control system can be further structured to: receive other information representing whether the estimate is incorrect; and adjust the predefined relationship based on the other information.

In the aforementioned first embodiment, the reference signature may further contain information corresponding to a condition of the component. The condition can be selected from the group consisting of a new component and a repaired component.

In the aforementioned first embodiment, the reference signature can further contain information corresponding to an amount of wear of the engine system.

In the aforementioned first embodiment, the reference signature can further contain information corresponding to an application of the engine system. The reference signature can contain information corresponding to an application of the engine system selected from the group consisting of an automotive application, an agriculture application, a construction application, an industrial application, an oil and gas application, a power unit application, a mining application, a marine application, an aviation application, and a power generation application.

In the aforementioned first embodiment, the analysis system can be further structured to update the reference signature based upon at least one selected from the group consisting of an application for which the engine system is being used, an extent to which a component of the engine system accumulates wear, a repair of a component of the engine system, and an extent to which a component of the engine system experiences load cycle effects.

In the aforementioned first embodiment, the component can be at least one selected from the group consisting of: a crankshaft, a piston rod, a piston, an engine block, an engine

head, a turbocharger apparatus, an exhaust gas recirculation device, a heat exchanger, a fuel injector, a mechanical actuator, a journal bearing, a rotatable shaft, a cam, an axle, a flywheel, an accessory drive device, a power unit, a cooling subsystem, an engine application attachment, and a lubrication subsystem. In the aforementioned first embodiment, the component can be at least one selected from the group consisting of mining equipment, drilling equipment, excavating equipment, and material conveying equipment.

In the aforementioned first embodiment, the system may further include a means for modifying the reference signature. The modifying means includes an artificial intelligence routine configured to continuously correct or modify the reference signature. Additionally or alternatively, the modifying means includes a service tool for loading new programming into the control system.

In a second of such other embodiments, a method may include: receiving sensor information from a sensor operatively coupled to an engine system having a component; generating an operational signature of the component based on the sensor information; estimating whether the component has a mechanical fault based on the operational signature; determining an engine operation mode adjustment if the component is estimated to have a mechanical fault; and outputting the engine operation mode adjustment to an output device.

In the aforementioned second embodiment, the method can further include: comparing the operational signature with a reference signature containing information corresponding to the component when the component does not have the mechanical fault; determining whether the operational signature has a predefined relationship with the reference signature based on the comparison; and estimating that the component has the mechanical fault if the operational signature has the predefined relationship with the reference signature.

In the aforementioned second embodiment, the method may further include: receiving other information indicating whether the estimating is incorrect; and adjusting the predefined relationship based on the other information.

In a third of such other embodiments, a method may include powering operation of a system with an internal combustion engine; during the operation of the system, monitoring vibration of one or more components of the system; generating an operational signature based on the vibration; with the system, performing a comparison of the operational signature to a reference signature; and indicating whether at least one of the components has a mechanical fault as a function of the comparison with the system.

In the aforementioned third embodiment, the method may include rotating the at least one of the components when the operation of the system is normal.

In the aforementioned third embodiment, the method may include reciprocating the at least one of the components when the operation of the system is normal.

In the aforementioned third embodiment, the method may include indicating two or more of the components has mechanically failed.

In the aforementioned third embodiment, the method may include, with the system, updating the reference signature. The updating may include operating an adaptive learning routine. Additionally or alternatively, the updating may include adjusting for nominal wear.

In the aforementioned third embodiment, the system is one of a vehicle, a power unit, and an electric power generation device (or any other system capable of use in an application as defined herein).

In the aforementioned third embodiment, the one or more components can be selected from the group consisting of: a crankshaft, a piston rod, a piston, an engine block, an engine head, a turbocharger apparatus, an exhaust gas recirculation device, a heat exchanger, a fuel injector, a mechanical actuator, a journal bearing, a rotatable shaft, a cam, an axle, a flywheel, an accessory drive device, a power unit, a cooling subsystem, an engine application attachment, and a lubrication subsystem. In the aforementioned third embodiment, the one or more components can be selected from the group consisting of mining equipment, drilling equipment, excavating equipment, and material conveying equipment.

In a fourth of such other embodiments, a system may include an interface module structured to receive sensor information from a sensor operatively coupled to an engine system having a component; and an analysis module coupled to the interface module. The analysis module may be structured to: generate an operational signature of the component based on the sensor information; estimate whether the component has a mechanical fault based on the operational signature; determine an engine operating mode adjustment based on the operational signature if the component is estimated to have a mechanical fault; and output the engine operating mode adjustment to the interface module.

In a fifth of such other embodiments, a system may include: means for receiving sensor information from a sensor operatively coupled to an engine system having a component; means for generating an operational signature of the component based on the sensor information; means for estimating whether the component has a mechanical fault based on the operational signature; means for determining an engine operation mode adjustment if the component is estimated to have a mechanical fault; and means for outputting the engine operation mode adjustment to an output device.

In the aforementioned fifth embodiment, the system can further include: means for comparing the operational signature with a reference signature containing information corresponding to the component when the component does not have the mechanical fault; means for determining whether the operational signature has a predefined relationship with the reference signature based on the comparison; and means for estimating that the component has the mechanical fault if the operational signature has the predefined relationship with the reference signature.

In the aforementioned fifth embodiment, the system may further include: means for receiving other information indicating whether the estimating is incorrect; and means for adjusting the predefined relationship based on the other information.

In a sixth of such other embodiments, a system may include means for powering operation of a system with an internal combustion engine; means for monitoring vibration of one or more components of the system during the operation of the system; means for generating an operational signature based on the vibration; means for performing a comparison of the operational signature to a reference signature with the system; and means for indicating whether at least one of the components has a mechanical fault as a function of the comparison with the system.

In the aforementioned sixth embodiment, the system may include means for rotating the at least one of the components when the operation of the system is normal.

In the aforementioned sixth embodiment, the system may include means for reciprocating the at least one of the components when the operation of the system is normal.

15

In the aforementioned sixth embodiment, the system may include means for indicating two or more of the components has mechanically failed.

In the aforementioned sixth embodiment, the system may include means for updating the reference signature. The means for updating may include means for operating an adaptive learning routine. Additionally or alternatively, the means for updating may include means for adjusting for nominal wear (e.g., by continuously correcting the reference signature).

In the aforementioned sixth embodiment, the system is one of a vehicle, a power unit, and an electric power generation device.

In the aforementioned sixth embodiment, the one or more components can be selected from the group consisting of: a crankshaft, a piston rod, a piston, an engine block, an engine head, a turbocharger apparatus, an exhaust gas recirculation device, a heat exchanger, a fuel injector, a mechanical actuator, a journal bearing, a rotatable shaft, a cam, an axle, a flywheel, an accessory drive device, a power unit, a cooling subsystem, an engine application attachment, and a lubrication subsystem.

In a seventh of such other embodiments, methods and systems are provided to protect any of the aforementioned components of the engine system from damage due to faults (e.g., mechanical faults, performance faults, etc.).

In an eighth of such other embodiments, a system can include an engine system having a component; a sensor operatively coupled to the engine system, the sensor being structured to generate sensor information; a control system coupled to the sensor and the engine system. The control system can be structured to: generate an operational signature of the component based on the sensor information; estimate whether the engine system has a performance fault based on the operational signature; determine an engine operating mode adjustment based on the operational signature if the engine system is estimated to have a performance fault; and output the engine operating mode adjustment to an output device.

In a ninth of such other embodiments, a method may include: receiving sensor information from a sensor operatively coupled to an engine system having a component; generating an operational signature of the component based on the sensor information; estimating whether the engine system has a performance fault based on the operational signature; determining an engine operation mode adjustment if the engine system is estimated to have a performance fault; and outputting the engine operation mode adjustment to an output device.

In a tenth of such other embodiments, a system may include an interface module structured to receive sensor information from a sensor operatively coupled to an engine system having a component; and an analysis module coupled to the interface module. The analysis module may be structured to: generate an operational signature of the component based on the sensor information; estimate whether the engine system has a performance fault based on the operational signature; determine an engine operating mode adjustment based on the operational signature if the engine system is estimated to have a performance fault; and output the engine operating mode adjustment to the interface module.

In an eleventh of such other embodiments, a system may include: means for receiving sensor information from a sensor operatively coupled to an engine system having a component; means for generating an operational signature of the component based on the sensor information; means for

16

estimating whether the engine system has a performance fault based on the operational signature; means for determining an engine operation mode adjustment if the engine system is estimated to have a performance fault; and means for outputting the engine operation mode adjustment to an output device.

In a twelfth of such other embodiments, a system may include means for powering operation of a system with an internal combustion engine; means for monitoring vibration of one or more components of the system during the operation of the system; means for generating an operational signature based on the vibration; means for performing a comparison of the operational signature to a reference signature with the system; and means for indicating whether the internal combustion engine has a performance fault as a function of the comparison with the system.

Any theory, mechanism of operation, proof, or finding stated herein is meant to further enhance understanding of the present invention and is not intended to make the present invention in any way dependent upon such theory, mechanism of operation, proof, or finding. It should be understood that while the use of the word preferable, preferably or preferred in the description above indicates that the feature so described may be more desirable, it nonetheless may not be necessary and embodiments lacking the same may be contemplated as within the scope of the invention, that scope being defined by any claims that follow. In reading the claims it is intended that when words such as "a," "an," "at least one," "at least a portion" are used there is no intention to limit the claim to only one item unless specifically stated to the contrary in the claim. Further, when the language "at least a portion" and/or "a portion" is used the item may include a portion and/or the entire item unless specifically stated to the contrary. While the invention has been illustrated and described in detail in the drawings and foregoing description, the same is to be considered as illustrative and not restrictive in character, it being understood that only the selected embodiments have been shown and described and that all changes, modifications and equivalents that come within the spirit of the invention as defined herein are desired to be protected.

What is claimed is:

1. A system comprising:

- an engine system including a flywheel and a damper;
- a first sensor and a second sensor operatively coupled to the engine system, the first sensor and the second sensor being structured to generate sensor information regarding a torsional vibration difference between the flywheel and the damper;
- a control system coupled to the first sensor, the second sensor, and the engine system, the control system including a memory and a plurality of reference signatures for the flywheel and the damper stored in the memory that include reference information for the torsional vibration difference between the flywheel and the damper without a mechanical fault, the control system being configured to:
  - generate an operational signature of the flywheel and the damper based on the sensor information generated during operation of the engine system;
  - update a reference signature of the flywheel and the damper, wherein the reference signature is selected from the plurality of reference signatures;
  - compare the operational signature with the reference signature;

17

estimate whether a fault exists within the engine system based on the comparison of the operational signature with the reference signature;

determine an engine operating mode adjustment based on the operational signature if a fault is estimated to exist;

output the engine operating mode adjustment to an output device; and

operate the engine system in response to the engine operation mode adjustment.

2. The system of claim 1, wherein the first sensor and the second sensor are structured to monitor a vibration of the flywheel and the damper during operation of the engine system.

3. The system of claim 1, wherein the first sensor and the second sensor comprise an accelerometer.

4. The system of claim 1, wherein the first sensor and the second sensor comprise a delta sensor.

5. The system of claim 1, wherein the fault includes a mechanical fault of at least one of the flywheel and the damper.

6. The system of claim 1, wherein the fault includes a performance fault of the engine system.

7. The system of claim 1, wherein the control system comprises:

a memory structured to store the reference signature containing information corresponding to the flywheel and the damper when the engine system does not have a mechanical fault; and

an analysis system coupled to the memory and structured to:

perform the comparison between the operational signature and the reference signature;

determine whether the operational signature has a predefined relationship with the reference signature based on the comparison; and

estimate that the engine system has the mechanical fault if the operational signature has the predefined relationship with the reference signature.

8. The system of claim 7, wherein the control system is further structured to:

receive other information representing whether the estimate is incorrect; and

adjust the predefined relationship based on the other information.

9. The system of claim 7, wherein the reference signature further contains information corresponding to a condition of the flywheel and the damper.

10. The system of claim 9, wherein the condition is selected from the group consisting of a new component of the engine system and a repaired component of the engine system.

11. The system of claim 7, wherein the reference signature further contains information corresponding to an amount of wear of the engine system.

12. The system of claim 1, wherein the control system is configured to:

select the reference signature based on an application for which the engine system is to be used; and

update the selected reference signature of the flywheel and the damper for nominal wear.

13. The system of claim 7, wherein the analysis system is further structured to continuously correct the reference signature based upon at least one selected from the group consisting of an application for which the engine system is being used, an extent to which a component of the engine system accumulates wear, a repair of a component of the

18

engine system, and an extent to which a component of the engine system experiences load cycle effects.

14. The system of claim 1, wherein the engine system further includes components selected from the group consisting of: a crankshaft, a piston rod, a piston, an engine block, an engine head, a turbocharger apparatus, an exhaust gas recirculation device, a heat exchanger, a fuel injector, a mechanical actuator, a journal bearing, a rotatable shaft, a cam, an axle, an accessory drive device, a power unit, a cooling subsystem, an engine application attachment, and a lubrication subsystem.

15. The system of claim 1, wherein the engine system includes at least one component selected from the group consisting of mining equipment, drilling equipment, excavating equipment, and material conveying equipment.

16. The system of claim 7, further comprising a means for modifying the reference signature.

17. The system of claim 16, wherein the modifying means includes an artificial intelligence routine.

18. The system of claim 16, wherein the modifying means includes a service tool for loading new programming into the control system.

19. A method, comprising:

powering operation of an engine system including a flywheel and a damper;

receiving, at a controller, sensor information regarding a torsional vibration difference between the flywheel and the damper from a first sensor and a second sensor operatively coupled to the engine system;

generating, with the controller, an operational signature of the flywheel and the damper based on the sensor information;

selecting, from a memory of the controller, a reference signature from a plurality of reference signatures for the flywheel and the damper that each include reference information for the torsional vibration difference corresponding to the engine system operating without a mechanical fault;

updating, with the controller, the selected reference signature of the flywheel and the damper;

estimating whether the engine system has a mechanical fault based on a comparison of the operational signature with the selected reference signature;

determining an engine operation mode adjustment if the component is estimated to have a mechanical fault; and operating the engine system in response to the engine operation mode adjustment.

20. The method of claim 19, further comprising:

comparing the operational signature with the selected reference signature containing information corresponding to the component when the component does not have the mechanical fault;

determining whether the operational signature has a predefined relationship with the selected reference signature based on the comparison; and

estimating that the component has the mechanical fault if the operational signature has the predefined relationship with the selected reference signature.

21. The method of claim 20, further comprising:

receiving other information indicating whether the estimating is incorrect; and

adjusting the predefined relationship based on the other information.

22. A method, comprising:

powering operation of a system with an internal combustion engine;



19

during the operation of the system, monitoring a torsional vibration difference between a flywheel and a damper of the internal combustion engine;

generating an operational signature based on the torsional vibration difference;

selecting a reference signature from a plurality of reference signatures for the flywheel and the damper, wherein each reference signature includes reference information for the torsional vibration difference corresponding to the internal combustion engine operating without a mechanical fault;

with the system, updating the selected reference signature of the flywheel and the damper based on;

with the system, performing a comparison of the operational signature to the updated reference signature;

determining whether the internal combustion engine has a mechanical fault as a function of the comparison;

determining an estimated severity of the mechanical fault based on the comparison;

providing, based on the estimated severity, one of a warning signal to display on an output device and a power output level reduction signal to the internal combustion engine; and

operating the engine system in response to the engine operation mode adjustment.

**23.** The method of claim **22**, which includes rotating the flywheel and the damper when the operation of the system is normal.

**24.** The method of claim **22**, which includes indicating the internal combustion engines has mechanically failed.

**25.** The method of claim **22**, wherein the updating includes operating an adaptive learning routine.

**26.** The method of claim **22**, wherein the system is one of a vehicle, a power unit, and an electric power generation device.

**27.** The method of claim **22**, wherein the system further includes one or more components selected from the group consisting of: a crankshaft, a piston rod, a piston, an engine block, an engine head, a turbocharger apparatus, an exhaust gas recirculation device, a heat exchanger, a fuel injector, a mechanical actuator, a journal bearing, a rotatable shaft, a cam, an axle, an accessory drive device, a power unit, a cooling subsystem, an engine application attachment, and a lubrication subsystem.

**28.** The method of claim **22**, wherein the system includes one or more components selected from the group consisting of mining equipment, drilling equipment, excavating equipment, and material conveying equipment.

**29.** A system, comprising:

an electronic controller operably coupled to an engine system including a damper and a flywheel, the electronic controller being structured to receive sensor information regarding a torsional vibration difference between the damper and the flywheel from a first sensor and a second sensor operatively coupled to the engine system to determine a control signal, and to provide the control signal to the engine system; and

the electronic controller including a memory and one or more corresponding reference signatures for the damper and flywheel stored in the memory that includes reference information for the torsional vibration difference corresponding to the operation of the engine system without a mechanical fault, the electronic controller further being configured to:

generate an operational signature of the flywheel and the damper based on the sensor information;

20

update the one or more corresponding reference signatures of the flywheel and the damper;

compare the operational signature with the one or more corresponding reference signatures;

estimate whether the engine system has a mechanical fault based on the comparison of the operational signature with the one or more corresponding reference signatures;

determine an engine operating mode adjustment based on the operational signature if the engine system is estimated to have a mechanical fault;

output the engine operating mode adjustment, wherein the control signal is based on the engine operating mode adjustment; and

operate the engine system in response to the engine operation mode adjustment.

**30.** The system of claim **29**, wherein the electronic controller is further structured to:

determine a number of predefined relationships that exist between the operational signature and the one or more corresponding reference signatures based on a comparison between the operational signature of the flywheel and the damper and the reference signatures corresponding to the flywheel and the damper, wherein the engine operating mode adjustment determination is further based on the number of predefined relationships.

**31.** The system of claim **30**, wherein the engine operating mode adjustment comprises an alarm signal when the number of predefined relationships determined to exist meets a first condition, an engine system power reduction signal when the total number of predefined relationships determined to exist meets a second condition, and an engine system shut-down signal when the total-number of predefined relationships determined to exist meets a third condition.

**32.** The system of claim **29**, wherein the electronic controller is further structured to:

determine an estimated severity of the fault, wherein the engine operating mode adjustment is further determined based on the estimated severity.

**33.** The system of claim **29**, wherein the operational signature of the flywheel and the damper is further determined based on at least one of a condition information of the internal combustion engine and a wear information of the internal combustion engine.

**34.** The system of claim **29**, wherein the engine operating mode adjustment includes at least one of a power output level reduction output and an alarm output.

**35.** The system of claim **22**, wherein the power output level reduction of the engine system includes a de-rate condition of the internal combustion engine, an idle condition of the internal combustion engine, and a shut-down condition of the internal combustion engine.

**36.** The system of claim **29**, wherein the electronic controller is configured to:

update the one or more corresponding reference signatures of the flywheel and the damper for nominal wear; and

select the one or more corresponding reference signatures based on an application for which the engine system is to be used.

**37.** The method of claim **22**, further comprising updating, with the system, the selected reference signature of the flywheel and the damper based on an application in which

the internal combustion engine is to be used, wherein the updating further includes adjusting the selected reference signature for nominal wear.

38. The method of claim 19, further comprising updating, with the controller the selected reference signature of the flywheel and the damper based on an application in which the internal combustion engine is to be used, wherein the updating further includes adjusting the selected reference signature for nominal wear. 5

39. The system of claim 12, wherein the application of the engine system is selected from the group consisting of an automotive application, an agriculture application, a construction application, an industrial application, an oil and gas application, a power unit application, a mining application, a marine application, an aviation application, and a power generation application. 10 15

\* \* \* \* \*