



US 20130315272A1

(19) **United States**

(12) **Patent Application Publication**  
**NOWAK et al.**

(10) **Pub. No.: US 2013/0315272 A1**

(43) **Pub. Date: Nov. 28, 2013**

(54) **REGENERATIVE AMPLIFIER, LASER APPARATUS, AND EXTREME ULTRAVIOLET LIGHT GENERATION SYSTEM**

**Publication Classification**

(71) Applicant: **GIGAPHOTON INC.**, Oyama-shi (JP)

(51) **Int. Cl.**  
*H01S 3/05* (2006.01)  
*H01S 5/06* (2006.01)  
*H01S 5/042* (2006.01)  
*H01S 3/22* (2006.01)

(72) Inventors: **Krzysztof NOWAK**, Oyama-shi (JP);  
**Takashi SUGANUMA**, Oyama-shi (JP);  
**Osamu WAKABAYASHI**, Hiratsuka-shi (JP)

(52) **U.S. Cl.**  
CPC ... *H01S 3/05* (2013.01); *H01S 3/22* (2013.01);  
*H01S 5/06* (2013.01); *H01S 5/042* (2013.01)  
USPC ..... **372/38.07**; 372/55; 372/99; 372/44.01

(73) Assignee: **GIGAPHOTON INC.**, Oyama-shi (JP)

(21) Appl. No.: **13/956,282**

(57) **ABSTRACT**

(22) Filed: **Jul. 31, 2013**

**Related U.S. Application Data**

(63) Continuation of application No. 13/121,319, filed on Jul. 12, 2011, filed as application No. PCT/JP2011/055861 on Mar. 7, 2011.

**Foreign Application Priority Data**

Mar. 15, 2010 (JP) ..... 2010-058512  
Dec. 20, 2010 (JP) ..... 2010-283716

A regenerative amplifier according to one aspect of this disclosure is used in combination with a laser device, and the regenerative amplifier may include: a pair of resonator mirrors constituting an optical resonator; a slab amplifier provided between the pair of the resonator mirrors for amplifying a laser beam with a predetermined wavelength outputted from the laser device; and an optical system disposed to configure a multipass optical path along which the laser beam is reciprocated inside the slab amplifier, the optical system transferring an optical image of the laser beam at a first position as an optical image of the laser beam at a second position.

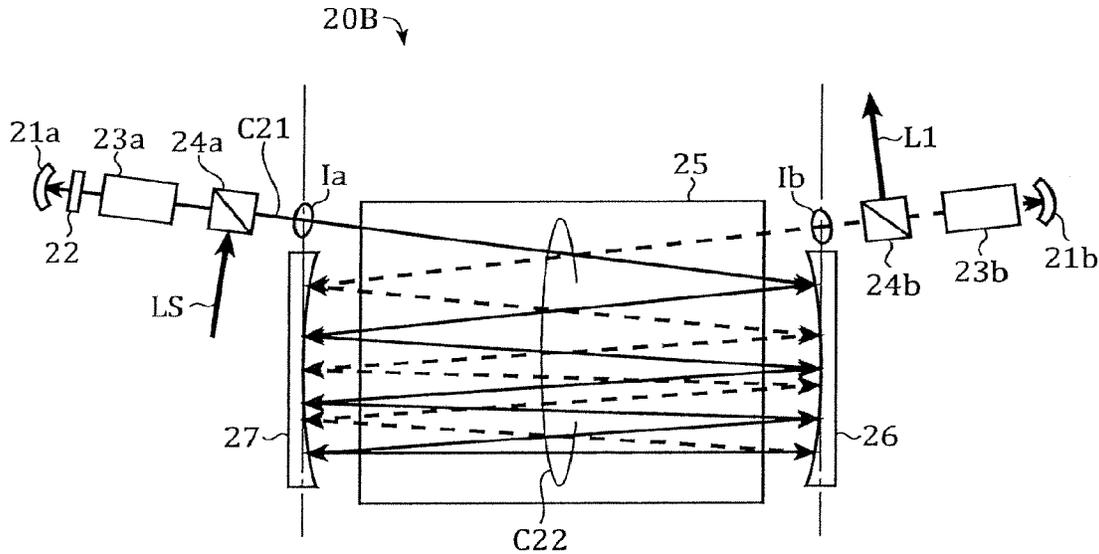


FIG. 1

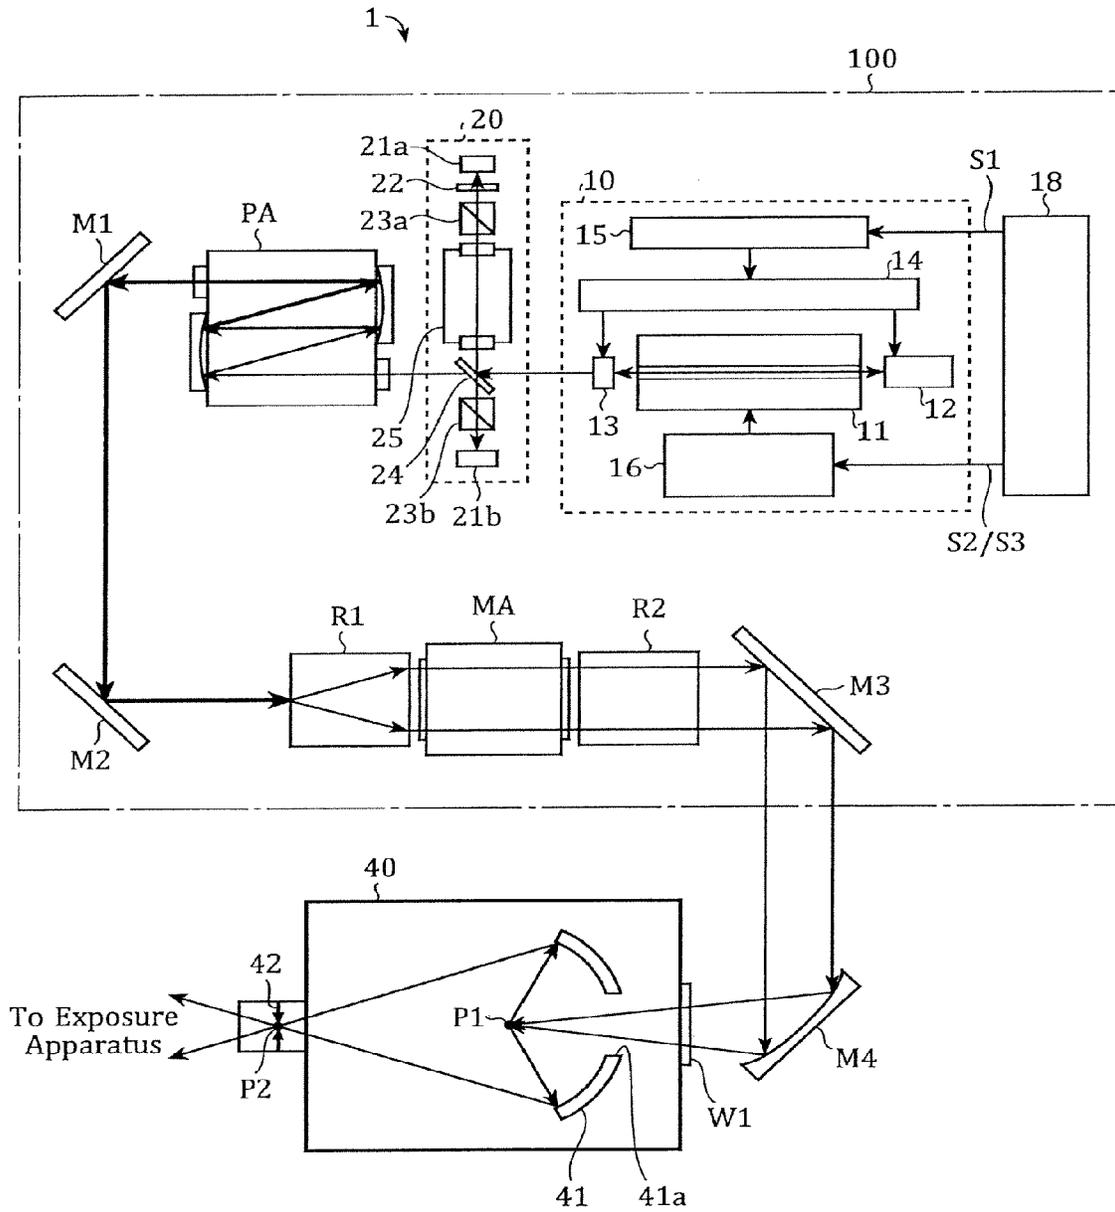


FIG. 2

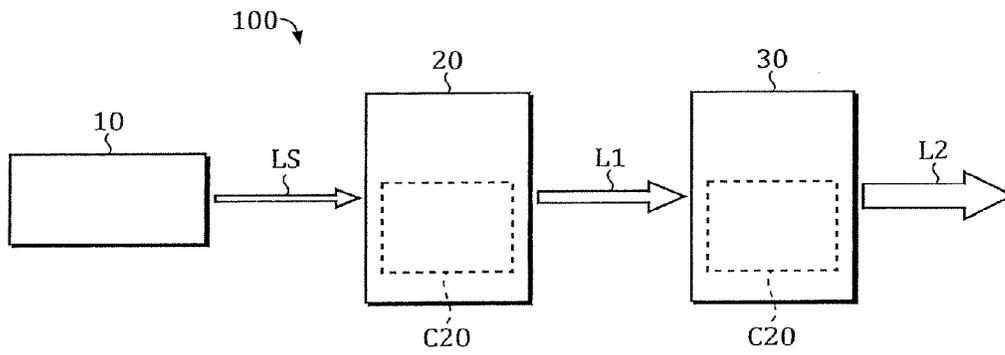
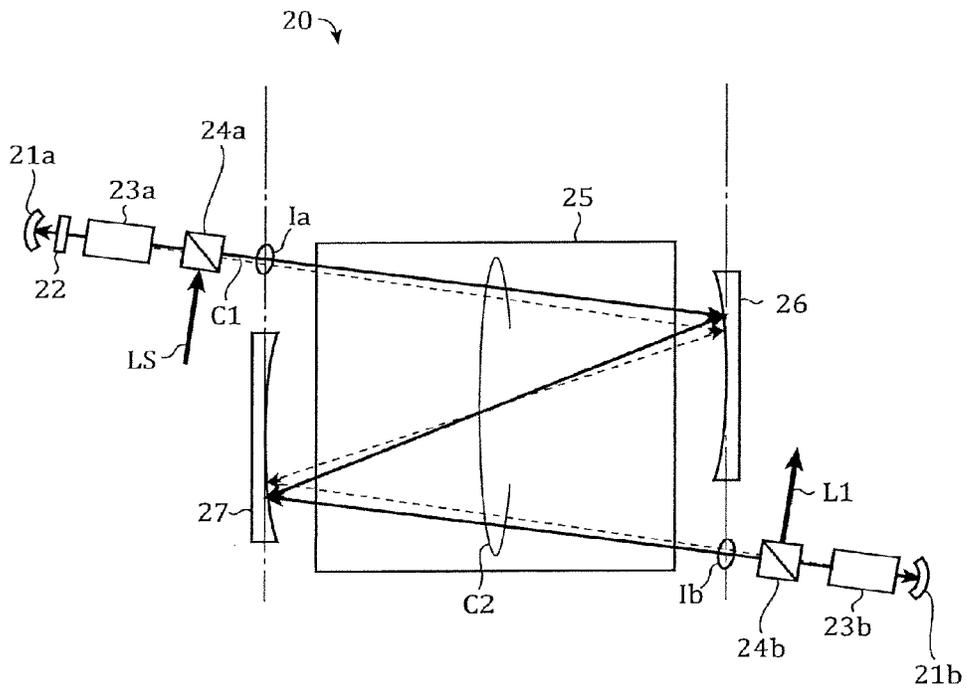


FIG. 3



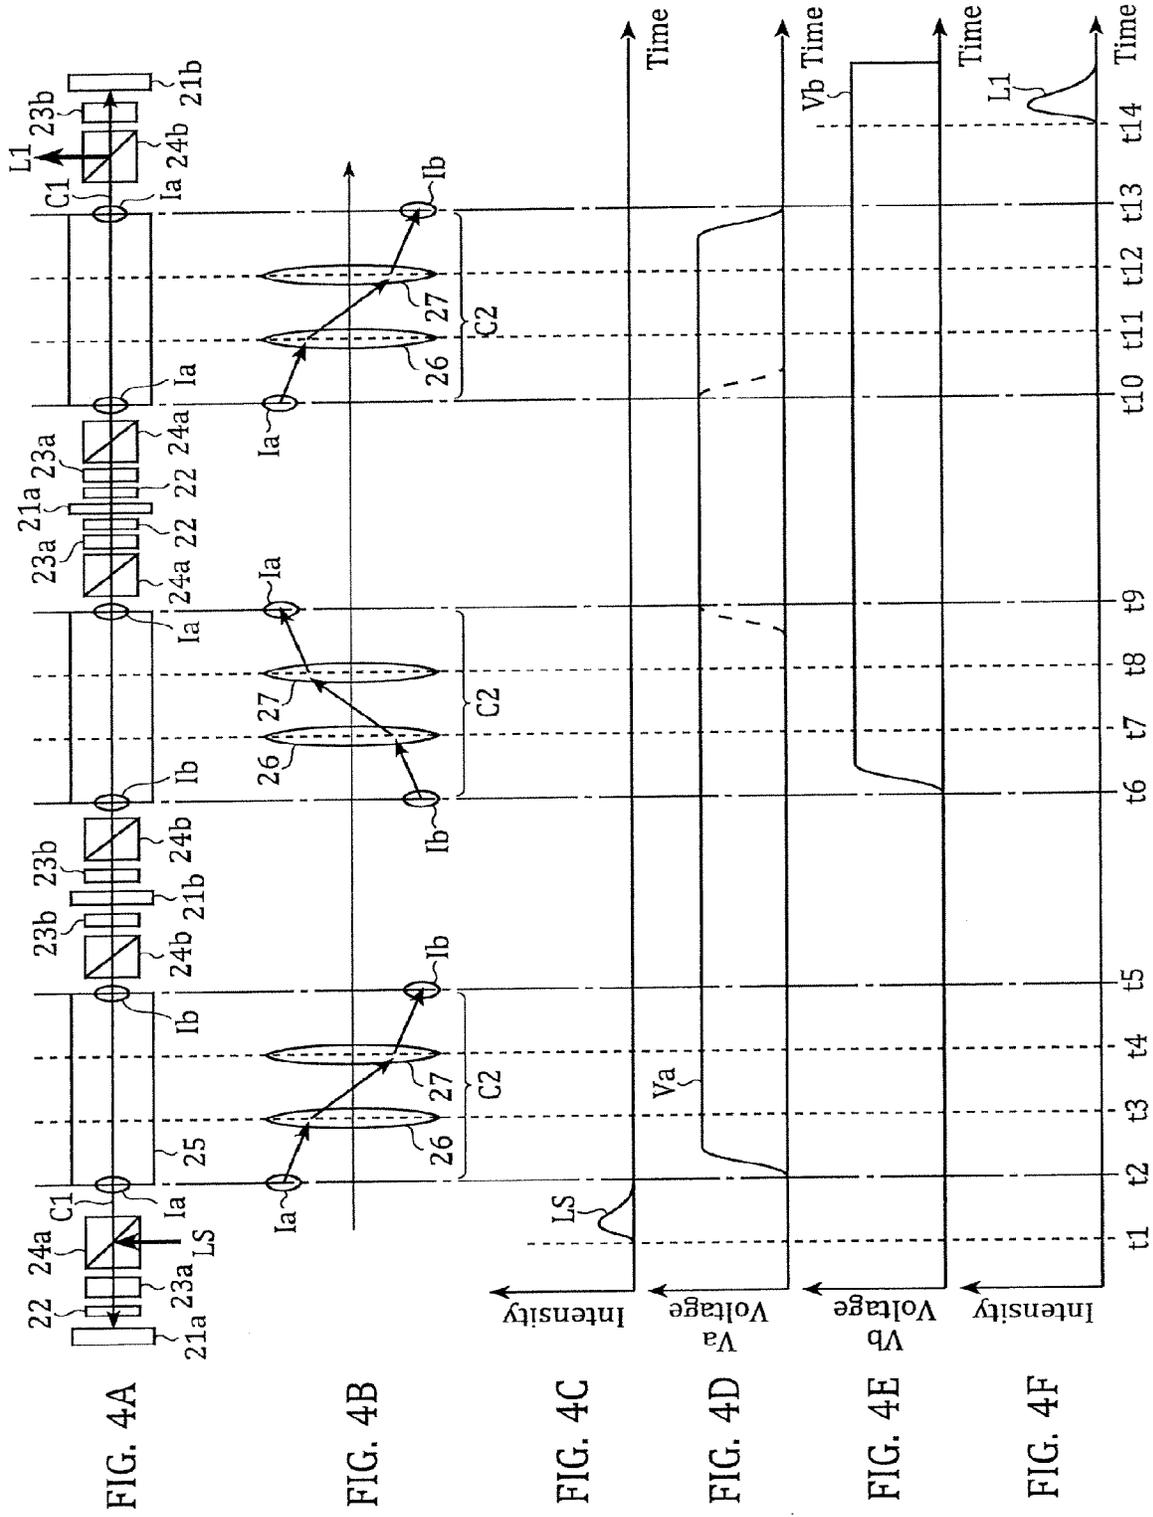




FIG. 7

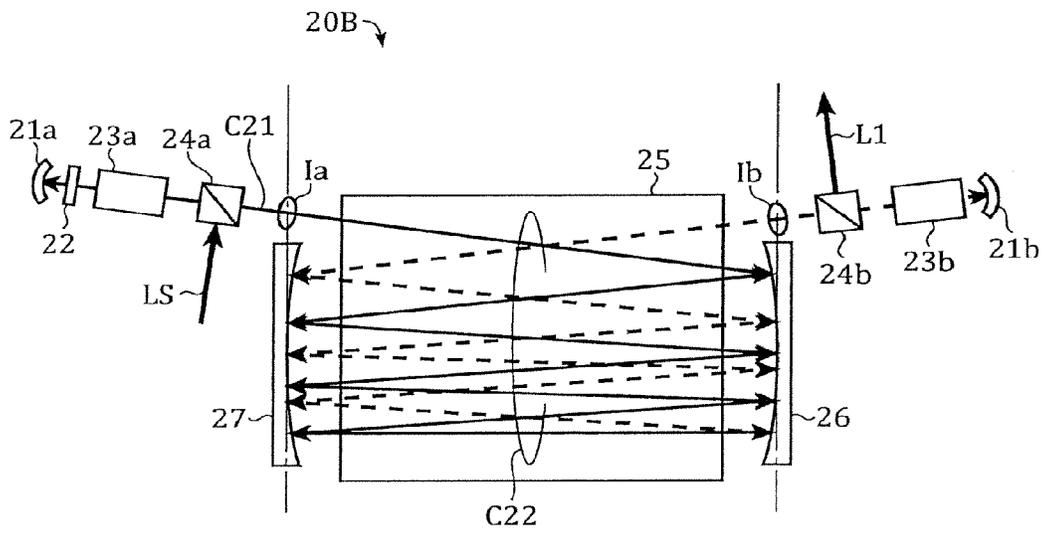


FIG. 8

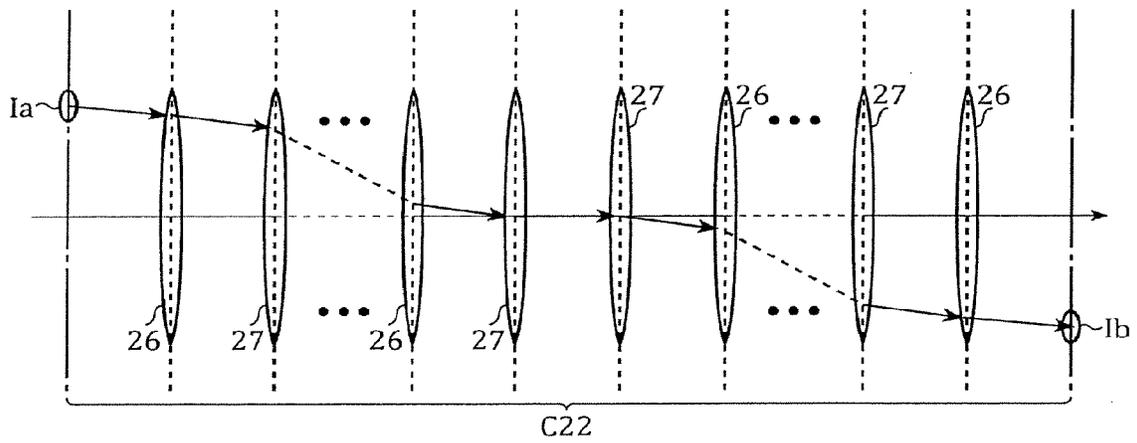


FIG. 9

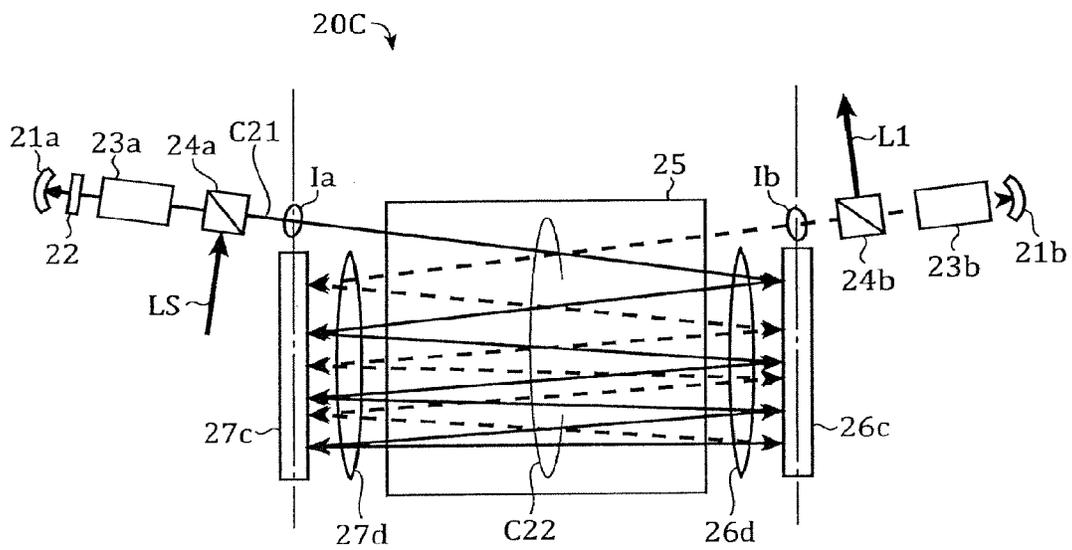


FIG. 10

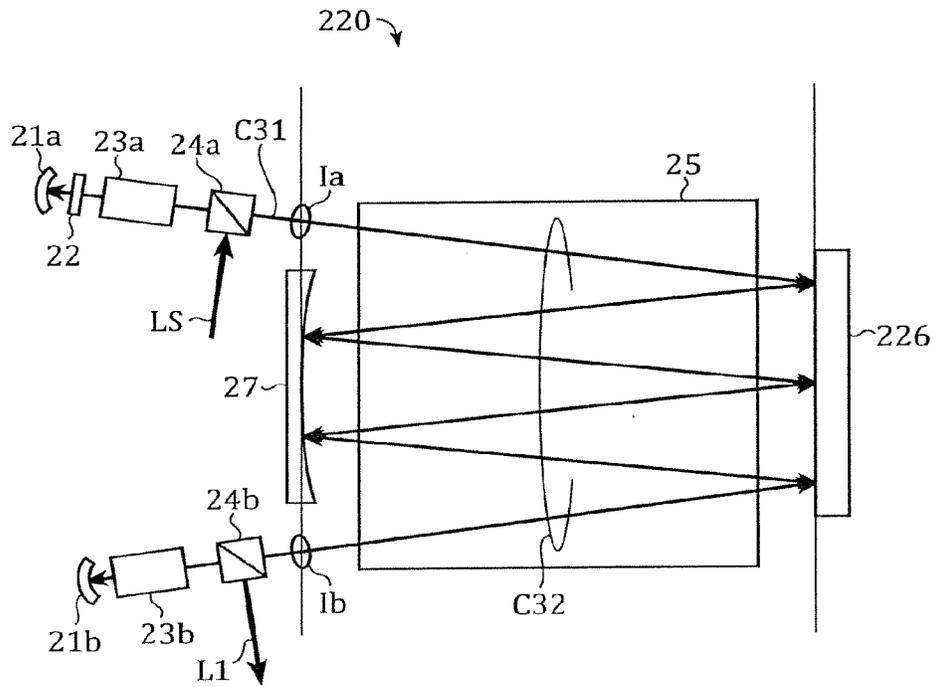


FIG. 11

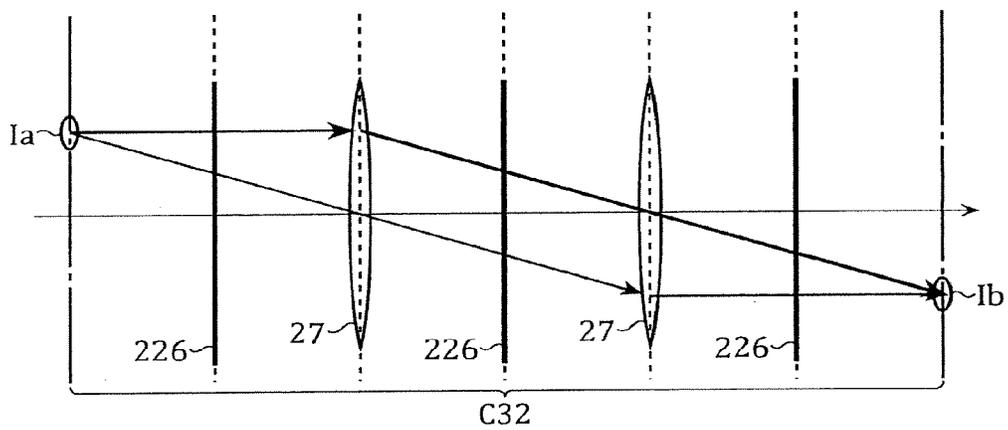


FIG. 12

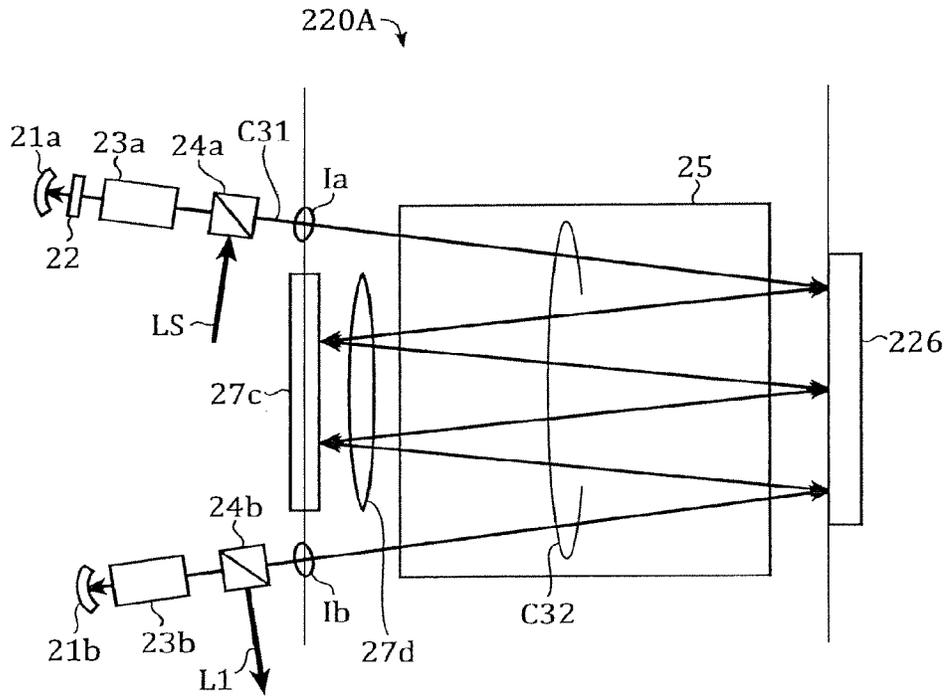
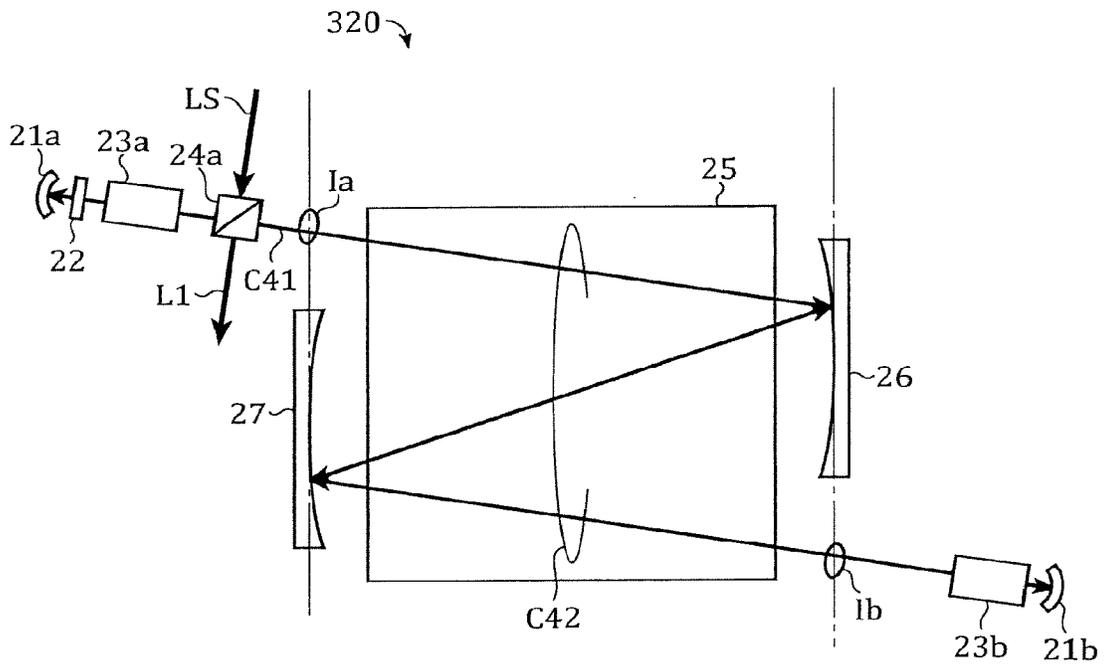


FIG. 13



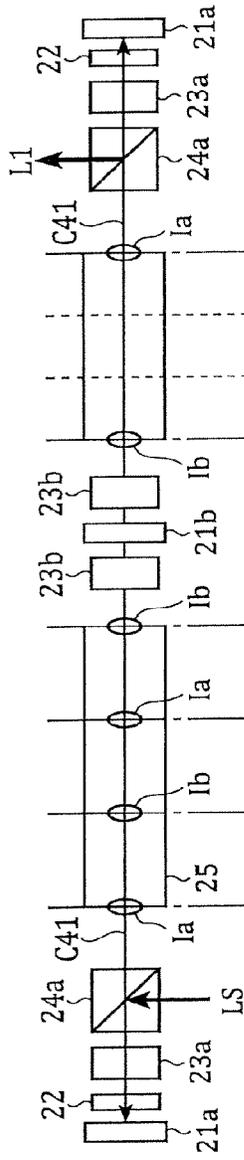


FIG. 14A



FIG. 14B

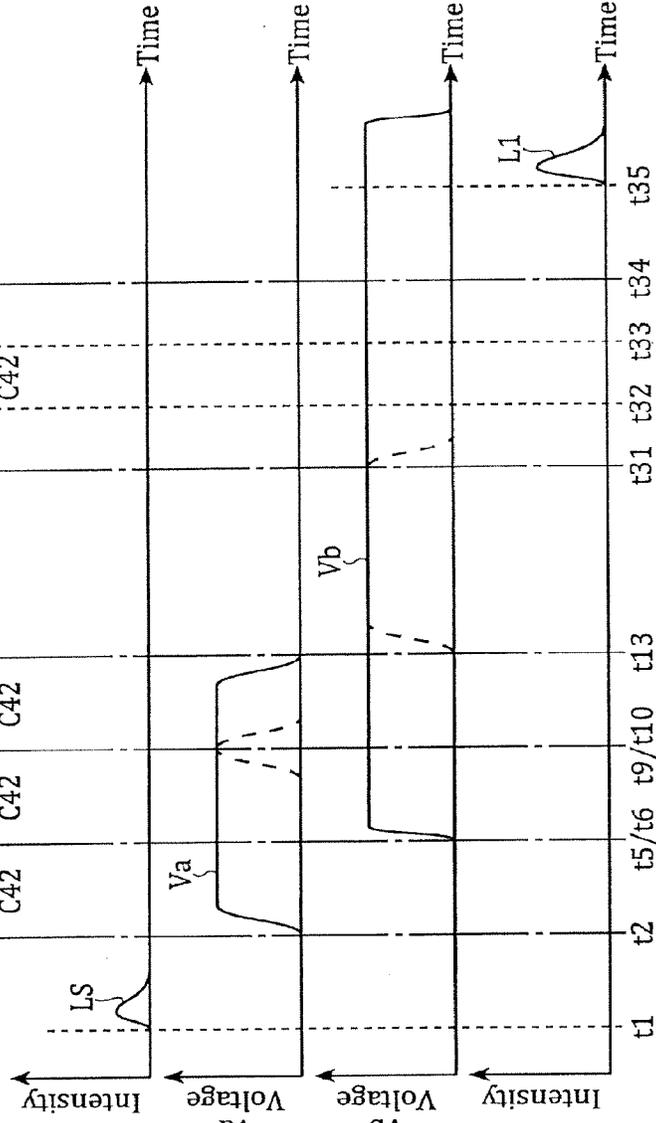


FIG. 14C

FIG. 14D

FIG. 14E

FIG. 14F



FIG. 17


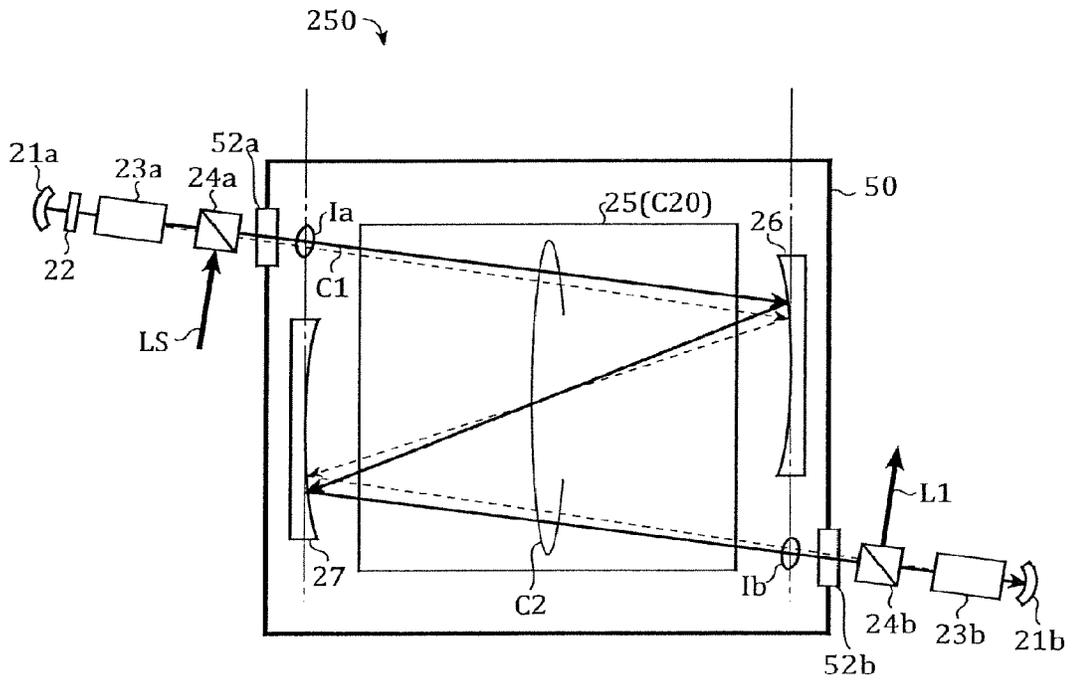


FIG. 18

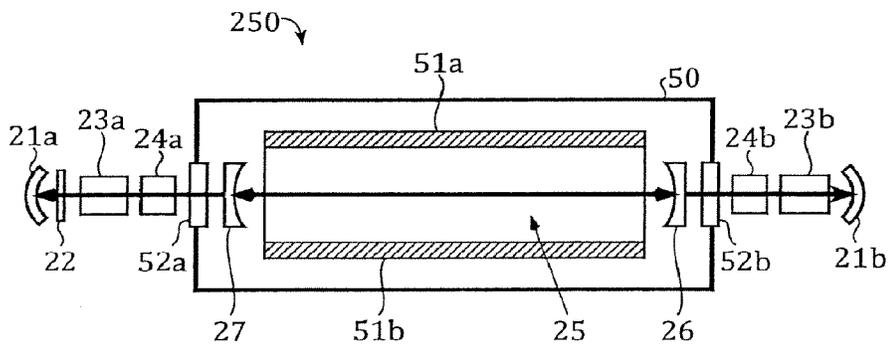

## REGENERATIVE AMPLIFIER, LASER APPARATUS, AND EXTREME ULTRAVIOLET LIGHT GENERATION SYSTEM

### CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application claims priority from Japanese Patent Application No. 2010-058512 filed on Mar. 15, 2010, and Japanese Patent Application No. 2010-283716 filed on Dec. 20, 2010, the disclosure of each of which is incorporated herein by reference in its entirety.

### BACKGROUND

[0002] 1. Technical Field

[0003] This disclosure relates to a regenerative amplifier, a laser apparatus, and an extreme ultraviolet light generation system.

[0004] 2. Related Art

[0005] With recent increase in integration of semiconductor devices, transfer patterns for use in photolithography of a semiconductor process have rapidly become finer. In the next generation, microfabrication at 70 to 45 nm, further, microfabrication at 32 nm or less is to be demanded. Accordingly, for example, to meet the demand for microfabrication at 32 nm or less, an exposure apparatus is expected to be developed, where an extreme ultraviolet (EUV) light generation system generating EUV light of a wavelength of approximately 13 nm is combined with a reduction projection reflective optical system.

[0006] There are mainly three types of EUV light generation systems, namely, a laser produced plasma (LPP) type system using plasma produced by applying a laser beam onto a target, a discharge produced plasma (DPP) type system using plasma produced by discharge, and a synchrotron radiation type system using orbital radiation.

### SUMMARY

[0007] A regenerative amplifier according to one aspect of this disclosure is used in combination with a laser device, and the regenerative amplifier may include: a pair of resonator mirrors constituting an optical resonator; a slab amplifier provided between the pair of the resonator mirrors for amplifying a laser beam with a predetermined wavelength outputted from the laser device; and an optical system disposed to configure a multipass optical path along which the laser beam is reciprocated inside the slab amplifier, the optical system transferring an optical image of the laser beam at a first position as an optical image of the laser beam at a second position.

[0008] A laser apparatus according to another aspect of this disclosure may include: at least one semiconductor laser oscillating a laser beam with a predetermined wavelength; and a regenerative amplifier including a pair of resonator mirrors constituting an optical resonator, an input coupling unit provided between the pair of the resonator mirrors for introducing the laser beam into the optical resonator, a slab amplifier provided between the pair of the resonator mirrors for amplifying the laser beam with the predetermined wavelength, an optical system disposed to configure a multipass optical path along which the laser beam is reciprocated inside the slab amplifier, the optical system transferring an optical image of the laser beam at a first position as an optical image of the laser beam at a second position, and an output coupling

unit for outputting the laser beam amplified by the slab amplifier to an exterior of the optical resonator.

[0009] An extreme ultraviolet light generation system according to yet another aspect of this disclosure may include: at least one semiconductor laser oscillating a laser beam with a predetermined wavelength; a regenerative amplifier including a pair of resonator mirrors constituting an optical resonator, an input coupling unit provided between the pair of the resonator mirrors for introducing the laser beam into the optical resonator, a slab amplifier provided between the pair of the resonator mirrors for amplifying the laser beam with the predetermined wavelength, an optical system disposed to form a multipass optical path along which the laser beam is reciprocated inside the slab amplifier, the optical system transferring an optical image of the laser beam at a first position as an optical image of the laser beam at a second position, and an output coupling unit for outputting the laser beam amplified by the slab amplifier to an exterior of the optical resonator; at least one amplifier for amplifying the laser beam outputted from the regenerative amplifier; a chamber provided with an input port through which the laser beam enters the chamber; a target supply unit provided to the chamber for supplying, to a predetermined region inside the chamber, a target substance serving as a plasma source; a focusing mirror for focusing the laser beam amplified by the at least one amplifier at a point in the predetermined region; and a collector mirror provided in the chamber for collecting the extreme ultraviolet light emitted from the plasma generated in the predetermined region.

[0010] These and other objects, features, aspects, and advantages of this disclosure will become apparent to those skilled in the art from the following detailed description, which, taken in conjunction with the annexed drawings, discloses preferred embodiments of this disclosure.

### BRIEF DESCRIPTION OF DRAWINGS

[0011] FIG. 1 illustrates a schematic configuration of an EUV light generation system according to a first embodiment of this disclosure.

[0012] FIG. 2 illustrates a schematic configuration of a laser apparatus according to the first embodiment.

[0013] FIG. 3 illustrates a schematic configuration of a regenerative amplifier according to the first embodiment.

[0014] FIGS. 4A through 4F describe overall operation of the regenerative amplifier of the first embodiment.

[0015] FIG. 5 illustrates a schematic configuration of a regenerative amplifier according to a first modification of the first embodiment.

[0016] FIG. 6 is a conceptual view schematically illustrating a multipass formed in a slab amplifier of the regenerative amplifier illustrated in FIG. 5.

[0017] FIG. 7 illustrates a schematic configuration of a regenerative amplifier according to a second modification of the first embodiment.

[0018] FIG. 8 is a conceptual view schematically illustrating a multipass formed in a slab amplifier of the regenerative amplifier illustrated in FIG. 7.

[0019] FIG. 9 illustrates a schematic configuration of a regenerative amplifier according to a third modification of the first embodiment.

[0020] FIG. 10 illustrates a schematic configuration of a regenerative amplifier according to a second embodiment of this disclosure.

[0021] FIG. 11 is a conceptual view schematically illustrating a multipass formed in a slab amplifier of the regenerative amplifier illustrated in FIG. 10.

[0022] FIG. 12 illustrates a schematic configuration of a regenerative amplifier according to a modification of the second embodiment.

[0023] FIG. 13 illustrates a schematic configuration of a regenerative amplifier according to a third embodiment of this disclosure.

[0024] FIGS. 14A through 14F describe overall operation of the regenerative amplifier of the third embodiment.

[0025] FIG. 15 illustrates a schematic configuration of a regenerative amplifier according to a modification of the third embodiment.

[0026] FIG. 16 illustrates a schematic configuration of a laser apparatus according to a fourth embodiment of this disclosure.

[0027] FIG. 17 is a schematic top view of a slab type regenerative amplifier according to a fifth embodiment of this disclosure, in which CO<sub>2</sub> laser gas is used as a gain medium.

[0028] FIG. 18 is a schematic side view of the regenerative amplifier illustrated in FIG. 17.

#### DESCRIPTION OF PREFERRED EMBODIMENTS

[0029] Selected embodiments of this disclosure will be described in detail below with reference to the drawings. In the following description, each drawing merely schematically illustrates shape, size, and positional relationship to a degree that allows the contents of the disclosure to be understood, so that the disclosure is not limited by the shape, the size, and the positional relationship illustrated in each drawing. Further, indicated numerical values are merely preferable exemplary values in the disclosure, so that the disclosure is not limited by the indicated exemplary numerical values.

##### First Embodiment

[0030] A regenerative amplifier, a laser apparatus, and an EUV light generation system according to a first embodiment of this disclosure will be described in detail below with reference to the drawings. FIG. 1 illustrates the schematic configuration of an EUV light generation system 1 of the first embodiment, FIG. 2 illustrates the schematic configuration of a laser apparatus 100 of the first embodiment, and FIG. 3 illustrates the schematic configuration of a regenerative amplifier 20 of the first embodiment.

[0031] As illustrated in FIG. 1, the EUV light generation system 1 of the first embodiment may include a semiconductor laser 10, a semiconductor laser controller 18, a regenerative amplifier 20, a pre-amplifier PA, high-reflection (HR) mirrors M1 and M2, a relay optical system R1, a main amplifier MA, a relay optical system R2, a high-reflection (HR) mirror M3, an off-axis paraboloidal mirror M4, and an EUV chamber 40. The semiconductor laser 10 may output a pulsed laser beam in a single-longitudinal mode or in a multi-longitudinal mode. The semiconductor laser controller 18 may control the oscillation wavelength of the semiconductor laser 10 and the pulse shape (including the pulse width) of a seed beam to be outputted from the semiconductor laser 10. The regenerative amplifier 20 may amplify the seed beam outputted from the semiconductor laser 10. The pre-amplifier PA may further amplify the amplified pulsed laser beam (hereinafter referred to as regenerative amplified pulsed laser

beam). The HR mirrors M1 and M2 may guide the pulsed laser beam outputted from the pre-amplifier PA (hereinafter referred to as amplified pulsed laser beam) to the main amplifier MA. The relay optical system R1 may increase the diameter of the amplified pulsed laser beam entering the main amplifier MA such that the diameter substantially coincides with the width of a slab amplifier in the main amplifier MA. The main amplifier MA may further amplify the amplified pulsed laser beam, of which the diameter has been increased. The relay optical system R2 may collimate the amplified pulsed laser beam which has been amplified by the main amplifier MA. The HR mirror M3 may guide the collimated amplified pulsed laser beam to the off-axis paraboloidal mirror M4. The off-axis paraboloidal mirror M4 may reflect the collimated amplified pulsed laser beam such that the amplified pulsed laser beam is focused at a point in a predetermined region (plasma generation region P1) inside the EUV chamber 40. The EUV chamber 40 may include a target supply unit (not illustrated) for supplying, to the plasma generation region P1 where the amplified pulsed laser beam is focused, a droplet or a solid target serving as a source for generating EUV light.

[0032] The semiconductor laser 10 may include a semiconductor device 11, a rear optical module 12, an output coupling mirror 13, a longitudinal-mode control actuator 14, a longitudinal-mode controller 15, and a current control actuator 16. The semiconductor laser 10 may output a pulsed laser beam of a wavelength corresponding to an amplification line of the pre-amplifier PA and the main amplifier MA. The semiconductor laser 10 may oscillate a pulsed laser beam of a wavelength corresponding to one or more amplification lines of a CO<sub>2</sub>-gas gain medium C20 to be used as a gain medium in the regenerative amplifier 20, the pre-amplifier PA, and the main amplifier MA provided downstream of the semiconductor laser 10. Such a semiconductor device may, for example, be configured of a quantum cascade laser (QCL).

[0033] The output coupling mirror 13 may be provided to a front side (also referred to as a beam lead-out side) of the semiconductor device 11, and the rear optical module 12 may be provided to a rear side of the semiconductor device 11. An optical resonator is configured of the output coupling mirror 13 and the rear optical module 12 which are arranged with the semiconductor device 11 being disposed therebetween. The longitudinal-mode controller 15 may drive the longitudinal-mode control actuator 14 in accordance with an oscillation wavelength signal S1 outputted from the semiconductor laser controller 18 so as to move at least one of the output coupling mirror 13 and the rear optical module 12, whereby the length of the optical resonator may be controlled.

[0034] The current control actuator 16 may control the waveform and the current (hereinafter simply referred to as current waveform) of a current signal to be inputted to the semiconductor device 11 in accordance with an oscillation pulse shape signal S2 and a control signal S3 outputted from the semiconductor laser controller 18. The semiconductor device 11 may oscillate a pulsed laser beam in accordance with the current waveform controlled by the current control actuator 16.

[0035] By thus using, in a master oscillator, the semiconductor device 11 of which the current can easily be controlled, the intensity and the pulse width of a pulsed laser beam outputted from the master oscillator can be controlled by the current waveform. Thus, a pulsed laser beam having desired intensity and a desired pulse width can be obtained easily.

Particularly, the intensity, the pulse width, and so forth, of a pulsed laser beam outputted from the semiconductor laser **10** can be adjusted relatively freely by controlling the current control actuator **16** to adjust the current waveform inputted to the semiconductor device **11**. As a result, a pulsed laser beam having desired intensity and a desired pulse width can be obtained easily without changing the configuration of the apparatus.

**[0036]** Next, the configuration of the regenerative amplifier **20** will be described below. The regenerative amplifier **20** may include resonator mirrors **21a** and **21b**, a slab amplifier **25**, a polarizer **24a**, Pockels cells (EOM) **23a** and **23b**, and a quarter-wave plate **22**. Detailed functions and operation of the regenerative amplifier **20** will be described later. The regenerative amplifier **20** can efficiently amplify a low-intensity pulsed laser (seed) beam outputted from the semiconductor device **11**. The pulsed laser beam amplified by the regenerative amplifier **20** may further be amplified by the pre-amplifier PA and the main amplifier MA. Then, the laser apparatus **100** may output a pulsed laser beam of such characteristics as follows. The pulsed laser beam has high pulse energy (approximately 50 to 200 mJ), a relatively short pulse width (10 to 100 ns), a high repetition rate (50 to 100 kHz), and a power of 10 to 20 kW. The pulsed laser beam outputted from the laser apparatus **100** may be reflected by the flat HR mirror **M3**, and be guided to the off-axis paraboloidal mirror **M4**.

**[0037]** The EUV chamber **40** may include a window **W1** and an EUV collector mirror **41**, in addition to the above-mentioned target supply unit. The amplified pulsed laser beam reflected by the off-axis paraboloidal mirror **M4** may be introduced into the EUV chamber **40** through the window **W1**. The EUV collector mirror **41** may collect and reflect EUV light emitted from plasma generated in the plasma generation region **P1** such that the EUV light is focused at a predetermined point (intermediate focus **P2**) outside the EUV chamber **40**. The EUV collector mirror **41** may have a through-hole **41a** through which the amplified pulsed laser beam passes, from the back side thereof, to travel toward the plasma generation region **P1**. The amplified pulsed laser beam may be reflected by the off-axis paraboloidal mirror **M4** and be focused, traveling through the window **W1** and the through-hole **41a**, on a target supplied to the plasma generation region **P1**.

**[0038]** EUV light with a desired wavelength to be used in an exposure apparatus may be emitted from the plasma generated as the target is irradiated with the amplified pulsed laser beam in the plasma generation region **P1**. As the target substance, tin (Sn) can be used, for example. In this case, Sn plasma may emit EUV light with a desired wavelength of approximately 13.5 nm.

**[0039]** As described above, the EUV light emitted from the plasma generated in the plasma generation region **P1** may be focused at the intermediate focus **P2** outside the EUV chamber **40**. An aperture **42** is positioned at the intermediate focus **P2**, for example. Thus, the EUV light focused at the intermediate focus **P2** may be introduced into the exposure apparatus (not shown) through the aperture **42**.

**[0040]** As illustrated in FIG. 2, the semiconductor laser **10**, the regenerative amplifier **20**, and an amplifier **30** which is configured of the pre-amplifier PA and the main amplifier MA shown in FIG. 1 may constitute the laser apparatus **100** of the first embodiment.

**[0041]** Next, a process in which an amplified pulsed laser beam is outputted in the first embodiment will be described in

detail with reference to FIG. 2. As illustrated in FIG. 2, a seed beam LS outputted from the semiconductor laser **10** under the control of the semiconductor laser controller **18** (see FIG. 1) may be guided into the regenerative amplifier **20**. The regenerative amplifier **20** may be filled with a gain medium for amplifying the seed beam LS. As such gain medium, for example, a CO<sub>2</sub>-gas gain medium **C20** containing CO<sub>2</sub> gas can be used. The seed beam LS having entered the regenerative amplifier **20** may be amplified by being reciprocated once or more times through the CO<sub>2</sub>-gas gain medium **C20** inside the regenerative amplifier **20**, and may then be outputted as a regenerative amplified pulsed laser beam L1.

**[0042]** The regenerative amplified pulsed laser beam L1 outputted from the regenerative amplifier **20** may be guided to the above-mentioned amplifier **30** configured of the pre-amplifier PA and the main amplifier MA (see FIG. 1). In the first embodiment, the regenerative amplified pulsed laser beam L1 may be first amplified by the pre-amplifier PA, and may then be further amplified by the main amplifier MA (see FIG. 1). After that, the regenerative amplified pulsed laser beam L1 having been amplified by the regenerative amplifier **20** may be outputted as an amplified pulsed laser beam L2 from the amplifier **30**.

**[0043]** The CO<sub>2</sub>-gas gain medium **C20** can be used as gain media in the pre-amplifier PA and in the main amplifier MA, as in the regenerative amplifier **20**. By using the same type of gain media in the regenerative amplifier **20** and in the amplifier **30** disposed downstream thereof, one or more amplification lines of both the regenerative amplifier **20** and the amplifier **30** can be made to coincide with each other. Thus, the pulsed laser beam can be amplified more efficiently. However, this disclosure is not limited thereto, and a regenerative amplifier and an amplifier filled with different gain media may also be combined.

**[0044]** The pulse width of a pulsed laser beam required of a driver laser in the LPP type system is relatively short, which is about 10 to 100 ns. Thus, the optical path length in the regenerative amplifier **20** may need to be increased so that a low-intensity, short-pulsed laser beam outputted from the semiconductor laser **10**, such as a QCL, with a predetermined pulse width can be amplified efficiently. For example, an optical path length L in the regenerative amplifier **20** which is necessary to amplify a pulsed laser beam having a pulse width T is given by the following Expression (1):

$$L = T \times C \quad (1)$$

where C represents the light speed.

**[0045]** Thus, for example, in order to amplify a pulsed laser beam having a pulse width T of 50 ns, the optical path length L of the regenerative amplifier **20** may need to be considerably long, such as 15 m ( $=3 \times 10^8 \times 50 \times 10^{-9}$ ). Accordingly, in the first embodiment, a multipass optical path may be formed in the regenerative amplifier **20**, as will be described later. This allows a pulsed laser beam having a relatively short pulse width to be stably amplified while the size of the regenerative amplifier **20** is not increased.

**[0046]** Next, the regenerative amplifier **20** of the first embodiment will be described in detail with reference to FIG. 3. As illustrated in FIG. 3, the regenerative amplifier **20** may include the quarter-wave plate **22**, the EOM **23a** such as an electro-optic (EO) Pockels cell, the input-side polarizer **24a**, the slab amplifier **25**, an output-side polarizer **24b**, and the EOM **23b** such as an EO Pockels cell. These components may be arranged in that order from the resonator mirror **21a** side

on the optical path of the optical resonator configured of the resonator mirrors **21a** and **21b**. The quarter-wave plate **22** may delay one component of a pulsed laser beam (a seed beam LS to be amplified) incident thereon by 90 degrees in phase. The polarizer **24a** may serve as a polarization beam splitter which reflects a beam incident thereon in a specific polarization state (S-polarized state in the first embodiment) and transmits a beam incident thereon in the other polarization state. The slab amplifier **25** may be filled with a CO<sub>2</sub>-gas gain medium C20. The polarizer **24b** may serve as a polarization beam splitter which reflects a beam incident thereon in a specific polarization state (S-polarized state in the first embodiment) and transmits a beam incident thereon in the other polarization state. The polarizer **24a**, the EOM **23a**, and the quarter-wave plate **22** may, in cooperation, function as an input coupling unit for guiding the seed beam LS outputted from the semiconductor laser **10** into the regenerative amplifier **20**. The polarizer **24b** and the EOM **23b**, on the other hand, may, in cooperation, function as an output coupling unit for outputting a pulsed laser beam amplified by the regenerative amplifier **20** as the regenerative amplified pulsed laser beam L1.

[0047] The regenerative amplifier **20** may also include a pair of concave high-reflection (HR) mirrors **26** and **27** arranged to form a multipass optical path along which the pulsed laser beam is reciprocated once or more times inside the slab amplifier **25**. That is, in the regenerative amplifier **20**, an optical path C1 between the two resonator mirrors **21a** and **21b** may include a multipass C2 formed by the concave HR mirrors **26** and **27**.

[0048] For example, reflective surfaces of the concave HR mirrors **26** and **27** are spherical-concave such that an image Ia of a pulsed laser beam at a certain point (first position), on the optical path C1, between the resonator mirror **21a** and a pulsed-laser-beam input/output edge of the slab amplifier **25** (referred to as an incident optical image) is simply transferred as an image Ib of the pulsed laser beam at another certain point (second position), on the optical path C1, between the pulsed-laser-beam output/input edge of the slab amplifier **25** and the resonator mirror **21b** (referred to as a transfer optical image). In other words, the concave HR mirrors **26** and **27** are spherical-concave such that the input-side optical image (incident optical image Ia) is simply transferred as the output-side optical image (transfer optical image Ib) through the multipass C2 along which the pulsed laser beam is reciprocated inside the slab amplifier **25**.

[0049] With this configuration, even when the optical path length (the length of the resonator formed by the resonator mirrors **21a** and **21b**) is increased by having a multipass (zigzag) optical path being formed, it is possible to prevent the beam axis of an entering pulsed laser beam and the exit position of an exiting pulsed laser beam from further deviating, dependent on the optical path length, due to the deviation of the beam axis of the entering pulsed laser beam. As a result, the laser beam can be amplified to desired intensity and to a desired pulse width, and the beam axis of the laser beam outputted from the regenerative amplifier **20** can be stabilized.

[0050] In the case illustrated in FIG. 3, an incident optical image Ia of the pulsed laser beam at an intersection where the optical path C1 meets a plane along the bottommost portion of the spherical-concave reflective surface of the concave HR mirror **27** to the incident side of the seed beam LS may be transferred as a transfer optical image Ib of the pulsed laser

beam at an intersection where the optical path C1 meets a plane along the bottommost portion of the spherical-concave reflective surface of the concave HR mirror **26** to the output side of the regenerative amplified pulsed laser beam L1. However, this disclosure is not limited to this case, and various modifications are possible. For example, an incident optical image Ia of a pulsed laser beam incident on the resonator mirror **21a** may simply be transferred as a transfer optical image Ib of the pulsed laser beam incident on the resonator mirror **21b**, or an incident optical image Ia of a pulsed laser beam incident on the polarizer **24a** may simply be transferred as a transfer optical image Ib of the pulsed laser beam incident on the polarizer **24b**.

[0051] Next, the operation of the regenerative amplifier **20** illustrated in FIG. 3 will be described in detail with reference to FIGS. 4A through 4F. FIGS. 4A through 4F illustrate the overall operation of the regenerative amplifier **20** of the first embodiment, in which a seed beam LS introduced into the regenerative amplifier **20** is reciprocated one and a half times in the resonator configured of the resonator mirrors **21a** and **21b**. FIG. 4A plainly illustrates the overall operation of the regenerative amplifier **20** illustrated in FIG. 3. FIG. 4B is an optical system diagram schematically illustrating a multipass formed in the slab amplifier **25** of the regenerative amplifier **20** illustrated in FIG. 3. FIGS. 4C through 4F are timing charts showing the overall operation of the regenerative amplifier **20** illustrated in FIG. 3. For the sake of simplicity, in FIGS. 4A through 4F, the plane along the bottommost portion of the spherical-concave reflective surface of the concave HR mirror **27** substantially coincide with a surface of the slab amplifier **25** facing the incident side of the seed beam LS, and the plane along the bottommost portion of the spherical-concave reflective surface of the concave HR mirror **26** substantially coincides with a surface of the slab amplifier **25** facing the output side of the regenerative amplified pulsed laser beam L1.

[0052] As illustrated, the S-polarized component of a seed beam LS incident on the polarizer **24a** (see FIG. 4A) at timing t1 (see FIG. 4C) may be reflected with high reflectivity by the polarizer **24a**, and introduced into the regenerative amplifier **20**. The seed beam LS having entered the regenerative amplifier **20** may pass, without a phase shift, through the EOM **23a** to which voltage is not applied (see FIG. 4D), and pass through the quarter-wave plate **22**, where one component of the pulsed laser beam is delayed by 90 degrees in phase, whereby the pulsed laser beam is converted into a circularly polarized pulsed laser beam. Subsequently, the circularly polarized pulsed laser beam may be reflected with high reflectivity by the resonator mirror **21a**, and pass through the quarter-wave plate **22** again, where the circularly polarized pulsed laser beam is converted into a pulsed laser beam that is in the P-polarized state with respect to the polarizer **24a**. This pulsed laser beam may pass, without a phase shift, through the EOM **23a** to which voltage is not applied (see FIG. 4D), and be transmitted through the polarizer **24a**. After that, the pulsed laser beam enters the slab amplifier **25** at timing t2 (see FIG. 4A). As illustrated in FIG. 4B, the pulsed laser beam having entered the slab amplifier **25** may be reflected by the concave HR mirrors **26** and **27** (timing t3 and t4 in FIG. 4B), to thereby be reciprocated once or more times (one and a half times in the first embodiment) between the concave HR mirrors **26** and **27**. Thus, the pulsed laser beam may pass through the slab amplifier **25** a plurality of times (three times in the

first embodiment). As a result, the pulsed laser beam is subjected to multipass amplification.

**[0053]** After that, the amplified pulsed laser beam may exit from the slab amplifier **25** at timing **t5**, and be transmitted through the polarizer **24b**. Then, the pulsed laser beam may pass, without a phase shift, through the EOM **23b** to which voltage is not applied (see FIG. **4E**), and be reflected with high reflectivity by the resonator mirror **21b**. The reflected pulsed laser beam may pass through the EOM **23b** to which voltage is not applied (see FIG. **4E**), and then pass through the polarizer **24b**. At timing **t6** (see FIG. **4A**), the pulsed laser beam may reenter the slab amplifier **25**. As illustrated in FIG. **4B**, the pulsed laser beam having entered the slab amplifier **25** may be reflected by the concave HR mirrors **27** and **26** (timing **t7** and **t8** in FIG. **4B**), similarly to the above, to thereby be reciprocated once or more times (one and a half times in the first embodiment) between the concave HR mirrors **27** and **26**. Thus, the pulsed laser beam may pass through the slab amplifier **25** a plurality of times (three times in the first embodiment). As a result, the pulsed laser beam is subjected to multipass amplification.

**[0054]** After that, the amplified pulsed laser beam may exit from the slab amplifier **25** at timing **t9**, be transmitted through the polarizer **24a**, and pass through the EOM **23a** to which voltage is applied (see FIG. **4D**). For regenerative amplification of the pulsed laser beam, voltage is applied to the EOM **23a**. In the example illustrated in FIGS. **4A** through **4F**, voltage is applied in timing **t2** through **t9**, in which predetermined voltage **Va** is applied, and voltage is turned off in timing **t10** through **t13**. When passing through the EOM **23a** to which the voltage **Va** is applied, one component of the pulsed laser beam may be delayed by 90 degrees in phase, whereby the pulsed laser beam is converted into a circularly polarized pulsed laser beam. Next, the circularly polarized pulsed laser beam may pass through the quarter-wave plate **22**, to thereby be converted into a pulsed laser beam that is in the S-polarized state with respect to the polarizer **24a**. After that, the pulsed laser beam may be reflected with high reflectivity by the resonator mirror **21a**, and pass again through the quarter-wave plate **22** to thereby be converted into a circularly polarized laser beam. Subsequently, the circularly polarized pulsed laser beam may pass through the EOM **23a** to which the voltage **Va** is applied (see FIG. **4D**), to thereby be converted again into a pulsed laser beam which is in the P-polarized state with respect to the polarizer **24a**. This pulsed laser beam may pass through the polarizer **24a** and reenter the slab amplifier **25** at timing **t10** (see FIG. **4A**). As illustrated in FIG. **4B**, the pulsed laser beam having entered the slab amplifier **25** may be reflected by the concave HR mirrors **26** and **27**, similarly to the above (timing **t11** and **t12** in FIG. **4B**), to thereby be reciprocated once or more times (one and a half times in the first embodiment) between the concave HR mirrors **26** and **27**. With this, the pulsed laser beam may pass through the slab amplifier **25** a plurality of times (three times in the first embodiment). As a result, the pulsed laser beam is subjected to multipass amplification.

**[0055]** After that, the amplified pulsed laser beam may exit from the slab amplifier **25** at timing **t13**, pass through the polarizer **24b**, and pass through the EOM **23b** to which voltage is applied (see FIG. **4E**) to thereby be converted into a circularly polarized pulsed laser beam. Voltage may be applied to the EOM **23b** in order to cause the regenerative amplified pulsed laser beam to be outputted from the regenerative amplifier **20**. In the example illustrated in FIGS. **4A**

through **4F**, voltage may be applied in timing **t6** through **t14**, and voltage may be turned off after the regenerative amplified laser beam is outputted from the regenerative amplifier **20**. Subsequently, the circularly polarized pulsed laser beam may be reflected with high reflectivity by the resonator mirror **21b**, and pass again through the EOM **23b** to which voltage is applied (see FIG. **4E**), to thereby be converted into a pulsed laser beam which is in the S-polarized state with respect to the polarizer **24b**. The pulsed laser beam which is in the S-polarized state with respect to the polarizer **24b** may be reflected with high reflectivity by the polarizer **24b**. With this, the pulsed laser beam having been subjected to multipass amplification between the resonator mirrors **21a** and **21b** may be outputted as the regenerative amplified pulsed laser beam **L1** from the regenerative amplifier **20** after timing **t14** (see FIG. **4D**).

**[0056]** As described above, the pulsed laser beam having been introduced into the regenerative amplifier **20** may be reciprocated in the slab amplifier **25** while traveling between the resonator mirrors **21** and **21b** constituting the optical resonator, to thereby be subjected to multipass amplification. The pulsed laser beam having been introduced into the regenerative amplifier **20** may be reciprocated a plurality of times between the resonator mirrors **21a** and **21b** until it is amplified at least to desired intensity.

**[0057]** As described above, in the first embodiment, the optical image (incident optical image **Ia**) on the input side of the multipass along which the pulsed laser beam is reciprocated inside the slab amplifier **25** may simply be transferred as the optical image (transfer optical image **Ib**) on the output side of the multipass. Accordingly, even when the optical path length is increased by having a multipass optical path being formed, it is possible to prevent the beam axis of an entering pulsed laser beam and the exit position of an exiting pulsed laser beam from further deviating, dependent on the optical path length, due to the deviation of the beam axis of the entering pulsed laser beam. As a result, the regenerative amplifier **20** of the first embodiment makes it possible to stabilize the beam axis of the pulsed laser beam and to amplify the pulsed laser beam stably.

#### First Modification

**[0058]** In the above-described first embodiment, the pulsed laser beam (seed beam **LS**) has been reciprocated one and a half times in the slab amplifier **25** of the regenerative amplifier **20**. However, this disclosure is not limited thereto, and various modifications are possible. For example, as in a regenerative amplifier **20A** illustrated in FIG. **5** according to a first modification of the first embodiment, an optical path **C11** of a pulsed laser beam may include a multipass **C12** along which the pulsed laser beam is reciprocated two and a half times (or twice, three times, or more times) inside a slab amplifier **25**. FIG. **5** illustrates the schematic configuration of the regenerative amplifier **20A** of the first modification, and FIG. **6** schematically illustrates an optical system formed in the slab amplifier **25** of the regenerative amplifier **20A** illustrated in FIG. **5**. As illustrated in FIG. **6**, in the regenerative amplifier **20A** of the first modification, a pulsed laser beam having entered the slab amplifier **25** may be reflected by the concave HR mirrors **26** and **27**, specifically, twice by each of the concave HR mirrors **26** and **27**. Thus, the pulsed laser beam may pass through the slab amplifier **25** five times.

**[0059]** This makes it possible to reduce the size of the slab amplifier **25** in a direction normal to the surfaces of the

concave HR mirrors **26** and **27**, whereby the size of the regenerative amplifier **20A** can be reduced.

#### Second Modification

**[0060]** In the above-described first embodiment, an incident end and an exit end of the pulsed laser beam with respect to the slab amplifier **25** have been located diagonally on two opposing surfaces of the slab amplifier **25** shaped in a rectangular parallelepiped. However, this disclosure is not limited thereto. FIG. 7 illustrates the schematic configuration of a regenerative amplifier **20B** according to a second modification of the first embodiment, and FIG. 8 is a conceptual view schematically illustrating an optical system formed in a slab amplifier **25** of the regenerative amplifier **20B** illustrated in FIG. 7. In the regenerative amplifier **20B** of FIG. 7, for example, the incident end and the exit end of the pulsed laser beam may be located on the same side (upper side or lower side in the plane of the figure) of opposing surfaces of the slab amplifier **25**, as viewed in a direction perpendicular to the plane of the figure. In this case, as illustrated in FIG. 8, a multipass **C22** along which the pulsed laser beam may travel substantially all over the slab amplifier **25** may be formed in an optical path **C21** in the slab amplifier **25**. A pulsed laser beam having entered the slab amplifier **25** may first travel to the side opposite the side of the incident and exit ends while being reflected repeatedly, travel then to the side of the incident and exit ends while being reflected repeatedly, and finally exit from the exit end. That is, in the second modification, the pulsed laser beam may be reciprocated once in the slab amplifier **25** in a direction substantially perpendicular to the optical path **C21**.

**[0061]** This configuration makes it possible to further reduce the size of the slab amplifier **25** in the direction normal to the surfaces of the concave HR mirrors **26** and **27**, as well as to amplify the pulsed laser beam by fully utilizing a CO<sub>2</sub>-gas gain medium **C20** in the slab amplifier **25**, which may enhance gain efficiency. As a result, the size of the regenerative amplifier can further be reduced, and a high-power regenerative amplified pulsed laser beam can be outputted with lower energy.

#### Third Modification

**[0062]** While the concave HR mirrors **26** and **27** have been used to configure a multipass along which the pulsed laser beam is reciprocated inside the slab amplifier **25** in the above-described first embodiment, this disclosure is not limited thereto. FIG. 9 illustrates the schematic configuration of a regenerative amplifier **20C** according to a third modification of the first embodiment. For example, as in the regenerative amplifier **20C** shown in FIG. 9, the concave HR mirror **26** may be replaced by a reflection optical system configured of a flat HR mirror **26c** and a spherical lens **26d** provided to a reflective surface side of the flat HR mirror **26c**, and the concave HR mirror **27** may be replaced by a reflection optical system configured of a flat HR mirror **27c** and a spherical lens **27d** provided to a reflective surface side of the flat HR mirror **27c**. Such a configuration can also provide advantageous effects similar to those of the above-described first embodiment.

#### Second Embodiment

**[0063]** Next, a regenerative amplifier, a laser apparatus, and an EUV light generation system according to a second

embodiment of this disclosure will be described in detail with reference to the drawings. FIG. 10 illustrates the schematic configuration of the regenerative amplifier of the second embodiment, and FIG. 11 is a conceptual view schematically illustrating an optical system formed in a slab amplifier of the regenerative amplifier shown in FIG. 10. The laser apparatus and the EUV light generation system of the second embodiment are similar in configuration to the laser apparatus **100** and the EUV light generation system **1** of the above-described first embodiment except in that the regenerative amplifier **20** is replaced by a regenerative amplifier **220** illustrated in FIG. 10. Hence, detailed descriptions of the laser apparatus and the EUV light generation system are omitted here.

**[0064]** As illustrated in FIGS. 10 and 11, the regenerative amplifier **220** of the second embodiment is similar in configuration to the regenerative amplifier **20** of the first embodiment except in that one of the pair of the concave HR mirrors **26** and **27** provided with the slab amplifier **25** being disposed therebetween (the concave HR mirror **26** in the second embodiment) is replaced by a flat HR mirror **226**. In FIGS. 10 and 11, the mirror on which a pulsed laser beam having entered the slab amplifier **25** from the incident side of the seed beam LS is incident first may be replaced by the flat HR mirror **226**.

**[0065]** In the second embodiment, a reflective surface of the concave HR mirror **27** is spherical-concave such that an incident optical image Ia of a pulsed laser beam at a certain point, on the optical path **C31**, between the resonator mirror **21a** and a pulsed-laser-beam input/output edge of the slab amplifier **25** may simply be transferred as a transfer optical image Ib of the pulsed laser beam at another certain point, on the optical path **C31**, between the pulsed-laser-beam output/input edge of the slab amplifier **25** and the resonator mirror **21b**. In other words, the concave HR mirror **27** may be spherical-concave such that the input-side optical image (incident optical image Ia) may simply be transferred as the output-side optical image (transfer optical image Ib) through the multipass **C32** along which the pulsed laser beam is reciprocated inside the slab amplifier **25**.

**[0066]** With this configuration, similarly to the above-described first embodiment, even when the optical path length is increased by having a multipass optical path being formed, it is possible to prevent the beam axis of an entering pulsed laser beam and the exit position of an exiting pulsed laser beam from further deviating, dependent on the optical path length, due to the deviation of the beam axis of the entering pulsed laser beam. As a result, the pulsed laser beam can be stably amplified, and the amplified pulsed laser beam can be stably outputted from the regenerative amplifier **220**.

**[0067]** While the incident and exit ends of the pulsed laser beam are located on the same side of the slab amplifier **25** shown in FIGS. 10 and 11, this disclosure is not limited thereto. For example, as illustrated in FIG. 3 or 7, the pulsed laser beam may be outputted from the side opposing the incident end.

#### Modification

**[0068]** Although the concave HR mirror **27** has been used as one of the mirrors that configures a multipass along which the pulsed laser beam is reciprocated inside the slab amplifier **25** and the flat HR mirror **226** has been used as the other mirror in the above-described second embodiment, this disclosure is not limited thereto. FIG. 12 illustrates the schematic configuration of a regenerative amplifier **220A** according to a modification of the second embodiment. As can be

seen in the regenerative amplifier 220A, the concave HR mirror 27 may be replaced by a reflective optical system configured of a flat HR mirror 27c and a spherical lens 27d provided to oppose the flat HR mirror 27c, as in the third modification of the first embodiment. This configuration can also provide advantageous effects similar to those of the second embodiment.

### Third Embodiment

[0069] Next, a regenerative amplifier, a laser apparatus, and an EUV light generation system according to a third embodiment of this disclosure will be described in detail with reference to the drawings. FIG. 13 illustrates the schematic configuration of a regenerative amplifier 320 of the third embodiment. FIGS. 14A through 14F are schematic diagrams showing overall operation of the regenerative amplifier 320 of the third embodiment. FIG. 14A is a schematic view plainly describing the overall operation of the regenerative amplifier 320 illustrated in FIG. 13. FIG. 14B is a conceptual view schematically illustrating a multipass formed in a slab amplifier 25 of the regenerative amplifier 320 of FIG. 13. FIGS. 14C through 14F are timing charts showing the overall operation of the regenerative amplifier 320 of FIG. 13. The laser apparatus and the EUV light generation system of the third embodiment are similar in configuration to the laser apparatus 100 and the EUV light generation system 1 of the above-described first embodiment except in that the regenerative amplifier 20 may be replaced by the regenerative amplifier 320 illustrated in FIG. 13. Hence, detailed descriptions of the laser apparatus and the EUV light generation system are omitted here.

[0070] As is apparent from the comparison of FIGS. 3 and 13, in the regenerative amplifier 320 of the third embodiment, the polarizer 24a may be used as a beam splitter for introducing a seed beam LS into the regenerative amplifier 320 as well as for outputting a regenerative amplified pulsed laser beam L1 from the regenerative amplifier 320. Thus, the polarizer 24b provided to the output side of the regenerative amplified pulsed laser beam L1, for example, in the regenerative amplifier 20 of the first embodiment is not provided in the regenerative amplifier 320. Other configurations are similar to those adopted in any of the above-described embodiments; therefore, detailed descriptions thereof are omitted here.

[0071] Next, the operation of the regenerative amplifier 320 of FIG. 13 will be described in detail with reference to FIGS. 14A through 14F. FIGS. 14A through 14F show a case in which a seed beam LS having been introduced into the regenerative amplifier 320 is reciprocated twice in a resonator configured of resonator mirrors 21a and 21b.

[0072] FIGS. 14A through 14F show the overall operation of the regenerative amplifier 320 of the third embodiment. For the sake of simplicity, in FIGS. 14A through 14F, a plane along the bottommost portion of a spherical-concave reflective surface of a concave HR mirror 27 substantially coincides with a surface of the slab amplifier 25 facing the incident side of a seed beam LS, and a plane along the bottommost portion of a spherical-concave reflective surface of a concave HR mirror 26 substantially coincides with a surface of the slab amplifier 25 facing the output side of a regenerative amplified pulsed laser beam L1. Operation from the time when the seed beam LS enters the regenerative amplifier 320 to the time when the seed beam LS is reflected three times by the resonator mirrors 21a and 21b and exits from the slab amplifier 25 is similar to the operation during the timing t1 through t13 in

the above-described first embodiment shown in FIGS. 4A through 4F. Therefore, detailed descriptions thereof are omitted here.

[0073] As illustrated in FIGS. 4A through 4F, a seed beam LS may be incident on the polarizer 24a (see FIG. 14A) at timing t1 (see FIG. 14C), and the S-polarized component of the seed beam LS may be outputted from the slab amplifier 25 toward the resonator mirror 21b by operation similar to the operation during the timing t1 through t13 in the first embodiment of FIGS. 4A through 4F.

[0074] After that, the pulsed laser beam having been subjected to multipass amplification may be outputted from the slab amplifier 25 at timing t13, and pass through an EOM 23b to which voltage is applied (see FIG. 4E), to thereby be converted into a circularly polarized pulsed laser beam. Voltage may be applied to the EOM 23b in order to cause a pulsed laser beam to be outputted from the regenerative amplifier 320. In FIGS. 14A through 14F, voltage Vb may be applied in timing t6 through t13, and the voltage Vb may be turned off in timing t31 through t35. Subsequently, the circularly polarized pulsed laser beam may be reflected with high reflectivity by the resonator mirror 21b, and pass again through the EOM 23b to which voltage is applied (see FIG. 4E), whereby the pulsed laser beam is converted into a pulsed laser beam which is in the S-polarized state with respect to the polarizer 24a. The pulsed laser beam which is in the S-polarized state with respect to the polarizer 24a may reenter the slab amplifier 25 at timing t31 (see FIG. 14A). As illustrated in FIG. 14B, the pulsed laser beam having entered the slab amplifier 25 may be reflected by the concave HR mirrors 27 and 26 (timing t32 and t33 in FIG. 14B), similarly to the above, to thereby be reciprocated once or more times (one and a half times in the third embodiment) between the concave HR mirrors 27 and 26. With this, the pulsed laser beam may pass through the slab amplifier 25 a plurality of times (three times in the third embodiment). As a result, the pulsed laser beam is subjected to multipass amplification.

[0075] After that, the amplified pulsed laser beam may be outputted from the slab amplifier 25 at timing t34, and be reflected with high reflectivity by the polarizer 24a. With this, the pulsed laser beam having been subjected to multipass amplification between the resonator mirrors 21a and 21b may be outputted as the regenerative amplified pulsed laser beam L1 from the regenerative amplifier 320 after timing t35 (see FIG. 14F).

[0076] As described above, the pulsed laser beam having been introduced into the regenerative amplifier 320 may be subjected to multipass amplification by being reciprocated in the slab amplifier 25 while traveling between the resonator mirrors 21a and 21b constituting the optical resonator. The pulsed laser beam having been introduced into the regenerative amplifier 320 may be reciprocated between the resonator mirrors 21a and 21b until it is amplified at least to desired intensity.

[0077] As described above, in the third embodiment, an optical image (incident optical image Ia) on the input side of the multipass along which the pulsed laser beam is reciprocated inside the slab amplifier 25 may simply be transferred as an optical image (transfer optical image Ib) on the output side of the multipass. Thus, even when the optical path length is increased by having a multipass optical path being formed, it is possible to prevent the beam axis of an entering pulsed laser beam and the exit position of an exiting pulsed laser beam from further deviating, dependent on the optical path length,

due to the deviation of the beam axis of the entering pulsed laser beam. As a result, the pulsed laser beam may be amplified stably, and the beam axis of the pulsed laser beam outputted from the regenerative amplifier 320 may be stabilized.

#### Modification

**[0078]** The regenerative amplifier 320 of the third embodiment can, for example, be modified into a regenerative amplifier 320A illustrated in FIG. 15. FIG. 15 illustrates the schematic configuration of the regenerative amplifier 320A of the modification. In the regenerative amplifier 320A of FIG. 15, a quarter-wave plate 22 may be provided right next to a resonator mirror 21b. Further, as illustrated in FIG. 15, the incident angle of the seed beam LS on the regenerative amplifier 320A may not necessarily be perpendicular to an optical path C41 in the regenerative amplifier 320A, and may be inclined to the optical axis C41. Since other configurations are similar to those adopted in the above-described third embodiment, detailed descriptions thereof are omitted here.

#### Fourth Embodiment

**[0079]** In the above-described embodiments, a single semiconductor laser 10 which may oscillate in a single-longitudinal mode or in a multi-longitudinal mode has been used as the master oscillator. In a laser apparatus 400 according to a fourth embodiment, on the other hand, a semiconductor laser 10A may be configured of a plurality of semiconductor devices, each of which may oscillate in a single-longitudinal mode or in a multi-longitudinal mode. FIG. 16 illustrates the schematic configuration of the laser apparatus 400 of the fourth embodiment. As illustrated in FIG. 16, the semiconductor laser 10A may include semiconductor devices 11-1 through 11-3, a resonator similar to that illustrated in FIG. 1, a controller, and so forth. Each of the semiconductor devices 11-1 through 11-3 can independently oscillate a laser beam with a predetermined wavelength, intensity, and pulse width. The semiconductor laser 10A may further include a beam combiner 17 for combining seed beams LS1 through LS3 outputted from the semiconductor devices 11-1 through 11-3, respectively. Thus, the seed beams are combined and the combined laser beam is amplified. Thus, a desired seed beam LS can be outputted and amplified, and an optimal laser condition for EUV light generation can easily be achieved even if a target or an irradiation condition is to be changed. Other configurations are similar to those adopted in any of the above-described embodiments; thus, detailed descriptions thereof are omitted here.

#### Fifth Embodiment

**[0080]** FIGS. 17 and 18 illustrate a fifth embodiment in which a slab CO<sub>2</sub> laser is applied to a regenerative amplifier. FIG. 17 is a schematic top view of a slab regenerative amplifier 250 of the fifth embodiment, which may include CO<sub>2</sub> laser gas as a gain medium. FIG. 18 is a schematic side view of the regenerative amplifier 250 illustrated in FIG. 17. In the fifth embodiment, a slab CO<sub>2</sub> laser may be applied to the regenerative amplifier 20 of FIG. 3. As is apparent from the comparison of FIGS. 17 and 18 and FIG. 3, the regenerative amplifier 250 of the fifth embodiment may include a CO<sub>2</sub> laser gas chamber 50, windows 52a and 52b, and discharge electrodes 51a and 51b, in addition to the components illustrated in FIG. 3. The discharge electrodes 51a and 51b and concave HR mirrors 26 and 27 may be disposed in the CO<sub>2</sub>

laser gas chamber 50. The windows 52a and 52b may transmit a laser beam into the CO<sub>2</sub> laser gas chamber 50 while airtightly sealing the CO<sub>2</sub> laser gas chamber 50. High-frequency voltage may be applied between the discharge electrodes 51a and 51b, whereby an electric discharge may occur therebetween. The discharge area may serve as an amplification region. Operation of the regenerative amplifier 250 is similar to that of the regenerative amplifier 20 illustrated in FIG. 3.

**[0081]** While one pre-amplifier PA and one main amplifier MA are adopted in the above-described embodiments, this disclosure is not limited thereto, and a plurality of pre-amplifiers PA and a plurality of main amplifiers MA may be disposed in series.

**[0082]** In the above description, the spherical-concave mirrors, a combination of the lenses and the flat mirrors, or the like have been used as the concave HR mirrors 26 and 27 so that the optical image (incident optical image Ia) on the input side of the multipass along which the pulsed laser beam may be reciprocated inside the slab amplifier 25 may simply be transferred as the optical image (transfer optical image Ib) on the output side of the multipass. This disclosure, however, is not limited thereto. The optical system may be variously modified as long as the optical system allows the optical image (incident optical image Ia) on the input side of the multipass along which the pulsed laser beam in reciprocated may simply be transferred as the optical image (transfer optical image Ib) on the output side of the multipass. For example, a combination of a concave mirror and a convex mirror, a combination of a convex lens and a concave mirror, a combination of a concave lens and a convex mirror, and for forth may be adopted.

**[0083]** In the above descriptions, as a specific example of the multipass amplification, the pulsed laser beam may zigzag through the amplification region. This arrangement allows the pulsed laser beam to be amplified efficiently.

**[0084]** The above-described embodiments and the modifications thereof are merely exemplary embodiments and modifications of this disclosure. This disclosure is not limited to these embodiments and modifications, and can be variously modified according to the specifications or the like. Further, it is obvious from the above description that other various embodiments can be made within the scope of the disclosure. In addition, the above embodiments and modifications can be combined as desired.

**1-15.** (canceled)

**16.** A regenerative amplifier used in combination with a laser device, the regenerative amplifier comprising:

a pair of resonator mirrors constituting an optical resonator;

an amplifier containing CO<sub>2</sub> gas and provided between the pair of the resonator mirrors for amplifying a laser beam with a predetermined wavelength outputted from the laser device; and

an optical system disposed to configure a multipass optical path along which the laser beam is reciprocated inside the amplifier, the optical system transferring an optical image of the laser beam at a first position as an optical image of the laser beam at a second position.

**17.** The regenerative amplifier according to claim 16, wherein

the optical system includes

a pair of mirrors, and

a reflective surface of at least one of the pair of the mirrors is spherical-concave.

**18.** The regenerative amplifier according to claim **16**, wherein

the optical system includes  
 a pair of mirrors, and  
 a reflective surface of at least one of the pair of the mirrors is flat.

**19.** The regenerative amplifier according to claim **18**, wherein

a spherical lens is disposed to face the reflective surface of the at least one of the pair of the mirrors.

**20.** A regenerative amplifier used in combination with a laser device, the regenerative amplifier comprising:

a pair of resonator mirrors constituting an optical resonator;

an amplifier provided between the pair of the resonator mirrors for amplifying a laser beam with a predetermined wavelength outputted from the laser device; and  
 an optical system disposed to configure a multipass optical path along which the laser beam is reciprocated inside the amplifier, the optical system transferring an optical image of the laser beam at a first position as an optical image of the laser beam at a second position, wherein the first position is located between one of the pair of the resonator mirrors and the amplifier, and

the second position is located between the other of the pair of the resonator mirrors and the amplifier.

**21.** A laser apparatus comprising:

at least one semiconductor laser oscillating a laser beam with a predetermined wavelength; and

a regenerative amplifier including

a pair of resonator mirrors constituting an optical resonator,

an input coupling unit provided between the pair of the resonator mirrors for introducing the laser beam into the optical resonator,

an amplifier provided between the pair of the resonator mirrors for amplifying the laser beam with the predetermined wavelength,

an optical system disposed to configure a multipass optical path along which the laser beam is reciprocated inside the amplifier,

the optical system transferring an optical image of the laser beam at a first position as an optical image of the laser beam at a second position, and

an output coupling unit for outputting the laser beam amplified by the amplifier to an exterior of the optical resonator.

**22.** The laser apparatus according to claim **21**, wherein the first position is located between one of the pair of the resonator mirrors and the amplifier, and

the second position is located between the other of the pair of the resonator mirrors and the amplifier.

**23.** The laser apparatus according to claim **21**, further comprising

a current control unit for controlling a current waveform inputted to the semiconductor laser.

**24.** The laser apparatus according to claim **21**, wherein the semiconductor laser is a quantum cascade laser.

**25.** The laser apparatus according to claim **21**, wherein the semiconductor laser oscillates in either one of a single-longitudinal mode and a multi-longitudinal mode.

**26.** The laser apparatus according to claim **21**, further comprising

at least one amplifier for amplifying the laser beam outputted from the regenerative amplifier.

**27.** The laser apparatus according to claim **26**, wherein at least one of the at least one amplifier contains CO<sub>2</sub> gas.

**28.** An extreme ultraviolet light generation system comprising:

at least one semiconductor laser oscillating a laser beam with a predetermined wavelength;

a regenerative amplifier including

a pair of resonator mirrors constituting an optical resonator,

an input coupling unit provided between the pair of the resonator mirrors for introducing the laser beam into the optical resonator,

an amplifier provided between the pair of the resonator mirrors for amplifying the laser beam with the predetermined wavelength,

an optical system disposed to form a multipass optical path along which the laser beam is reciprocated inside the amplifier,

the optical system transferring an optical image of the laser beam at a first position as an optical image of the laser beam at a second position, and

an output coupling unit for outputting the laser beam amplified by the amplifier to an exterior of the optical resonator;

at least one amplifier for amplifying the laser beam outputted from the regenerative amplifier;

a chamber provided with an input port through which the laser beam enters the chamber;

a target supply unit provided to the chamber for supplying, to a predetermined region inside the chamber, a target substance serving as a plasma source;

a focusing mirror for focusing the laser beam amplified by the at least one amplifier at a point in the predetermined region; and

a collector mirror provided in the chamber for collecting the extreme ultraviolet light emitted from the plasma generated in the predetermined region.

**29.** The extreme ultraviolet light generation system according to claim **28**, wherein

the first position is located between one of the pair of the resonator mirrors and the amplifier, and

the second position is located between the other of the resonator mirrors and the amplifier.

\* \* \* \* \*