

(19)



(11)

**EP 1 775 644 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:  
**22.10.2008 Bulletin 2008/43**

(51) Int Cl.:  
**G03G 15/20<sup>(2006.01)</sup>**

(21) Application number: **06250847.8**

(22) Date of filing: **17.02.2006**

**(54) Rotary roller structure and fuser of image forming apparatus employing the same**

Drehbare Walzenkonstruktion und Schmelzfixierelement eines Bilderzeugungsgeräts das diese verwendet

Structure de rouleaux rotatifs et l'élément de fixage par fusion d'un appareil de formation d'image l'utilisant

(84) Designated Contracting States:  
**DE FR GB NL**

(30) Priority: **28.06.2005 KR 2005056204**

(43) Date of publication of application:  
**18.04.2007 Bulletin 2007/16**

(73) Proprietor: **Samsung Electronics Co., Ltd.**  
**Yeongtong-gu**  
**Suwon-si, Gyeonggi-do (KR)**

(72) Inventors:  
• **Hong, Seock-deock**  
**Suwon-si**  
**Gyeonggi-do (KR)**

• **Chung, Kyung-shig,**  
**208-2003 Woncheon**  
**Suwon-si**  
**Gyeonggi-do (KR)**

(74) Representative: **Sherrard-Smith, Hugh et al**  
**Appleyard Lees**  
**15 Clare Road**  
**Halifax HX1 2HY (GB)**

(56) References cited:  
**JP-A- 59 038 777**                      **US-A1- 2002 106 224**  
**US-A1- 2004 264 991**

**EP 1 775 644 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

**[0001]** The present invention relates to an image forming apparatus. More particularly, the present invention relates to a rotary roller structure and a fuser of an image forming apparatus employing the rotary roller structure.

**[0002]** A rotary roller structure transfers a sheet-shaped object, for example, a sheet of paper, with a pair of rollers that are engaged with each other and rotate. The rollers are engaged with each other at a predetermined pressure in the lengthwise direction of the rollers. The pressure should be constant during the rotation of the rollers. When any of the rollers has an elastic layer, the size of a nip formed by the compression of the elastic layer should be constant in the lengthwise direction during rotation of the rollers.

**[0003]** A rotary roller structure may be employed in a fuser of an electrophotographic image forming apparatus having a heat roller and press roller. If the pressure and nip of the heat roller and the press roller are not constant, a recording medium may be skewed. Furthermore, the heat and pressure transferred to the recording medium may become unstable so that fusing performance deteriorates. The imbalance of the pressure and nip of the two rollers is caused by various factors such as processing errors or roundness errors.

**[0004]** Accordingly, there is a need for an improved rotary roller structure which maintains a constant pressure and a constant nip.

**[0005]** An aspect of the present invention is to address at least the above problems and/or disadvantages and to provide at least the advantages described below.

**[0006]** US2002/0106224 discloses shock absorbers that face each other on a photoconductive drum and a transfer roller. The shock absorbers do not rotate with the drum and roller.

**[0007]** According to the present invention, a rotary roller structure for transferring a sheet-shaped object comprises first and second rollers elastically biased against each other, the first and second rollers having first and second end portions, respectively, and the first and second rollers being arranged to rotate while facing each other, a gear being coupled to the first end portion of at least one of the first and second rollers, and first and second interval maintenance members respectively coupled to the first and second rollers to face each other at the second end portions of the rollers, the maintenance members being constrained to rotate with the rollers and being arranged to contact each other and an elastic layer is provided on at least one of the first and second rollers.

**[0008]** The first and second interval maintenance members may be installed at both the first and second end portions of each of the first and second rollers.

**[0009]** The above and other objects, features, and advantages of certain exemplary embodiments of the present invention will be more apparent from the following description taken in conjunction with the accompanying drawings, in which:

Figure 1 is a cross-sectional view of a fuser of an image forming apparatus according to an exemplary embodiment of the present invention;

Figure 2 is a cross-sectional view of a nip according to an exemplary embodiment of the present invention;

Figure 3 is a cross-sectional view showing the inclination between a press roller and a gear;

Figure 4 is a perspective view showing the instability of the press roller;

Figure 5 is a view showing the change in the size of the nip due to the instability of the press roller;

Figure 6 is a cross-sectional view of a fuser of an image forming apparatus according to another exemplary embodiment of the present invention;

Figure 7 is a view showing the change in the size of the nip due to the imbalance in the elastic force of a pair of first elastic members and the irregularity in the thickness of an elastic layer;

Figure 8 is a view showing an error in the roundness of a heat roller;

Figure 9 is a view showing the change in the size of the nip due to the error in the roundness of the heat roller;

Figure 10 is a view showing an error in the roundness of a first interval maintenance member;

Figure 11 is a view showing an example of an undesirable combination of the heat roller and a first interval maintenance member;

Figure 12 is a view showing the change in the size of a nip in the undesirable combination of the heat roller and first interval maintenance member shown in Figure 11;

Figure 13 is a view showing an example of a desirable combination of the heat roller and the first interval maintenance member according to an exemplary embodiment of the present invention; and

Figure 14 is a view showing the change in the size of a nip in the desirable combination of the heat roller and first interval maintenance member shown in Figure 13.

**[0010]** Throughout the drawings, the same drawing reference numerals will be understood to refer to the same elements, features, and structures.

**[0011]** The matters defined in the description such as a detailed construction and elements are provided to assist in a comprehensive understanding of the exemplary embodiments of the invention. Accordingly, those of ordinary skill in the art will recognize that various changes and modifications of the exemplary embodiments described herein may be made without departing from the scope and spirit of the invention. Also, descriptions of well-known functions and constructions are omitted for clarity and conciseness.

**[0012]** Figure 1 shows a fuser of an image forming apparatus according to an exemplary embodiment of the present invention. An electrophotographic image forming apparatus prints an image on a recording medium by performing a series of processes of charging, exposing, developing, transferring, and fusing. In detail, the surface of a photoreceptor is charged to a uniform electric potential using a charge roller to which bias is applied or a corona charger (charging process). A light beam corresponding to image information is radiated onto the uniformly charged photoreceptor using an exposing unit such as a laser scanning unit (LSU) to form an electrostatic latent image (exposing process). Toner is supplied to the electrostatic latent image to form a toner image on the photoreceptor (developing process). The toner image is transferred to the recording medium directly or by way of an intermediary transfer unit (transferring process). Then, the toner image of an image to be printed is attached to the recording medium by an electric force. When heat and pressure are applied to the recording medium using a fuser, the toner is melted and permanently attached to the recording medium (fusing process).

**[0013]** Referring to Figure 1, the fuser includes a heat roller (first roller) 10 and a press roller (second roller) 20. The heat roller 10 includes a hollow pipe 11 and an elastic layer 12 formed of, for example, silicon rubber and coated on the surface of the hollow pipe 11. The heat roller has a first end portion 13 and a second end portion 14. A heat source 50, for example, a halogen lamp, is installed in the hollow pipe 11. The press roller 20 is a metal pipe, and has a first end portion 23 and a second end portion 24. Although not shown in the drawing, it is possible that the heat roller 10 is an uncoated metal pipe and the press roller 20 is a metal pipe with an elastic layer. Alternatively, both the heat roller 10 and press roller 20 may be metal pipes with elastic layers. In the present exemplary embodiment, the heat roller 10 is rotatably supported at a fixed position by bearings 30. The press roller 20 is supported by bearings 40. A pair of first elastic members 61 and 62 press the press roller 20 against the heat roller 10. Then, as shown in Figure 2, a nip N is formed between the heat roller 10 and the press roller 20 as the elastic layer 12 of the heat roller 10 is compressed by the press roller 20. A gear 71 is installed at the first end portion 13 of the heat roller 10 and connected to a drive motor (not shown). A gear 72 is provided at the first end portion 23 of the press roller 20 and engaged with the gear 71. When

the drive motor (not shown) rotates, the heat roller 10 and the press roller 20 are rotated by the above mechanism. Alternatively, the press roller 20 may be driven by contact with the heat roller 10 so that the gear 72 does not need to be provided. Also, the gear 72 may be directly connected to the drive motor. In the present and later-described exemplary embodiments, a fuser with a heat source 50 is used as an example of a rotary roller structure for transferring a sheet-shaped object. Also, the operation and effect of the exemplary embodiments will be described with respect to a fuser. It should be understood, however, that the present invention is applicable to any rotary roller structure, and is not limited to a fuser.

**[0014]** As indicated by a dotted line in Figure 1, a pair of second elastic members 63 and 64 that press the heat roller 10 against the press roller 20 may be further provided.

**[0015]** The axes 23a and 72a of the press roller 20 and the gear 72 should be coaxial with each other. However, as shown in Figure 3, the axes 23a and 72a of the press roller 20 and the gear 72 may be inclined at an angle  $q$  with respect to one another due to an error in the manufacture of the gear 72 and/or an error in the processing of the end portion 23 of the press roller 20 to which the gear 72 is coupled. In this case, when the press roller 20 rotates, the second end portion 24 of the press roller 20 shakes, as shown in Figure 4 in which the movement of the press roller 20 is exaggerated for the convenience of explanation. When the press roller 20 is located at a position "A" in Figure 4, since the press roller 20 presses the heat roller 10, the amount of compression of the elastic layer 12 increases so that the size of the nip N increases accordingly. Thus, as indicated by a line AA in Figure 5, the amount of compression of the elastic layer 12 and the size of the nip N increase from the end portion 13 of the heat roller 10 to the second end portion 14. When the press roller 20 is located at a position "B" in Figure 4, the amount of compression of the elastic layer 12 and the size of the nip N decrease. Thus, as indicated by a line BB in Figure 5, the amount of compression of the elastic layer 12 and the size of the nip N decrease from the end portion 13 of the heat roller 10 to the second end portion 14. Thus, when the heat roller 10 and the press roller 20 rotate, as indicated by the lines AA and BB in Figure 5, the amount of compression of the elastic layer 12 and the size of the nip N periodically repeats, increasing and decreasing.

**[0016]** The periodic change in the amount of compression of the elastic layer 12 and the size of the nip N may cause a sheet-shaped object, for example, a recording medium, to skew in a rotary roller structure in which the object is transferred as the first and second rollers 10 and 20 are engaged with each other. Furthermore, in a fuser employing the heat roller 10 and the press roller 20, a periodic horizontal line may be generated on the fused recording medium due to a periodic difference in the amount of heat transferred to the recording medium. Also, the lifespan of the heat roller 10 may be shortened

due to accumulated fatigue of the elastic layer 12. The periodic change in the amount of compression of the elastic layer 12 and the size of the nip N may be generated by the inclination of axes (not shown) of the gear 71 and the heat roller 10 when the heat roller 10 is elastically biased by the second elastic members 63 and 64 toward the press roller 20.

**[0017]** To address this problem, as shown in Figure 1, first and second interval maintenance members 81 and 82 are provided at the second end portions 14 and 24 of the heat roller 10 and the press roller 20, respectively. The first and second interval maintenance members 81 and 82 contact each other to prevent the heat roller 10 and the press roller 20 from coming too close to each other. In other words, the first and second interval maintenance members 81 and 82 contact each other at a position where the heat roller 10 and the press roller 10 form a desirable amount of compression of the elastic layer 12 and a desirable size of the nip N. Thus, the first and second interval maintenance members 81 and 82 can prevent excessive compression of the elastic layer 12 and excessive expansion of the nip N.

**[0018]** Furthermore, by making the elastic force of the first elastic member 62 pushing the second end portion 24 of the pressure roller 20 against the heat roller 10 larger than that of the first elastic member 61, the press roller 20 may be prevented from being separated from the heat roller 10 as indicated by the position B of Figure 4. In this case, even when the elastic force of the first elastic member 62 is large, since the hot roller 10 and the press roller 20 are prevented from coming too close to one another by the first and second interval maintenance members 81 and 82, the amount of compression of the elastic layer 12 and the size of the nip N are maintained substantially constant.

**[0019]** Also, as shown in Figure 6, first and second interval maintenance members 81 and 82 may also be installed at the first end portion 13 of the heat roller 10 and the first end portion 23 of the press roller 20. By doing so, the instability of the entire press roller 20 caused by the inclination of the axis 23a of the press roller 20 and the axis 72a of the gear 72 may be prevented. In this case, even when the elastic force of the first elastic member 61 is large, since the hot roller 10 and the press roller 20 are prevented from coming too close to one another by the first and second interval maintenance members 81 and 82, the amount of compression of the elastic layer 12 and the size of the nip N are maintained substantially constant.

**[0020]** The above-described configuration may prevent a transferred object (such as a recording medium) from skewing, and may prevent the generation of a horizontal line on the fused recording medium. Also, this configuration may improve the reliability of the rotary roller structure and a fuser that employs the same.

**[0021]** As shown in Figure 6, the heat roller 10 is rotatably supported by the bearing 30 at a fixed position and, while being supported by the bearing 40, the press

roller 20 is pressed by the first elastic members 61 and 62 against the heat roller 10. When the press roller 20 contacts the elastic layer 12 of the heat roller 10, the elastic layer 12 is compressed and generates a repulsive force. Physical properties such as elastic coefficients of the first elastic members 61 and 62 are determined so that a desirable amount of compression of the elastic layer 12 and a desirable size of the nip N are obtained when the repulsive force and the elastic force of the first elastic members 61 and 62 are balanced. When the elastic forces of the first elastic members 61 and 62 are excessively large, the elastic layer 12 of the heat roller 10 is compressed too much and the nip N increases too much, which may have a significant influence on the lifespan of the heat roller 10.

**[0022]** In contrast, when the elastic forces of the first elastic members 61 and 62 are too small, the nip N is decreased too much so that the recording medium is not properly transferred or the heat needed for fusing is not properly transferred to the recording medium. Thus, the elastic forces of the first elastic members 61 and 62 are designed to maintain the desirable amount of compression of the elastic layer 12 and the desirable size of the nip N. However, despite the above design, the amount of the elastic forces of the first elastic members 61 and 62 may be different from each other due to assembly or manufacturing errors. For example, the elastic force of the first elastic member 61 may be greater than that of the first elastic member 62. In this case, the elastic layer 12 at the end portion 13 of the heat roller 10 is compressed more so that the nip N increases. Also, when the thickness of the elastic layer 12 of the heat roller 10 is inconsistent due to a manufacturing error of the heat roller 10, for example, when the elastic layer 12 at the end portion 13 of the heat roller 10 is thick while the elastic layer 12 at the second end portion 14 is thin, the first elastic member 61 is compressed more, and a larger elastic force is applied to the press roller 20. Thus, the elastic layer 12 at the end portion 13 of the heat roller 10 is more compressed and the nip N is increased.

**[0023]** Figure 7 shows the variation of the nip N caused by the imbalance in the elastic forces of the first elastic members 61 and 62 or the irregularity in the thickness of the elastic layer 12 of the heat roller 10. Referring to Figure 7, the nip N decreases from the end portion 13 of the heat roller 10 to which a large elastic force is applied to the second end portion 14 so that a boundary D of the nip N is inclined. This can cause problems such as a deterioration of the quality of a fused image and skewing of the recording medium. To address these problems, as shown in Figure 6, the first and second interval maintenance members 81 and 82 are installed at both end portions 13 and 14 of the heat roller 10 and both end portions 23 and 24 of the press roller 20. The first and second interval maintenance members 81 and 82 make the interval between the heat roller 10 and the press roller 20 uniform despite an imbalance in the elastic forces of the first elastic members 61 and 62 or an irregularity in the

thickness of the elastic layer 12 of the heat roller 10. Thus, the amount of compression of the elastic layer 12 and the size of the nip N remain constant despite an imbalance in the elastic force of the first elastic members 61 and 62 or an irregularity in the thickness of the elastic layer 12 of the heat roller 10. According to the above configuration, the irregularity in the nip N or the inclination of the boundary of the nip N may be prevented, as shown in Figure 7.

**[0024]** Moreover, the outer circumferential surface of the heat roller 10, that is, the surface of the elastic layer 12, may not be a perfect circle. The heat roller 10 is typically manufactured by coating the elastic layer 12 on the hollow pipe 11, and the hollow pipe 11 is typically manufactured by extruding a metal material such as aluminum. A roundness error of the outer circumferential surface may be generated during the process of extruding the metal material and/or coating the elastic layer 12. Of course, the press roller 20 may also have a roundness error. For example, referring to Figure 8, the heat roller 10 indicated by a solid line represents a heat roller with roundness errors. The heat roller 10 indicated by a dotted line represent an ideal heat roller (that is, one without roundness errors). When these two rollers are compared, the maximum positive roundness error ( $+\delta_{max}$ ) and the maximum negative roundness error ( $-\delta_{max}$ ) occur at around angles of  $90^\circ$  and  $270^\circ$ , respectively. Figure 9 shows the changes in the amount of compression of the elastic layer 12 and the size of the nip N when the heat roller 10 is applied to the fuser shown in Figure 6. In Figure 9, it is assumed that the press roller 20 is a perfect circle and there is no irregularity in the thickness of the elastic layer 12 in the lengthwise direction of the heat roller 10. Referring to Figure 9, if the heat roller 10 is an ideal perfect circle, the size of the nip N remains unchanged as indicated by a dotted line although the heat roller 10 rotates once. When the heat roller 10 having roundness errors ( $+\delta_{max}$  and  $-\delta_{max}$ ) rotates, however, the amount of compression of the elastic layer 12 and the size of the nip N have desirable values at angles of around  $0^\circ$  and  $180^\circ$ . When the roundness error becomes a positive value, the press roller 20 is pushed and the first elastic members 61 and 62 are compressed so that a large elastic force is applied to the press roller 20. The elastic layer 12 is compressed by the elastic force. The press roller 20 is stopped at a position where the elastic force and the repulsive force by the compression of the elastic layer 12 are balanced. At this time, the size of the nip N is larger than that of the desirable nip N. The size of the nip N at the position of  $90^\circ$  where the roundness error is the maximum positive value ( $+\delta_{max}$ ) becomes larger than the desirable size. The size of the nip N is at a minimum at the position of  $270^\circ$  where the roundness error is the maximum negative value ( $-\delta_{max}$ ).

**[0025]** Since the nip N increases at the position where the roundness error is the maximum positive value ( $+\delta_{max}$ ), a larger amount of heat and pressure are transferred to the toner image on the recording medium. Con-

versely, a lesser amount of heat and pressure are transferred to the toner image at the position where the roundness error is the minimum negative value ( $-\delta_{max}$ ). This irregular transfer of heat and pressure may produce a noticeable stain such as a wave pattern after fusing is completed. Also, the rotary roller structure transfers the object in an irregular manner due to the roundness errors.

**[0026]** Furthermore, when the rotational speed of the heat roller 10 having a roundness error increases, the elastic forces of the first elastic members 61 and 62 and the repulsive force by the compression of the elastic layer 12 are not balanced. Thus, the press roller 20 repeatedly approaches and separates from the heat roller 10, causing instability. The instability of the press roller 20 may be prevented to a degree by increasing the elastic force of the first elastic members 61 and 62. In this case, however, since the size of the nip N excessively increases at the position where the roundness error is at a maximum ( $+\delta_{max}$ ), the lifespan of the heat roller 10 may be adversely affected.

**[0027]** The instability of the press roller 20 may be further impacted by roundness errors of the first interval maintenance member 81. Referring to Figure 10, the first interval maintenance member 81 may have a roundness error. For example, it is assumed that the roundness error of the first interval maintenance member 81 are the maximum positive value ( $+\lambda_{max}$ ) and the minimum negative value ( $-\lambda_{min}$ ) at angles of around  $90^\circ$  and  $270^\circ$ , respectively. When the heat roller 10 and the first interval maintenance member 81 are coupled to each other, as shown in Figure 11, it may be assumed that  $+\delta_{max}$  and  $-\lambda_{max}$  are matched and  $-\delta_{max}$  and  $+\lambda_{max}$  are matched. In Figure 12, the dotted line indicates the size of the nip N when the heat roller 10 is an ideal perfect circle, the solid line indicates that the heat roller 10 has roundness errors of  $\pm\delta_{max}$ , and the one-dot chain line indicates the size of the nip N when the heat roller 10 and the first interval maintenance member 81 are coupled to each other by matching  $+\delta_{max}$  and  $-\lambda_{max}$ , and  $-\delta_{max}$  and  $+\lambda_{max}$ . It may be seen that the change in the size of the nip N is significant in the one-dot chain line. This is because the amount of compression of the elastic layer 12 further increases as the press roller 20 further moves toward the heat roller 10 by the elastic forces of the first elastic members 61 and 62 since the first interval maintenance member 81 has  $-\lambda_{max}$  at a position where the heat roller 10 has  $+\delta_{max}$ . Also, since the first interval maintenance member 81 has  $+\lambda_{max}$  at a position where the heat roller 10 has  $-\delta_{max}$ , the press roller 20 is separated from the heat roller 10 so that the amount of compression of the elastic layer 12 is further decreased.

**[0028]** To address the above problem, as shown in Figure 13,  $+\delta_{max}$  and  $+\lambda_{max}$  are matched when the heat roller 10 and the first interval maintenance member 81 are coupled to each other. In Figure 14, a dotted line indicates the size of the nip N when the heat roller 10 is an ideal perfect circle, a solid line indicates the size of the nip N when the heat roller 10 has roundness errors

of  $\pm \delta_{\max}$  and the first interval maintenance member 81 is an ideal perfect circle, and a double-dot chain line indicates the size of the nip N when the heat roller 10 and the first interval maintenance member 81 are coupled to each other by matching  $+\delta_{\max}$  and  $+\lambda_{\max}$ , and  $-\delta_{\max}$  and  $-\lambda_{\max}$ . As shown in Figure 14, since the press roller 20 is separated from the heat roller 10 as the first and second interval maintenance members 81 and 82 contact each other at a position (at an angle of about  $90^\circ$ ) where the roundness error of the heat roller 10 is  $+\delta_{\max}$ , the increase of the size of the nip N may be alleviated. Also, when  $-\delta_{\max}$  and  $-\lambda_{\max}$  are matched, since the press roller 20 approaches the heat roller 10 as the first and second interval maintenance members 81 and 82 contact each other at a position (at an angle of about  $270^\circ$ ) where the roundness error of the heat roller 10 is  $-\delta_{\max}$ , the decrease of the size of the nip N may be alleviated.

**[0029]** Although the roundness errors of the heat roller 10 and the first interval maintenance member 81 may not be the same as those shown in FIGS. 8 and 10, the roundness error of the heat roller 10 and the first interval maintenance member 81 typically becomes uniform in a mass production process. Thus, the position (positive " $+\delta_{\max}$ " or negative " $-\delta_{\max}$ ") where the roundness error of the heat roller 10 becomes maximum may be marked. Also, the position (positive " $+\lambda_{\max}$ " or negative " $-\lambda_{\max}$ ") where the roundness error of the first interval maintenance member 81 becomes maximum may be marked. The instability of the press roller 20 due to the roundness error of the heat roller 10 may be alleviated to a degree by coupling the first interval maintenance member 81 to the heat roller 10 with these marking positions matched. The instability of the press roller 20 may be remarkably alleviated compared to a case in which the heat roller 10 and the first interval maintenance member 81 are coupled to each other without considering the roundness errors.

**[0030]** Although not shown in the drawings, the press roller 20 and the second interval maintenance member 82 may have roundness errors. When the press roller 20 and the second interval maintenance member 82 are coupled to each other, by matching the positions where the roundness errors thereof are at the maximum values, the instability of the press roller 20 may be alleviated.

**[0031]** As described above, according to the exemplary embodiment of a rotary roller structure according to the present invention, since the nip between two rollers remains substantially uniform, an object may be stably transferred without skew. Also, according to the exemplary embodiment of a fuser according to the present invention, a recording medium may be stably transferred without skew. Heat and pressure may be uniformly applied to a toner image formed on the recording medium so that the quality of a fused image may be improved.

**[0032]** While the invention has been shown and described with reference to certain exemplary embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be

made therein without departing from the scope of the invention as defined by the appended claims.

## 5 Claims

1. A rotary roller structure for transferring a sheet-shaped object comprising first and second rollers (10,12) elastically biased against each other the first and second rollers having first (13) and second (14) end portions respectively;

the first and second rollers being arranged to rotate while facing each other;

a gear (71) coupled to the first end portion (13) of at least one of the first and second rollers; and first and second interval maintenance members (81,82) respectively coupled to the first and second rollers to face each other at the second end portions of the rollers;

**characterised in that:**

the first and second interval maintenance members (81,82) are constrained to rotate with their respective rollers and are arranged to maintain contact with each other and an elastic layer (12) is provided on at least one of the first and second rollers.

2. The roller structure as claimed in claim 1, comprising:

further first and second interval maintenance members (81, 82) respectively coupled to the first (10) and second (20) rollers to face each other at the side of the first end portion (13) of the roller where the gear is coupled.

3. The roller structure of claim 1 or 2, wherein

the first interval maintenance member (81) is coupled to the first roller (10) such that a portion of the first interval maintenance member having a maximum roundness error in the circumferential direction matches a portion of the first roller having a maximum roundness error in the circumferential direction.

4. The roller structure as claimed in claim 3, wherein the second interval maintenance member (82) is coupled to the second roller (20) such that a portion of the second interval maintenance member having a maximum roundness error in the circumferential direction matches a portion of the second roller having a maximum roundness error in the circumferential direction.

5. The roller structure as claimed in any of claims 1 to 4, wherein

the second roller (20) is elastically biased toward the first roller by a pair of first elastic members (61, 62).

6. A fuser of an electrophotographic image forming apparatus for fusing a toner image to a recording medium by applying heat and pressure comprising a roller structure as claimed in any preceding claim; and a heat source (50) provided in at least one of the first and second rollers.
7. A fuser as claimed in claim 7 including a heat source (50) provided on at least one of the first and second rollers.

### Patentansprüche

1. Drehbare Walzenkonstruktion zur Transferierung eines bogenförmigen Gegenstands mit einer ersten und einer zweiten Walze (10, 12), die elastisch gegeneinander vorgespannt sind, wobei die erste und die zweite Walze jeweils einen ersten (13) und einen zweiten (14) Endabschnitt haben, wobei die erste und die zweite Walze so angeordnet sind, dass sie sich drehen, während sie sich gegenüberliegen,

einem Zahnrad (71), das an den ersten Endabschnitt (13) mindestens einer der ersten und der zweiten Walze gekoppelt ist, und einem ersten und einem zweiten Element (81, 82) zur Aufrechterhaltung des Zwischenraums, die jeweils so an die erste und zweite Walze gekoppelt sind, dass sie sich an den zweiten Endabschnitten der Walzen gegenüberliegen, **dadurch gekennzeichnet, dass** das erste und das zweite Element (81, 82) zur Aufrechterhaltung des Zwischenraums gezwungen sind, sich mit ihren jeweiligen Walzen zu drehen, und so angeordnet sind, dass sie miteinander in Kontakt bleiben, und eine elastische Schicht (12) auf mindestens einer der ersten und der zweiten Walze vorgesehen ist.

2. Walzenkonstruktion nach Anspruch 1 mit einem weiteren ersten und zweiten Element (81, 82) zur Aufrechterhaltung des Zwischenraums, die jeweils so an die erste (10) und zweite (20) Walze gekoppelt sind, dass sie sich auf der Seite des ersten Endabschnitts (13) der Walze, wo das Zahnrad gekoppelt ist, gegenüberliegen.
3. Walzenkonstruktion nach Anspruch 1 oder 2, wobei das erste Element (81) zur Aufrechterhaltung des Zwischenraums so an die erste Walze (10) gekoppelt ist, dass ein Abschnitt des ersten Elements zur Aufrechterhaltung des Zwischenraums mit einer ma-

ximalen Rundlaufabweichung in Umfangsrichtung mit einem Abschnitt der ersten Walze mit einer maximalen Rundlaufabweichung in Umfangsrichtung zusammenpasst.

4. Walzenkonstruktion nach Anspruch 3, wobei das zweite Element (82) zur Aufrechterhaltung des Zwischenraums so an die zweite Walze (20) gekoppelt ist, dass ein Abschnitt des zweiten Elements zur Aufrechterhaltung des Zwischenraums mit einer maximalen Rundlaufabweichung in Umfangsrichtung mit einem Abschnitt der zweiten Walze mit einer maximalen Rundlaufabweichung in Umfangsrichtung zusammenpasst.
5. Walzenkonstruktion nach einem der Ansprüche 1 bis 4, wobei die zweite Walze (20) über ein Paar erster elastischer Elemente (61, 62) zur ersten Walze elastisch vorgespannt ist.
6. Schmelzfixierelement eines elektrofotografischen Bilderzeugungsgeräts zum Schmelzfixieren eines Tonerbilds auf ein Aufzeichnungsmedium durch Aufbringen von Wärme und Druck mit einer Walzenkonstruktion nach einem der vorhergehenden Ansprüche sowie einer Wärmequelle (50), die in mindestens einer der ersten und zweiten Walze vorgesehen ist.
7. Schmelzfixierelement nach Anspruch 7, mit einer Wärmequelle (50), die an mindestens einer der ersten und zweiten Walze vorgesehen ist.

### Revendications

1. Structure de rouleaux rotatifs destinée à transférer un objet en forme de feuille, comprenant des premier et deuxième rouleaux (10, 12) poussés élastiquement l'un contre l'autre, les premier et deuxième rouleaux ayant des première (13) et deuxième (14) portions d'extrémité respectives ;

les premier et deuxième rouleaux étant agencés de manière à tourner tout en se faisant face ; un engrenage (71) étant accouplé à la première portion d'extrémité (13) d'au moins l'un desdits premier et deuxième rouleaux ; et des premier et deuxième organes d'espacement (81, 82) étant respectivement accouplés aux premier et deuxième rouleaux de manière à se faire face au niveau des deuxième portions d'extrémité des rouleaux ;

**caractérisée en ce que :**

les premier et deuxième organes d'espacement (81, 82) sont forcés de tourner avec leurs rouleaux respectifs et sont agencés

de manière à maintenir le contact l'un avec l'autre, et une couche élastique (12) est prévue sur au moins l'un desdits premier et deuxième rouleaux.

5

2. Structure de rouleaux selon la revendication 1, comprenant :

des premier et deuxième organes d'espacement (81, 82) supplémentaires, respectivement accouplés au premier (10) et au deuxième (20) rouleaux de manière à se faire face au niveau du côté de la première portion d'extrémité (13) du rouleau où l'engrenage est accouplé.

10

15

3. Structure de rouleaux selon la revendication 1 ou 2, dans laquelle :

le premier organe d'espacement (81) est accouplé au premier rouleau (10) de telle sorte qu'une portion du premier organe d'espacement, ayant une erreur de rotondité maximale dans la direction circonférentielle, corresponde à une portion du premier rouleau ayant une erreur de rotondité maximale dans la direction circonférentielle.

20

25

4. Structure de rouleaux selon la revendication 3, dans laquelle :

le deuxième organe d'espacement (82) est accouplé au deuxième rouleau (20) de telle sorte qu'une portion du deuxième organe d'espacement, ayant une erreur de rotondité maximale dans la direction circonférentielle, corresponde à une portion du deuxième rouleau ayant une erreur de rotondité maximale dans la direction circonférentielle.

30

35

5. Structure de rouleaux selon l'une quelconque des revendications 1 à 4, dans laquelle :

40

le deuxième rouleau (20) est poussé élastiquement vers le premier rouleau par une paire de premiers organes élastiques (61, 62).

45

6. Élément de fixation par fusion d'un appareil de formation d'image électrophotographique destiné à faire fondre une image de toner sur un support d'enregistrement en appliquant de la chaleur et de la pression, comprenant une structure de rouleaux selon l'une quelconque des revendications précédentes ; et une source de chaleur (50) prévue dans au moins l'un desdits premier et deuxième rouleaux.

50

7. Élément de fixation par fusion selon la revendication 6, comportant une source de chaleur (50) prévue sur au moins l'un desdits premier et deuxième rouleaux.

55



FIG. 1

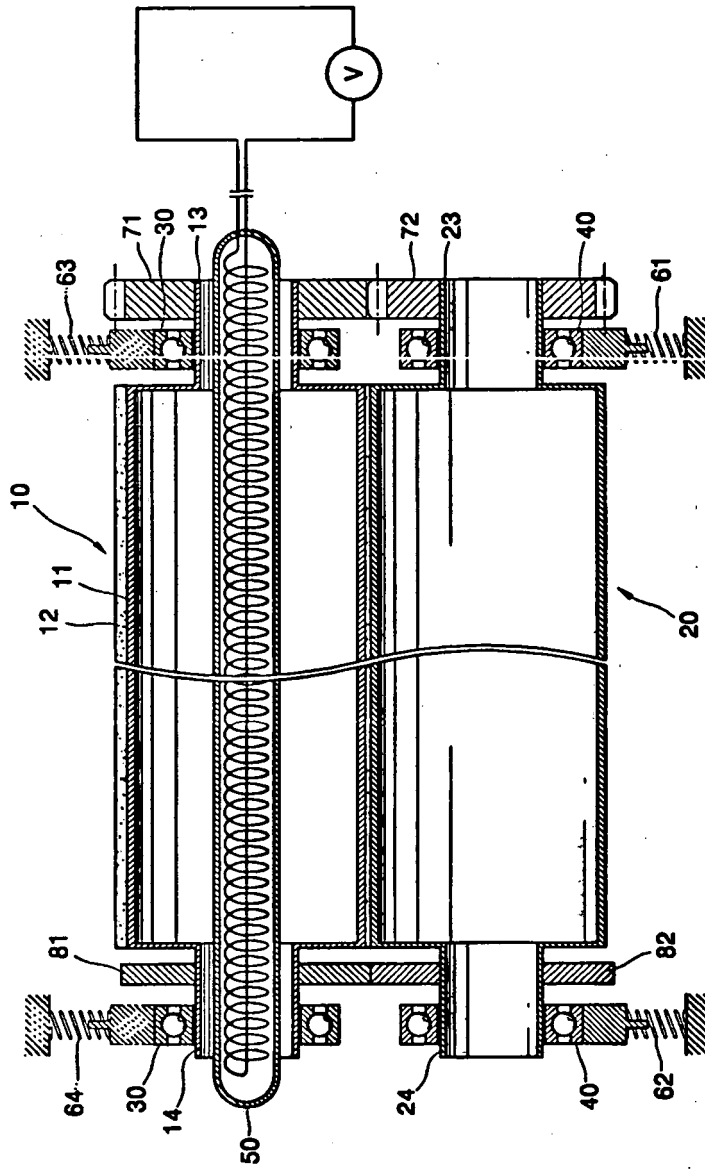


FIG. 2

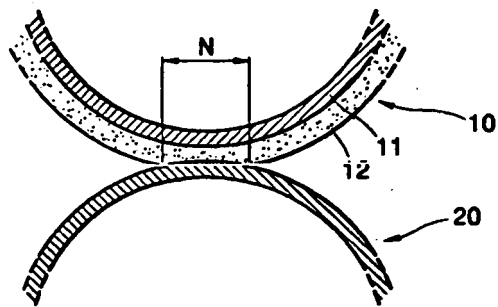


FIG. 3

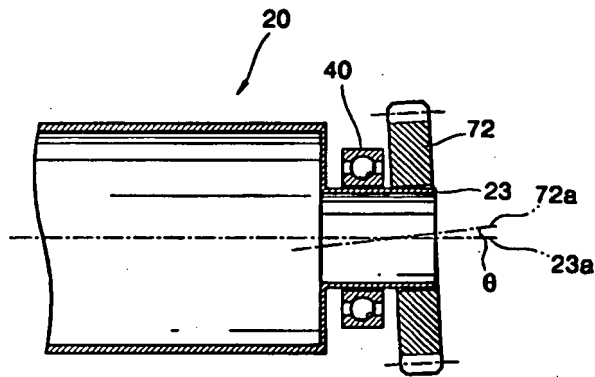


FIG. 4

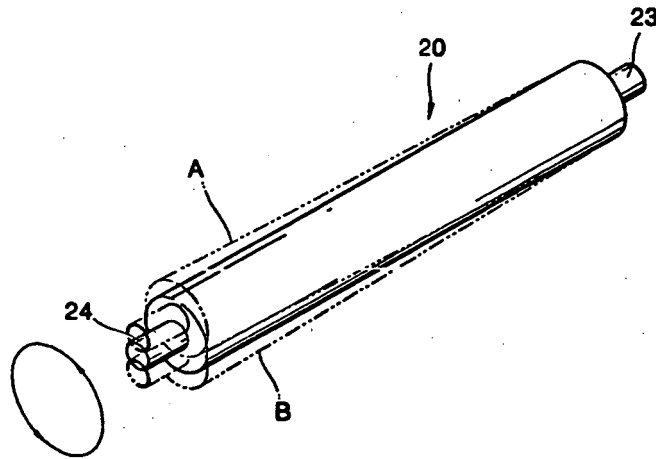


FIG. 5

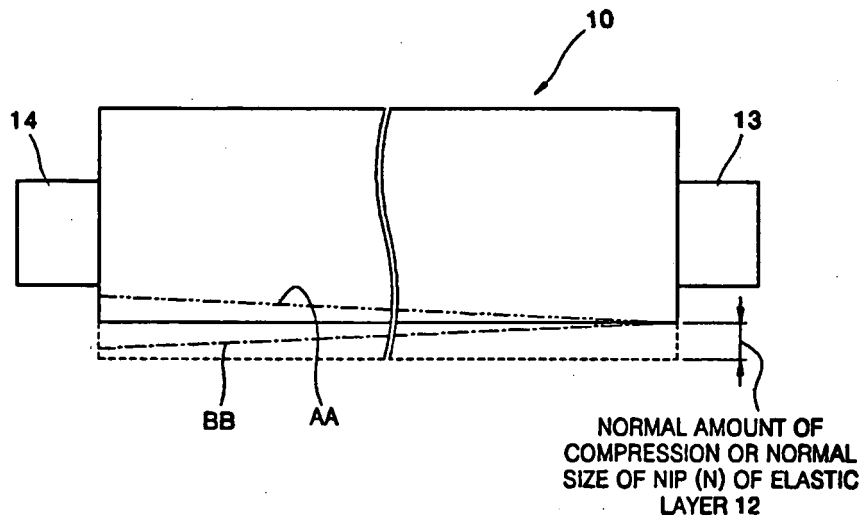


FIG. 6

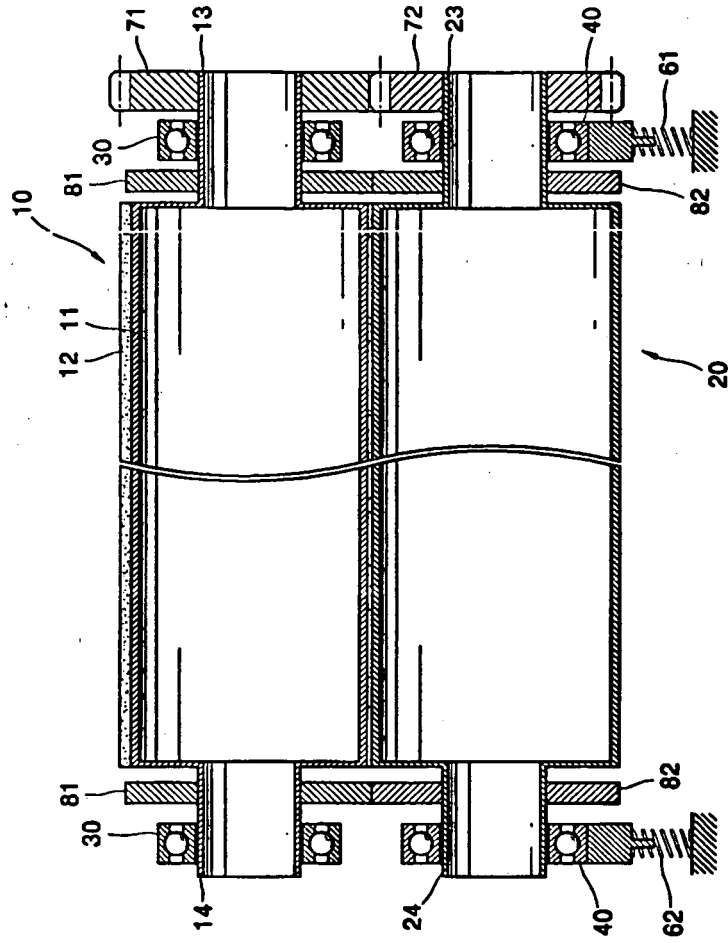


FIG. 7

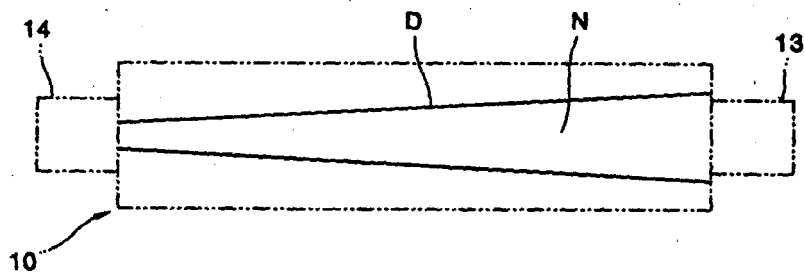


FIG. 8

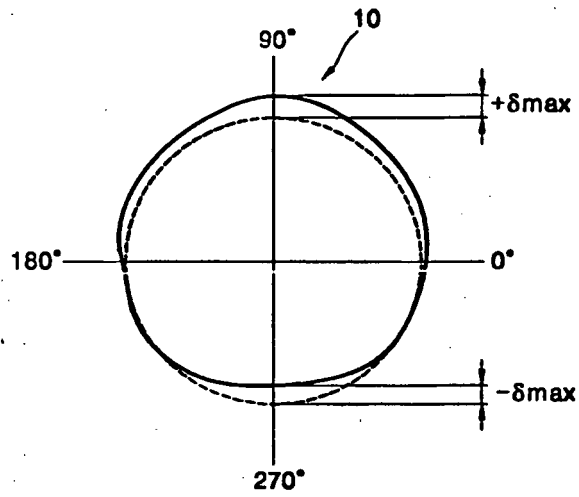


FIG. 9

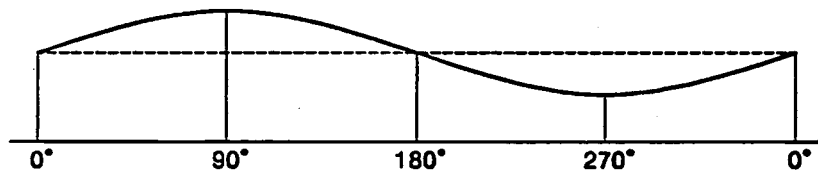


FIG. 10

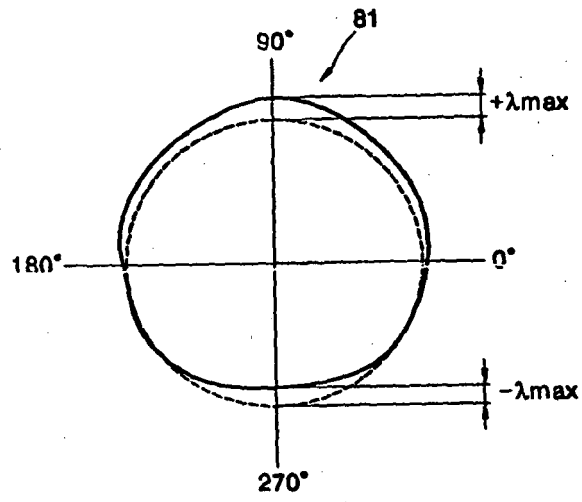


FIG. 11

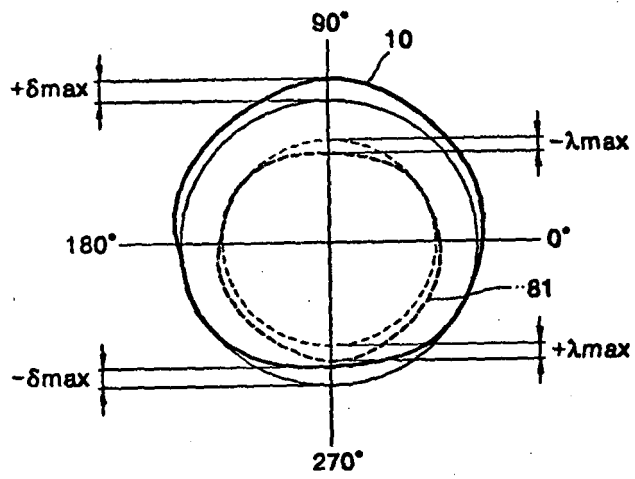


FIG. 12

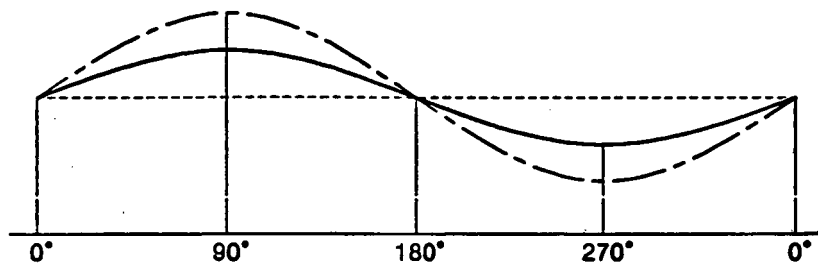


FIG. 13


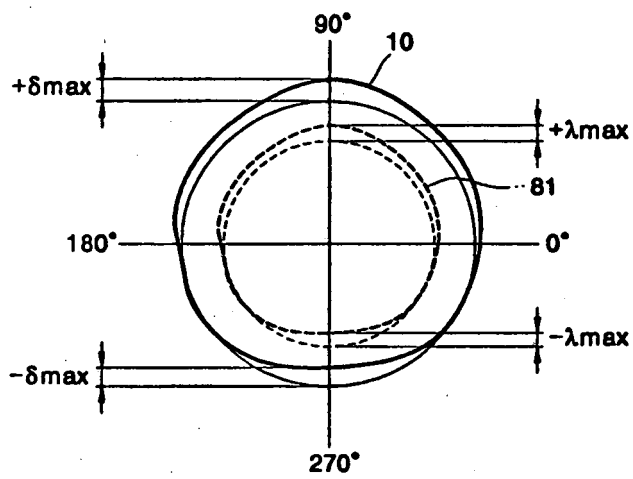




FIG. 14

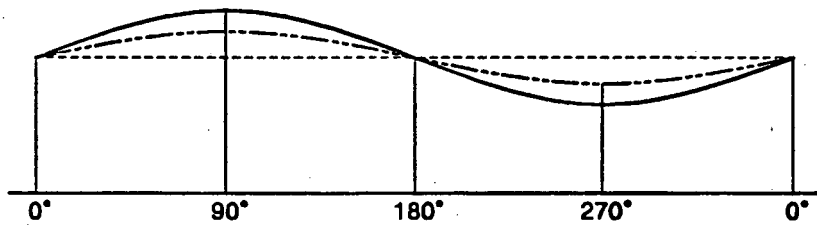

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 20020106224 A [0006]