



US009444750B2

(12) **United States Patent**  
**Kimura**

(10) **Patent No.:** **US 9,444,750 B2**

(45) **Date of Patent:** **Sep. 13, 2016**

(54) **DATA COMMUNICATION APPARATUSES FOR COMMUNICATION WITH AN EXTERNAL APPARATUS OVER A NETWORK, CONTROL METHODS OF THE DATA COMMUNICATION APPARATUSES AND STORAGE MEDIUMS**

(58) **Field of Classification Search**  
CPC ..... H04L 47/25; H04L 47/10; Y02B 60/31  
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

9,197,571 B2\* 11/2015 Kimura ..... H04L 47/25  
2009/0285221 A1\* 11/2009 Ito ..... H04L 12/12  
370/395.53

FOREIGN PATENT DOCUMENTS

JP 2006024016 A 1/2006  
JP 2009278240 A 11/2009

\* cited by examiner

*Primary Examiner* — Omar Ghowrwal

(74) *Attorney, Agent, or Firm* — Canon U.S.A., Inc. IP Division

(71) Applicant: **CANON KABUSHIKI KAISHA**,  
Tokyo (JP)

(72) Inventor: **Tomohiro Kimura**, Kawasaki-shi (JP)

(73) Assignee: **Canon Kabushiki Kaisha**, Tokyo (JP)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **14/883,022**

(22) Filed: **Oct. 14, 2015**

(65) **Prior Publication Data**

US 2016/0043958 A1 Feb. 11, 2016

**Related U.S. Application Data**

(63) Continuation of application No. 13/893,063, filed on May 13, 2013, now Pat. No. 9,197,571.

(30) **Foreign Application Priority Data**

May 15, 2012 (JP) ..... 2012-111863

(51) **Int. Cl.**

**H04L 12/801** (2013.01)

**H04L 12/825** (2013.01)

(52) **U.S. Cl.**

CPC ..... **H04L 47/25** (2013.01); **H04L 47/10** (2013.01); **Y02B 60/31** (2013.01)

(57) **ABSTRACT**

A communication apparatus communicating with an external apparatus via a relaying device is provided. The communication apparatus includes a communication unit configured to perform communication with the relaying device, and a control unit configured to reduce a communication speed of the communication unit to a lower speed if the communication apparatus is to be shifted from a first power mode to a second power mode in which power consumption is lower than that in the first power mode. The communication unit, if the communication apparatus shifts to the second power mode, transmits identification information of the communication apparatus to the relaying device using a first method, and after a predetermined time has passed, transmits the identification information to the relaying device by a second method.

**18 Claims, 10 Drawing Sheets**

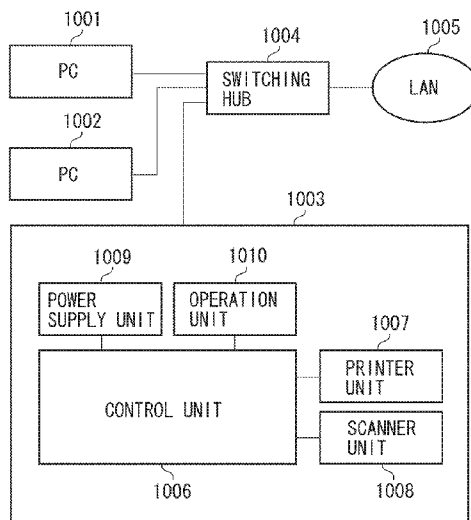


FIG. 1

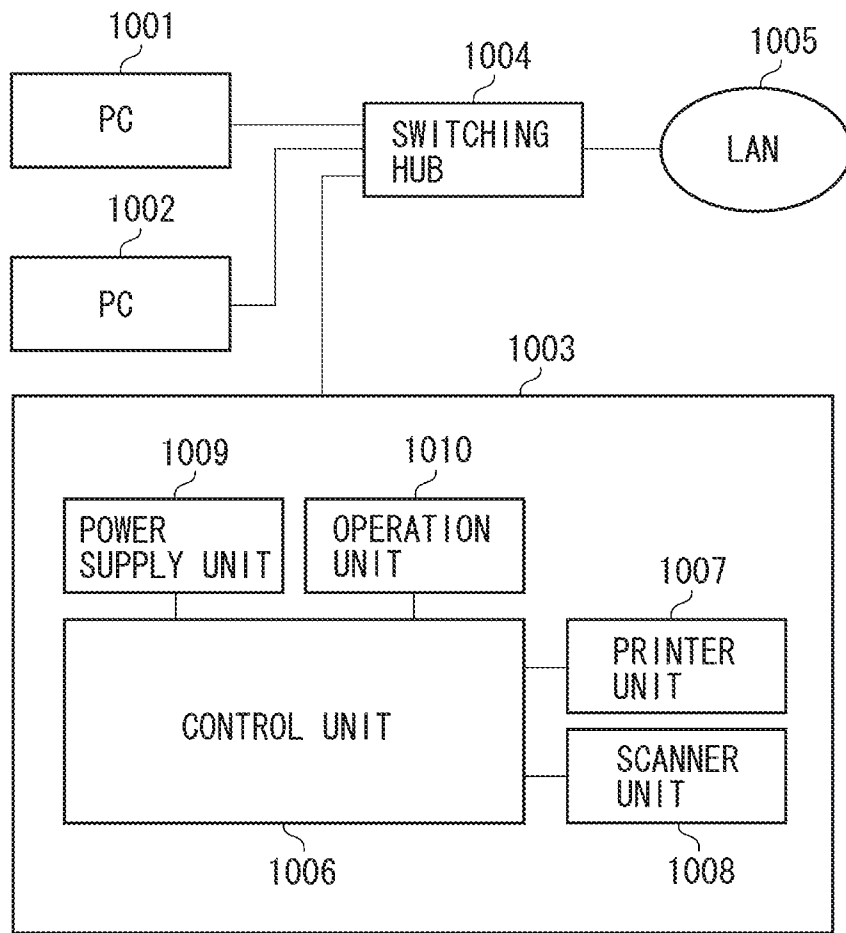
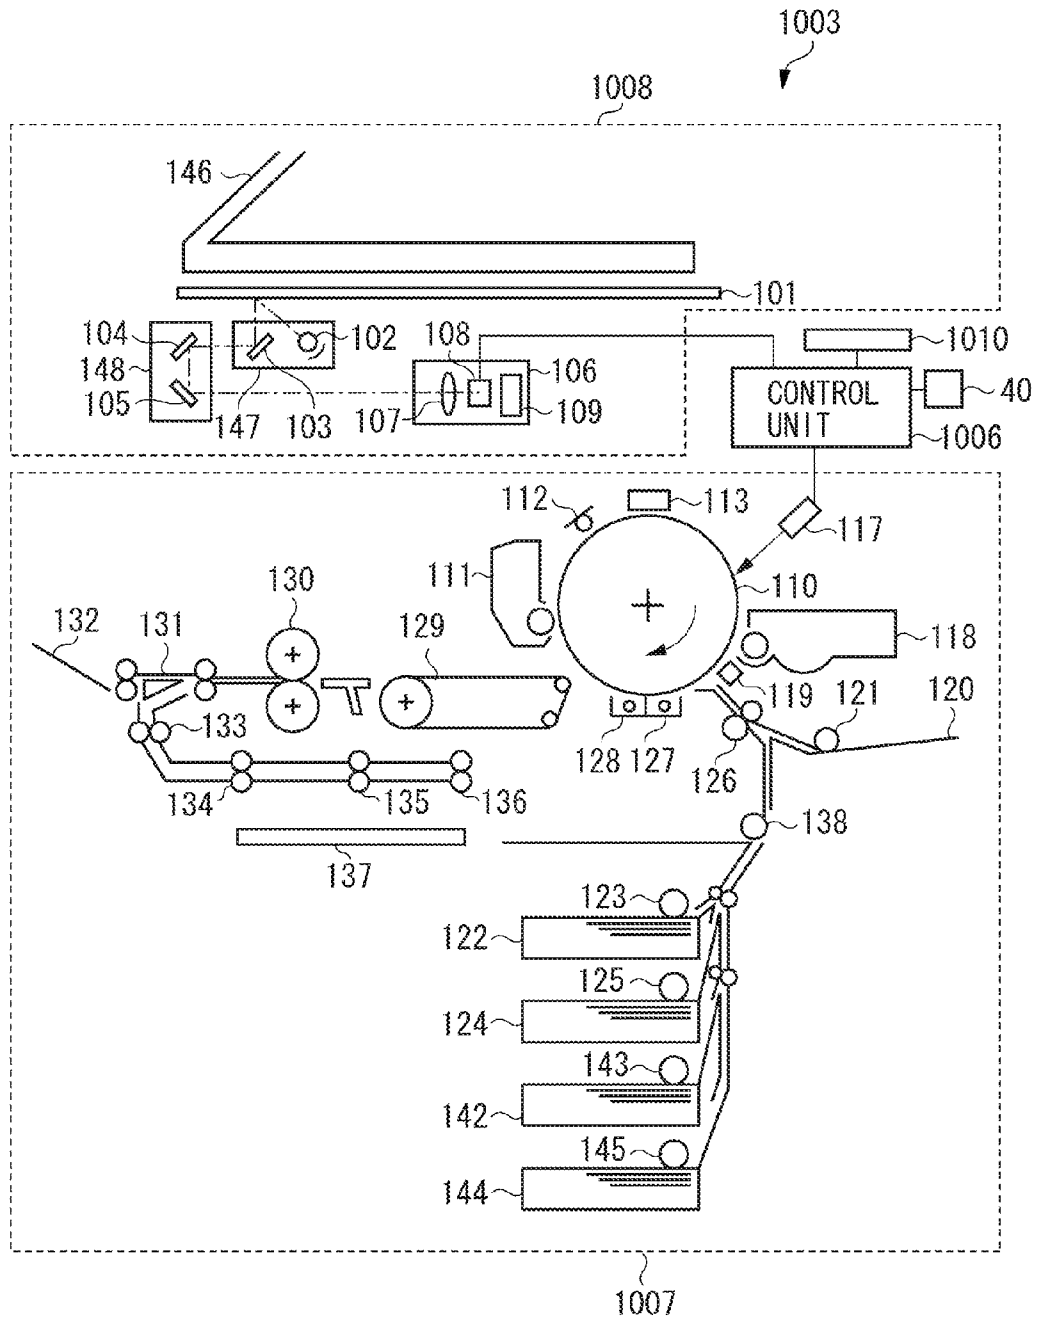


FIG. 2



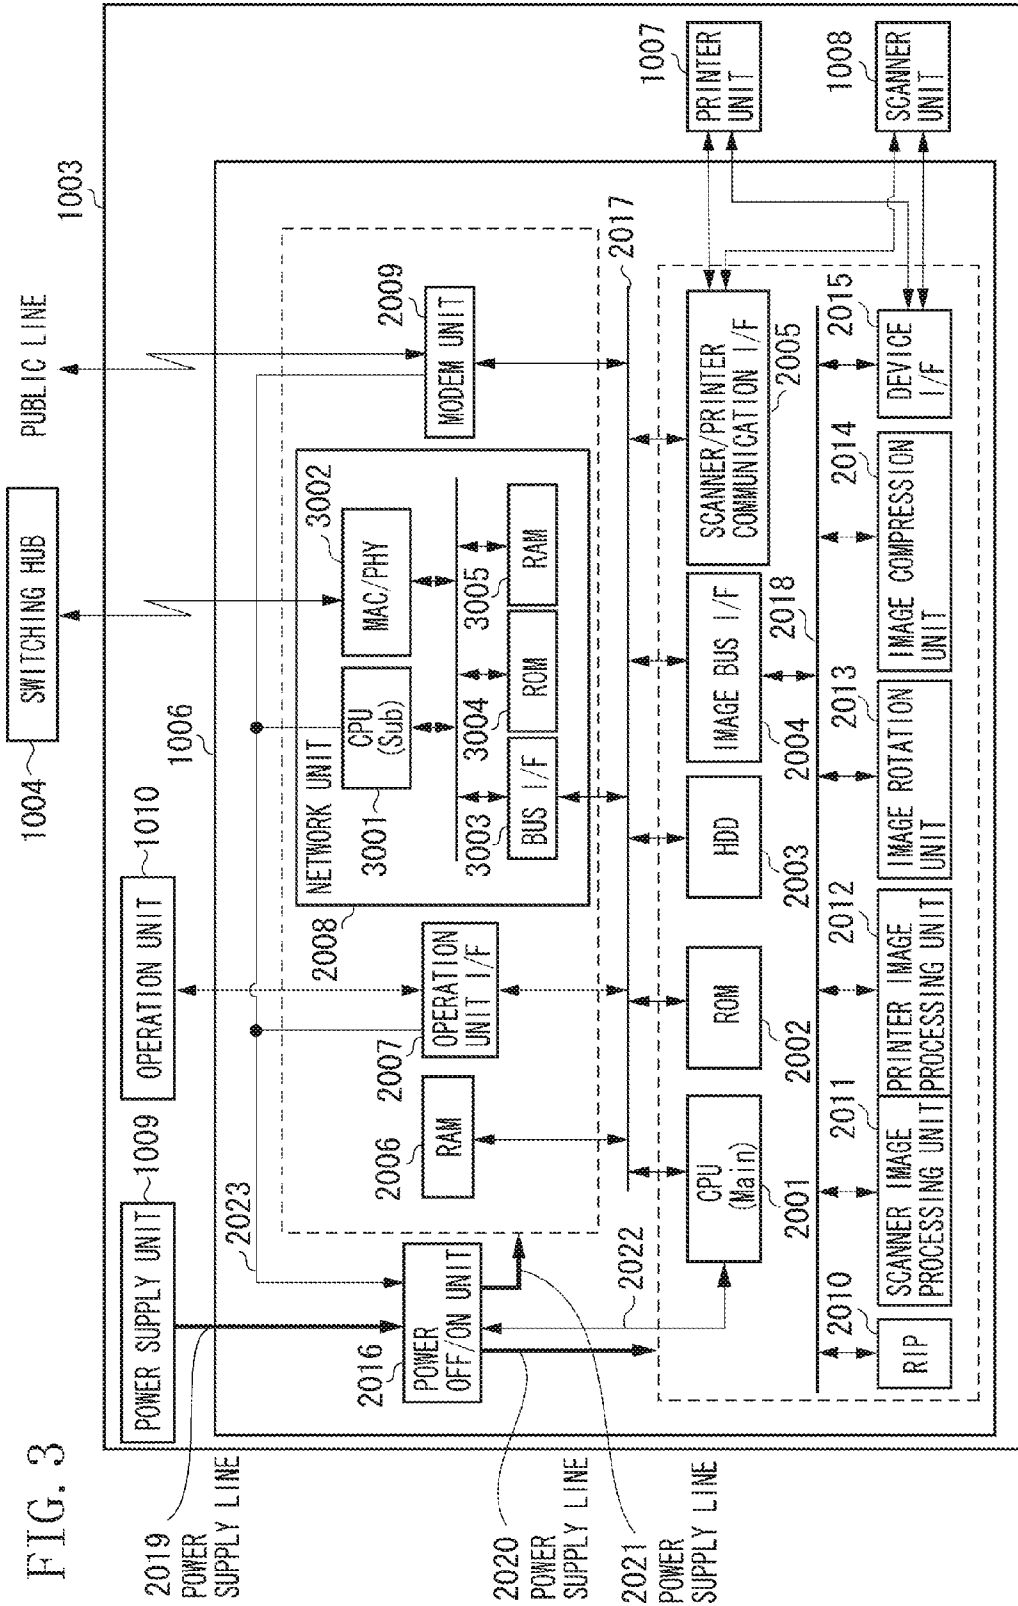


FIG. 4

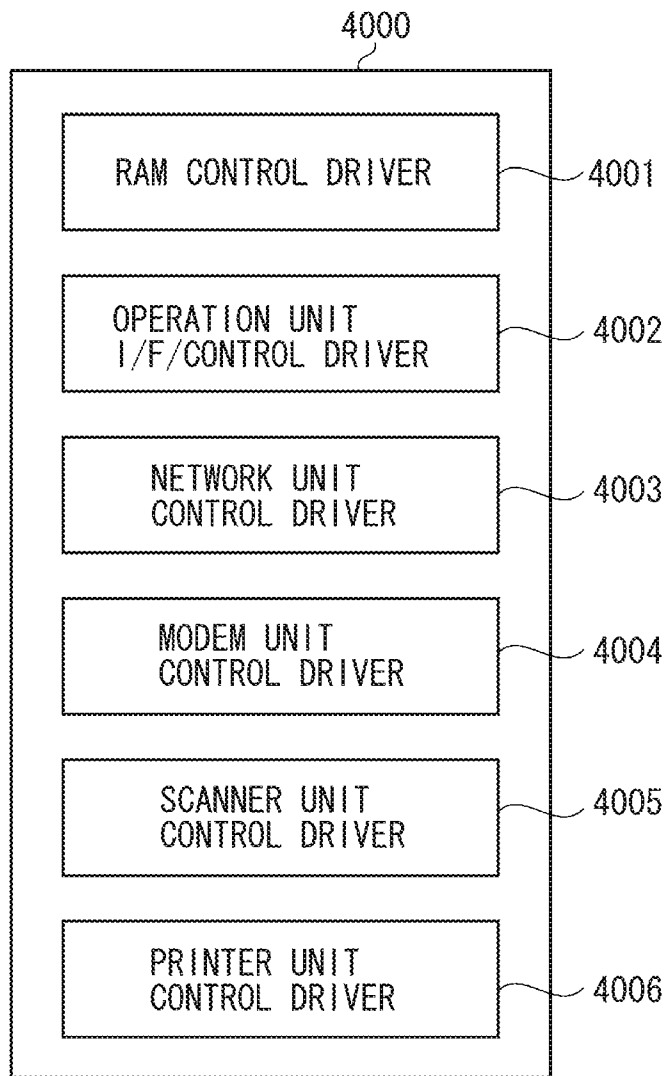


FIG. 5

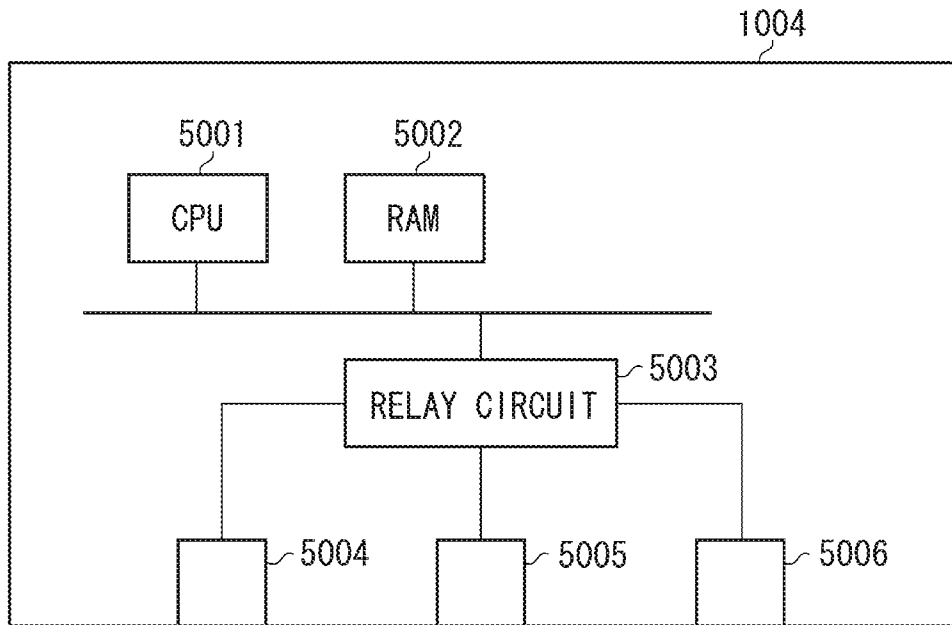


FIG. 6

PORT NUMBER	MAC ADDRESS	VLAN NUMBER	VLAN PARTICIPATION STATE
FIRST PORT 5004	00:00:85:00:00:01	VLAN1	NOT PARTICIPATE
SECOND PORT 5005	00:00:85:00:00:02	VLAN2	PARTICIPATE
THIRD PORT 5006	00:00:85:00:00:03	VLAN1	PARTICIPATE

FIG. 7

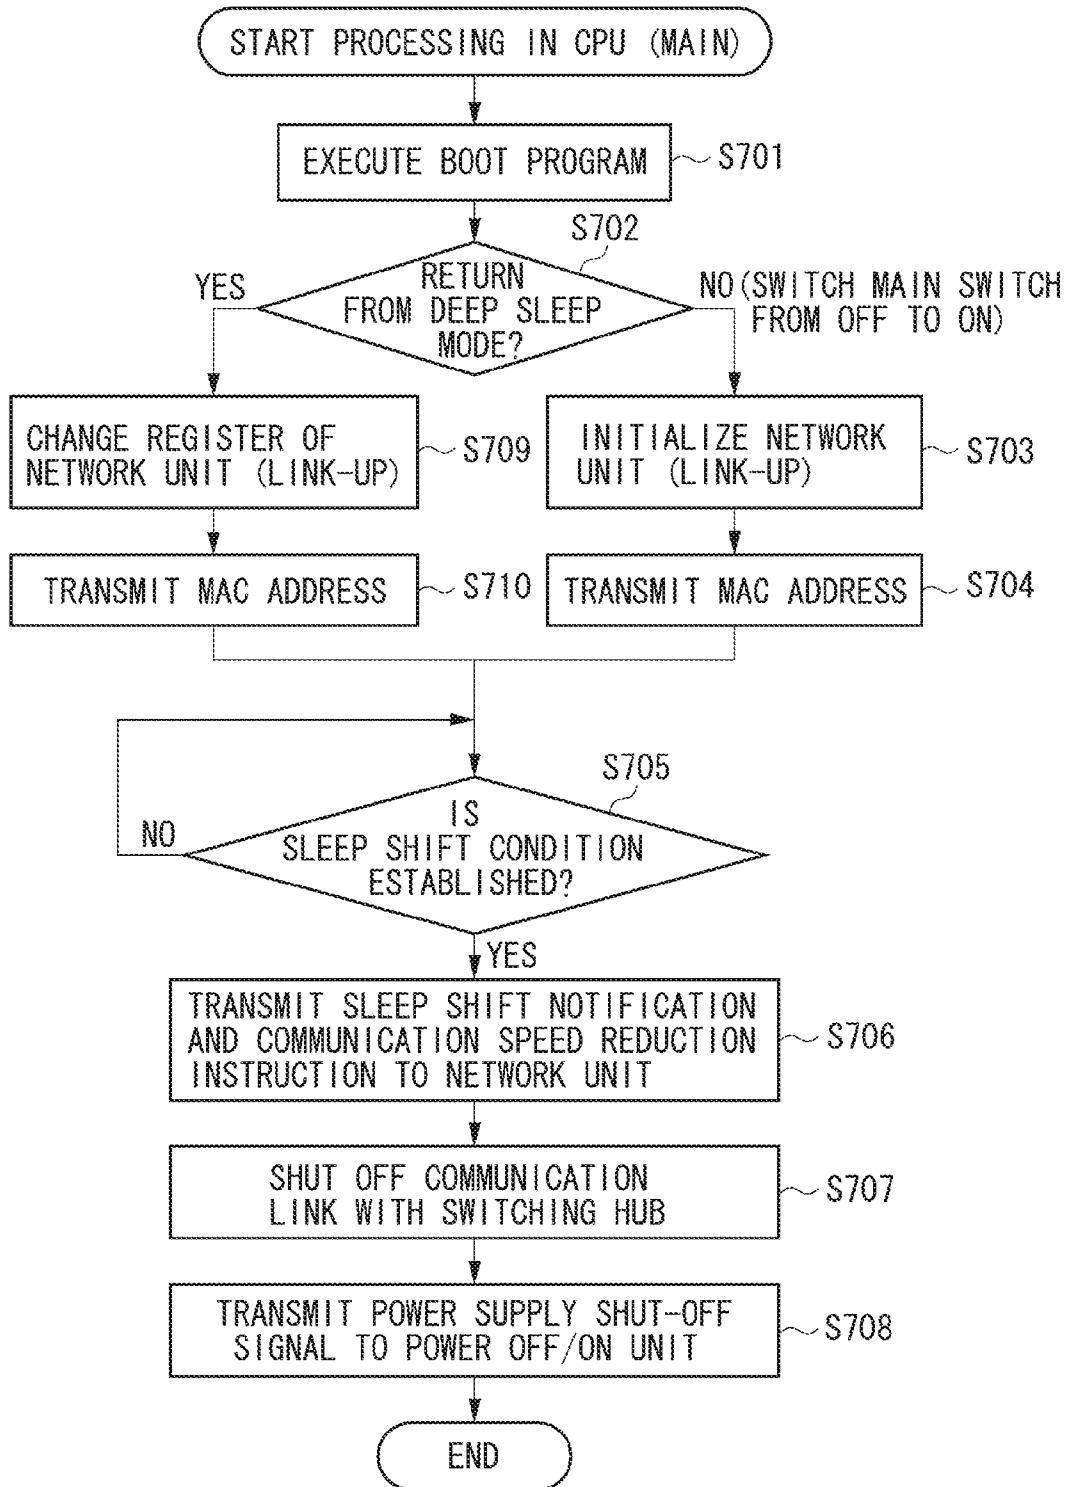




FIG. 8

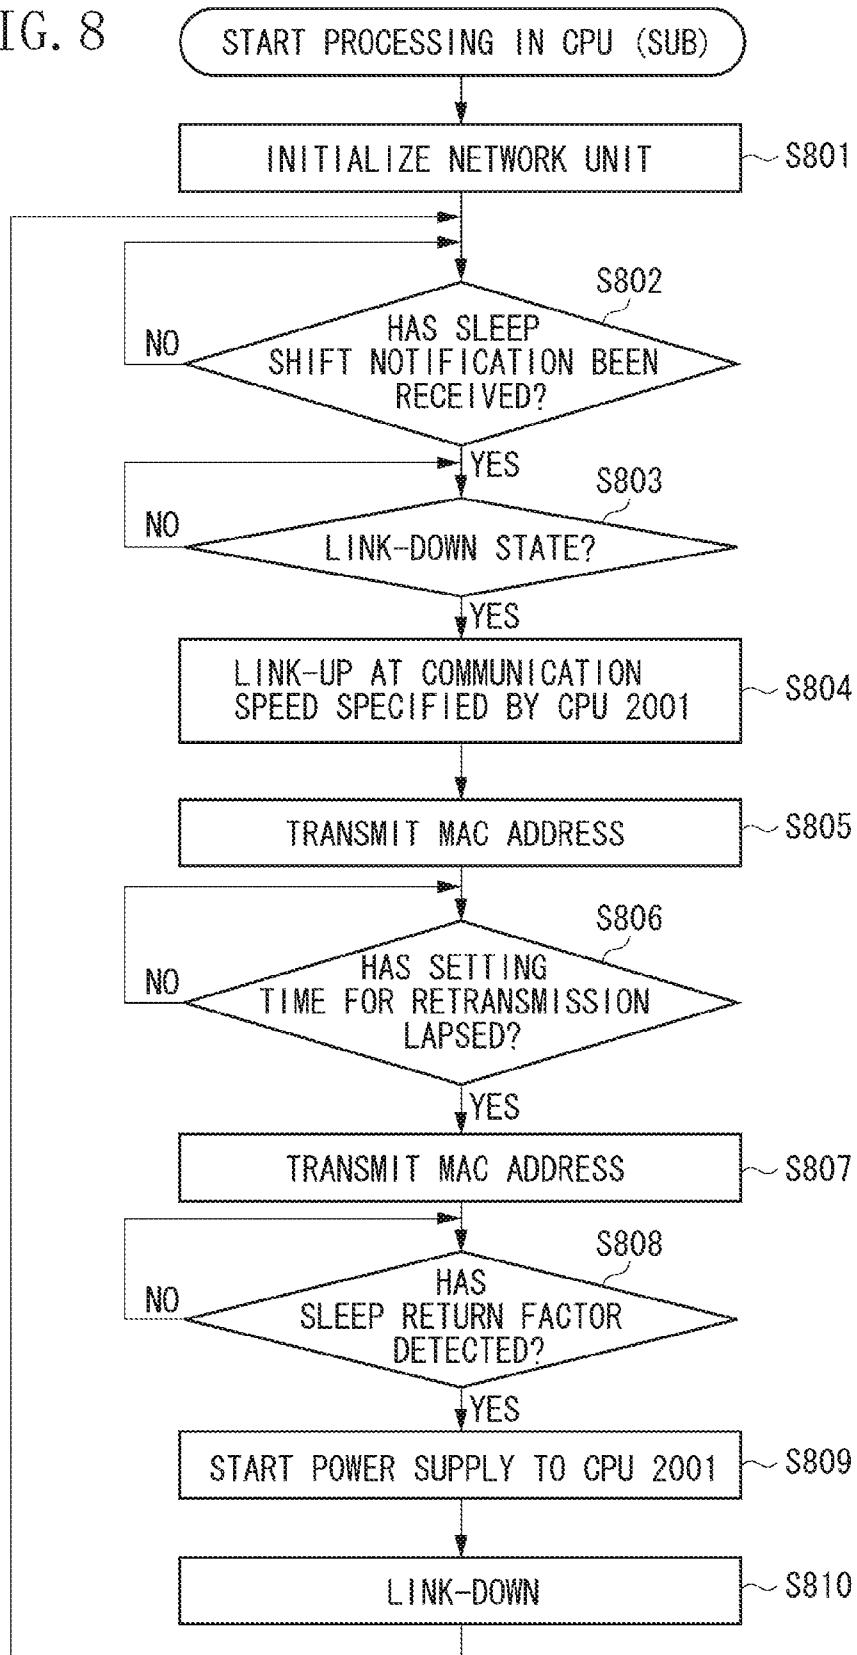


FIG. 9

PORT NUMBER	IP ADDRESS	VLAN NUMBER	VLAN PARTICIPATION STATE
FIRST PORT 5004	192. 168. 11. XXX	VLAN1	NOT PARTICIPATE
SECOND PORT 5005	192. 168. 12. YYY	VLAN2	PARTICIPATE
THIRD PORT 5006	192. 168. 11. XXX	VLAN1	PARTICIPATE

FIG. 10

PORT NUMBER	USER ID	VLAN NUMBER	VLAN PARTICIPATION STATE
FIRST PORT 5004	USER-A	VLAN1	NOT PARTICIPATE
SECOND PORT 5005	USER-B	VLAN2	PARTICIPATE
THIRD PORT 5006	USER-C	VLAN1	PARTICIPATE

**DATA COMMUNICATION APPARATUSES  
FOR COMMUNICATION WITH AN  
EXTERNAL APPARATUS OVER A  
NETWORK, CONTROL METHODS OF THE  
DATA COMMUNICATION APPARATUSES  
AND STORAGE MEDIUMS**

RELATED APPLICATIONS

This application is a Continuation of U.S. patent application Ser. No. 13/893,063 filed on May 13, 2013, which issued as U.S. Pat. No. 9,197,571 B2, and claims the benefit of Japanese Application No. 2012-111863 filed May 15, 2012, which are hereby incorporated by reference herein in their entirety.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a communication apparatus for communicating with a relaying device in a network.

2. Description of the Related Art

A network interface card (NIC) has conventionally been used for enabling a digital multi-function peripheral that performs printing, transmission, and the like to communicate with other devices via a network such as a local area network (LAN).

Ethernet® is popular as a representative network standard. A NIC compliant with the Ethernet® standard can perform communication by selecting one of communication speeds of 10 Mbps, 100 Mbps, and 1000 Mbps.

Recently, power saving has been required of the digital multi-function peripherals. In this regard, for example, Japanese Laid-Open Patent Application No. 2001-154763 discusses a technique for saving power by reducing a communication speed of an NIC when the digital multi-function peripheral operates in a power-saving mode.

To achieve more power saving, in addition to the reduction in the communication speed as discussed in Japanese Laid-Open Patent Application No. 2001-154763, Japanese Laid-Open Patent Application No. 2007-276341 discusses a technique for cutting off power supply to a part of a communication apparatus when the communication apparatus operates in a power-saving mode.

As a recent network related technique, virtual local area network (VLAN) has been popular. The VLAN technique virtually divides a plurality of physically connected computer terminals on a network into a plurality of groups ("virtual networks") by using a relaying device such as a switching hub to manage the groups as if they belong to different LANs respectively. The VLAN technique is further classified into a static VLAN technique and a dynamic VLAN technique. In the static VLAN technique, computer terminals are divided into a plurality of groups for each port of a switching hub. In the dynamic VLAN technique, a switching hub virtually divides a plurality of computer terminals into a plurality of groups to manage the terminals based on information (for example, media access control or MAC address) acquired from each computer terminal connected to a port.

It is assumed that a communication link with a switching hub is cut off ("linked-down") in a communication apparatus connected to the switching hub compliant with the dynamic VLAN technique. In such a case, to reconnect ("link-up") the communication link with the switching hub, the communication apparatus has to retransmit information such as a MAC address to the switching hub. This is because the

switching hub supporting the dynamic VLAN technique considers that the computer terminal whose communication link has been cut off no longer belongs to ("participates in") the VLAN by cutting-off of the communication link. To participate in the VLAN including the switching hub, as discussed in Japanese Laid-Open Patent Application No. 2009-278240, the communication apparatus has to transmit information such as a MAC address to the switching hub.

SUMMARY OF THE INVENTION

The present invention is directed to secure transmission of information necessary for a communication apparatus to participate in a virtual network, to a switching hub while achieving power saving of the communication apparatus.

According to an aspect of the present invention, a communication apparatus communicating with an external apparatus via a relaying device is provided. The communication apparatus includes a communication unit configured to perform communication with the relaying device, and a control unit configured to reduce a communication speed of the communication unit to a lower speed if the communication apparatus is to be shifted from a first power mode to a second power mode in which power consumption is lower than that in the first power mode. The communication unit, if the communication apparatus shifts to the second power mode, transmits identification information of the communication apparatus to the relaying device using a first method, and after a predetermined time has passed, transmits the identification information to the relaying device by a second method.

According to the present invention, participation of a communication apparatus in a network can be secured while achieving power saving of the communication apparatus.

Further features and aspects of the present invention will become apparent from the following detailed description of exemplary embodiments with reference to the attached drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate exemplary embodiments, features, and aspects of the invention and, together with the description, serve to explain the principles of the invention.

FIG. 1 is a block diagram illustrating an overall configuration of a communication system.

FIG. 2 is a block diagram illustrating a configuration of a multifunction peripheral (MFP).

FIG. 3 is a block diagram illustrating a configuration of a control unit.

FIG. 4 illustrates a software configuration of a program executed by a main central processing unit (CPU).

FIG. 5 is a block diagram illustrating a configuration of a switching hub.

FIG. 6 illustrates a database managed in the switching hub configuring a VLAN.

FIG. 7 is a flowchart illustrating an operation performed by a CPU of the control unit.

FIG. 8 is a flowchart illustrating an operation performed by a CPU of a network unit.

FIG. 9 illustrates a VLAN database in a subnet based VLAN.

FIG. 10 illustrates a VLAN database in a user based VLAN.

## DESCRIPTION OF THE EMBODIMENTS

Various exemplary embodiments, features, and aspects of the invention will be described in detail below with reference to the drawings.

Components of the exemplary embodiments are only examples, and the scope of the present invention is not limited to the examples.

FIG. 1 is a block diagram illustrating a configuration of a communication system including a communication apparatus according to the first exemplary embodiment of the present invention.

The communication system in FIG. 1 includes a digital MFP (hereinafter, simply referred to as MFP) 1003, and personal computers (PCs) 1001 and 1002 serving as external apparatuses. The MFP 1003 is provided with a plurality of functions such as a network print function, and a network transmission function. The PCs 1001 and 1002 and the MFP 1003 are connected to a LAN 1005 via a switching hub 1004.

The MFP 1003 includes an operation unit 1010, a scanner unit 1008, and a printer unit 1007. The operation unit 1010 is used when a user performs various kinds of operations. The scanner unit 1008 reads image information according to an instruction from the operation unit 1010. The printer unit 1007 prints image data on a sheet. The MFP 1003 further includes a control unit 1006 that controls the scanner unit 1008 and the printer unit 1007 according to an instruction from the operation unit 1010, or a remote instruction from the PC 1002.

The PCs 1001 and 1002 can transmit a print job including image data of one page or a plurality of pages to the MFP 1003 via the LAN 1005. The PCs 1001 and 1002 can transmit, other than print jobs, various kinds of commands to the MFP 1003. The PCs 1001 and 1002 can transmit a print job to MFPs connected to the LAN 1005 other than the MFP 1003.

FIG. 2 is a block diagram illustrating a configuration of the MFP 1003 illustrated in FIG. 1.

In FIG. 2, the scanner unit 1008 includes a platen glass 101 for placing a document thereon, and an automatic document feeder 142 for sequentially feeding documents to a predetermined position of the platen glass 101. The scanner unit 1008 scans the document placed on the platen glass 101 in a main scanning direction during an exposure process. The scanner unit 1008 includes a document illumination lamp 102, a scanning mirror 103, a scanning unit 147 disposed below the platen glass 101, and scanning mirrors 104 and 105 for deflecting reflected light of the scanning mirror 103 toward a charge coupled device (CCD) unit 106. The scanner unit 1008 further includes a scanning unit 148 for scanning in a sub-scanning direction at a half speed of the scanning unit 147, and an imaging lens 107 for receiving the reflected light of the scanning mirror 105 and forming an image. The CCD unit 106 is provided with an image sensor 108 consisting of a CCD for converting the formed image into a digital image signal of, for example, 8 bits, and a CCD driver 109 for driving the image sensor 108.

The control unit 1006 receives an instruction from the operation unit 1010 and generates image data based on the image signal output from the image sensor 1008, and controls the entire apparatus. With reference to FIG. 3, the control unit 1006 will be described in detail below.

The printer unit 1007 exposes a photosensitive drum 110 to light to form an electrostatic latent image based on image data generated in the control unit 1006. The printer unit 1007 includes, for example, an exposure unit 117 consisting of a

semiconductor laser, and a development unit 118 containing toner that is black developer. The printer unit 1007 develops the electrostatic latent image on the photosensitive drum 110 with the toner. The printer unit 1007 further includes a pre-transfer charging device 119 for applying high voltage to the toner image developed on the photosensitive drum 110 prior to transfer.

The printer unit 1007 further includes a manual feed tray 120, and sheet feeding units 122, 124, 142, and 144 for storing sheets. The printer unit 1007 further includes feeding rollers 121, 123, 125, 143, and 145 for feeding sheets on the manual feed tray 120 or stored in the sheet feeding units 122, 124, 142, and 144, respectively. The printer unit 1007 further includes registration rollers 126 for feeding the sheet(s) fed from the sheet feeding rollers 121, 123, 125, 143, or 145 to the photosensitive drum 110. The feeding rollers 121, 123, 125, 143, and 145 feed and stop the sheet(s) on the manual feed tray 120 or the sheet(s) stored in the sheet feeding units 122, 124, 142, and 144 at the position of the registration rollers 126. The feeding rollers 121, 123, 125, 143, and 145 feed the sheet(s) in synchronization with write timing of the toner image developed on the photosensitive drum 110.

The printer unit 1007 further includes a transfer charger 127 for transferring the toner image developed on the photosensitive drum 110 to the fed sheet, and a separation charger 128 for separating, from the photosensitive drum 110, the sheet on which the toner image has been transferred from the photosensitive drum 110. The printer unit 1007 includes a conveyance belt 129 for conveying the separated sheet to a fixing device 130 described below, and a cleaner 111 for recovering toner remaining on the photosensitive drum 110 without transferred. The printer unit 1007 includes a pre-exposure lamp 112 for discharging the photosensitive drum, and a primary charging unit 113 for uniformly charging the photosensitive drum 110.

The printer unit 1007 includes a fixing device 130 for fixing the toner image on the sheet on which the toner image has been transferred, and a sorter 132 for receiving the sheet on which the toner image is fixed via a flapper 131. The printer unit 1007 includes an intermediate tray 137 for receiving the sheet on which the toner image is fixed via the flapper 131 and feed rollers 133 to 136. The printer unit 1007 includes a re-feed roller 138 for feeding the sheet on the intermediate tray 137 to the photosensitive drum 110 again. The flapper 131 switches the feeding destination of the sheet on which the toner image is fixed, between the sorter 132 and the intermediate tray 137. The feed rollers 133 to 136 are configurable both not to invert (i.e., for multiple-printing) and to invert (i.e., for two-sided printing) the sheet on which the toner image is fixed.

FIG. 3 is a block diagram illustrating a configuration of the control unit 1006 in FIG. 2.

In FIG. 3, the control unit 1006 is connected to the scanner unit 1008, the printer unit 1007, the switching hub 1004, and a public line to input and output image data or device information.

The control unit 1006 includes a raster image processor (RIP) 2010 for rasterizing a page description language (PDL) code included in a print job received from a computer terminal on the LAN via the LAN 1005 to be a bitmap image. The control unit 1006 includes a scanner image processing unit 2011 for correcting, processing, or editing image data input from the scanner unit 1008. The control unit 1006 further includes a printer image processing unit 2012 for correcting or changing the resolution of the image data output (printed) from the printer unit 1007, and an image rotation unit 2013 for rotating the image data.

The control unit **1006** includes an image compression unit **2014** for compressing or decompressing multivalued image data in a Joint Photographic Experts Group (JPEG) format, and compressing or decompressing binary image data in a Joint Bi-level Image Experts Group (JBIG) format, a Modified Modified READ (MMR) format, or a Modified Huffman (MH) format. The control unit **1006** includes a device interface (I/F) **2015** for connecting the control unit **1006** to the scanner unit **1008** and the printer unit **1007** to perform synchronous/asynchronous conversion of image data. The control unit **1006** further includes an image bus **2018** for interconnecting these components to transfer image data at a high speed.

The control unit **1006** includes a CPU **2001** for controlling the MFP **1003**. Hereinafter, the CPU **2001** of the control unit **1006** is referred to as “main CPU” to distinguish the CPU **2001** from a CPU of a network unit **2008** described below. The CPU **3001** in the network unit **2008** described below is referred to as “sub CPU”.

The control unit **1006** includes a random access memory (RAM) **2006** serving as a system work memory for operating the main CPU **2001**. The RAM **2006** also serves as an image memory for temporarily storing image data. The control unit **1006** includes an operation unit I/F **2007** for outputting, to the operation unit **1010**, image data to be displayed on the operation unit **1010**.

The operation unit I/F **2007** transmits information entered by a user of the system via the operation unit **1010** to the main CPU **2001**. The control unit **1006** includes a network unit **2008** connected to the LAN **1005** via the switching hub **1004** to communicate (transmit or receive) with the PC **1002** or a computer terminal (for example, PC **1001**) on the LAN **1005**. The control unit **1006** includes a modem unit **2009** connected to a public line to communicate (transmit or receive) data with an external facsimile device. The network unit **2008** receives data from the computer terminal on the LAN **1005**, and processes the received data. The control unit **1006** includes a read-only memory (ROM) **2002** for storing a boot program to be executed by the main CPU **2001**, and a hard disk drive (HDD) **2003** for storing system software, image data, or a software count value. The control unit **1006** includes a scanner/printer communication I/F **2005** for communication with CPUs in the scanner unit **1008** and the printer unit **1007**, and a system bus **2017** for interconnecting these components.

The control unit **1006** includes an image bus I/F **2004** serving as a bus bridge for interconnecting the system bus **2017** and the image bus **2018** to convert a data structure. The control unit **1006** includes a power OFF/ON unit **2016** for supplying direct current (DC) power received from the power supply unit **1009** via a power supply line **2019**, to predetermined circuit elements of the control unit **1006** via power supply lines **2020** and **2021**. The power OFF/ON unit **2016** is controlled according to a control signal received from the network unit **2008** via a control signal line **2023** and a control signal received from the main CPU **2001** via a control signal line **2022**. The power OFF/ON unit **2016** selectively turns on or off the power supply lines **2020** and **2021**. The power supply line **2020** is connected to the main CPU **2001**, the ROM **2002**, the HDD **2003**, the image bus I/F **2004**, and the scanner/printer communication I/F **2005**. The power supply line **2020** is connected to the device I/F **2015**, the image rotation unit **2013**, the image compression unit **2014**, the RIP **2010**, the scanner image processing unit **2011**, and the printer image processing unit **2012**. The power

supply line **2021** is connected to the RAM **2006**, the operation I/F **2007**, the network unit **2008**, and the modem unit **2009**.

The MFP **1003** in FIG. 1 performs printing processing as follows based on a print job transmitted from a computer terminal (PC **1001**, PC **1002**, or the like) connected to the LAN **1005**. The main CPU **2001** stores in the RAM **2006** print data, which is image data, received from the computer terminal connected to the LAN **1005** via the network unit **2008**. The main CPU **2001** supplies the image data to the RIP **2010** via the image bus I/F **2004**. The RIP **2010** expands the image data (PDL code) in bitmap data. The image compression unit **2014** compresses the image data to store the data in the HDD **2003**. The image data (compressed bitmap data) stored in the HDD **2003** is supplied to the image compression unit **2014** via the image bus I/F **2004**. The image compression unit **2014** decompresses the supplied image data (compressed bitmap data). The printer image processing unit **2012** performs correction and resolution-conversion of the printer image data. The image rotation unit **2013** rotates the image data if necessary. The variously processed image data is transmitted as print data to the printer unit **1007** via the device I/F **2015**. The printer unit **1007** performs print processing on the sheet.

The MFP **1003** is operable in a deep sleep mode that is one of power-saving modes. In a normal mode, the power supply unit **1009** supplies power to the power OFF/ON unit **2016** via the power supply line **2019**. The main CPU **2001** controls the power OFF/ON unit **2016** such that each of the power supply line **2020** and the power supply line **2021** is turned on. In such a state, the power supply unit **1009** supplies power to both of the main CPU **2001** and the network unit **2008**.

In the deep sleep mode, the power supply unit **1009** supplies power to the power OFF/ON unit **2016** via the power supply line **2019**. The main CPU **2001** controls the power OFF/ON unit **2016** such that the power supply line **2020** is turned off and the power supply line **2021** is turned on. In such a state, power supplied to the main circuit components including the main CPU **2001** of the control unit **1006** is cut off. Consequently, power consumption of the MFP **1003** can be largely reduced. When the network unit **2008** receives data such as a print job from the computer terminal on the LAN **1005**, the network unit **2008** can control the power OFF/ON unit **2016** to return to the normal mode. In the deep sleep mode, the power supplied to the main CPU **2001** is cut off; however, other arrangements can be employed. For example, the clock frequency of the main CPU **2001** can be reduced to lower than that in the normal mode to reduce the power consumption. Alternatively, without cutting off the power supply, the power to be supplied can be reduced to lower than that in the normal mode. In an exemplary embodiment, in the deep sleep mode, the main CPU **2001** can execute only limited processing compared to the normal mode. The limited processing includes at least processing of packets received from the computer terminal on the LAN **1005** by the network unit **2008**.

In the deep sleep mode, power has been supplied to the RAM **2006** from the power supply unit **1009**. Consequently, the RAM **2006** performs a self-refreshing operation to back up a system program.

In the above description, the network unit **2008** switches the power supply mode from the deep sleep mode to the normal mode. Alternatively, other arrangements can be employed. Specifically, instead of using the network unit **2008**, the modem unit **2009** or the operation unit I/F **2007** can switch the mode from the deep sleep mode to the normal

mode. The former case enables facsimile communication with the public line, and the latter case enables reception of an instruction from the user of the operation unit 1010.

The MFP 1003 in FIG. 1 returns from the deep sleep mode to the normal mode as described below.

For example, when the network unit 2008 receives a print job from the PC 1002, the network unit 2008 analyzes to determine whether the packets received as the print job include data sequence corresponding to a physical address unique to the apparatus. If the network unit 2008 detects the data sequence corresponding to the apparatus, the network unit 2008 controls the power OFF/ON unit 2016 via the control signal line 2023 to turn the power supply line 2021 on, and starts the main CPU 2001. The main CPU 2001 determines whether the start of the CPU 2001 is caused by a return from the deep sleep mode to the normal mode, based on the power OFF/ON unit 2016. If the main CPU 2001 determines that the start is caused by a return from the deep sleep mode to the normal mode, the main CPU 2001 starts a boot sequence. In this processing, the main CPU 2001 uses the system program backed up by the RAM 2006 at the time of shift to the deep sleep mode, without performing a sequence for down-loading the system program from the HDD 2003 to the RAM 2006. By such processing, the control unit 1006 is set to the normal mode, and the control unit 1006 instructs the printer unit 1007 to start printing in response to the print job from the computer terminal on the LAN 1005.

The network unit 2008 includes the sub CPU 3001 for controlling the network unit 2008, a MAC/PHY unit 3002, a bus I/F 3003, a ROM 3004, and a RAM 3005, which are interconnected via a bus. The network unit 2008 is connected to the system bus 2017 via the bus I/F 3003. The MAC/PHY unit 3002 communicates with the switching hub 1004 to transmit and receive packet data.

The ROM 3004 stores a wake-on-LAN pattern (WOL pattern) for returning from the deep sleep mode to the normal mode, and a proxy response pattern for responding to a received packet without returning from the deep sleep mode to the normal mode. Hereinafter, an operation performed when the MFP 1003 receives a packet of the WOL pattern to return the MFP 1003 from the deep sleep mode to the normal mode is described.

First, an operation performed when the MAC/PHY unit 3002 receives a packet of the WOL pattern in the deep sleep mode is described. The sub CPU 3001 determines, when the MFP 1003 operates in the deep sleep mode, whether a packet received by the MAC/PHY unit 3002 via the LAN 1005 matches the WOL pattern stored in the ROM 3004. If the sub CPU 3001 determines that the packet received by the MAC/PHY unit 3002 matches the WOL pattern, the sub CPU 3001 transmits an instruction for starting power supply to the power OFF/ON unit 2016 via the control signal line 2023. As a result, the power supply to the main CPU 2001 and other components is resumed.

Next, an operation performed when the MAC/PHY unit 3002 receives a packet of the proxy response pattern in the deep sleep mode is described. The ROM 3004 stores the proxy response pattern and response data associated with the proxy response pattern. The response data includes, for example, status information of the MFP 1003 (e.g., information indicating an operation mode of the MFP 1003, information indicating the remaining amount of sheets, and the like). The sub CPU 3001 determines, when the MFP 1003 operates in the deep sleep mode, whether a packet received by the MAC/PHY unit 3002 via the LAN 1005 matches the proxy response pattern stored in the ROM 3004.

If the sub CPU 3001 determines that the packet received by the MAC/PHY unit 3002 matches the proxy response pattern, the sub CPU 3001 reads the response data corresponding to the matched proxy response pattern from the RAM 3005. The sub CPU 3001 transmits the response data read from the RAM 3005 to the computer terminal on the LAN 1005. The terminal is the transmission source of the proxy response pattern. Even if the sub CPU 3001 detects the proxy response pattern, the sub CPU 3001 issues no instruction to the power supply unit 1009 for causing the power OFF/ON unit 2016 to resume the power supply to the main CPU 2001 and other components via the power supply line 2020. Consequently, when the MFP 1003 receives the proxy response pattern and performs the response processing, the MFP 1003 can perform the response processing while maintaining the deep sleep mode without returning from the deep sleep mode to the normal mode.

The network unit 2008 can perform communication complying with Ethernet® standard. The network unit 2008 can perform communication in a plurality of communication modes, and can communicate with the switching hub 1004, for example, at one of communication speeds of 10 Mbps, 100 Mbps, and 1000 Mbps. The switching hub 1004 complies with the Ethernet® standard, and can perform communication at one of communication speeds of 10 Mbps, 100 Mbps, and 1000 Mbps.

FIG. 4 illustrates a software configuration of a program executed by the main CPU 2001. The program illustrated in FIG. 4 is stored in the HDD 2003, and the main CPU 2001 executes a boot program to read out the program from the HDD 2003 to the RAM 2006.

In FIG. 4, an operating system (OS) 4000 operates as a basic program for executing various driver programs described below. A RAM control driver 4001 is a program for controlling the RAM 2006 based on an instruction from the OS 4000. An operation unit I/F control driver 4002 is a program for controlling the operation unit I/F 2007 based on an instruction from the OS 4000. A network unit control driver 4003 is a program for controlling the network unit 2008 based on an instruction from the OS 4000. A modem unit control driver 4004 is a program for controlling the modem unit 2009 based on an instruction from the OS 4000. A scanner unit control driver 4005 is a program for controlling the scanner unit 1008 based on an instruction from the OS 4000. A printer unit control driver 4006 is a program for controlling the printer unit 1007 based on an instruction from the OS 4000.

The main CPU 2001 executes the OS 4000 read on the RAM 2006 to control the units including the RAM 2006, the operation unit I/F 2007, the network unit 2008, the modem unit 2009, the printer unit 1007, and the scanner unit 1008. The programs 4001 to 4006 can operate in parallel on the OS 4000. The main CPU 2001 executes the programs while switching the programs in a time-division manner such that the programs 4001 to 4006 can operate in parallel.

FIG. 5 is a block diagram illustrating a configuration of the switching hub 1004.

The switching hub 1004 includes three connection ports of a first port 5004, a second port 5005, and a third port 5006. The switching hub 1004 includes a relay circuit 5003 for relaying data among the ports. Under control of a CPU 5001, the relay circuit 5003 can switch connections to the ports. A RAM 5002 stores a VLAN database illustrated in FIG. 6 described below. The VLAN database is data associating, as described below, identification information (in the exemplary embodiment, MAC address) for identifying a computer terminal that can participate in a virtual network

(VLAN) of the switching hub **1004**, with a type of VLAN. The CPU **5001** determines whether information included in the packet data received from each port matches the identification information stored in the VLAN database. If the CPU **5001** determines that the information matches the identification information, the CPU **5001** performs management to cause the terminal that has transmitted the packet data to participate in the virtual network corresponding to the matched identification information.

The switching hub **1004** can configure a dynamic VLAN as a virtual network. In the VLAN technique, a plurality of computer terminals on a network physically connected by using a relaying device such as a switching hub is divided into a plurality of groups (virtual networks), and each group is managed to belong to different LANS.

The VLAN technique includes a technique for configuring a VLAN by grouping a plurality of ports of the switching hub (static VLAN technique). According to the technique, for example, the switching hub manages two computer terminals connected to the first and second ports as terminals configuring a VLAN **1**, and one computer terminal connected to the third port as a terminal configuring a VLAN **2**.

The VLAN technique also includes a dynamic VLAN technique. According to the dynamic VLAN technique, the switching hub virtually divides a plurality of computer terminals into a plurality of groups to manage the terminals based on information acquired from each of computer terminals connected to the switching hub.

For example, in a case of a MAC based VLAN technique, MAC addresses are acquired from computer terminals connected to the switching hub, and the switching hub performs management to determine to which VLAN a computer terminal with any MAC address belongs.

In a case of a subnet based VLAN technique, for example, IP addresses are acquired from computer terminals connected to the switching hub, and the switching hub performs management to determine to which VLAN a computer terminal with any IP address belongs.

In a case of a user based VLAN technique, for example, user information is acquired from computer terminals connected to the switching hub, and the switching hub performs management to determine to which VLAN a computer terminal of any user information belongs.

In the description, it is assumed that the switching hub **1004** illustrated in FIG. **1** complies with the MAC based VLAN.

In FIG. **1**, the PC **1001**, the PC **1002**, and the MFP **1003** are connected to the switching hub **1004**. The PC **1001** is connected to the first port **5004** of the switching hub. The PC **1002** is connected to the second port **5005**. The MFP **1003** is connected to the third port **5006**. The switching hub **1004** performs management such that the PC **1002** belongs to a first VLAN (VLAN **1**), and the PC **1001** and the MFP **1003** belong to a second VLAN (VLAN **2**). In this case, the VLAN database illustrated in FIG. **6** is stored in a memory (not illustrated) in the switching hub **1004**.

In FIG. **6**, the PC **1001** having a MAC address of 00:00:85:00:00:01 and the MFP **1003** having a MAC address of 00:00:85:00:00:03 are managed as the VLAN **1** by the switching hub. The PC **1002** having a MAC address of 00:00:85:00:00:02 is managed as the VLAN **2**.

When the switching hub **1004** is managed as illustrated in FIG. **6**, even if the PC **1002** designates the IP address of the PC **1001** to request data transmission or reception, the PCs **1002** and **1001** belong to different VLANs. Consequently, no data is transmitted or received between the PCs **1002** and **1001** as the terminals in the same LAN segment. Conse-

quently, when the switching hub **1004** receives a broadcast packet from the PC **1001**, the switching hub **1004** transmits the broadcast packet to the MFP **1003** that belongs to the same VLAN (VLAN **2**) as the PC **1001**. Meanwhile, the switching hub **1004** transmits no broadcast packet to the PC **1002** that belongs to a VLAN (VLAN **1**) different from that of the PC **1001**. In FIG. **6**, the PC **1001** having a MAC address of 00:00:85:00:00:01 is in a VLAN non-participation state. In the above description, however, it is assumed that the PC **1001** is in a participation state.

In the VLAN database in FIG. **6**, the VLAN participation state is a management item for determining whether a computer terminal identified by a MAC address is participating in the VLAN, or not. As described above, to enable participation of a certain computer terminal in the VLAN, simple establishment of a communication link with the switching hub **1004** is not enough. Namely, in the communication link established state, the switching hub **1004** has to further receive a MAC address of the computer terminal. It is assumed that the switching hub **1004** has received a MAC address of a computer terminal in a link-up state where a communication link with the computer terminal has been established. In this case, the switching hub **1004** performs management to switch a VLAN participation state corresponding to the MAC address from non-participation to participation. The MAC address, the VLAN number, and the participation state of the VLAN are managed in association with each port (from the first port **5004** to the third port **5006**) of the switching hub **1004**.

An operation performed by the MFP **1003** connected to the switching hub **1004** supporting the MAC based VLAN will be described.

FIG. **7** is a flowchart illustrating an operation performed by the main CPU **2001** of the control unit **1006**. FIG. **8** is a flowchart illustrating an operation performed by the sub CPU **3001** of the network unit **2008**.

The operation in the flowchart in FIG. **7** is started by starting power supply from the power supply unit **1009** to the main CPU **2001**.

There follow two cases for starting power supply from the power supply unit **1009** to the main CPU **2001**. One is a case where a main switch (not illustrated) of the MFP **1003** is switched from off to on. The other is a case where the operation mode of the MFP **1003** is switched from the deep sleep mode to the normal mode in a state where the main switch of the MFP **1003** is in the on state.

In step S701, the main CPU **2001** reads the boot program stored in the ROM **2002** to expand the program on the RAM **2006**, and executes the boot program expanded on the RAM **2006**. The main CPU **2001** reads, by executing the boot program, the OS **4000** and various control drivers **4001** to **4006** illustrated in FIG. **4** from the HDD **2003** to expand them on the RAM **2006**. Then, the main CPU **2001** operates the OS **4000** expanded on the RAM **2006** and the network unit control driver **4003** to be executed on the OS **4000** to execute each step.

In step S702, the OS **4000** determines whether the MFP **1003** has returned from the deep sleep mode to the normal mode, or whether the main switch has been switched from off to on. The OS **4000** refers to flag information stored in the RAM **2006** to make the determination in step S702. In step S707 described below, the OS **4000** stores information indicating a shift to the deep sleep mode as the flag information if the mode is shifted to the deep sleep mode. If the information indicating a shift to the deep sleep mode is



stored as the flag information, the OS 4000 determines that the MFP 1003 has returned from the deep sleep mode to the normal mode.

If the OS 4000 determines that the MFP 1003 has returned from the deep sleep mode (YES in step S702), the process proceeds to step S709. Otherwise (NO in step S702), the process proceeds to step S703.

In step S703, the network unit control driver 4003 issues an instruction to the network unit 2008 to initialize the network unit 2008. Specifically, the network control unit control driver 4003 sets a register of the sub CPU 3001 to cancel a reset signal to the sub CPU 3001. Further to initialize the MAC/PHY unit 3002, the network control unit control driver 4003 sets a register of the MAC/PHY unit 3002. Thereby, the network unit 2008 is initialized to become capable of communicating with the main CPU 2001 and the switching hub 1004.

It is assumed that the MAC/PHY unit 3002 of the network unit 2008 and the switching hub 1004 both support an auto-negotiation function. In the register of the MAC/PHY unit 3002, whether the auto-negotiation function is turned on or off can be set. It is assumed that in the register of the MAC/PHY unit 3002, as default setting at the time of initialization of the network unit 2008, the auto-negotiation function is turned on. In this case, the MAC/PHY unit 3002 transmits a pulse signal called a fast link pulse (FLP) to the switching hub 1004 in response to the initialization of the network unit 2008. The FLP is also transmitted from the switching hub 1004 to the MAC/PHY unit 3002. The MAC/PHY unit 3002 can recognize a communication speed which the switching hub 1004 supports based on the FLP received from the switching hub 1004. In such exemplary embodiments, the MAC/PHY unit 3002 and the switching hub 1004 support communication speeds of 10 Mbps, 100 Mbps, and 1000 Mbps. The MAC/PHY unit 3002 determines 1000 Mbps, that is the highest communication speed for both, as a communication speed to be used, and links up with the switching hub 1004. The link-up means a communication link established state, that is, a data transmission or reception enable state. Link-down means a non-established state of communication link, that is, a data transmission or reception disable state. The communication link established state means a state where not only certain information can be transmitted or received but also packet data can be transmitted or received.

In step S704, the network unit control driver 4003 transmits a MAC address that is a physical address allocated to the network unit 2008 to the switching hub 1004 via the network unit 2008. In step S7003, the main CPU 2001 generates a packet including a MAC address, and performs control such that the generated packet is transmitted to the switching hub 1004 via the MAC/PHY unit 3002 in the network unit 2008. In step S704, the sub CPU 3001 of the network unit 2008 is not involved in the packet transmission. In the exemplary embodiment, it is assumed that the network unit control driver 4003 transmits a packet of the Address Resolution Protocol (ARP) including a MAC address to the switching hub 1004. Alternatively, the network unit control driver 4003 can transmit a packet of a Gratuitous ARP (GARP) that requests the IP address of the device.

If the switching hub 1004 receives the MAC address (in this example 00:00:85:00:00:03) of the network unit 2008 from the MFP 1003, the switching hub 1004 switches a VLAN participation state of the received MAC address from "non-participation" to "participation". The switching hub 1004 accordingly determines that the computer terminal

corresponding to the received MAC address has participated in the VLAN, and manages the computer terminal.

In step S709, the network unit control driver 4003 issues an instruction to the network unit 2008 to change the register of the MAC/PHY unit 3002 of the network unit 2008. Specifically, the setting to turn off the auto-negotiation function in the MAC/PHY unit 3002 is changed to setting to turn it on. In this case, the MAC/PHY unit 3002 transmits a pulse signal called a FLP to the switching hub 1004 in response to the turning on operation of the auto-negotiation function. The FLP is also transmitted from the switching hub 1004 to the MAC/PHY unit 3002. The MAC/PHY unit 3002 can recognize a communication speed which the switching hub 1004 supports based on the FLP received from the switching hub 1004. In this exemplary embodiment, the MAC/PHY unit 3002 and the switching hub 1004 both support communication speeds of 10 Mbps, 100 Mbps, and 1000 Mbps. The MAC/PHY unit 3002 determines 1000 Mbps that is the highest communication speed for both, to be a communication speed to be used, and links up with the switching hub 1004.

In step S710, the network unit control driver 4003 transmits a MAC address that is a physical address allocated to the network unit 2008 to the switching hub 1004 via the network unit 2008. In step S703, the main CPU 2001 generates a packet including the MAC address, and performs control such that the generated packet is transmitted to the switching hub 1004 via the MAC/PHY unit 3002 in the network unit 2008. In step S710, the sub CPU 3001 of the network unit 2008 is not involved in the packet transmission.

In step S705, the OS 4000 determines whether a sleep shift condition (switching condition) for switching the mode of the MFP 1003 to the deep sleep mode has been established. If the OS 4000 determines that the condition has been established (YES in step S705), the process proceeds to step S706. If the sleep shift condition has not been established (NO in step S705), the OS 4000 executes step S705 again. The OS 4000 determines that the sleep shift condition has been established, for example, if a state in which neither of the control drivers 4001 to 4006 is executed on the OS 4000, continues for a predetermined period (for example, 15 minutes). For example, if a state where the network unit 2008 receives no packet and the operation unit 1010 is not operated continues for a predetermined period, the OS 4000 determines that the sleep shift condition has been established.

In step S706, the network unit control driver 4003 notifies the sub CPU 3001 of the network unit 2008 that the MFP 1003 is shifting to the deep sleep mode. In this step, the network unit control driver 4003 notifies the sub CPU 3001 of information indicating a speed of communication carried out between the network unit 2008 and the switching hub 1004 after the shift to the deep sleep mode. In this exemplary embodiment, the network unit control driver 4003 notifies the sub CPU 3001 of information indicating a communication speed of 10 Mbps to set the communication speed to the lowest speed.

In the register of the MAC/PHY unit 3002, the setting to turn on the auto-negotiation function has been made. The main CPU 2001 turns off the auto-negotiation. This change is made, in the deep sleep mode, to set the speed of communication carried out between the network unit 2008 and the switching hub 1004 to a speed lower than that of the normal mode.

In step S707, the network unit control driver 4003 changes the connection state between the MAC/PHY unit

**3002** and the switching hub **1004** from the link-up state where the communication link has been established, to the link-down state where no communication link has been established. Specifically, the network unit control driver **4003** sets the register of the MAC/PHY unit **3002** to the link-down state. After this register setting, the MAC/PHY unit **3002** sets the communication state to the link-down state.

The switching hub **1004** periodically monitors the link state with the MFP **1003**, and if the switching hub **1004** detects a link-down state, the switching hub **1004** switches the VLAN participation state of the MAC address corresponding to the MFP **1003** from “participation” to “non-participation”. The switching hub **1004** accordingly recognizes the non-participation state of the MFP **1003** in the VLAN **1** of the switching hub **1004**.

In step **S708**, the main CPU **2001** transmits a signal for cutting off the power supply to the power OFF/ON unit **2016** via the control signal line **2022**. The power OFF/ON unit **2016** that has received the signal cuts off the power supply to the main components, including the main CPU **2001**, via the power supply line **2020**. Thus, the MFP **1003** shifts from the normal mode to the deep sleep mode.

The operation of the MFP **1003** to return from the deep sleep mode to the normal mode is as described above.

FIG. **8** is a flowchart illustrating an operation performed by the sub CPU **3001** of the network unit **2008**.

The operation in the flowchart in FIG. **8** is started when the following processing is performed. That is, by changing an operation of the main switch (not illustrated) of the MFP **1003** from off to on, power supply starts from the power supply unit **1009** to the sub CPU **3001**. When the network unit control driver **4003** cancels a reset signal of the sub CPU **3001**, the processing in FIG. **8** starts.

In step **S801**, the sub CPU **3001** reads a program stored in the ROM **3004** to expand the program on the RAM **3005**, and executes the program expanded on the RAM **3005**. When the program is executed, the network unit **2008** is initialized, which enables communicating with the main CPU **2001** and the switching hub **1004**.

After the initialization of the network unit **2008**, as described above, the MAC/PHY unit **3002** determines the highest communication speed between the MAC/PHY unit **3002** and the switching hub **1004**, in this example **1000** Mbps, to be the communication speed which is to be used. At the determined communication speed, the MAC/PHY unit **3002** links up with the switching hub **1004**.

In step **S802**, the sub CPU **3001** determines whether the sub CPU **3001** has received a notification of a shift to the deep sleep mode, from the network unit control driver **4003** (main CPU **2001**). If the sub CPU **3001** determines that the notification has been received (YES in step **S802**), the process proceeds to step **S803**. In this step, the sub CPU **3001** receives from the main CPU **2001** the notification of the shift to the deep sleep mode together with the information indicating the speed of communication carried out between the network unit **2008** and the switching hub **1004** after the shift to the deep sleep mode.

In step **S803**, the sub CPU **3001** checks whether the network unit control driver **4003** (main CPU **2001**) has set the register of the MAC/PHY unit **3002**. The sub CPU **3001** accordingly determines whether the MAC/PHY unit **3002** and the switching hub **1004** have been set to the link-down state. If the sub CPU **3001** determines that the MAC/PHY unit **3002** and the switching hub **1004** have been set to the link-down state (YES in step **S803**), the process proceeds to

step **S804**. The register setting of the MAC/PHY unit **3002** is changed by the main CPU **2001** to the turn-off of the auto-negotiation function.

In step **S804**, the sub CPU **3001** switches the connection state between the MAC/PHY unit **3002** and the switching hub **1004** from the link-down state to the link-up state at the communication speed indicated by the communication speed information received from the main CPU **2001** in step **S802**. The main CPU **2001** (network unit control driver **4003**) has specified the speed of **10** Mbps, that is lower than the communication speed (**1000** Mbps) in the normal mode, to save power. Consequently, the sub CPU **3001** notifies the switching hub **1004** of linking-up at the communication speed of **10** Mbps. According to the notification, the MAC/PHY unit **3002** and the switching hub **1004** are set to a linked-up state at the communication speed of **10** Mbps.

In step **S805**, the sub CPU **3001** transmits a MAC address that is a physical address allocated to the network unit **2008** to the switching hub **1004** via the MAC/PHY unit **3002**. In this exemplary embodiment, the sub CPU **3001** transmits the MAC address at intervals of **200** ms in total four times. In other words, in the case where the MFP **1003** has shifted to the sleep mode, the sub CPU **3001** transmits the MAC address (or other identification information of the MFP **1003**) a plurality of times using a first method. In step **S805**, the sub CPU **3001** generates a packet including the MAC address, and performs control such that the generated packet is transmitted to the switching hub **1004** via the MAC/PHY unit **3002**. In step **S805**, the main CPU **2001** is not involved in the packet transmission. The MAC address information is necessary when the switching hub **1004** causes the MFP **1003** to participate in the VLAN **1**.

The MAC address is necessary when the switching hub **1004** causes the MFP **1003** to participate in the VLAN **1** due to the reasons described below. When the switching hub **1004** receives the MAC address (for example **00:00:85:00:00:03**) of the network unit **2008** from the MFP **1003**, the switching hub **1004** switches the VLAN participation state of the received MAC address from “non-participation” to “participation”. The switching hub **1004** accordingly recognizes the participation state of the computer terminal (in this case, the MFP **1003**) corresponding to the received MAC address in the VLAN **1** of the switching hub **1004**. However, if a collision or the like occurs, the packet transmitted to the switching hub **1004** is lost, and consequently, the VLAN participation state of the MFP **1003** never enters the “participation” state. In another case, depending on the settings of the switching hub, when a packet is transmitted right after linking-up, the determination of VLAN participation may not be performed. For example, when a communication apparatus transmits a packet almost simultaneously with a linking-up operation and with high frequency, some switching hubs determine the sender to be a malicious attacker, and perform control to prevent the participation of the attacker in the VLAN. To solve such problems, in steps **S806** and **S807**, the switching hub **1004** performs again the packet transmission processing for VLAN participation.

In step **S806**, the sub CPU **3001** determines whether a predetermined period (such as a few seconds) has passed since the transmission of the packet including the MAC address in step **S805**. The predetermined period is set based on the time (predetermined time period) until retransmission processing specified by the program read from the ROM **3004**. The predetermined time can be adjusted depending on the operation environment and the installation environment of the MFP **1003**, the specifications of the switching hub which is a communication partner, and the like. If the sub

CPU **3001** determines that the predetermined time has passed (YES in step **S806**), the process proceeds to step **S807**. In step **S807**, the sub CPU **3001** transmits the MAC address at intervals of 100 ms, twice in total. In other words, in the case where the MFP **1003** has shifted to the sleep mode, the sub CPU **3001** transmits the MAC address (or other identification information of the MFP **1003**) a plurality of times by a second method.

In this exemplary embodiment, the measurement of the predetermined time period starts after the transmission of the packet including the MAC address in step **S805**. Alternatively, the time measurement can be started after the linking-up processing in step **S804**.

In step **S808**, the sub CPU **3001** determines whether a sleep return factor (whether a return condition has been established) has been detected. If the sub CPU **3001** has detected the sleep return factor (YES in step **S808**), the process proceeds to step **S809**. For example, the following two cases could be the sleep return factors. One is a case where the MAC/PHY unit **3002** has received a WOL pattern via the LAN **1005**. The sub CPU **3001** determines whether a packet received by the MAC/PHY unit **3002** matches a WOL pattern stored in the ROM **3004**. If it matches, it is presumed that the sub CPU **3001** has detected a sleep return factor. The other is a case where a LAN cable is inserted into or pulled out of a LAN socket of the network unit **2008**. The sub CPU **3001** determines whether the LAN cable has been inserted or pulled out. If the sub CPU **3001** determines that the LAN cable has been inserted or pulled out, it is presumed that the sub CPU **3001** has detected a sleep return factor.

In step **S809**, the sub CPU **3001** transmits a control signal for resuming the power supply to the main CPU **2001** and other components to the power OFF/ON unit **2016** via the control signal line **2023** to start the power supply to the main CPU **2001**.

In step **S810**, the sub CPU **3001** sets the register of the MAC/PHY unit **3002** so that the link-state between the MAC/PHY unit **3002** and the switching hub **1004** becomes the link-down state. After this register setting, the MAC/PHY unit **3002** sets the communication state to the link-down state. The switching hub **1004** periodically monitors the link state with the MFP **1003**, and if the switching hub **1004** detects a link-down state, the switching hub **1004** switches the VLAN participation state of the MAC address corresponding to the MFP **1003** from "participation" to "non-participation". The switching hub **1004** accordingly recognizes the non-participation state of the MFP **1003** in the VLAN **1** of the switching hub **1004**.

The first exemplary embodiment has been described above.

According to the first exemplary embodiment, in the deep sleep mode, the communication speed between the switching hub and the MFP **1003** is decreased to the lower speed, and this largely reduces the power consumption in the standby state.

Further, according to the first exemplary embodiment, after the shift to the deep sleep mode (specifically, right after the linking-up operation), the MAC address is transmitted to the switching hub **1004**. Consequently, while the MFP **1003** is operating in the deep sleep mode, the MFP **1003** can participate in the virtual network (MAC address based dynamic VLAN).

Further, according to the first exemplary embodiment, in the deep sleep mode, the MAC address is retransmitted after the predetermined period of time has lapsed. This enables the MFP **1003** to surely participate in the VLAN even if a

VLAN participation request right after a linking-up operation failed due to settings of the switching hub, or the like.

In the exemplary embodiment, average power consumption in the operated state of the main CPU **2001** is higher than that consumed in the operated state of the sub CPU **3001**. The main CPU **2001** notifies, during a shift to the power-saving mode, the network unit **2008** of the shift to the sleep mode and the communication speed; however, the main CPU **2001** is not involved in the MAC address transmission. In other words, in the shift to the power-saving mode, the power supply to the main CPU **2001** is cut off before a reconnection (linking-up) of the communication link, and consequently, the communication link is reconnected and the MAC address are transmitted to the sub CPU **3001**. Consequently, as compared with a case where the main CPU **2001** performs the MAC address transmission, the power consumption can be reduced since the power supply to the main CPU **2001** can be cut off at an earlier stage. This also enables power saving.

In the above description, the switching hub **1004** corresponds to the MAC based VLAN, which is a dynamic LAN. Alternatively, other arrangements can be employed.

For example, the switching hub **1004** can correspond to a subnet based VLAN that is a dynamic VLAN. In such a case, the switching hub **1004** stores a database similar to that illustrated in FIG. **9** as a VLAN database in the RAM **5002**. The MFP **1003** establishes a communication link with the switching hub **1004** to set a link-up state, and then transmits, to the switching hub **1004**, an IP address allocated to the MFP **1003** to participate in the VLAN **1**. After the communication link with the MFP **1003** has been established to enter the link-up state, the switching hub **1004** receives an IP address (such as 192.168.11.ZZZ) of the MFP **1003**. In such a case, the switching hub **1004** performs management, presuming that the MFP **1003** has (previously) participated in the VLAN **1**. The IP address, the VLAN number, and the participation state of the VLAN are managed in association with each port (from the first port **5004** to the third port **5006**) of the switching hub **1004**.

Further, the switching hub **1004** may correspond, for example, to a user based VLAN that is a dynamic VLAN. In such a case, the switching hub **1004** stores a database similar to that illustrated in FIG. **10** as a VLAN database in the RAM **5002**. The MFP **1003** establishes a communication link with the switching hub **1004** to enter link-up state. Then, the MFP **1003** transmits, to the switching hub **1004**, a user ID (or other user information) for identifying a user logging-in the MFP **1003** to participate in the VLAN **1**. It is assumed that after the communication link with the MFP **1003** has been established to enter the link-up state, the switching hub **1004** receives the user ID (such as USER-C) from the MFP **1003**. In such a case, the switching hub **1004** performs management presuming that the MFP **1003** has participated in the VLAN **1**. The user ID, the VLAN number, and the participation state of the VLAN are managed in association with each port (from the first port **5004** to the third port **5006**) of the switching hub **1004**.

In the above description, the switching hub **1004** corresponds to the dynamic VLAN (for example, MAC based VLAN). Alternatively, other arrangements can be employed. For example, a switching hub **1004** that does not correspond to a dynamic VLAN can be employed. The MFP **1003** acquires, from the switching hub **1004**, information indicating whether the switching hub **1004** corresponds to a dynamic VLAN. Based on the acquired information, the MFP **1003** determines whether the switching hub **1004** corresponds to a dynamic LAN. If the MFP **1003** determines

that the switching hub **1004** does not correspond to the dynamic LAN, the main CPU **2001** does not execute the processing in steps **S704** and **S710**. Further, the sub CPU **3001** also then does not execute the processing in steps **S805** to **S807**. Thus, the processing can be appropriately performed depending on whether the switching hub **1004** corresponds to the dynamic VLAN.

The setting time, for determining whether time to the retransmission processing used in step **S806** has lapsed, can be input via an external input device such as the operation unit **1010**.

In a case where the determination result in step **S806** is NO (the setting time has not lapsed), if a packet is received from a computer terminal (such as PC **1001** or PC **1002**) connected via the switching hub **1004**, the sub CPU **3001** can determine that the MFP **1003** has participated in the VLAN. In such a case, the processing in steps **S806** to **S807** may be skipped, and the process can proceed to step **S808**.

In the exemplary embodiment, in step **S807**, after the transmission of the MAC address, the process proceeds to step **S808**. Alternatively, a loop can execute such that the processing returns to step **S806** again to determine whether a predetermined time has lapsed. In such a case, the transmission of the MAC address is repeated at predetermined time intervals. Then, in response to a reception of a packet from a computer terminal (such as PC **1001** or PC **1002**) connected via the switching hub **1004**, the sub CPU **3001** can determine that the MFP **1003** has participated in the VLAN, and the process can proceed to step **S808**.

#### OTHER EMBODIMENTS

Embodiments of the present invention can also be realized by a computer of a system or apparatus that reads out and executes computer executable instructions recorded on a storage medium (e.g., non-transitory computer-readable storage medium) to perform the functions of one or more of the above-described embodiment(s) of the present invention, and by a method performed by the computer of the system or apparatus by, for example, reading out and executing the computer executable instructions from the storage medium to perform the functions of one or more of the above-described embodiment(s). The computer may comprise one or more of a central processing unit (CPU), micro processing unit (MPU), or other circuitry, and may include a network of separate computers or separate computer processors. The computer executable instructions may be provided to the computer, for example, from a network or the storage medium. The storage medium may include, for example, one or more of a hard disk, a random-access memory (RAM), a read only memory (ROM), a storage of distributed computing systems, an optical disk (such as a compact disc (CD), digital versatile disc (DVD), or Blu-ray Disc (BD)<sup>TM</sup>), a flash memory device, a memory card, and the like.

While the present invention has been described with reference to exemplary embodiments, it is to be understood that the invention is not limited to the disclosed exemplary embodiments. The scope of the following claims is to be accorded the broadest interpretation so as to encompass all modifications, equivalent structures, and functions.

What is claimed is:

**1.** A communication apparatus comprising:

at least one processor and at least one memory which are coupled to each other and cooperating to act as:

a communication unit configured to communicate with an external apparatus over a network at one of a plurality of communication speeds; and

a control unit configured to change the communication speed of the communication unit in response to the control unit determining to shift a power mode of the communication apparatus,

wherein the control unit is configured to control the communication unit to transmit identification information of the communication apparatus to the network at first intervals of time based on the changing of the communication speed, and

wherein the control unit is further configured to control the communication unit to transmit the identification information to the network at: second intervals of time after a predetermined time has passed since the transmission of the identification information at the first intervals of time, and

wherein the second intervals of time are of a different length than the first intervals of time.

**2.** The communication apparatus according to claim **1**, wherein the identification information is a MAC address.

**3.** The communication apparatus according to claim **1**, wherein the communication unit performs the communication complying with an Ethernet standard.

**4.** The communication apparatus according to claim **1**, wherein the control unit generates a packet including the identification information and controls the communication unit to transmit the generated packet.

**5.** The communication apparatus according to claim **1**, wherein the communication unit communicates with the external apparatus via a switching hub in accordance with a dynamic virtual local area network (VLAN) technique.

**6.** The communication apparatus according to claim **1**, wherein the changing of the communication speed accompanies link-down and link-up.

**7.** The communication apparatus according to claim **1**, further comprising a printer unit configured to print image data on a sheet, the image data being transmitted via the network.

**8.** A method of controlling a communication apparatus communicating with an external apparatus over a network at one of a plurality of communication speeds, the method comprising:

determining to shift a power mode of the communication apparatus;

changing the communication speed of the communication apparatus in response to a determination to shift a power mode of the communication apparatus;

transmitting identification information of the communication apparatus to the network at first intervals of time based on the changing of the communication speed; and

transmitting the identification information to the network at second intervals of time after a predetermined time has passed since the transmission of the identification information at the first intervals of time,

wherein the second intervals of time are of a different length than the first intervals of time.

**9.** A non-transitory computer readable storage medium having instructions recorded thereon, the instructions being executable by a processor to perform a process for controlling a communication apparatus communicating with an external apparatus over a network at one of a plurality of communication speeds, the process comprising:

determining to shift a power mode of the communication apparatus;

changing the communication speed of the communication apparatus in response to a determination to shift a power mode of the communication apparatus;

19

transmitting identification information of the communication apparatus to the network at first intervals of time based on the changing of the communication speed; and

transmitting the identification information to the network at second intervals of time after a predetermined time has passed since the transmission of the identification information at the first intervals of time, wherein the second intervals of time are of a different length than the first intervals of time.

10. A communication apparatus comprising: at least one processor and at least one memory which are coupled to each other and cooperating to act as:

a communication unit configured to communicate with an external apparatus over a network at one of a plurality of communication speeds; and

a control unit configured to change the communication speed of the communication unit in response to the control unit determining to shift a power mode of the communication apparatus,

wherein the control unit is configured to control the communication unit to transmit identification information of the communication apparatus to the network at first intervals of time based on the changing of the communication speed,

wherein the control unit is further configured to control the communication unit to transmit the identification information to the network at second intervals of time after a predetermined time has passed since the transmission of the identification information at the first intervals of time,

wherein, when the power mode of the communication apparatus is to be shifted, the control unit cuts off a communication link to a relaying device and changes the communication speed to a lower speed, and then reconnects the communication link with the relaying device, and

wherein the communication unit transmits the identification information using the first intervals of time in response to the reconnection of the communication link.

11. The communication apparatus according to claim 10, wherein the identification information is a MAC address.

12. The communication apparatus according to claim 10, wherein the communication unit performs the communication complying with an Ethernet standard.

13. The communication apparatus according to claim 10, wherein the control unit generates a packet including the identification information and controls the communication unit to transmit the generated packet.

14. The communication apparatus according to claim 10, wherein the communication unit communicates with the external apparatus via a switching hub in accordance with a dynamic virtual local area network (VLAN) technique.

15. The communication apparatus according to claim 10, wherein the changing of the communication speed accompanies link-down and link-up.

16. The communication apparatus according to claim 10, further comprising a printer unit configured to print image data on a sheet, the image data being transmitted via the network.

20

17. A method of controlling a communication apparatus communicating with an external apparatus over a network at one of a plurality of communication speeds, the method comprising:

determining to shift a power mode of the communication apparatus;

changing the communication speed of the communication apparatus in response to a determination to shift a power mode of the communication apparatus;

transmitting identification information of the communication apparatus to the network at first intervals of time based on the changing of the communication speed; and

transmitting the identification information to the network at second intervals of time after a predetermined time has passed since the transmission of the identification information at the first intervals of time,

wherein, when the power mode of the communication apparatus is to be shifted, the control unit cuts off a communication link to a relaying device and changes the communication speed to a lower speed, and then reconnects the communication link with the relaying device, and

wherein the communication unit transmits the identification information using the first intervals of time in response to the reconnection of the communication link.

18. A non-transitory computer readable storage medium having instructions recorded thereon, the instructions being executable by a processor to perform a process for controlling a communication apparatus communicating with an external apparatus over a network at one of a plurality of communication speeds, the process comprising:

determining to shift a power mode of the communication apparatus;

changing the communication speed of the communication apparatus in response to a determination to shift a power mode of the communication apparatus;

transmitting identification information of the communication apparatus to the network at first intervals of time based on the changing of the communication speed; and

transmitting the identification information to the network at second intervals of time after a predetermined time has passed since the transmission of the identification information at the first intervals of time,

wherein, when the power mode of the communication apparatus is to be shifted, the control unit cuts off a communication link to a relaying device and changes the communication speed to a lower speed, and then reconnects the communication link with the relaying device, and

wherein the communication unit transmits the identification information using the first intervals of time in response to the reconnection of the communication link.