

### (19) United States

### (12) Patent Application Publication (10) Pub. No.: US 2016/0283906 A1 Cranfill et al.

(43) Pub. Date:

Sep. 29, 2016

#### (54) METHOD AND SYSTEM FOR MATCHING DATA SETS OF NON-STANDARD FORMATS

(71) Applicant: Careerbuilder, LLC, Chicago, IL (US)

Inventors: Andrew B. Cranfill, Roswell, GA (US); Jason Elliott, Roswell, GA (US)

(21) Appl. No.: 15/165,486

(22) Filed: May 26, 2016

### Related U.S. Application Data

(63) Continuation of application No. 13/744,715, filed on Jan. 18, 2013, now Pat. No. 9.355,151, which is a continuation of application No. 11/869,570, filed on Oct. 9, 2007, now Pat. No. 8,375,026, which is a continuation-in-part of application No. 11/835,994, filed on Aug. 8, 2007, now Pat. No. 8,103,679, which is a continuation-in-part of application No. 11/622, 572, filed on Jan. 12, 2007, now abandoned.

Provisional application No. 60/759,242, filed on Jan. 13, 2006.

#### **Publication Classification**

(51) Int. Cl. G06Q 10/10 (2006.01)G06Q 10/06 (2006.01)G06F 17/30 (2006.01)

(52) U.S. Cl.

CPC ..... G06Q 10/1053 (2013.01); G06F 17/30702 (2013.01); G06F 17/30675 (2013.01); G06Q *10/063112* (2013.01)

#### (57)ABSTRACT

A computer-based system and method is described for converting non-standardized resumes and job listings into standardized profiles that can be easily searched, compared and referenced. Attributes are identified within the resumes and job listings, and are evaluated for various features. Each resume or job listing is broken down into its component parts and analyzed based on a logic-based routine to identify and package meaningful content.

50-



Home [Find Jobs]

(Sign Out

Help I CareerBuilder.com Customer Service: 800-891-8880

Career Fairs

EXTENDEDSTAYHOTELS™ EXTENDEDSTAYHOTELS COM

Over 670 Extended Stay Hotels For All Your Needs.

Employer?

My CareerBuilder Improve Your Resume Manage Resumes Upgrade Resumes | Verify Resume Distribute Resumes | Help | About Privacy

The choice is yours! Upload or Build your resume:



Post Resumes

Job Alerts

Upload your resume (Fastest method)

Advice & Resources

- If you already have a resume, simply upload your document or copy and paste your resume into our form. It's fast and easy! Upload now >>
- Build your resume


If you do not have a resume, use our step-by-step process to build one from scratch. We've built in helpful tips for you too! Build your resume >>


🔯 CareerBuilder.com Customer Service: 866-438-1485 | Heip | New Users | Feedback

Email this page to a friend

About Us | Work at CareerBuilder | Affiliate Program | Advertising Info | Our Partners | Privacy | Fraud | Terms

Partner Sites: Enseiance & Contract Jobs | College Scholarships | Condition | Shopping | Apartments | Carr | Real Estate | News Local Newspaper Stes by City: A | E | Q | D | E | E | Q | E | I | I | K | L | M | N | Q | E | Q | B | S | I | U | Y | Y | X | Y | Z | Show all

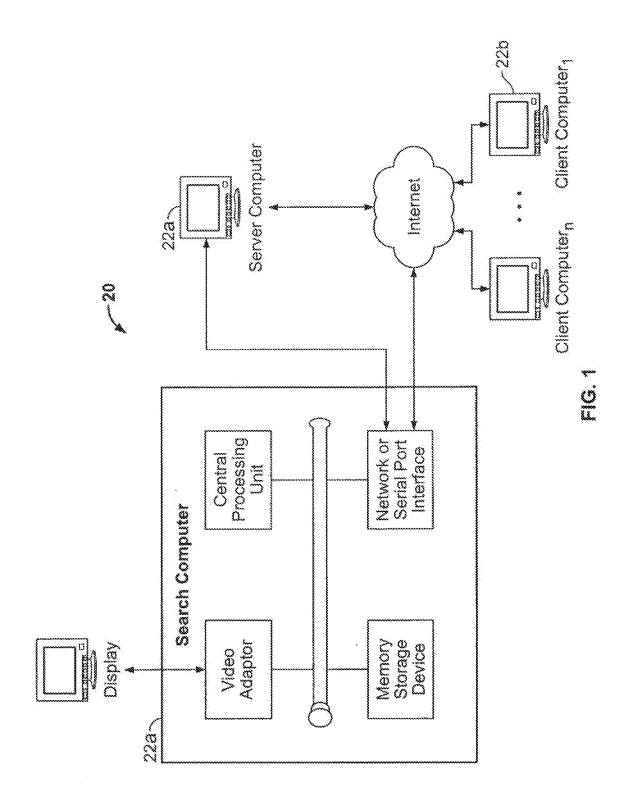

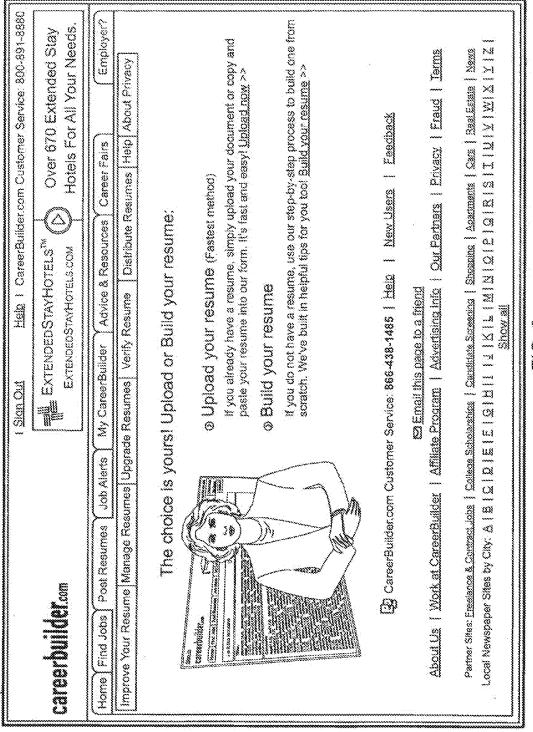

2 2 1

### **Job Posting**

Web Developer-

Our client, located in Atlanta, GA, is seeking a Web Developer. The Web Developer is responsible for designing and delivering business applications for intranet, extranet, and internet sites using Microsoft .NET technologies in the BEA Aqualogic Interaction (formerly Plumtree) portal. Understand business and technical requirements and then delivers appropriate end-to-end solutions consisting of component-based. services-oriented applications developed using the .NET Framework and the BEA Aqualogic Interaction application suite.

Additionally, in this role you must understand, analyze, and document technical environment and business requirements. Participate in the development and delivery of web portal solutions by estimating, planning, designing, and implementing portal-based composite applications. Provide guidance and direction regarding SOA, Web Services, and .NET development standards, policies, and best practices. Develop web service based integrations with existing enterprise applications and systems. Perform technology/tools evaluation and software technical proofs of concept.

#### Prerequisites include:

Bachelor's degree in Computer Science, related field or equivalent experience. Five years experience with web technologies including portal software, content management, and development in HTML, ASP, and fourth-generation software languages.

MCD or MCSD certifications preferred.

- 2 + years of experience with Microsoft's .NET framework and development environment including, but not limited to, C# ASP.NET and XML.
- Knowledge of the .NET XML class libraries.
- 4 + years of experience with classic ASP development environment and scripting.
- 4 + years of experience with SQL language and light-duty database management with Microsoft SQL Server.

FIG. 4

m	Total Band	Description 928
Band	Text 81 Attorney/Software Developer	Resume title
******	i am an attorney/software developer v has designed, written and been sellin and supporting legal practice software applications for corporate/securities/	vho The first band is the first g block of text we find that isn't preceded by a date range (ie 1981-2005 I worked for
energia de la composició d	transactional paralegals and attorney in the past few months, i have complete development i set high standards for myself in designing and developing lessoftware applications summary of qualifications - skilled software development.	eted block of text is generally a or summery of an individual and gal their skills. We consider this to be an important band, and oper is therefore scored highly.
**************************************	with extensive experience success software vendor experienced corpo securities attorney responsible for strong analytical, organizational, written and verbal skills expert in word, except the securities of the securi	rate/ en
2	internet and microsoft visual basic. work experience 1990 - present 94	This band is the first block of
	software designer/ developer/sole proprietor ABC corporation, chicago - designed, wrote, tested, marketed, sold and continuously	text where we found a date range. In this case: "1980-present". These date ranges indicate work experienc
	supported and maintained the software program developed and wrote the automated software, which generated of the organizational documents necessary for corporations.  —94b	and generally contain important
3	1985-90 attorney, corporate and secu ABCD Law Firm, chicago - represent various startup companies in raising in capital through the private or public so of limited partnership interests draft numerous agreements and other documents in connection with a wide	rities Date range block of text. ed "1985-90" 920 pitial ale ed
	variety of general corporate transaction of the corporate transaction of the corporate transaction of the corporate transaction of the corporate law administrators of the cor	orate deral d
94¢*	.1984-85 attorney, tax law, XY & comp dallas - researched tax law issues and processed annual tax returns. educate university of ABC school of law, j.d., 1 publication; university of XYZ, b.b.a., distinction, 1981 major; accounting concentrations; calculus, economics a finance professional licenses admitted state bar in 1984, received cpa certific	1 "1984-85" 920 ion 984 high and 1 to

FIG. 5A


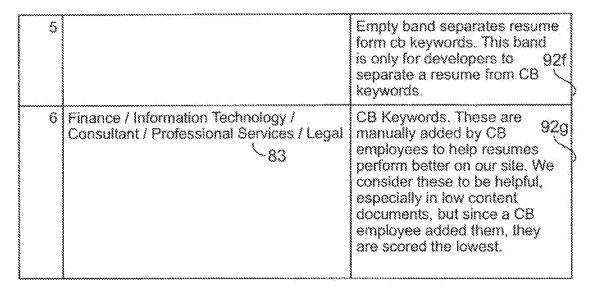


FIG. 5B

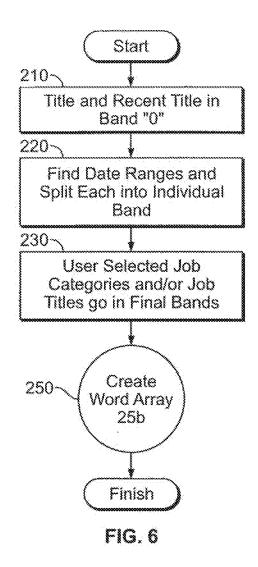

25b 🔪	Word Array	
_ [	Word	Band
_\attorney/s	software	0 /_5
attorney		0 / *
software		0
develope	r	0
am		1 / 7
an		1/'
attorney/s	software	1
attorney		1
software		. 1
develope	ř.	1
who		
has		1
designed		1
written		1
and		1
been		1
selling		1
and		1
supportin	9	
legal		1
practice		1
software		1
applicatio	រាទ	1
for		1
corporate	/securities/transactional	
corporate		
securities	***************************************	1
transactio	nal	1
paralegal	\$	
and		1
attorneys		1
for		
	*	
	<b>.%</b> .	
	*	
	*	
work		2
experienc	<b>*</b>	2 2

FIG. 7A

present	2
software	2
designer/developer/sole	2 2
designer	2
developer	2
sole	2
proprietor	2
ABC	2
corporation	2 2
chicago	2
designed	2
wrote	2 2 2 2 2 2 2 2
tested	2
marketed	2
sold	2
and	2
continuously	2
supported	2
and	2
maintained	2
the	2
Software	2
Program	2
*	
*	
*	
*	
and	2
iowa	2
corporations	2
attorney	3
corporate	3
and	3
securities	3
law	3
ABCD	3
Lawfirm	3
p.c	3


FIG. 7B

chicago	3
represented	3
various	3
startup	3
companies	
în	3 3 3
raising	3
înitial	3
capital	3
through	3
the	3
private	3
or	3
public	3
sale	3 3 3
of	3
limited	3
partnership	3 3 3
interests	3
*	
·	
*	4
* *	4 4
* * * attorney	
* * attorney lax	4
attomey tax law X	4
attorney tax law X Y company	4 4 4
attomey tax law X	4 4 4 4
attorney tax law X Y company	4 4 4 4
* attorney tax law X Y company dallas	4 4 4 4 4
* attorney tax law X Y company dallas researched	4 4 4 4 4
attorney  tax law X Y company dallas researched tax law law	4 4 4 4 4 4 4 4
attorney  tax law X Y company dallas researched tax law law issues and	4 4 4 4 4 4 4 4 4
attorney tax law X Y company dallas researched tax law issues and processed	4 4 4 4 4 4 4 4 4
attorney  tax law X Y company dallas researched tax law issues and processed annual	4 4 4 4 4 4 4 4 4
attorney  tax law X Y company dallas researched tax law issues and processed annual tax	4 4 4 4 4 4 4 4 4 4 4
attorney tax law X Y company dallas researched tax law issues and processed annual tax returns	4 4 4 4 4 4 4 4 4 4 4 4
attorney  tax law X Y company dallas researched tax law issues and processed annual tax	4 4 4 4 4 4 4 4 4 4 4

FIG. 7C

of	4
ABC	4
school	4
of	4
law	4
j,d	4
**	
*	
*	
*	
logical	4
framework	4
finance	δ.,
information	6
technology	6
consultant	6
professional	6
services	6
legal	6

FIG. 7D

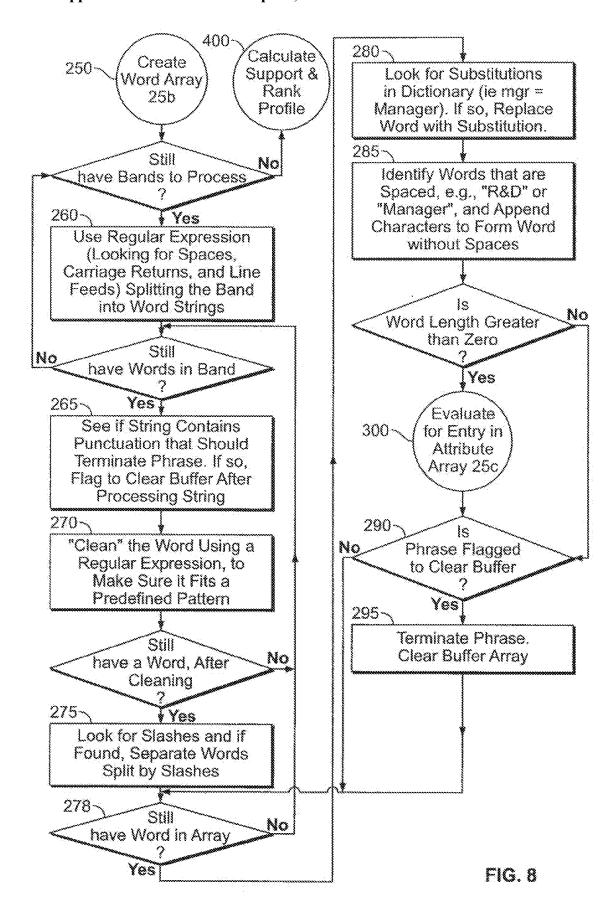




# **Original Substitute**

ap	accounts payable
ar	accounts receivable
acctg	accounting
ad	advertising
admin	administrative
adv	advertise
agcy	agency
agt	agent
ap	accounts payable
approx	approximately
appl	appointment
ar	accounts receivable
assn	association
assoc	associate
asst	assistant
atty	attomey
bkkpg	bookkeeping
bkkpr	bookkeeper
bldg	building
bus	business
capt	captain
cpa	certified public accountant
dept	department
dir	director
dist	district
dp	data processing
elec	electric
eng	engineer
equip	equipment
exam	examination
exch	exchange
exec	executive
exp	experience
fact	factory
govt	government
grad	graduate
h.s.	high school
hosp	hospital
intl	international
it	information technology

FIG. 9

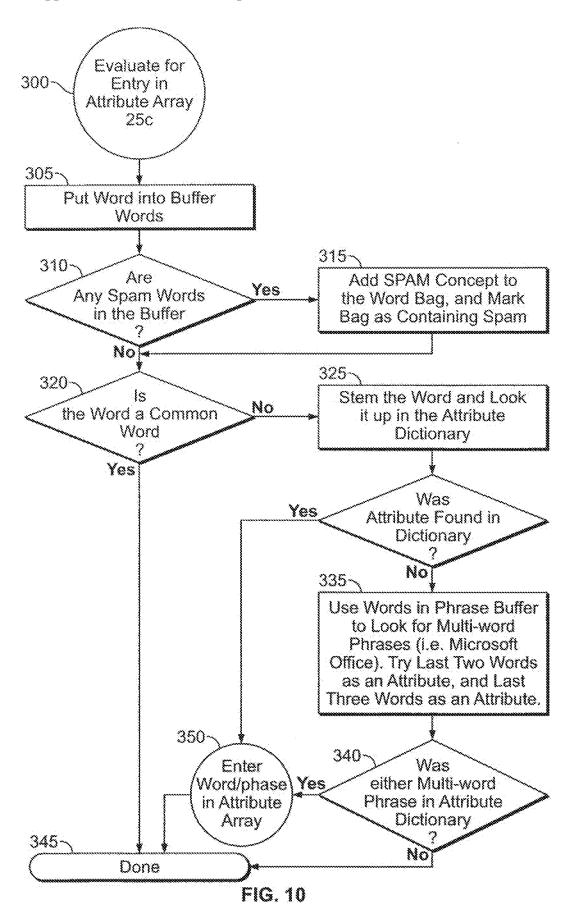



## **Common Words**

***************************************		~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	····	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	******
believe	N	build	N	changes	N
believed	N	buildings	N	charge	Υ
below	N	built	N	charged	Υ
beneath	N	business	Υ	charles	N
benefil	Y	busy	N	check	N
berlin	N	but	N	chicago	N
beside	N	buy	N	chief	Υ
besides	N	by	N	china	N
best	N	california	N	choice	N
better	N	call	Y	chosen	N
between	N	called	N	christ	N
beyond	N	calling	Υ	churches	N
bible	N	calls	N	circle	N
big	N N	came	N	circumstances	N
bill	Υ	camp	N	cities	N
billion	N	can	N	citizens	N
birds	N	can't	N	city	N
birth	N	cannot	N	class	N
bit	Υ	capable	N	classes	N
black	N	capacity	Υ	clean	Y
block	N	care	Υ	clear	Y
blue	N	career	Υ	clearly	Y
board	N	careful	N	close	N
bodies	N	carefully	N	closed	Y
body	N	carried	N	closely	N
bom	N	carry	N	closer	Υ
boston	N	carrying	N	clothes	N
both	N	cars	Υ	coast	Υ
bottle	N	case	N	cold	Υ
bottom	N	cases	N	color	N
bought	N	caught	N	column	N
box	N	cause	N	combination	Υ
boy	N	caused	N	come	N
boys	N	causes	N	comes	Ň
break	N	cell	Ÿ	coming	Ň
bridge	N	cells	······································	command	Ÿ
brief	N	cent	Ň	common	N
bring	N	center	Ÿ	communism	N
britain	N	central	Ÿ	communist	<del>N</del>

FIG. 11

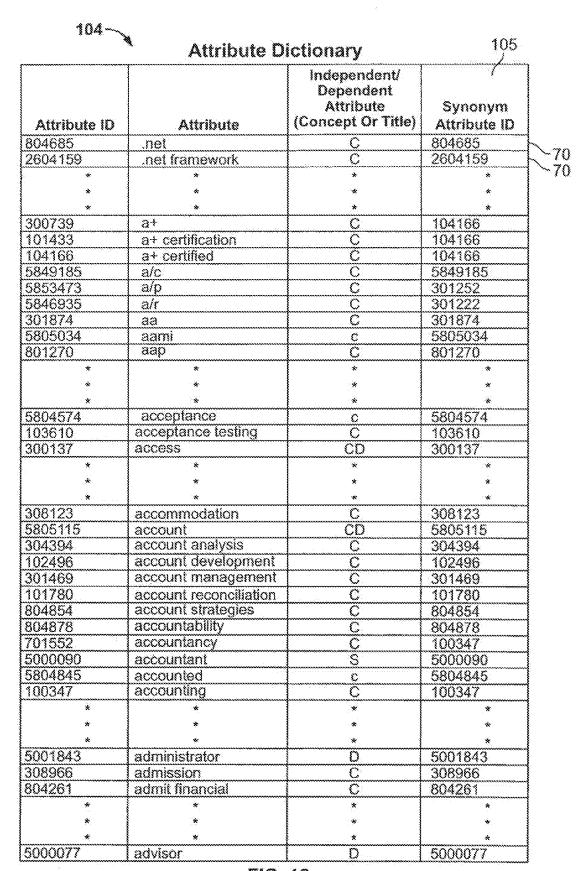


FIG. 12

25c <u>Attribute</u>	92 90a	90b 108	3 90c
Attribute	∕Band Oc	currences/S	upport
Tittle		7	
Attorney	Y 0	13	3
Paralegal	1	2	3
Software developer	0	6	0
Attorney software developer	0	2	0
Legal practitioner	1	2	0
Transactional paralegal	1	2	0
Practitioner	1	2	0
Securities transactional paralegal	1	2	0
Securities attorney	1	1	0
Corporate securities attorney	1		0
Skill software developer	1	1	0
Designer	2	1	0
Designer developer	2	1	0
Accountant	4	1	5
Technology consultant	6	2	2
Corporate law administrator	3	1	0
Securities administrator	3	1	0
Law administrator	3	1	0
Certified public accountant	4	1	4
Public accountant	4	1	4
Information technology consultant	6	1	1
Conc	e <i>pt</i> s		**********
Legal	1	9	6
Law	1	7	4
Attorney software	0	4	0
Developer software	0	2	0
Research	1	3	1
Internet	1	1	2
Regulatory	1	1	0
Corporate	1	9	5
Vendor	1	1	2
Investment	2	1	5
Tax	3	4	6
Finance	4	2	3
Federal .	2	2	2
Securities	1	8	2
Corporate securities		6	0
Transactional	1 1	2	3
Transaction	1	3	<del>-</del>

FIG. 13A

C-8			
Software application		41	<u>0</u> / ′
Securities transactional	1	4	0
Legal software		4	0
Development process	1	2	0
Organizational	1	2	0
Application development	1	2	0]
Skill software	1	2	0]
Legal application	1	2	0
Legal software application	1	2	0
Software vendor	1	2	0
Analyze law	1	2	0
Corporate securities transactional	1	2	0
Design software	1	2	0
Microsoft visual	1	2	0
Drafting	1		1
Draft	3	1	2
Macros	1	1	1
Vba	1	1	1
Financing	1	1	1
Analyze	1 1	i l	<u> </u>
Analytical	1 1	11	1
* * *			v a asiyi i agasananani.
Capital	31	1	2
Automated	2	2	<del></del>
Automate	2	2	<del>-</del>
Federal compliance	2	<del></del>	Ö
Software program	1 2	2	ő
Registration	1 2	7	ő
Software automated	1 2	1	<del></del>
Book	<del>~~~{</del> ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	<u></u>	Ö
Automated corporate	<del></del>	1	0
Sky	2 2 2 2 2 2 2 2 2	1	0
Software program automate	<del></del>	1	ANNOUNCE PROPERTY AND ADDRESS OF THE PERSON ADDRESS OF THE PERSON AND ADDRESS OF THE PERSON ADDRESS OF THE
Program automate	<del></del>	<del>~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~</del>	0
Federal compliance process	<del></del>	1	0
Compliance process	<del></del>		0
nombiane hinces	4	1	0

FIG. 13B

Test	7 21	1	0
Accounting	4	2	5
Connection	3	1	1
Tax law	3	3	0
Corporate law	3	2	0
Corporate transaction	3	1	0
Commodity pool	3	1	0
Estate	3	1	0
Real estate	3	1	0
Securities law	3	1	0
Private	3	1	0
Oil	3	1	0
Commodity	3	1	0
Pool	3	1	0
Gas	3	1	0
Oil gas	3	1	0
Economic	4	1	2
Finance professional	4	2	0
Certified public	4	2	0
Research tax	4	2	0
Process annual	4	2	0
Framework	4	1	0
Bar	4	1	0
Logical	4	1	0
Securities act	4	1	0
Research tax law	4	1	0
Finance professional license	4	1	0
Annual tax	4	1	0
Process annual tax	4	1	0
Logical framework	4	1	0
Professional license	4	3	0
License	4	1	0
Professional service	6	2	0
Consultant professional	6	2	0
Finance information	6	2	0
Information technology	6	2	0
Professional service legal	6	1	Ŏ
Service legal	6	1	~ <del>~~~~</del>
Consultant professional service	6	1	Ö
Finance information technology	6	1	0 0 0
Technology consultant professional	6	1	Ŏ

FIG. 13C

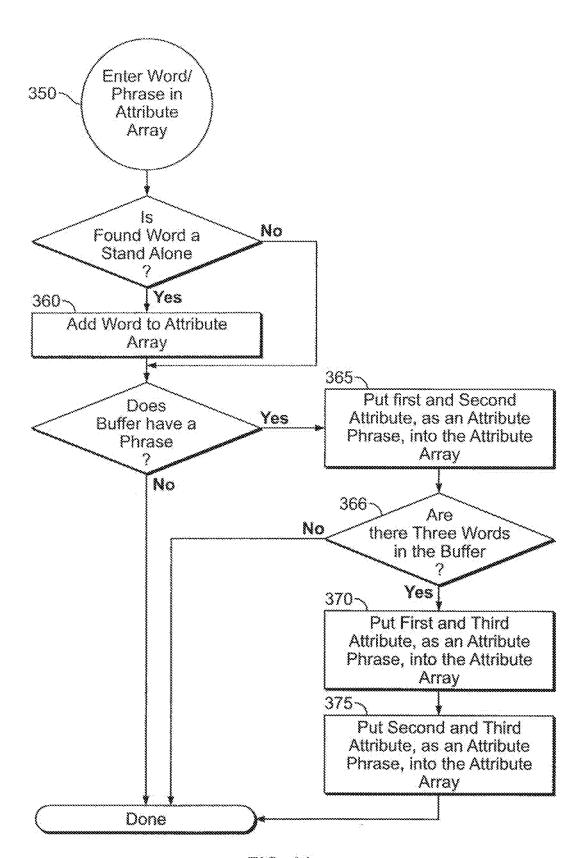


FIG. 14

	Docs	***	100	3.4	ļ	<b>.</b>	\$	74 74	46 46	0 629	8 278		84 53	9 2639		5 1517	73 73	9 3964	6 1682	1844	530	-22		6 256	3 879	197	undunumum
:	Docs	with	718	2281	2263	ļ				630	278	10161		11949	19582	5375		15529	5796		641	S	575		2263	307	dictions
	Docs	with a	4577	4577	4577	4577	4577	4577	4577	4577	4577	4577	4577	4577	4577	4577	4577	4577	4577	4577	4577	4577	4577	4577	4577	4577	COCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC
	***************************************	ž v	91.84	70.34	62.27	75.16	73.43	73.33	66.67	47.64	45.88	62.27	66.67	56.41	56,04	61.45	40.57	27.63	53.94	51.15	33,73	20,35	29.51	31.61	45.11	30.97	obstacionacionacionacion
	***************************************	% 0 0 0	91.84	70.34	62.22	74.18	69.18	66.67	64.71	56.41	62.90	62.27	66.67	56.41	60,24	63,43	40.57	33.96	53.21	51.38	36,47	28.49	36.26	46.30	44.00	47,66	AAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAA
	Leaf ->	<b>X</b>	100,14	100.09	100.09	99.52	100.00	100.00	100.00	99,84	100,00	24.40	63.10	22.09	13.58	28.22	100.00	26.53	29.02	27.63	82.68	15,33	76.00	65.27	38.84	64,17	Programment and Company of the Compa
	Root >	Leaf %	15,71	49.88	49.48	4.50	2.29	1.62	1.01	13.74	6.07	54.16	1,18	57.66	58.12	33.14	1.59	86.61	36.75	40.29	11.58	92.58	9.55	5.79	19.20	4.30	****
125a \ POD		Q	accountant	accountant	certified	consultant	public	account	accounts receivable	accountant	accounting	accounts payable	payable	cpa	accounting	ට යක්ත ව	sales tax	receivable	tribal balance	195 8 South September State St							
		SHIT FEG.	staff	public	public	tax	fund	management	financial	senior	junior		tax		***	corporate											
5 35		A THE THE PARTY OF			certified			***							į	****											
130 135		Root Title	accountant	accountant		accountant	accountant	accountant	accountant	accountant /	accountant	accountant	accountant	accountant	accountant	accountant	accountant	accountant	accountant	accountant	accountant	accountant	accountant	accountant	accountant	accountant [	
j.		ũ		3																							The second second



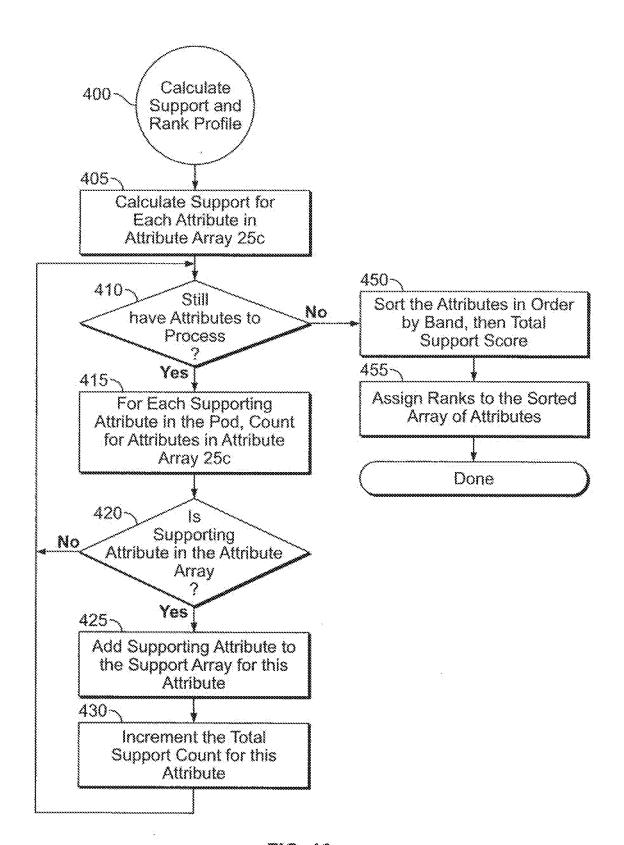


FIG. 16

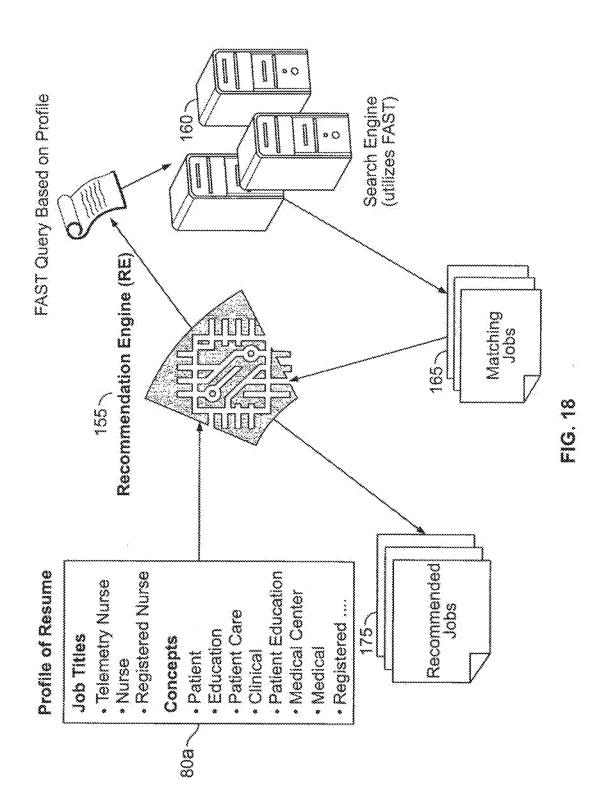

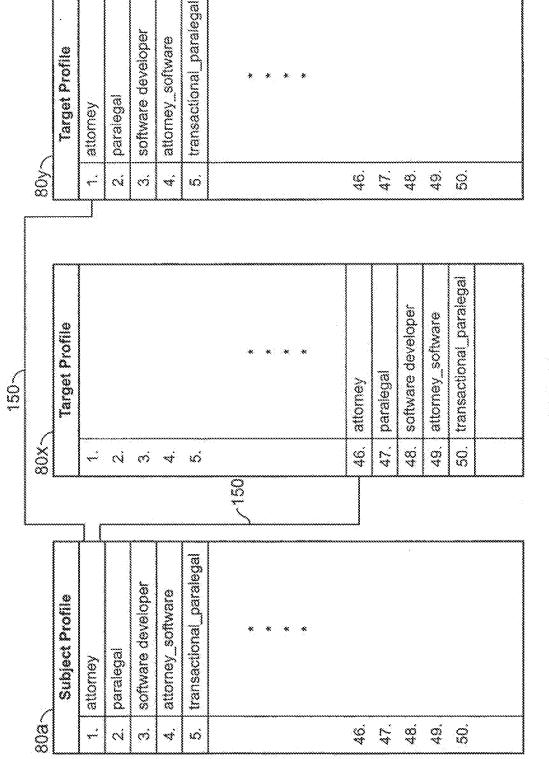

Aiready Registered? Sign in >->	//////////////////////////////////////	
	Employers: Search Resumes	Past Jobs Advice
Home My Career Builder Find Jobs Job Recommendations	Post Resumes Job Alerts Advice & Resquras	Rescurtes
DID. [J3F56F69476R92G3CC8] Bacs; DID.		
Free text area:	e liche	
49 47		:
City C State	00000000000000000000000000000000000000	
Job Level: JL, mid (Enth): D Senion O Exec. (1) - concepts: (0.0.0) Education Level: EL Mis		7250
Bast Scare: 38.07 (Avg of top 95 results.)	The second secon	And the second s
***************************************	Concepts:	
Ri Ward Sard Com Pos	RiWord	Spril Com Post
0, 150,00 3, 98, 100,00 33, 316,89, 100,00 33,86	ware_development	3, 84, 100.00 21, 191.97, 50.58 40.31
2, 38, 53,09 23, 293,84, 92,73, 44,57		2, 80, 63,09 22, 230.30, 72,67 24,24
3 SCHWARF GEVERPRONT ENGINEET 2, 35.00 2, 39, 63.09 22, 202.13, 53.78, 45.87 93.60	3 ums 1, 121.50	2, 19, 63,08 15, 158,32, 50,24 46,21 97,40
### 1, 44, 0.60 16, 186.73, 52.81 35.78 89.80	S Co. 2. Only print. 2.	22,279,33,66,15,45,13
_engineer 2, 96,00 1, 2,	sineer_support_professional	14, 168.07, 53.04, 47.25
database empineer 10,0,000 1,24,0,00 15,202,37,63,86 48.91		73, 293, 28, 92, 55, 48, 80
3 SONWAR DESCRIPTION 11 DIV. 1, 35, U.B. 25, 205,35, 54 Rt. 42 ST 45 DI 3 secondesist fewerkner. 18 O.O. 1, 27, 00, 11, 172, 28, 55,00 as 14, 50	S dequirement qualification 1, 121.50	1, 56, 0.00 14, 165,41, 56,51 32,26 39,20 1 44 0.00 11 388 13 50 11 20 17 08 80
design engineer 10,000 1.98,0.00 25,192,54,60.76.31.54	a	20, 238,55, 76,28, 35,59
per 10,0,00 1,97,0,00 18,140,77,44,42	38	11, 178.49, 56.32, 48.15
12 dba 5, 82, 80, 26, 92, 80, 26, 96, 40, 04, 46, 50, /	12 ce_beam 2, 96.00	1, 47, 0.00   20, 271.50, 85.65   46,85   51,20
	soffware_davelopment	
		8, 106,23, 33.52, 49.74
	CA	
	16 support_professional 2, 96,00	1, 38, 0.00 13, 147.78, 46.63 45.46 70.60
	andonomiconomiconomical commission of calculations of the second of the	***************************************

17 c++ program	2, 96,00	1, 8, 0,00	4, 81,62, 25,82		85.40
18 software_system	2, 98.00	1, 14, 0.00	4, 88, 38, 27,89	48.22 84	00,28
19 medical_devica_company	2, 36,00	1, 1, 0.00	6, 29.26, 9.23	49.73 88	SE 330
20 device company	2, 96,00	1, 1,0,05	5, 26,89, 8,49	49.73 98	98.20
21 configurate_manage	2, 98,00	1, 5, 0,00	10, 78.25, 24.69	48.55.78	78.80
22 per	2,96,00	1, 12, 0.80	10, 92.83, 29.29	44.62 75	78.80
23 placement position	2, 96.00	1, 28, 0,00	12, 117, 19, 38,98	47.77 65	65,60
24 contract_compensation	2, 96.00	1, 7, 0.00	8, 62,21, 19.63	46.95 74	74.20
25 elecirical computer	2, 36,00	1,1,0,00		50.00 83	83,80
26 100	2, 96,00	1, 6, 0.88	7, 55.36, 17.47	41.63.79	79.80
27 design_program	2,98,00	1, 1, 0,00		49.70 88	88.40
[38 mul_model	2, 96,00	1, 3, 0.00		50,00 83	38,18
29 manage_tool	2, 98,00	1, 1, 0.00	2, 12.36, 4.06	49.09 77	77.80
30 top_network	2, 96.00	1, 2, 0,00		49.69 73	73.40
31 firmware	10, 0.00	1, 39, 0.00	23, 289.65, 91.40	47.73 48	48.20
32 software_design	10, 0,00	1, 39, 0.00	26, 227.09, 71.86	47.48 45	\$8.20
33 peoplesoft	10,0,00	1, 6, 0.00	1, 3,34, 1,05	44,39 48	48.00
34 embedded_control	2, 96.00	-1, 0, 0.00		50.00 92	92.40
35 electrical_enginear_computer	2, 96.00	-1, 0, 0.50		\$0.00 89	93,80
36 engineer_computer	2, 36.00	-1, 0, 0.00		50.00 83	83.60
37 computer_engineer_science	2, 38,00	1, 0, 0.00		56.00 83	83.40
38 engineer_compuler_science	2, 96,00	1, 0, 0,00		50,00 89	89.40
33 angineer_science	2,96,00	-4, 0, 0,00		49.85 89	39,40
40 real-lime_software	2, 96.00	-5, 0, 0.00		49.85 34	94,20
41 real-time_software_system	2, 96.00	-1,0,0,00		50.00 BM	84.00
42 multi linead environment	2, 96.000	4, 9, 9.95		50.00 83	83.20
43 thread_environment	2, 96,00	-1, 0, 0.00		50.00 83	83.20
44 developer_um	2, 96,00	-1, 0, 0.00		50,00 82	82.00
45 developer_uml_model	2, 96.00	-1, 0, 0.80		50.00 84	87.80
48 device_expenence	2, 38.00	-1,0,0,00		50.00 81	87.00
47 top_network_experience	2, 38,00	-1, 0, 0.80		50.00 79	79.20
48 network_experience	2,96.90	-1, 0, 0,00		49,85 79	79.20
49 rsquirement manage	2,96,00	~4, 0, 0.00		48,87 78	78.00
With requirement manage tool	2, 96,03	-4 0.0.00		X 00 00 77	77 80

<-emply>> experience developer uni model <-intely>> medical device experience <-emply>> unix program experience <-ine>> <-emply>> comply>> comply>> comply>> drons requirement manage tool experience <-ine>> <-emply>> scripting language <-emply>> perty program <--empty--> 3+ years of embadded software development <-limp-> <-empty-> experience with real-time software system in a multi thread environment <-limp-> program <--empty-> 3+ years of embadded software development <-limp-> 8 a large medical device company. In the greater miwasistes metro area is tooking for a software development engineer 8 one of the lead providers of (anginearlanginear) support professional in north emerica eto <-emply-> 8 signa disa grembelt certification <-fine-> classification te constantly on the lockout for qualified professional to place in contract, and permanent placement position across a number of different industry. s more than just day to day responsibilities that can make or break a job , s the reason serotek as offers a variety of benefit including medical, <-ine-> contract <-line-> compansation : that has experience with embedded control t put your career in the hand of lust anyone \$33 to \$60 <--line--> join seratek ceem, candidates will need the following: put it in the hand of a specialist software engineer <-band--> requirement qualification. join the aerotek on team <--ine--> requirement : embedded a program s the support you get. software engineer, skill requirement: due to our growth, contract to hire. and many more. umi <--band--> preference : we know R. : asocano eptical 4038 dentai 8 % %

TO SE

system destyn, multotatorm, system integratorn, oeveloper, categorical, sca, assembly, languaga, development, experience, software gengineer, categorical, php. lest, engineer, software, development, experience, configurate, manage, um, firmeare, E., MS, multi, Grend, perh, embedded, software, program, experience, detabase\_engineer, software, development, engineer, design, engineer, esperenza schniale development, man engineer, maniteme, technical consultant, technology, executive, company, mysty, misenet, development, de, jitee, developer, mysenen, exil 28. (p=1834/s=315.EEEE68314723.:sahware engineer, ce ham, c++, computer, science, software engineer, support, development engineer, peoplesoft developer, ce, degree, ompules, graduate, computer, experience, developer, shelf, stript, system, administrator, system, artificiantes, senior developer, system, indolessare, correct defaller, defalors a design, unit lest, cracke developer, Des Jechnology, object orientation design, jobs, softwere, architect, system engineer, data warehouseng computer, engineer, activara, devacament, electrical, engineer, software, system, Ji, mid, software, design, engineer, dita, software, design; engineer, dita, software developer os. Rochel, computer software, saf developer, suftware quality assurance, system, development, ento jaten, system, developer, ma saf server, telescon, recouli, quality assurance engineer, oracle, microprocesson, sentir, engineer, mann, siaing, net framework, test, executive, developer, ms.ss), os, xel iest. Case, precisión, specification, web, basa application, leader categorial, software, lest, engineer, application, development, crrm, software, jest, J. genko, doom, itos, serkor soliwate, oracle database, inclinical health, datar servica, system integratori, engineer categorical, engineer experience, development. He gycle, etc, mil, engineer, beveloper, simikarion, engineer, relationed, database, application, server, m/s, linux, web cesigner, net, dep, eg), des, esperience java, ecp, éformation consultant, program jarquage, do2, software jarginses, developer, cacheror\_engineer, less took, system\_anskyss, full job\_litte, regression\_test, microsch\_ssp, bug, shelt, avtonic, web\_base. information (edinology, application, developer, mi, asp, lesq, tomati, web, development, high, cellber, solars, dearcase, gui, co, mo, fortan, ant, businesis intelligence, system software empireer, word format, desirea computer science, cus, lara, operating system, signal process, corba, unix, api, developer analyst, java beans, weblogic, hardware, open, cobol, stone procedure, ado,net, definity, enperience profinare, device phiver, websphere, mostyt, bea, aclosa, 2006, web server, vb.net, stromatica, its, alo, integration, test, crystal report, software, product, vo. aliegis (groupilis) subsidiaries are equal opportunity employer software development engineer software engineer <--band--> software design engineer, peoplesoft developer software developer, <--(irig--> <--band--> c-ding-> c-ding-> <--line-> <--tand-> c--}!!!!!-> <--\$!!!!-> <--line--> <--band--> <-- (me--> <--band--> <-- fine--> <-- fine--> database engineer dba system, developer, computer, developer <--band--> firmware, analyst,

10.2g

dient server, life cycle, design developer, test procedure, unix shell soriot, virdl, execulive company, onm, sel, rational rose, urgent open, web service, service, service, and vxworks. load\_developer, servict\_system\_engineer, strings, acidence\_engineer, system\_analyst, ett, web\_application, winnimer, developer\_software, test\_director, python, microsoft\_visual, davelopment, Bam, project Jeader, network, protocod, saf, server, ada, embedded, system, Isan, cracle, sqf. electronic, engineer, development, ibot, orientalion, design, script Janguage, crimi, level, feam, developer, El., BS, jms, .nef., developer, skill, set, support, engineer, serior, sontware, engineer, database, developer, java, script, soap, application, architect, chtml, beee, gsm. unix, ehell, voa, mfc., embedded\_software\_engineer, vo++, software\_developer, categorical, dollar\_service\_company. ilfe, intel, apache, hardware\_engineer system\_test, edp, junit, premiere\_technology, jsp, senior\_system, javaschpt, system\_software, html, software\_quality, software application, system architect, team technical, team teader, object orientation, user interface, data warehouse, hardware design, software consultant, base\_application, oo, ms access, dasign\_pattern, serior\_software\_developer, data\_structural, java\_developer, jol, technical\_lead\_swing, computer\_developer, team technical\_leader, technical\_professional, ood, np-ux, o# net, tiboo, team\_beconical\_professional\_pod, np-ux, o# net, tiboo, experience\_design, premiere\_lechnology\_executive, real\_time, rdans, multiplatform\_system, relation\_discipline, veritas, visual\_studio, cmm\_level, development

Band 0

Software Engineer

Sand 1

required qualifications;

skills requirements: c++, embedded c programming, eaftware engineer, uml

Band 2

purpose:

medical device experience - unix programming experience - udp and topip networking experience - clearcase configuration management - doors requirement management tooks expenience a large medical device company in the greater milwaukee metro area is looking for a software development engineer, that has expenience with embedded controls, candidates will need the programming - 34 years of embedded software development - experience with real-time software systems in a mult-threaded environment preferred: - experience developing um models following: required. - be or ms in electrical engineering/computer engineering/computer science - experience with all aspects of swifecycle - 3+ years of clobject-oriented design and c++ scripting languages - pert, csh., etc - 6-sigma diss gneenbelt cartified

classification:

confract

compensation:

\$59 to \$60

that can make or break a job. It's the support you get, that's the reason aerolek ce offers a variety of benefits including medical, dentel, optical, 401k, and many more, don't put your career in professionals to place in contract, contract-to-hire, and parmanent placement positions across a number of different inclustries, we know it's more than just your day-to-day responsitivities join aerotek cesm, one of the feating providers of engineering and engineering support professionals in north america, due to our growth, we're constantly on the bookcut for qualified the hands of just anyone, put it in the hands of a specialist, John the perotek as team! allegis group and its subsidiaries are equal opportunity employens.

, was

Band 18

analyst. computer, database engineer, db. dba systems, developer, firmware, peoplescut developer, programmer, saftware developer, software developer, software developer, software developer, software developer, software developer, engineer, software engineer

E C C

49 47								
xec: 0) - concepts	(O+)							
Titles:  R3  Word	Concepts:		Band	Calc	ll Band If Occili Sodil Ca		Fos	
2, 0, 100,00	#a	Ť	, 68,67	i.o	2, 45, 87, 100,00	200		
1, 34, 0,00 1, 16,53, 33,18 38,12 79,40		Ť		1, 38, 0.00	1, 33, 33, 66,84			C*\
3 contractor_worker 1, 65,67 -4, 0, 0,00 55,00 55,60 65,60 ( \255C			. ***	1, 44, 0.00	3, 37, 50, 75,19			
	4 position_base 5 hitings spanish		1, 56.67 1, 56.67	*, *, %		80.00 44 9.90	28 28 28 28 28 28 28	~~~~~
Pand: 36 37 25C /	6 construction		20	, 83, 9,00	3, 21, 32, 42.78			
288 July Sacramon		***		-3, 0, 0,00		49.08		
, worker <band< td=""><td>7</td><td></td><td></td><td>5.00 000 000 000 000 000 000 000 000 000</td><td></td><td>50.00</td><td></td><td>, m. p.</td></band<>	7			5.00 000 000 000 000 000 000 000 000 000		50.00		, m. p.
SAS.	9 worker paint	in the second		-1, p, 0,00		88.00		, pe <b>cesso</b>
phone number <line></line>		E S	3.	2000		20,25		~ .
* (-Man - ) - 137	11 roraign_marienal 12 worker nack		1, 555,57 1, 88,87	2, 5, 5, 5, 5, 5, 5, 5, 5, 5, 5, 5, 5, 5,		9000	2	
, professional skil	51			-1, 0, 0,00		30.00		
	14 worker out		1, 68.87	4, 6, 0.00		50,00	76.20	35%
et <line> professional march 2006 the dynamic group lid</line>	15 language_bilingual		1, 88,67	4, 6, 0.00		49,85	74.80	
(c) ching	16 language bilingual	spanish	1, 88.67	-1, 0, 0.00	totis estate descendinations de la constitue de la cons	50.00	74.40	
dean schrents,								
(30)								
coat or other foreign cultiens material.								~~~
A								
august 2004 pack all inc.								
Deacon fells _ 45								
1								
assamble;								
(shipping/receivable)								
	* C %	*******************************	***************************************	notranionament	organization de la companie de la co	orestones en		province

My Job Recommendations					
			wareneg · Car	od Basymas E	ost Jobs Advice
WHO WILL WIN A DIST FOR A DAY YOU VOTE NOW IN THE DISNEY DREAM "JOE	CHOOSE!	49	No.	tii resouma .	OSE 2008 AUGUST
careerbuilder.com					
Home My CareerBuilder Find	Jobs Job Recommend	ations Post R	Resumes Job	Alerts Advice	& Resources
Recommended For You					
Welcome to Recommendation Hea engine to find jobs for you.			ised our pater	nt-pending reco	mmendation
Sections. We organize the jobs into socions below. Available sections are fresh, close, relevant, entry-level, mid-level, senior, executive, and regional. Browse the sections to find jobs that fit you, know the sections around and siter their size using the buttons on each section's heading. To retrieve a hidden section go to preferences.  Tabs. There are tabs highlighting different topics in your profits. Click on a tab to view jobs the first that topic.					
figuralization and analysis and all little control of	en er en jours for de der fen de en jour jour de dispersion de mouw jour.	ana ariang ang ang ang ang	i ess	a a a a a a a a a a a a a a a a a a a	adabaa adabad.
		Location	o · US· Roswe	ll. GA 00075 (I	Add Locations Default:
	<u> </u>	3	222.7322	31.12A100101)	Maranii)
All development manager, Job Leveltsenior, .net, vb.net, software engineer	web site, lead developer, web	account payat manager, account payat	manag	er, control er, control er, inventory	web web
			(M) (M)	(A) (C)	(¥)
APOLE AND FRANK HOUSE SELECTION OF PROPERTY	r war accompanies sages		PRIORITY	NO. of JOSS	HIDE
15 jobs found that match this section, (No. of job Job Title	s Requested, 15) Company	Location	Freshness Clos	oness Relevanca	Dote
Web Applications Developer in house NEW)	Southern Insurance Underwriters	*************			03/22 Similar John
Sr. Software Engineer, Full-time costantivity in Allenta GA NEW	Kelv II Resources				03/22 <u>Similar Jobs</u>
Java C++ Developer I New Development News	MATRIX Besources, Inc.	Allenta, GA	naman kan	unis municis	03/22 Similar John
Senior Systems/Software Developer New)	Search Smart inc.				03/22 Simier Jobs
Sharepoint Expert II NEW!	MATRIX Resources, log.				08/22 Similar Jobs
Software Empireer (C++ UNDO - Dumyoudy GA NEW)	Global Payments	Atlanta, GA		uns eniun	03/22 Similar Jobs
Business Development Manager NEWI Allenta (SA Pamacoja, Fi.	American Staffina Resources IIIX	± 2 Locations			08/22 Similar Jobs
Elogismmer NEWI	Think Energy Group	Cateraville,		enies kinimaasa	09/21 SimilarJobs
Sr. JAVA Sufficate Engineer New!	The Feccile Notwork	GA.			63/21 Similar Jobs
C++Usva Real Esiste Developer NEWI	Solomon Pogo Group				03/21 Similar Jobs
Subware/Firmware Engineer NEW)	Manpower Professions				03/21 Similar Jobs
Software Engineer NEWI	Think Energy Group				03/21 Similar John
Programmer Analysi NEW (	Federated Logistics & Operations				03/20 Similar Jobs
Software Engineer	CareerBuilder, U.C.				03/20 Simiar Jobs
Software Engineer NEW!	Northridge Systems				03/20 Similar Jobs
					7

View All Fresh Jobs				
	***************************************		MAGA	
			PRIORITY NO.07.308S HIDE	
	US: Roswell, GA 30075 (	Default)	CARONICE NO. O SORO MISIO	
15 jobs found that match this section. (No. of J.	its Requested (S)			
Job Title	Company	Location	Freshness Closeness Relevance Date	
Senior Software Engineer	Witness Systems, Inc	Roswell, GA	CHARLES CARRETTE CHARLES 03/12 Sim	ior Joi
Applications Consultant	Witness Systems, Inc	Roswell, GA	AUDINING CHINNYS ANDREWS 68/30 Sim	lar. Lat
Web Developer	Adecco Technical	Roswell, GA	mining function and into 09/18 She	ist dob
Software Engineer <sup>S</sup> NEW/	Northridge Systems	Roswell, GA	CONTRACTOR CONTRACTOR CONTRACTOR	ar Job
Workflow Systems Engineer	SNAPS, Inc.	Roswell, GA	CONTRACTOR CONTRACTOR 69/07 Sim	dar Job
VB.NET / C# Developer	MATRIX Resources, Inc.	Roswell, GA	CONTROL CONTROL CONTROL 02/28 Sim	iac Job
JO Edwards One/World - Senior Programmer Analysi	MizonoUSA		CILIPITA CILVITA CILITATA SAM	
Consulting Software Engineer	Signers Energy & Automation	Norcross, GA	7222223 7222237 7222223 03/18 <u>Sim</u>	180 YOU
Senior NET Saftware Developer/ Lead Developer	Advects	Alpharetta, GA	KITTUTTI KITTITTI KITTUTTI 09/13 Sim	der deb
Senior Softwere Engineer	Penson Systems Incorporated	Alpharetta, GA	F11111117 F11111117 F11111117 D2019 SAM	lar Job
Senior Engineer Architect		Alpharetta, GA	KINDING FUNDING FUNDING 0000 Sim	lar Job
Business Analyst	The Martin Silver Group	Alpharetta,	FAILTAIN CARTAIN CARTAIN 03/14 Sm	
Serior Software Engineer (Java)	Principle Solutions Group	Alpharetta, GA	CINCIPA CULTURA CULTURA 0305 Sim	
Senior Consultant	Oynamics Tatent	Alpharetta, GA	Civiliti Civiliti Civiliti 03:05 Sim	
Java/JZEE Doveloper	Remail Station	Alpharetta, GA	alinin elinin elinin 03/18 Bm	
	Yiew All Close J	abs		*******
			MAMAM	
20 jobs found that match this section, (No. of jo	is Removaled 20)		PRIORITY NO of JOBS HIDE	
		doministe i	would noted as 1 or 1 sec \$100 or a sector	
Job Title	Company	Lacation	Freshness Ciosoness Relevance Date	
	AND 11 1 10 10 10	Cataravilla		
Programmer_NEW I	Think Energy Group	Cateraville, GA	CITATION CULTURE COLUMN 08/21 Sim	lar Job
	Think Energy Gross Curtis 1990	Cateraville, GA Obluth, GA		
Sr. NET Daveloper		Oskobi, GA	CINCUS CULTUS FULLUIS 03/21 Sim	det Job
Sc. NET Davelorer	Curtis 1000	Oututh, GA Atlanta, GA	Culture Culture Culture 08/21 Sim	dot sel dot sel
Sr. NET Developer .NET Developer .Net Developer	Curtis 1900 IEKsystems	Oskuth, GA Atlanta, GA Atlanta, GA	CITATION CATALLES CATALLES 03/21 Sim CITATION CATALLES CATALLES 03/16 Sim CITATION CATALLES CATALLES 03/18 Simulation 03/18 S	dot sel dot sel dot se
Sr. NET Developer NET Developer Net Developer Net Web Asplications Developer	Contis 1990 TEKsystems 3i Pospie, Inc. Garaer Builder, LLC	Dokub, GA Atlanta, GA Atlanta, GA Norcross, GA	Culture, Culture function 03/21 Sim Function Culture function 02/26 Sim Function Culture function 03/16 Sim Function Culture function 03/18 Sim Function Culture function 03/08 Sim	dot vel dot vel edot ve dot vel
Sr., NET Developer NET Developer Net Developer Net Web Asplications Developer ASP NET Developer	Contis 1000 TEKsystems 3i Possie, inc.	Outub, GA Atlanta, GA Atlanta, GA Norcruss, GA Atlanta, GA	CITATION CATALLES CATALLES 03/21 Sim CITATION CATALLES CATALLES 03/16 Sim CITATION CATALLES CATALLES 03/18 Simulation 03/18 S	iot vel iot vel dot ve iot vel
Sr. NET Developer NET Developer Net Web Asplications Developer ASP/NET Developer Software Engineer Sr.	Cortis 1900 TEKsystems Si Pesole, Inc. Career Suider, LLC MATRIX Resources, Inc. Dicisal Insignt an Insult	Oukuth, GA Atlanta, GA Atlanta, GA Nororusa, GA Atlanta, GA Nororusa, GA	Calling Calling Calling 03/21 Sim Calling Calling Calling Calling 03/26 Sim Calling Calling Calling Calling 03/16 Sim Calling Calling Calling 03/16 Sim Calling Calling Calling 03/14 Sim Calling Calling Calling 03/14 Sim	dot pel dot mi dot rel dot rel dot rel
St. NET Developer .NET Developer .Net Developer .Net Web Asplications Developer ASP NET Developer Software Engineer Sr. SharePoint Specialists	Contis 1600  TEKsystems  Si Pesolo, Iro.  Career Builder, LLC  MATRIX Resources, Inc.	Ontath, GA Atlanta, GA Atlanta, GA Norcross, GA Atlanta, GA Norcross, GA Atlanta, GA	Carriero, Carriero, Carriero, 03/21 Sim Carriero, Carriero, Carriero, 03/26 Sim Carriero, Carriero, Carriero, 03/26 Sim Carriero, Carriero, Carriero, 03/24 Sim Carriero, Carriero, Carriero, 03/27 Sim Carriero, Carriero, Carriero, 03/26 Sim	dot vel dot vel dot vel dot vel dot vel
Emainment NEW I  Sr. NET Developer  NET Developer  Net Developer  Net Wen Aspirations Developer  ASP NET Developer  Software Engineer Sr.  SharePoint Spasialiste  Software Engineer  Software Engineer	Cortis 1900 TEKsystems Si Pesole, Inc. Career Suider, LLC MATRIX Resources, Inc. Dicisal Insignt an Insult	Oblub, GA Allanta, GA Allanta, GA Norcous, GA Allanta, GA Norcoss, GA Allanta, GA Outub, GA	Calling Calling Calling 03/21 Sim Calling Calling Calling Calling 03/26 Sim Calling Calling Calling Calling 03/16 Sim Calling Calling Calling 03/16 Sim Calling Calling Calling 03/14 Sim Calling Calling Calling 03/14 Sim	iar Job iar Job iar Job iar Job iar Job iar Job

## METHOD AND SYSTEM FOR MATCHING DATA SETS OF NON-STANDARD FORMATS

#### **CROSS-REFERENCE**

[0001] This application is a continuation of U.S. patent application Ser. No. 13/744,715, filed on Jan. 18, 2013 (to issue as U.S. Pat. No. 9,355,151 on May 31, 2016), which is a continuation of U.S. patent application Ser. No. 11/869, 570, filed on Oct. 9, 2007 (issued as U.S. Pat. No. 8,375,026 on Feb. 12, 2013), which is a continuation-in-part of U.S. patent application Ser. No. 11/835,994, filed on Aug. 8, 2007 (issued as U.S. Pat. No. 8,103,679 on Jan. 24, 2012), which is a continuation-in-part of U.S. patent application Ser. No. 11/622,572 filed on Jan. 12, 2007 (now abandoned), which was a non-provisional patent application claiming priority to U.S. provisional application No. 60/759,242 filed on Jan. 13, 2006. These prior applications are incorporated herein in their entirety by reference.

#### BACKGROUND OF THE INVENTION

[0002] This invention relates generally to a method and system for receiving a plurality of non-standardized data sets and generating respective standardized profiles 80 that can be used for efficiently comparing and matching the data sets. [0003] One application for the current invention is providing online recruiting services, and more specifically, for converting job seekers' resumes on the one hand and job postings on the other hand into standardized profiles, which can be compared and matched to one another. Conventional online recruiting systems permit employers to create job posting for available positions and permit job seekers to post their resumes. Conventional online recruiting systems have also permitted job seekers to browse or conduct keywords searches through available job postings and submit their resumes for specific jobs. Conversely, these systems have also permitted employers to browse or conduct keyword searches through available candidate resumes. However, the task of browsing for candidate resumes or job postings is time consuming and can be a hit-or-miss proposition for both the job seeker and the employer. While conducting targeted keyword searches may reduce the total number of job postings or resumes, the only way to find the most suitable match is to review and evaluate each resume or job posting individually.

#### SUMMARY OF THE INVENTION

[0004] A system and method is described for receiving a plurality of non-standardized data sets and generating respective standardized profiles that can be used for efficiently comparing and matching the data sets. One application of this invention is to convert job seekers' resumes and job postings into respective standardized profiles and then ranking the standardized profiles according to their suitability for a particular job posting. Generally, the system includes a remote computer, which is connected to a server computer via a network system or the Internet and which is capable of exchanging files and information with the server computer.

[0005] A better understanding of the objects, advantages, features, properties and relationships of the invention will be obtained from the following detailed description and accompanying drawings which set forth an illustrative embodiment

and which are indicative of the various ways in which the principles of the invention may be employed.

#### BRIEF DESCRIPTION OF DRAWINGS

[0006] For a better understanding of the invention, reference may be had to the following Appendices, which further describe a preferred embodiment of the present invention and which include drawings and exemplary screen shots therefore:

[0007] FIG. 1 is a diagram depicting a computer network on which an embodiment of the invention may be operated.

[0008] FIG. 2 is a sample graphical user interface of one screen employed by the present invention.

[0009] FIG. 3 illustrates an exemplary data set in the form of a job posting.

[0010] FIG. 4 illustrates an exemplary data set in the form of a candidate resume.

[0011] FIG. 5A-5B illustrates an illustrative band array generated from the data set shown in FIG. 4.

[0012] FIG. 6 illustrates the steps for parsing a data set into bands.

[0013] FIGS. 7A-7D illustrate an illustrative word array generated from the data set shown in FIG. 4.

[0014] FIG. 8 illustrates the steps for parsing the band array of FIG. 4 into a word array shown in FIGS. 7A-7D.

[0015] FIG. 9 illustrates an excerpt of a substitute database, as used in the present invention.

[0016] FIG. 10 illustrates the steps for evaluating words for entry into the attribute array.

[0017] FIG. 11 depicts an excerpt from the common word database as used in the present invention.

[0018] FIG. 12 illustrates an excerpt of the attribute dictionary, as used in the present invention.

[0019] FIGS. 13A-13C illustrate an exemplary attribute array generated from the data set shown in FIG. 4 according to the present invention.

[0020] FIG. 14 illustrates the steps for entering a word or phrase into the attribute array.

[0021] FIG. 15 illustrates an excerpt from an exemplary pod, as used in the present invention.

[0022] FIG. 16 illustrates the steps for calculating support values and ranking the attributes within the profile.

[0023] FIG. 17 illustrates an exemplary profile generated from the data set shown in FIG. 4 according to the present invention.

[0024] FIG. 18 illustrates a recommendation engine, as used in the present invention.

[0025] FIG. 19 illustrates the profile matching conducted by the recommendation engine shown in FIG. 18.

[0026] FIGS. 20A-20E illustrate an exemplary tagged job posting featuring an embodiment employing the pond, job level, and education level.

[0027] FIG. 21 illustrates an exemplary tagged resume featuring an embodiment employing the pond, job level, and education level.

[0028] FIG. 22A-22B illustrate any exemplary recommendation page featuring dynamic pods corresponding to a profile.

### DETAILED DESCRIPTION

[0029] Turning now to the Figures, wherein like reference numerals refer to like elements, there is illustrated a system and method for receiving a plurality of non-standardized data sets and generating respective standardized profiles 80 that can be used for efficiently comparing and matching the data sets. The system permits users to use the standardized profiles 80 to compare and match various data sets.

[0030] As will be described, each data set is processed to (A) parse the data set into bands 92; (B) identify attributes 70a, 70b, 70c, etc., such as concepts 85 or titles 87 related to the data set; (C) identify the band 92 in which each attribute 70 is first found; (D) identify the number of occurrences 108 in which each attribute is associated with each data set; and (E) identify what support 140 is present in the rest of each data set for each attribute 70. The results provided in an array 25c can then be weighted to create a profile 80. For example, all of the attributes 70a, 70b, 70c, etc. can be ranked depending on one or more metrics 90a, 90b, 90c, etc., which are described herein. The metrics 90a, 90b, 90c, etc. may include band 92, occurrences 108, support 140 or various combinations of all three metrics.

#### The System

[0031] Although not required, the system and method will be described in the general context of a computer network 20, as is well know in the industry, and computer executable instructions being executed by general purpose computing devices within the computer network 20. Referring to FIG. 1, in this regard, the general purpose computing devices may comprise one or more server computers 22a hosting a data set software application. If there are multiple server computers 22a, they may interface via a network or serial interface either directly or over the Internet or other local or wide area network. The server computer 22a can also include one or more databases for storing data sets. Data sets can include resume information, job-posting information, personal profile information, housing information, or any other data sets for which it would be advantageous to compare one data set against other data sets to select appropriate matches. In the context of recruiting services, data sets may include (1) detailed information about a prospective applicant, such as, previous job history, experience, education, and job-search criteria, or (2) information about an employer or possible job posting, such as, hiring criteria, educational and skill qualifications, location, and employee benefits. It should be appreciated that the network components could be described as having client and server relationships, as generally known in the art.

[0032] To allow each user having a client computer 22b to access and utilize the data matching system, the software application will reside on the server computer(s) 22a. Further, it is preferable that client users access the software application via an internet browser, which acts as an interface between the software application and the operating system for the server computer 22a and the client computer 22b may be Windows®-based or could employ any one of the currently existing operating systems, such as LINUX®, MAC OS®, Mozilla®, etc. In addition, it should be appreciated by those with skill in the art that other applications besides the browser may also be utilized to act as an interface between the software application and the server computers 22a.

[0033] For editing, populating and maintaining the databases, the browser includes a graphical user interface 50. As shown in FIG. 2, the graphical user interface 50 is further comprised of various menu bars, drop-down menus, buttons and display windows.

[0034] As will be appreciated by those of skill in the art, the computers 22a, 22b need not be limited to personal computers, but may include hand-held devices, multiprocessor systems, microprocessor-based or programmable consumer electronics, minicomputers, mainframe computers, personal digital assistants, cellular telephones or the like depending upon their intended end use within the system. For performing the procedures described hereinafter, the computer executable instructions may be written as routines, programs, objects, components, and/or data structures that perform particular tasks. Within the computer network 20, the computer executable instructions may reside on a single computer 22, a server computer 22a, a client computer 22b, or the tasks performed by the computer executable instructions may be distributed among any combination of those computers 22, 22a, 22b. Therefore, while described in the context of a computer network, it should also be understood that the present invention may be embodied in a stand-alone, general purpose computing device that need not be connected to a network.

[0035] To efficiently provide users with access to the software application 30, the server computers 22a and the underlying framework for the computer network 20 may be provided by the service company itself or by outsourcing the hosting to an application service provider ("ASP"). ASP's are companies that provide server computers that store and run a software application on behalf of a third party, which is accessible to that party's users via the Internet or similar means. Therefore, companies are able to provide a computer network without supplying the server computer(s) 22a. In addition, users are able to access and use software applications without storing the software application on their computers. It should be understood, however, that ASP models are well-known in the industry and should not be viewed as a limitation with respect to the type of system architectures that are capable of providing a computer network 20 that can properly operate the software application discussed herein. Similarly, a provider of the system may also choose to host the system on its own equipment or employ a third-party hosting service to maintain the system.

[0036] To perform the particular tasks in accordance with the computer executable instructions, the computers 22a, 22b may include, as needed, a video adapter, a processing unit, a system memory, and a system bus that couples the system memory to the processing unit. The video adapter allows the computers 22a, 22b to support a display, such as a cathode ray tube ("CRT"), a liquid crystal display ("LCD"), a flat screen monitor, a touch screen monitor or similar means for displaying textual and graphical data to a user. The display allows a user to view information, such as, code, file directories, error logs, execution logs and graphical user interface tools.

[0037] The computers 22a, 22b may further include read only memory (ROM), a hard disk drive for reading from and writing to a hard disk, a magnetic disk drive for reading from and writing to a magnetic disk, and/or an optical disk drive for reading from and writing to a removable optical disk or any other suitable data storage device. The hard disk drive, magnetic disk drive, optical disk drive or other data storage device may be connected to the system bus by a hard disk drive interface, a magnetic disk drive interface, or an optical disk drive interface, respectively, or other suitable data interface. The drives and their associated computer-readable media provide a means of non-volatile storage for the

computer executable instructions and any other data structures, program modules, databases, arrays, etc. utilized during the operation of the computers 22a, 22b.

[0038] To connect the computers 22a, 22b within the computer network 20, the computers 22a, 22b may include a network interface or adapter. For example, used in a wide area network, such as the Internet, the computers 22a, 22b typically include a modem, router or similar device. The modem, which may be internal or external, may be connected to the system bus via a serial port interface. It will be appreciated that the described network connections are exemplary and that other means of establishing a communications link between the computers 22a, 22b may be used. For example, the system may also include a wireless access interface that receives and transmits information via a wireless communications medium, such as a cellular communications network, a satellite communications network, or another similar type of wireless network. It should also be appreciated that the network interface will be capable of employing TCP/IP, FTP, SFTP, Telnet SSH, HTTP, SHTTP, RSH, REXEC, etc. and other network connectivity protocols.

[0039] As mentioned above, in one embodiment, the software application 30 and databases reside on the server computer(s) 22a and are managed by the provider of the software application 30 or by a third-party. Those with skill in the art will understand, however, that the software application and databases may reside on the remote client computer 22b and be managed and maintained by a user. The graphical user interface 50 may load web pages via HTTP or HTTPS or other suitable application protocol.

[0040] For populating the databases, the browser may be utilized, but this may also be accomplished via an MS-SQL Server Enterprise Manager. While the software application 30 may be programmed in any software language capable of producing the desired functionality, it is envisioned that the software application will be programmed using Microsoft ASP.net, HTML, Javascript, PHP3, or MS-SQL Stored Procedures.

[0041] For maintaining the security associated with the software application and databases, a unique login page may be maintained for each user including, for example, individuals and employers. The login page may also be used to control the access privileges for various levels of users. In addition, each login page may also require a user name and password. For security purposes, the user names and passwords may be kept separately for each company that is accessing the software application. To gain access to the software application, the user must enter the proper user name and password. It should be appreciated that different login procedures may be employed, which are well know in the industry, on an as-needed basis.

[0042] To maintain edit, populate and maintain the databases, the graphical user interface 50 allows the user to perform standard text editing functions, including, mouse placement of the cursor, click-and-drag text selection and standard Windows® key combinations for cutting, copying and pasting data. In addition, the graphical user interface 50 allows users to access, copy, save, export or send data or files by using standard Windows® file transfer functions. It should be understood that these editing and file transfer functions may also be accomplished within other operating system environments, such as LINUX®, MAC OS®, UNIX, Mozilla®, etc.

Data Sets

[0043] While the system can be used for any application in which it would be desirable to compare non-standardized data sets, the following description applies the system in the context of employment recruiting and job searching. As shown in FIG. 3, job posting 61 for a Web Developer is an exemplary data set, which typically provides a title 62, job description 64, and the criteria 66 for the job posting 61, including the type and level of education, professional credentials, and experience that a qualified job seeker should possess. As will be described in greater detail below, from each of these pieces of information, the system can generate an attribute. In this example, job posting 61 calls for a job seeker with, among other things, a bachelors degree in computer science and experience in development in HTML and ASP.

[0044] Similarly, a resume 71 represents another data set that comprises information about a job seeker. FIG. 4 provides an illustrative resume 71 for an individual seeking position as a software developer. Information about a job seeker may include, for example, professional objectives 72, qualifications 73, levels of education 74, past and present job titles and experience 76, and personal interests 78. As described below, the system may optionally permit a user to input her last job title 75 and offer pre-defined categories from which the user can select. The title 75 and categories can then be associated in the data set. As with job postings 61, the system can generate one or more attributes from each of these pieces of information.

[0045] In one embodiment of the invention, each data set is processed by system to generate a corresponding profile 80 comprising a plurality of attributes 70a, 70b, 70c, etc. generated from each of the respective data sets. An exemplary profile 80 is shown in FIG. 17. Each data set may comprise a job posting 61 or a resume 71. In another embodiment of the invention, the system may generate attributes 70 that are separately sub-categorized into concepts 85 and titles 87. As will be appreciated by those of ordinary skill in the art, without departing from the invention, attributes 70 may optionally remain consolidated or may be categorized by any number of characteristics other than concepts 85 and titles 87, such as, for example only, education, interests, and work schedule.

Profiles

[0046] Bands

[0047] The system and process for creating a profile 80 from each data set will now be described. FIG. 4 illustrates data set comprising a user-provided resume 71. The system associates at least one of a plurality of metrics 90a, 90b, 90c, etc. (identified in FIGS. 13A and 17) with at least one attribute 70 (for example, concept 85 or title 87) generated from resume 71. In one embodiment, a metric 90a is a band 92 representing the relative position of text within the data set. Frequently, the relative location of data within a data set is indicative of the relative importance of that data. For example, in resume 71, the most recent experience 76 or the job seeker's professional objective 72 is typically near the top of the resume 71. In the context of a data set for a real estate listings, the address and price of the property is typically also at the top of the listing. Accordingly, metric 90a for band 92, which represents the location of data within the data set, is helpful in assigning relative importance to each datum within the data set as the corresponding attributes 70 are generated.

[0048] As shown in FIG. 5, Resume 71 is first broken into bands 92 and placed into band array 25a. In one embodiment, when a user uploads or enters her resume 71 into the system, the user assigns the resume 71 a title 75 and the user's most recent job title 81. The system may also request that the user select a job category 83 from a predetermined list of categories 83. The steps of parsing the data set into bands 92 is shown in FIG. 6. In step 210, system assigns the title 75, if any, to band "0" 92a. The remaining text of resume 71 is parsed by dates. At step 220, after the title 75 is assigned to band "0", the entire remaining text of resume 71 is entered into a memory field of band array 25a identified as band "1" 92b, as shown in FIG. 5A. System may use a regular expression to locate a date expression 94 in various formats, for example, Jan. 1, 2005, Jan. 1, 2005, 1/1/05, etc. Once a first date 94a is found, the system dumps all of the text that appears in resume 71 after first date 94a into a second row in the array 25a called band "2" 92c. System continues to run the regular expression through the text of data set of resume 71 until it finds the next date 94b, at which time it dumps any text data appearing after next date 94b into a new row in the array 25a referred to as band "3" 92d. Regular expression continues to search for dates 94c, 94d, 94e, etc. and dumps the text that follows each of those dates 94c, 94d, 94e, etc. into respective bands 92e, 92f, 92g until no further dates are found in the remaining text. Finally, at step 230, the system dumps the user-selected categories 83 in a final band 92g, which may optionally be segregated by an open band 92f, as depicted in FIG. 5B.

[0049] As will be appreciated by those of skill in the art, without departing from the invention, other variables may be used to parse bands 92, for example, biographical data like "education", "experience," "skills," and "professional associations". In one embodiment, the system may permit yet another band (not shown) that could be manually populated with key words by the system provider or user.

#### Word Array

[0050] Next, at step 250 of FIG. 6, and as shown in greater detail in FIGS. 7A-7D and 8, the system analyzes the text in each band 92a, 92b, 92c, 92d, etc. to create word array 25b. The steps to create the word array 25b are shown in FIG. 8. Starting with band "0" 92a shown in FIG. 5a, and continuing with each subsequent band 92b, 92c, etc., all of the text in each band 92 of FIGS. 5a and 5b is dumped into the word array 25b, shown in FIGS. 7A-7D. At step 260 in FIG. 8, each character string 96 is parsed by spaces, line feeds or carriage return characters (e.g., word or phrase) to occupy a separate row of array 25b, along with a second column that identifies the band 92 from which the word was found. At steps 265, 270 and 275, system then runs through each row of array 25b and uses another regular expression to identify and remove undesirable punctuation, such as asterisks or to separate words by slashes. As shown in FIG. 8, at steps 280 and 285, the system may optionally check each character string 96a, 96b, 96c, etc., against substitute database 102 to replace certain character strings 96 that have well-known abbreviations. An excerpt of substitute database 102 is shown in FIG. 9. For example, the word "a/p" or "ap" may be replaced with "accounts payable." By substituting equivalent terms, a more standardized lexicon of attributes 70 is ultimately generated in profile 80, while the original data set, such as resume 71, remains unchanged. In addition, at step 285, the system may replace irregular word spacing, e.g., "r\_&\_d".

[0051] FIG. 10 illustrates the steps for determining whether a character string 96 contained in the word array 25b should generate an entry into the attribute array 25c. Initially, at step 305, each word found in the word array is placed into a multi-word buffer, as described below. Then, at step 310, the system checks the words in the buffer to determine whether any pre-defined "spam" term is found within the multi-word buffer. If such a spam word is identified, at step 315, a flag is set to mark the entire profile 80 as including spam, so that the profile and associated data set can later be eliminated from matching searches or optionally called up for further investigation or review.

[0052] After stripping each character string 96 of punctuation, at step 320, the character string 96 may be searched against common word database 98. An excerpt from the common word database is illustrated in FIG. 11. If the character string 96a is found in the common word database 98, further processing can be aborted at step 345, and system increments to the next word in array 25b comprising character string 96b. By avoiding processing a common, and therefore, unhelpful word, the system processing speed is increased. As shown in FIG. 11, "N" designates that the word is common and therefore "not allowed." An entry labeled "Y" designates that the word may be part of a multi-word phrase, and is therefore retained.

[0053] At step 325, the system then compares each character string 96 in word array 25b against the words contained in at least one attribute dictionary 104. An excerpt of the attribute dictionary 104 is shown in FIG. 12. If character string 96 is found in attribute dictionary 104, attribute array 25c is created at step 350 and character string 96 is placed in attribute array 25c, along with an association to the band 92 in which the character string 96 was first found. A sample attribute array 25c is shown in FIGS. 13A-13C. FIG. 14 illustrates the steps for entering single (stand-alone) or multi-word phrases into the attribute array at step 360. In addition, counter is incremented to track metric 90b, which counts the number of occurrences 108 in which character string 96a is found in the word array 25b. As will be described later, a third metric 90c, defined as support 140, is tabulated in another column of attributable array 25c.

[0054] After comparing character string 96 with the attribute dictionary 104, character string 96 is also copied to buffer array to determine whether the character string 96 is part of a multi-word attribute 70. If, however, character string 96 is followed by a hard carriage return, a comma or other similar punctuation that would signal that the adjacent words are unrelated, the buffer array is cleared, as indicated in FIG. 8 at steps 290 and 295. This flag for termination is shown in FIG. 8. If character string 96 does not include such a flag, the buffer array retains the character string 96a to be compared with the next few words that are found in the word array 25b. The number of words to be saved in the buffer array can be varied within the system to optimize results.

[0055] System then searches to see whether there are any more character strings 96 in word array 25b, shown in FIG. 8 at step 278. If so, the steps shown in FIGS. 10 and 14 are repeated. If the character string 96 is in the common word database 98 or ends in appropriate punctuation, then at step 295 on FIG. 8, the multi-word buffer array is cleared and the

system processes the next character string 96 in the word array 25b. If not, then at step 335 on FIG. 10, the multi-word buffer array is retained, and system searches attribute array 25c to see whether character string 96 has already been placed in attribute array 25c. If the next character string 96 is already in the array 25c, the occurrence counter is incremented by one. Within attribute array 25c, the band designation 92 retains the original value of the band 92 in which the character string 96 was first found, even if later occurrences are identified in later bands. The system then checks, at step 335 on FIG. 10, to see whether the multiword buffer array contains any multi-word attributes 70 contained in the attribute dictionary 104. If so, the system checks to see whether the multi-word is found in the attribute dictionary 104. If it is in the attribute dictionary 104, then at steps 365-375 on FIG. 14, the attribute array 25cis populated with a new multi-word attribute 104, then at steps 365-375 on FIG. 14, along with the band 92 from which the multi-word attribute word was triggered.

[0056] An example will illustrate the population of the attribute array 25c. Refer to the following text that is entered into band array 25a shown in FIG. 5A: "attorney/software developer who has designed, written and been selling and supporting legal practice software applications." As shown in FIG. 7A, the character string 96 "attorney" is encountered in the word array 25b at line 2. The word "attorney" is located in the attribute dictionary 104 (although the word "attorney" is not specifically shown), so it is placed in attribute array 25c, shown in FIG. 13A, along with the band 0. In addition, the occurrence counter is incremented to "1." The word "attorney" is then saved in the buffer array. The system then finds the next character string 96, in this example, "software." As described below, because "software" is such a commonly-used word, it is considered a dependent attribute, and is not placed in the attribute array 25c. Similarly, the next word, "developer," another commonly-used word, is also designated a dependent attribute, and is therefore not placed in the attribute array 25c. But, the multi-word buffer array 110 now contains the words "software" and "developer," which, as a combined multi-word phrase, is found in the attribute dictionary 104 (multi-word phrase is not shown). Accordingly, system checks the attribute array 25c to see whether the multi-word attribute 70 "software developer" has already been entered. Since this is the first occurrence of "software developer," the multi-word attribute 70 is entered in the array 25c, along with its associated band 92, band "0" 92a, and the counter is initially incremented to "1." As seen in FIG. 13A, the multi-word "software developer" attribute is found in the word array 25b for a total of six occurrences.

[0057] As also depicted in FIG. 13A, the system also identified the multi-word attributes 70 "attorney software" and "attorney software developer." As seen with this example, the generation of a single occurrence of the words "attorney", "software" and "developer" in sequential order within the word array 25b yielded four separate attributes 70 in the array 25c, namely, "attorney", "software developer," "attorney software," and "attorney software developer." Later, as shown on FIG. 13B at line 7, when the system encounters "software" followed by "application," it created a new entry in attribute array 25c for "software application," which was incremented for a total of four occurrences. Referring to element 6 in FIG. 7A, the word in word array 25b is "am," which is found in the common word database

98, so the "am" character string 96 is ignored, the buffer array is cleared and the system selects the next character string in band array 25b, which is element 7, "an."

[0058] In one embodiment, a further enhancement is provided by subcategorizing the attributes 70 as either concepts or titles. For example, the word "accountant" is identified as a title, whereas the word "accounting" is considered a concept. This can be accomplished by distinguishing between concepts and titles within the attribute dictionary 104 or by creating separate dictionaries, one title dictionary and another concept dictionary. For example, the excerpt from the attribute dictionary 104 shown in FIG. 12 differentiates titles and concepts as follows: a "c" represents an independent (or stand-alone) concept; "cd" represents a dependent concept; "s" represents a stand-alone title; and "d" represents a dependent title. Alternatively, separate dictionaries may be used, and the system can look up each character string 96 first in the title dictionary and if no match is found, then character string 96 may be looked up in the concept dictionary.

[0059] The idea of identifying independent attributes, which are entered in the attribute array 25c by themselves, and dependent attributes, which must be combined with other terms, can be applied to concepts and titles as shown in FIG. 12. The dependent concepts and titles are words that are commonly used, but provide little or no value in matching a candidate with a relevant job opening, unless combined with another word. As described in the example above, neither the concept "software" nor the title "developer" is helpful by itself in identifying qualifications of a job applicant or needs of an employer. But when the two words are combined, the phrase "software developer" is a recognized job title that is a helpful attribute.

[0060] Alternatively, dependent concepts and dependent titles can be separated into separate databases, for example, in dependent concept database and dependent title database. If the character string 96 is found on either database, character string 96 is not placed in the array 25c, but it is placed in the multi-word buffer and may be placed in the array 25c along with the next character string 96b if the next word meets the criteria in steps described in FIGS. 10 and 14. The system can be set to buffer a variable number of words, although buffering up to four words has been found advantageous. This permits multi-word attributes 70 comprised of four or less words to be identified, for example, "securities transactional paralegal," "information technology consultant," and "corporate securities transactional."

[0061] The steps in FIGS. 8, 10, and 14 are repeated until there are no more character strings in the word array 25b. At this point, attribute array 25c will be filled with the all of the attributes 70 (or substitutions) generated by the word array 25b that appear in attribute dictionary(ies) along with the identity of the respective band 92 in which each attribute 70 was first encountered and the total number of occurrences that each attribute 70a, 70b, 70c, etc. appeared in word array 25b.

[0062] Next, the system checks each attribute 70 (concept or title) in the array 25c against the attribute dictionary (104, shown in FIG. 12) to identify synonyms as shown in column 105 to reduce redundancy and enhance the results during the searching and matching routine. For example, the words "a+", "a+ certification" and "a+ certified" would all be replaced by the attribute "ID" 70 for the attribute "a+ certified" as provided in the synonym column 105, shown in

FIG. 12. As with the substitute list 102 described earlier, this routine adds consistency to the results.

#### Tagger

[0063] In an alternative embodiment, rather than placing the words in the word array 25b, pond 35 of words is created from the band array 25a. The pond 35 is created by converting the data structure and data contents of the band array 25a into a doubly-linked list. As will be known by those of ordinary skill in the art, a doubly-linked list comprises a sequence of nodes, each containing a data field and having two references, one pointing to the previous node and the other to the next node in the list.

[0064] Through a series of operations, the doubly-linked list, which comprises pond 35, is tagged using HTML to assign tokens to certain items in the double-linked list. The tokens may identify attributes 70, such as a dependant concept or title 36, an independent concept or title 37, a negator such as the word "not" (not shown), a break 38, an unrecognized word 39, a slash group 45, or a connector 43, as will be described further. In one embodiment, pond 35 tokens may be color coded in HTML. For example, in FIGS. 20A-20E, pond 35 identifies several pond items, including "software" and "program," which may be displayed in orange to designate dependant concepts or titles 36; "engineer" and "c++," which may be displayed in green to designate concepts or titles 37; "<-band->," ":" "," which may be displayed in red to designate hard breaks 38 between words in the pond; "in the," "in," "of," and "<—line—>," which may be displayed in blue to designate connector 43 that may join adjacent items; and finally, items grouped within "{ }" brackets to indicate slash groups 45.

[0065] The addition of the tokens may be done in sequential operations. For example, multiword concepts—such as "visual basic," in which neither "visual" nor "basic" is, by itself, a concept or title but becomes a concept when appearing adjacent one another-may be identified and tagged. Similarly, multi-part concepts—such as "computer science," which include dependant and independent concepts or titles-may be identified and tagged. The use of a double-linked list for the pond eliminates the need to maintain a multi-word buffer, and also permits greater flexibility for combining attributes 70 that are spaced more than a limited number of positions away from one another. For example, in the embodiment employing a buffer, described above, the combination of multi-word attributes is limited by the number of words or character strings 96 held in the buffer, whereas by using a double-linked list, the words may searched for attributes 70 anywhere within the double-linked list (i.e., pond 35), subject to any tagged limitations, such as hard breaks 38 or negators. This advantage increases the flexibility for combining separate attributes surrounding attributes within a slash group. The tokens further provide flexibility for defining and modifying behaviors (i.e., programming instructions) associated with particular types of words. For example, by retaining a connection between two lists of words, a connector 43, such as "of," may identify a useful attribute 70, such as "human resources manager" from the original "manager of human resources."

[0066] A post processing step may be optionally provided in which "orphaned" attributes are identified and replaced with more meaningful attributes. For example, if the dependant title "engineer" appears by itself in one location in the pond but the multi-word title "electrical engineer" appears

elsewhere in the pond, the orphaned dependant title "engineer" may be replaced with "electrical engineer."

[0067] In further aspect of this embodiment, because the attributes, such as independent concepts or titles (or both) 37, have already been identified in the pond 35 during the tagging process, the attribute array 25c may be readily created by running through the tagged pond. The attribute array is illustrated in FIGS. 13A, 13B, 13C, and 20A.

#### Assigning Support Metric

[0068] To further enhance the accuracy of the profile generation, each attribute 70 that is entered into array 25c is evaluated by how closely the attribute 70a, 70b, 70c, etc. is related to other attributes 70a, 70b, 70c, etc. in the array 25c. This is accomplished by the use of attribute "pods" 125. FIG. 15 shows excerpts from a sample pod 125a. FIG. 16 illustrates the steps described next for generating a support metric 90c.

[0069] Each pod 125a, 125b, 125c, etc. identifies the relatedness of a "root" attribute 130 (for example, concept or title) to other words that may appear within word array 25b (which, in turn, are related to words appearing in the data set, for example, a resume 71 or a job posting 61). Each pod 125a, 125b, 125c, is created by conducting an analysis for each root 130 to determine what other attributes 70a, 70b, 70c, etc. are related to the root 130. In one embodiment, every attribute 70a, 70b, 70c, etc. is designated, in turn, as the root 130 and searches are conducted through a large number of sample data sets (for example, resumes 71a, 71b, 71c, etc. and/or job postings 61a, 61b, 61c, etc.) or sample sets of profiles 80 to identify each occurrence of another attribute 70, which is referred to as a "leaf" 135.

[0070] The pod 125 information can be refined, for example, by counting the number of occurrences in which both the root 130 and each leaf 135 appears (a) within a given data set, (b) within the same paragraph of a data set, and/or (c) within the same sentence of a data set. Similarly, the comparisons could be made between attributes 70 appearing in profiles 80 and within the same bands 92. The resulting occurrences 108 for the sample data sets are then compiled into a pod 125 for each root 130, identifying how many times each leaf 135 is associated with the root 130. Thus each pod 125 can list the number and percentage of occurrences that both the root 130 and each leaf 135 appeared within the same document, paragraph, and sentence of the sample data sets or same bands 92 of profiles **80***a*, **80***b*, **80***c*, etc. An example of the pod **125***a* for the root, "accountant" is set forth in FIG. 15.

[0071] Pods 125a, 125b, 125c, etc. may be used to scale the profile 80 in several ways and to add various degrees of precision by assigning a metric 90c for "support" 140, which signifies the presence of attributes 70 that are more likely related to the root 130. For example, in one embodiment, the pod 125 may be truncated into a binary value, whereby "1" identifies the existence of a relationship and "0" identifies the absence of a relationship. This assignment of support value is shown in steps 405-430 on FIG. 16. To illustrate, in a given array 25c, if a leaf 135 appears in the pod 125 for a root 130, support 140 counter would be incremented by one, at step 430, regardless of whether the leaf 135 appeared in all of the sample data sets or only one of the sample data sets. In this scenario, each time any leaf 135 is found in the pod 125 for a root 135a, the counter would be incremented by 1 for that particular root 130a. Thus, if many leafs 135a,

135b, 135c, etc. for a particular root 130a are found in the attribute array 25c, the support 140 for the root 130a is high and the root 130a is weighed more strongly in the profile 80. [0072] In an alternate embodiment, the relative percentage of appearances of each leaf 135a, 135b, 135c, etc. to each root 130a can be cumulatively added and then normalized with the other metrics 90 (e.g., the band 90a and occurrence 90b scores). For example, as seen in FIG. 15 pod 125a for the root 130a "accountant" and the leaf 135a "certified" provides support 140a of 54.16%, and support 140b for the leaf 135b, "gaap" of 76.00%. So, if a profile 80 includes the root "accountant" and the leafs "certified" and "gaap", these support values can be added to 130.16%. Accordingly, the support 140 values for all the leafs 135a, 135b, 135c, etc. in the attribute array 25c associated with each root 130 could be totaled for a grand support 140 value for each concept in the attribute array 25c.

[0073] In another embodiment this total support 140 value can then normalized to correspond with the approximate magnitude of the other metrics 90a, 90b, 90c, etc. associated with the attribute array 25c. Normalizing the support 140 value can be done many ways without departing from the invention. For example, in one embodiment, the support value 140 totals are divided by a value such as the highest score of all the support 140a, 140b, 140c, etc. value totals and then multiplied by a multiplier.

[0074] In another embodiment, each gross support 140a, 140b, 140c, etc. value can merely be ranked. For example, the gross support 140 value can be replaced by the reverse rank (so the highest gross support 140 value would have the highest value). To illustrate, as shown in Table 1, if a series of root attributes 130 have a gross support 140 values of root 140a=1209, root 140b=2409, root 140c=478, root 140d=8904, root 140e=35, root 140f=0, the support 140 values assigned in attribute array 25c could be as follows: root 140a=3, root 140b=4, root 140c=2, root 140d=5, root 140e=1 and 140f=0. Various methods for using the pods 125 for assigning relative weighting for the support 140 value may be employed without departing from the invention.

TABLE 1

ROOT	GROSS SUPPORT	SUPPORT VALUE
140d	8904	5
140b	2409	4
140a	1209	3
140c	478	2
140e	35	1
140f	0	0

Ranking the Profile

[0075] To complete the profile 80 for each data set, the metrics 90 are used to rank the attributes according to relative importance, as identified in steps 450 and 455 of FIG. 16. FIG. 17 shows an exemplary profile 80. In one embodiment, all the generated attributes 70a, 70b, 70c, etc. are placed in the array 25c in order of appearance within the bands 92 as shown in steps 450 and 455, shown in FIG. 16. That is, all the attributes 70a, 70b, 70c, etc. found for the first time in band "0" 92a are listed as band "0", then band "1", band "2", and so on. Next, after the support values 140a, 140c, etc. are assigned, the leafs 135a, 135b, 135c, etc. that are found supporting each root 130a, 130b, 130c, etc.

are pulled up in order of descending support value 140 behind each related root 130. Finally, within each group of root 130 and associated leafs 135a, 135b, 135c, etc., the leafs are listed in order of number of occurrence 108. This ranking or weighting scheme is exemplary and other schemes may be used without departing from the invention.

[0076] Once the array 25c and associated metrics 90a, 90b, 90c, etc., such as, band 92, occurrence 108 and support 140, are ranked, the attributes 70 and associated metrics 90a, 90b, 90c, etc. can be saved as a profile 80, which is associated with the respective data set from which the profile 80 was generated. For example, FIG. 17 illustrates the ranked attributes 70 for the sample resume 71 shown in FIG. 4. In this example, titles 87 are broken out from concepts 85 into separate lists. The values in parenthesis after each attribute 70 represent the band 92, occurrences 108, and support 140 generated for each attribute 70. The attributes 70 are thereby ranked in order of relative importance in the context of the originating data set. The respective list of titles 87 and concepts 85 can be selectively combined, for example, by interleaving the two ranked lists, (i.e., by placing the highest ranked title 87 first, then the highest ranked concept 85, then the second highest ranked title, etc.) or by giving each variable weight.

[0077] In addition, the data set may also be further associated with user account information. For example, a job seeker may have an account set up that can include contact information, history of job postings that the job seeker has reviewed, job postings that the job seeker has applied for, and other data associated with the individual. Similarly, a job poster or employer may have a user account that retains contact information, service packages, billing information, other job postings, applications received for each job posting, and other information associated with the employer.

[0078] In one embodiment, a user may be given an opportunity to see the resulting profile 80, for example in the format shown in FIG. 17, and be permitted to modify the profile 80. For example, the user could be permitted to emphasize or deemphasize certain attributes 70, their associated metrics 90 or manually adjust their ranking. A job seeker may notice that a particularly important attribute 70 is ranked lower than other less important (to the user) attributes 70. Accordingly, the user may optionally be permitted to adjust one or more of the metrics 90 for the attribute(s) 70 to give the attribute(s) 70 more significance when used for matching, as described below.

[0079] It will be appreciated by those of ordinary skill in the art that the system and method, which is described above in the context of data sets comprising resumes 71, could just as readily be used for other data sets, including job postings 61. For other data sets, the metrics 90 used to score the attributes 70 may be varied. For example, job postings 61 typically do not delineate information by date, as is typical with resumes 71, but may instead parse the data by title, experience, and skills. Accordingly, bands 92 could use different character strings or words rather than dates to parse the data set.

[0080] Moreover, the system and method for creating standardized profiles 80 for non-standard data sets can be used for data sets unrelated to recruiting and employment, including for example, dating or match-making services, real estate listings, classified advertising, used-car listings, etc.

#### Assigning a Level Metric

[0081] In another embodiment, the profile 80 may include a level, which is commensurate with the degree of skill represented by the data set, that is, a level being sought by a job posting or attained by a job seeker. For example, education level 47 represents a metric 90 and job level 49 represents another metric 90.

[0082] The education level 47 is derived from a search of keywords contained in the data set that represent education, such as "high school", "BA", "BS", "MBA", "masters degree", "MD", "PhD", etc. If such keyword are contained in the data set, a metric 90 representing 47 is assigned, which is indicative of the education level. Education levels may include:

EL_HS	High School
EL_BA	Bachelor of Arts
EL_BS	Bachelor of Science
EL_RN	Registered Nurse
EL_MS	Master of Science
EL_MBA	Master of Business
	Administration
EL_MD	Medical Doctor
EL_PHD	Doctor Philosophy
	• •

[0083] The job level 49 may be derived using the education level 47 as an input, as well as by factoring in additional data from which a job level 49 may be assigned. For example, in one embodiment, the job levels 49 may be assigned as "entry", "mid", "senior", or "executive." In addition to the education level 47 described above, another input may include the results of a search identifying other keywords that are indicative of job level 49, for example, "vice president", "vp", "manager", "supervisor", and others. [0084] Beyond keyword searching, the method and system

[0084] Beyond keyword searching, the method and system may also seek other indicia of job responsibility, like managing other people. In one embodiment, upon a job seeker posting his or her resume, the system may ask whether the job seeker has ever managed people, and the resulting answer may be used as an input for evaluating job level 49. Similarly, an input for the appropriate job level 49 may include the numbers of years of experience in a particular field. The number of years of experience can be identified by using regular expressions to identify all the date designations for a particular position on a resume, and calculating the number of years from the date of one position to the date of the prior position.

[0085] Based on one or more of the inputs described above, scores may be tallied to assign a job level 49. In one embodiment, job levels 49 are assigned as either "entry", "mid", "senior", or "executive". In one embodiment, the data set begins with a default job level of "mid" and the inputs described above are used to tally points for the respective levels. For example, the presence of "high school" may generate adding a point to the job level, "entry", whereas the presence of "MBA" may generate adding a point to the job level, "senior". Similarly, having less than two years of experience may generate a point for the job level, "entry", while more than five years experience may generate a point for the job level 49, "senior". Upon tallying all the points based on the various inputs described above, the tallies are compared to assign a job level 49. In one exemplary tally, if the tally for "executive" had more points than "entry" and "senior," the data set would be assigned an "executive" job level 49. If the tallies for "entry" is less than "senior", and "senior" is tied with "executive," a job level 49 of "senior" would be assigned. If the tally for "senior" is two or more than the tally for "entry", the data set may be assigned "senior", whereas any differential less than two will result in an assignment of "mid." In another example, if the tally for "entry" is two or more than the tally for "senior," the data set may be assigned "entry," whereas any differential less than two will result in an assignment of "mid." In the last two examples, requiring at least a twopoint differential between "senior" and "entry" results in a "mid" assignment for any close results, and prevents skewing the assigned job level 49 unless there is a meaningful indication that a job level 49 is higher. In the described embodiment, the default job level 49 when there are no indicia of seniority is "mid."

[0086] As will be understood by a person of ordinary skill in the art, the various levels create a spectrum of experience and skill, and various logic can be used to generate job level 49 assignments that will be beneficial in matching data sets. [0087] Once assigned, the job level 49 may be used in various ways to filter, search and display the output of matched profiles, as will be described next.

#### Matching Profiles

[0088] Once profiles 80 are generated for a series of data sets, the profiles 80 may be leveraged in many ways. Because the data sets—be they resumes 71, job postings 61, or others—are generated into profiles 80 having standardized sets of attributes 70 and organized in a standard ranking or scaling scheme, disparate data sets can be efficiently compared, grouped, and ranked. One use for the profiles 80 is to match prospective job seekers having respective resumes 71 to a particular job posting 61. Conversely, the profiles 80 can be used to match prospective job postings 61 to a particular job seeker having a resume 71. In addition, a job seeker who is interested in a particular job posting 61 can leverage that particular job posting profile 80 to search for other job postings that are similar to the job posting of interest. Similarly, employers can leverage the profile 80 of a particular job seeker's resume to search for other job seekers whose resumes are similar to the resume of interest. [0089] Once the profiles 80 of the data sets are generated. there are many ways known in the art to conduct searches and generate matches between one profile 80a of a data set to find the closest matching other profiles 80b,  $80c \dots 80n$ . In one embodiment, the system converts each profile 80 into a series of numerical values, where each available attribute 70 is assigned a unique numeric integer value or identifier (e.g., "ID"). Such numeric IDs are illustrated in FIG. 12. Converting the text value of each attribute 70a, 70b, 70c, etc. into a numeric value increases the efficiency of commercially available search engines. Accordingly, each of the attributes 70a-70n in a profile 80 can be converted into its assigned numeric value, for example, the attribute 70 ".net" shown in FIG. 12 may be assigned numeric value "80 4685." Because integer values can comprise significantly smaller amounts of data than full ASCII character words, this translation can speed up the processing time for the search engine. This conversion from text character to integer value can be performed while the profile 80 is being created or after it is done.

[0090] One example of a suitable search engine 60 for use in generating searches to match various profiles 80 is offered

9

by Fast Search & Transfer ASA. One search engine solution offered by Fast and suitable for use with an embodiment of this invention is FAST Data Search<sup>TM</sup>.

[0091] To conduct a candidate search of a plurality of resumes 71a, 71b, 71c, . . . 71n based on a profile 80a for a job posting, (for ease of reference, the "subject profile 80"), the subject profile 80a can be readily converted into a search query for input into the search engine 160 to conduct a search of a plurality of resume profiles 80 (the "target profiles 80b-80n").

[0092] The search can optionally be weighted to further enhance the search results. In one embodiment, the query based upon the subject profile 80a can be created by weighting each attribute 70a-70n according to its ranking within profile 80a, so that the highest ranking attribute 70a is weighted highest in the search, the second highest-ranking attribute 70b is weighted second highest, and so on through all the attributes 70n.

[0093] Similarly, it is beneficial to weight the target profiles 80b-80n to enhance the search results. While the search query can include as many attributes 70 as desired, it is more practical and efficient to limit the number of attributes 70 that are separately weighted among the target profiles 80b-80n; otherwise, the amount of data for all the attributes 70 associated with all the target profiles 80b-80n would slow the search engine. Accordingly, the attributes 70 of the target profiles 80b-80n may be weighted in tiers. If each target profile 80 (e.g., resume profile) contains a ranked list of, for example, forty-three separate attributes 70, the forty-three attributes 70 can be weighted according to the following tiers. The first 10 attributes can each be assigned a weight of, for example, 5000 points, while attributes 11-20 may each be assigned a weight of, for example, 700 points, and attributes 21-43 may be assigned a weight of, for example, 10 points.

[0094] The query generated from the subject profile 80a will then cause the search engine 160 to return a list of target profiles 80b-80n (in the foregoing example, resume profiles) in a ranked order by how closely the weighted target profiles 80b-80n match the subject profile query. These are matching profiles 165, as identified in FIG. 18.

[0095] The system can optionally provide even further refinement of the search results by using a recommendation engine 155, as illustrated in FIG. 18, to select recommended profiles 175 from the matching profiles 165. The recommendation engine 155 may eliminate target profiles 80b-80n that fail to meet a minimum threshold matching score or modify the ranking of the profiles 80b-80n. In other words, the subject profile 80a may be compared against each target profile 80b-80n retrieved by the search engine and through the following process matching scores may be assigned to each target profile 80b-80n. Specifically, the system checks each attribute 70 in the subject profile 80a against each target profile 80b-80n retrieved by the search engine and, using a suitable formula that will be described below, assigns points corresponding to how closely the attributes 70 in the subject profile 80a correlate with the attributes 70 in the target profile 80b-80n. An attribute 70 that is listed in both the subject profile 80a and a target profile 80b-80n can be referred to as a "matching attribute" 150. The degree with which a subject profile 80a matches a target profile 80b-80nwill depend on the number of matching attributes 150 and the relative ranking of each matching attribute 150 within the subject profile 80a and a target profile 80x. For example,

a target profile **80***x*, shown in FIG. **19**, whose lowest-ranked attribute matches the highest-ranked attribute of the subject profile **80***a* will likely be less relevant than a target profile **80***y*, whose highest-ranked attribute matches the highest-ranked attribute of the subject profile **80***a*.

[0096] Accordingly, in one embodiment, points are assigned to each target profile 80b-80n based on how high the matching attributes 150 for both the subject profile 80a and the target profile 80x rank. For example, the system checks each attribute 70x in the subject profile 80a to determine whether the same attribute 85 is also included in the target profile 80x. For attributes that do not match, no points are assigned, and the system moves to the next attribute 70 in the subject profile 80a. If the system finds a matching attribute 150, it assigns points based on how high the matching attribute 150 is ranked in the subject profile **80***a*. The system runs through all the attributes in the subject profile 80a and compiles the total points based on the ranking of the matching attributes 70 within the subject profile 80a. Obviously, if only the five bottom ranked attributes 70 in the subject profile 80 matched the attributes in the target profile 80x, there may not be a very good match, even if such five matching attributes 150 were ranked high in the target profile 80x. As a result, the system then repeats the process, but this time assigns points based on how high the matching attributes 150 are ranked in the target profile 80x. Then the points assigned for the subject profile 80a and the points for the target profile 80x are added together for a total matching score.

**[0097]** To convert the highest rank (which is typically represented by the lowest number, i.e., first or 1) to the highest points, the system assigns the total number of attributes in the subject profile 80a, minus the rank of each matching attribute 150. For example, assuming there are 50 attributes in the subject profile 80, if a matching attribute 150 is the highest ranking attribute in the target profile 80x, the target profile 80x would be assigned points equal to 50-1=49.

[0098] In one embodiment, to enhance the screening and create even more differentiation between the rankings, the results are then squared. So in the last example,  $(50-1)^2=49^2=2401$  would be assigned to the target profile 80x. The system may then search for the next matching attribute 150 and continue assigning points until all the matching attributes 150 were assigned points. The total points will identify how high the matching attributes 150 were ranked in the target profile 80x. Then the system repeats the tally by assigning points for how high the matching attributes 150 ranked in the subject profile 80a.

[0099] This can be illustrated by an example, as shown in FIG. 19. Assume that there are five matching attributes 150 between a subject profile 80a and a target profile 80x, and for simplicity, assume that both the target profile and subject profile each have 50 attributes. Further assume that the matching attributes 150 were the top five ranked attributes in the subject profile 80a. In this case, the score would be  $(50-1)^2+(50-2)^2+(50-3)^2+(50-4)^2+(50-5)^2=11055$ . If the five matching attributes 150 were ranked 46-50 (at the bottom) in target profile 80x, the totals would be  $(50-50)^2+(50-49)^2+(50-48)^2+(50-47)^2+(50-46)^2=0+1+4+9+$ 

16=30. To further enhance the matching results, the two scores can be added together for a total score of 11085. In contrast, compare to another example using a target profile 80y having the same matching attributes 150 as target profile

80x, but where they are ranked in the top five on the subject profile 80a. This would yield a score of 11055, so when the two scores were added together, the total score would be 22110.

[0100] This calculation can be completed for each target profile 80b-80n retrieved by the search engine. Finally, the point totals are normalized by dividing the score for each target profile 80b-80n by a perfect score for the subject profile 80a, where a perfect score would be the matching score that would be yielded by a profile that exactly matched the subject profile 80a. Using this scoring method, it has been found that matching scores of less than 18% yield unsatisfactory results. Thus, target profiles 80 yielding a match score less than a preset threshold may be optionally discarded. It should be understood that this threshold can be changed or varied to optimal values without departing from the invention.

[0101] While this describes one method for identifying how closely a target profile matches a subject profile, many other methods can be employed without departing from the invention. For example, the ranking of each matching attribute within the subject profile and the target profile can be compared to determine the relative degree of similarity between the two profiles. For example, if a matching attribute is ranked third in the subject profile and ranked 34<sup>th</sup> in the target profile, the matching attribute could be assigned a score of the difference, i.e., 34–3=31, and this score can be used to screen or weight the importance of the matching attribute. So, for example, the system could optionally discard any matching attributes that are not within a predetermined number of ranking from each other.

[0102] The same technique can be used to input a resume profile 80 into the search engine and generate job posting profiles. Indeed, the system can be used to create matches between the profiles created for any data sets. For example, the system could be used to compare individual profiles for a personal match-making service, real estate listings, classified advertising, used car listings, etc.

[0103] As will be appreciated by those of skill in the art, the present system may be used to generate matches between various data sets. For example, upon uploading a new resume, a user could be provided with a list of suitable job postings. Similarly, upon an employer uploading a job posting could be provided a list of suitable resumes based on the output of the system and method described herein. In addition, a job seeker who has found one job posting of interest could request that the system find other job postings that are similar to the job posting of interest. Conversely, an employer who finds a candidate of interest could request the system generate a search using the system and method disclosed herein to provide a list of similar candidate resumes.

#### Recommendation Page

**[0104]** Once matching profiles are selected, they can be further arranged or categorized in groups to assist the job seeker or job poster in selecting the most appropriate matches.

[0105] For example, in one embodiment, to further enhance searching and matching capabilities, job levels 49 may be used to rank, organize or filter the data set search results. For example, upon searching for job postings that match a particular job seeker's resume, the resulting job postings could be presented in groups according to discrete

job levels. Similarly, upon searching for resumes that match a particular job posting, the resulting resumes may be presented in groups according to job levels, such as "entry-level," "mid-level," "senior," and "executive." Further, the system may optionally filter out the results to limit the results only to matching job levels. In yet another embodiment, searches may permit a user to specify a particular job level to match the interests of a given job seeker or job poster.

[0106] In addition, matching profiles may be organized by "fresh" for more recent postings, "close" for ranking profiles that are located geographically nearby, "region" for ranking profiles by geographical region, or "relevant" for ranking profiles by how closely the match.

[0107] In another embodiment, the target profiles can be organized by various topics within the subject profile. In other words, attributes contained in a profile may be identified and grouped together in order to conduct searches that are focused on specific topics. In one embodiment, each attribute in the subject profile is compared to every other attribute in the profile and uses the pods 125 to determine how related (if at all) the two attributes are. Each attribute is then paired with its highest matching other attribute to form "dynamic pods" containing two attributes. To ensure that attributes have some minimum level of relatedness, thresholds can be set. The system then takes another pass comparing each dynamic pod to each other using a lower threshold, and the highest matching dynamic pods are combined to form larger pods. This comparison process continues until an optimum dynamic-pod size is reached. For example, the system can be configured to continue iterations until there is an optimum number of attributes within each dynamic pod (e.g., 4-8) or until there is an optimum number of dynamic pods (e.g., 3-5). In further enhancement, the system may optionally add attributes to the dynamic pods by adding attributes that are highly related based on the pods 125, even where the related attribute is not actually in the profile. This can create more robust results based on the dynamic pods, as will be described next.

[0108] Once the dynamic pods are generated, user may seek profiles that match only the attributes captured within the dynamic pod. For example, the dynamic pod may be displayed in a tab on a recommendation page, and by clicking on the tab, the system can fire a new search seeking for profiles matching just the attributes listed in the dynamic pods. This search will generate more focused profile search results.

[0109] While specific embodiments of the present invention have been described in detail, it will be appreciated by those skilled in the art that various modifications and alternatives to those details could be developed in light of the overall teachings of the disclosure. For example, the processes described with respect to computer executable instructions can be performed in hardware or software without departing from the spirit of the invention. Furthermore, the order of all steps disclosed in the figures and discussed above has been provided for exemplary purposes only. Therefore, it should be understood by those skilled in the art that these steps may be rearranged and altered without departing from the spirit of the present invention. In addition, it is to be understood that all patents discussed in this document are to be incorporated herein by reference in their entirety. Accordingly, the particular arrangement disclosed is meant to be illustrative only and not limiting as to the scope of the invention which is to be given the full breadth of the appended claims and any equivalents thereof.

- 1. A computer-driven method for automatically assessing the similarity between a subject non-standardized data set and at least a first target non-standardized data set, the method comprising the steps of:
  - receiving a first subject data file containing the subject non-standardized data set;
  - using a computer processor programmed to manipulate non-standardized data sets, electronically generating a second subject data file containing a standardized subject profile, wherein the standardized subject profile is comprised of a plurality of subject attributes that are collectively representative of the information contained within the first subject data file;
  - receiving to the computer processor a first target data file containing the first target non-standardized data set;
  - using the computer processor programmed to manipulate non-standardized data sets, electronically generating a second target data file containing a standardized first target profile, wherein the standardized first target profile is comprised of a plurality of target attributes that are collectively representative of the information contained within the first target data file;
  - rank ordering each individual attribute from the plurality of subject attributes against the remaining subject attributes based on how well the individual attribute is representative of the entire subject non-standardized data set:
  - rank ordering each individual attribute from the plurality of target attributes against the remaining target attributes based on how well the individual attribute is representative of the entire first target non-standardized data set;
  - identifying all first target matching attributes, wherein each first target matching attribute is comprised of a subject attribute from the plurality of subject attributes and an identical target attribute from the plurality of target attributes comprising the first target profile;
  - assigning first target points to the subject profile based on the rank order of all subject attributes from the plurality of subject attributes that are components of a first target matching attribute;
  - assigning first target points to the first target profile based on the rank order of all target attributes from the plurality of target attributes comprising the first target profile that are components of a first target matching attribute; and
  - adding the first target points assigned to the subject profile and the first target profile to determine a first target total matching score representative of the similarity between the subject non-standardized data set and the first target non-standardized data set.
- 2. The method of claim 1, wherein the criterion indicative of the relative ability of each individual attribute from among the plurality of subject attributes to accurately characterize the subject non-standardized data set is the location within the subject non-standardized data set at which the information represented by the attribute from among the plurality of subject attributes to be rank ordered first appears.
- 3. The method of claim 1, wherein the criterion indicative of the relative ability of each individual attribute from the plurality of subject attributes to accurately characterize the subject non-standardized data set is the number of times that

- the information represented by an attribute to be rank ordered is repeated within the subject non-standardized data set.
- **4**. The method of claim **1**, wherein the subject non-standardized data set represents a job description and the first target non-standardized data set represents a resume of a job applicant.
- **5**. The method of claim **1**, wherein the subject non-standardized data set represents a resume of a job applicant and the first target non-standardized data set represents a job description.
- **6**. The method of claim **1**, wherein the first target non-standardized data set represents a listing type from the set of listing types consisting of: real estate listings, classified advertisement listings, used car listings, and dating service listings.
  - 7. The method of claim 1, further comprising the steps of: receiving a third target data file containing a second target non-standardized data set;
  - using the computer processor programmed to manipulate non-standardized data sets, electronically generating a fourth target data file containing a standardized second target profile, wherein the standardized second target profile is comprised of a plurality of target attributes that are collectively representative of the information contained within the third target data file;
  - rank ordering the plurality of target attributes comprising the second target profile based on at least a criterion indicative of the relative ability of each individual attribute from the plurality of target attributes comprising the second target profile to accurately characterize the second target non-standardized data set;
  - determining all second target matching attributes, wherein each second target matching attribute is comprised of a subject attribute from the plurality of subject attributes and an identical target attribute from the plurality of target attributes comprising the second target profile;
  - assigning second target points to the subject profile based on the rank order of any subject attribute from among the plurality of subject attributes that is a component of a second target matching attribute;
  - assigning second target points to the second target profile based on the rank order of any target attribute from the plurality of target attributes comprising the second target profile that is a component of a second target matching attribute; and
  - adding the second target points assigned to the subject profile and the second target profile to determine a second target total matching score representative of the similarity between the subject non-standardized data set and the second target non-standardized data set.
- **8**. The method of claim **7**, further comprising the step of recommending the first target non-standardized data set as a better match for the subject non-standardized data set than the second target non-standardized data set if the first target total matching score is greater than the second target total matching score.
- **9**. The method of claim **1**, wherein the number of first target points assigned to the subject profile for a given subject attribute from among the plurality of subject attributes that is a component of a first target matching attribute is equivalent to the total number of subject attributes comprising the plurality of subject attributes minus the rank order of the given subject attribute.

- 10. The method of claim 1, wherein the number of first target points assigned to the subject profile for a given subject attribute from among the plurality of subject attributes that is a component of a first target matching attribute is equivalent to the square of the total number of subject attributes comprising the plurality of subject attributes minus the rank order of the given subject attribute.
- 11. A job applicant selection system for evaluating a resume of a job applicant based on a score that is indicative of the job applicant's fit for a job having a non-standardized job description, said job applicant selection system comprising:
  - a profile generation module to:
    - convert the resume into a target profile comprised of a plurality of target attributes ranked in order of importance to the resume, each of the plurality of target attributes having a target rank order based at least partially upon a relationship between each one of the target attributes with respect to each of the other target attributes, and
    - convert the non-standardized job description into a subject profile comprised of a plurality of subject attributes ranked in order of importance to the job, each of the plurality of subject attributes having a subject rank order based at least partially upon a relationship between each one of the subject attributes with respect to each of the other subject attributes;
  - a comparison module to compare the target profile to the subject profile to identify matched attributes; and
  - a scoring module to:
    - assign numbers to each matched attribute in the target profile based on the target rank order of the matched attribute within the target profile and, separately, to each matched attribute in the subject profile based on the subject rank order of the matched attribute within the subject profile; and
    - sum the numbers assigned to all matched attributes in both the target profile and the subject profile to arrive at a total matching score.
- 12. The system of claim 11, wherein the scoring module s to:
- compare the total matching score to a minimum threshold matching score; and
- in response to the total matching score being less than the minimum threshold matching score, discard the resume.
- 13. The system of claim 11, wherein the scoring module is to:
  - normalize the total matching score;
  - compare the normalized total matching score to a minimum threshold matching score; and
  - in response to the normalized total matching score being less than the minimum threshold matching score, discard the resume.
- 14. The system of claim 13, wherein to normalize the total matching score, the scoring module is to divide the total matching score by a objective total matching score, the

- objective total matching score being the total matching score that would be calculated if the resume were to exactly matched the non-standardized job description.
- 15. The system of claim 13, wherein the number assigned to each matched attribute in the target profile is equivalent to the total number of target attributes comprising the plurality of target attributes minus the rank order of the given target attribute.
- 16. The system of claim 13, wherein the number assigned to each matched attribute in the target profile is equivalent to the square of the total number of target attributes comprising the plurality of target attributes minus the rank order of the given target attribute.
  - 17. The system of claim 13, wherein:
  - the profile generation module is to convert a second resume into a second target profile comprised of a plurality of second target attributes ranked in order of importance to the second resume, each of the plurality of second target attributes having the target rank order based at least partially upon a relationship between each one of the second target attributes with respect to each of the other second target attributes;
  - the comparison module is to compare the second target profile to the subject profile to identify matched attributes; and
  - the scoring module is to:
    - assign second numbers to each matched attribute in the second target profile based on the target rank order of the matched attribute within the second target profile and, separately, to each matched attribute in the subject profile based on the subject rank order of the matched attribute within the subject profile; and
    - sum the second numbers assigned to all matched attributes in both the second target profile and the subject profile to arrive at a second total matching score.
- 18. The system of claim 17, wherein the scoring module is to assign ranked orders to the resume and the second resume based on the relative difference between the total matching score and the second total matching score.
- 19. The system of claim 17, wherein the scoring module is to normalize the total matching score and the second total matching score based on a objective total matching score, the objective total matching score being the total matching score that would be calculated if the resume were to exactly matched the non-standardized job description.
- 20. The system of claim 19, wherein the scoring module is to:
  - assign ranked orders to the resume and the second resume based on the relative difference between the normalized total matching score and the normalized second total matching score; and
  - recommend one of the resume or the second resume based on which one of the resume and the second resume that has a higher ranked order.

\* \* \* \* \*