



(12) **United States Patent**
Pratt et al.

(10) **Patent No.:** **US 9,820,527 B2**
(45) **Date of Patent:** **Nov. 21, 2017**

(54) **RAPID-ENTRY FOOTWEAR WITH REBOUNDED FIT SYSTEM**

(71) Applicant: **FAST IP, LLC**, Alpine, UT (US)

(72) Inventors: **Michael James Pratt**, Alpine, UT (US); **Steven Hermann**, Saratoga Springs, UT (US); **Seth Lytle**, Pleasant Grove, UT (US); **James Kuangcheng Tsen**, Needham, MA (US)

(73) Assignee: **FAST IP, LLC**, Alpine, UT (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **15/493,582**

(22) Filed: **Apr. 21, 2017**

(65) **Prior Publication Data**

US 2017/0303632 A1 Oct. 26, 2017

Related U.S. Application Data

(60) Provisional application No. 62/368,497, filed on Jul. 29, 2016, provisional application No. 62/326,650, filed on Apr. 22, 2016.

(51) **Int. Cl.**

- A43B 1/10* (2006.01)
- A43B 11/00* (2006.01)
- A43B 23/28* (2006.01)
- A43B 3/24* (2006.01)
- A43B 23/02* (2006.01)
- A43B 23/26* (2006.01)
- A43B 23/08* (2006.01)

(52) **U.S. Cl.**

CPC *A43B 3/248* (2013.01); *A43B 23/027* (2013.01); *A43B 23/028* (2013.01); *A43B 23/0275* (2013.01); *A43B 23/088* (2013.01); *A43B 23/26* (2013.01); *A43B 23/28* (2013.01)

(58) **Field of Classification Search**

CPC *A43B 3/101*; *A43B 3/102*; *A43B 11/00*; *A43B 23/08*; *A43B 23/088*; *A43B 23/10*; *A43B 23/105*; *A43B 3/122*; *A43B 23/26*
USPC 36/58.5, 58.3
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

827,330 A *	7/1906	Tillson	<i>A43B 23/28</i>
				36/58.5
863,549 A	8/1907	Metz		
1,081,678 A	12/1913	Langerak		

(Continued)

FOREIGN PATENT DOCUMENTS

CN	2438353	7/2001
CN	1403041	3/2003

(Continued)

OTHER PUBLICATIONS

Restriction Requirement dated Jan. 2, 2015 in U.S. Appl. No. 13/509,780.

(Continued)


Primary Examiner — Katharine Gracz

(74) *Attorney, Agent, or Firm* — Snell & Wilmer L.L.P.

(57) **ABSTRACT**

A rapid-entry and rebounding fit shoe having one or both of a rapid-entry heel element and a rapid-entry tongue element and both snap back for fit. The rapid-entry shoe directs a user's foot into or otherwise accommodates a user's foot with respect to, a shoe opening, and thereafter secures a rear portion of rapid-entry shoe about a user's heel as well as forefoot.

18 Claims, 14 Drawing Sheets

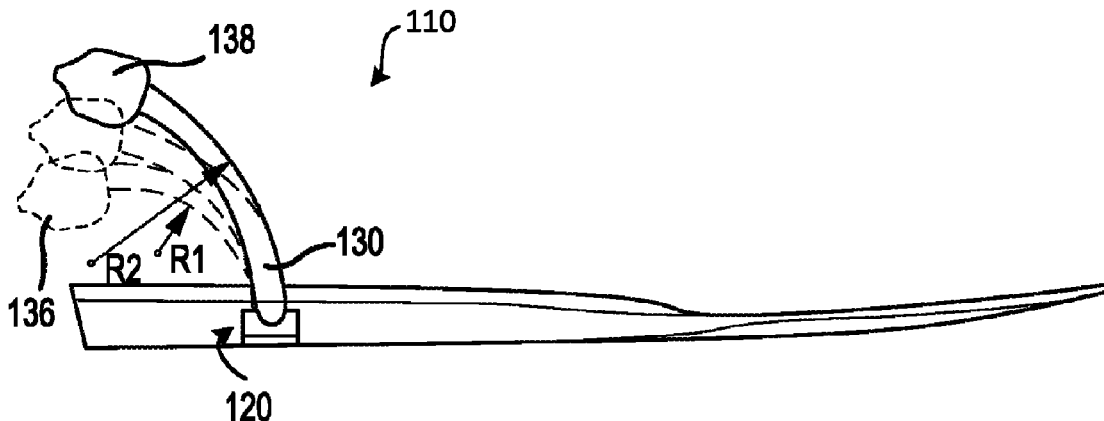

(56)

References Cited

U.S. PATENT DOCUMENTS

1,494,236 A * 5/1924 Greathouse A43B 3/18
36/58.5

1,686,175 A 10/1928 Read
2,069,752 A 8/1935 Dorr
2,450,250 A 3/1945 Napton
2,452,502 A 4/1945 Tarbox
2,736,110 A 2/1956 Hardimon
2,920,402 A 1/1960 Minera
3,146,535 A 9/1964 Owings
4,489,509 A 12/1984 Libit
4,972,613 A * 11/1990 Loveder A43B 5/00
36/105

5,054,216 A 10/1991 Lin
5,181,331 A 1/1993 Berger
5,184,410 A 2/1993 Hamilton
5,282,327 A 2/1994 Ogle
5,351,583 A 8/1994 Hallenbeck
5,371,957 A 12/1994 Gaudio
5,467,537 A 11/1995 Aveni et al.
5,481,814 A 1/1996 Spencer
5,842,292 A * 12/1998 Siesel A43B 23/28
36/58.5

6,189,239 B1 2/2001 Gasparovic et al.
6,378,230 B1 4/2002 Rotem et al.
6,684,533 B1 2/2004 Su
6,938,361 B2 9/2005 Su
7,103,994 B2 9/2006 Johnson
7,225,563 B2 * 6/2007 Chen A43B 3/26
36/10

7,439,837 B2 * 10/2008 McDonald A43B 3/126
36/11.5

7,685,747 B1 3/2010 Gasparovic et al.
7,793,438 B1 9/2010 Busse et al.
7,823,299 B1 * 11/2010 Brigham A43B 3/105
36/100

7,975,403 B2 7/2011 Mosher
D648,512 S * 11/2011 Schlageter D2/896
8,065,819 B2 11/2011 Kaufman
8,161,669 B2 4/2012 Keating
8,769,845 B2 * 7/2014 Lin A43B 9/02
36/138

2002/0144434 A1 * 10/2002 Farys A43B 23/26
36/54

2005/0039348 A1 2/2005 Raluy et al.
2007/0074425 A1 4/2007 Leong
2008/0086911 A1 4/2008 Labbe
2008/0307673 A1 12/2008 Johnson

2011/0016751 A1 1/2011 Somerville
2011/0146106 A1 6/2011 Kaufman
2012/0317839 A1 12/2012 Pratt
2013/0185959 A1 7/2013 Coleman
2013/0219747 A1 8/2013 Lederer
2015/0305432 A1 10/2015 Wiens

FOREIGN PATENT DOCUMENTS

CN 201005111 1/2008
DE 19534249 3/1997
DE 19611797 10/1997
DE 29809404 8/1998
DE 10247163 10/2002
DE 102004005288 8/2005
EP 1059044 12/2000
GB 2517399 8/2013
JP 181910 6/1989
JP 2001149394 6/2001
JP 2006055571 3/2006
WO 2007080205 7/2007

OTHER PUBLICATIONS

Office Action dated Apr. 10, 2015 in U.S. Appl. No. 13/509,780.
Final Office Action dated Oct. 27, 2015 in U.S. Appl. No. 13/509,780.
Office Action dated Apr. 13, 2016 in U.S. Appl. No. 13/509,780.
Final Office Action dated Oct. 11, 2016 in U.S. Appl. No. 13/509,780.
Advisory Action dated Mar. 30, 2017 in U.S. Appl. No. 13/509,780.
Office Action dated May 23, 2014 in Chinese Application No. 201080061183.8.
Office Action dated Oct. 15, 2013 in Japanese Application No. 2012-539036.
Office Action dated May 13, 2014 in Japanese Application No. 2012-539036 (English translation not available).
Notice of Allowance dated Mar. 3, 2015 in Japanese Application No. 2012-539036.
International Search Report and Written Opinion dated Feb. 23, 2011 in PCT Application No. PCT/US2010/056608.
International Search Report and The Written Opinion dated Aug. 22, 2017 in PCT Application No. PCT/US2017/028774.
Office Action dated Nov. 7, 2013 in Canadian Application No. 2,784,281.
Office Action dated May 19, 2017 in U.S. Appl. No. 13/509,780.

* cited by examiner

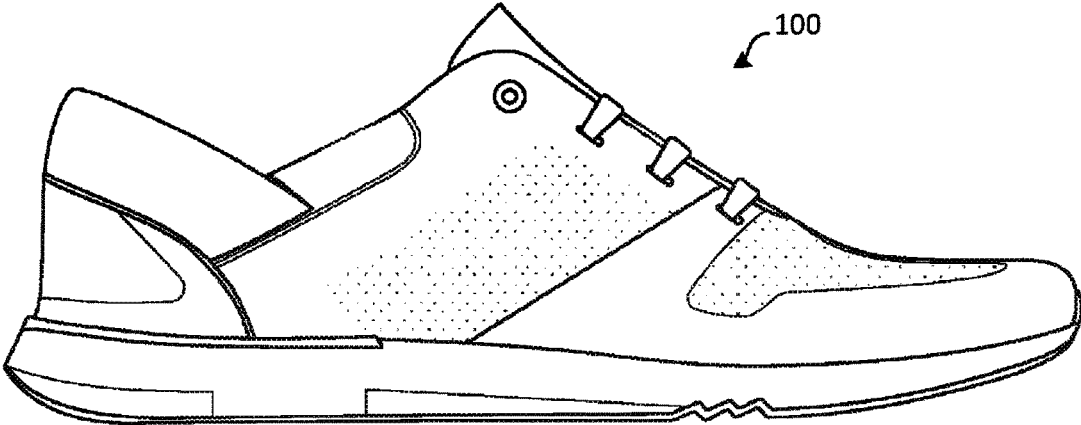


FIG. 1A

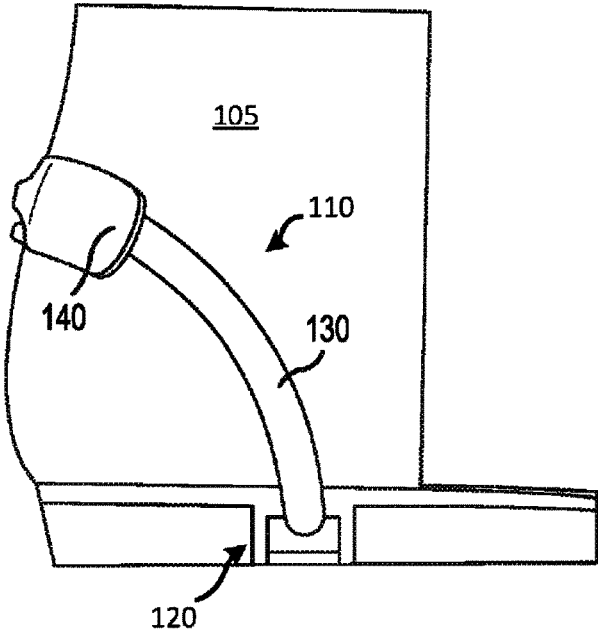


FIG. 1B

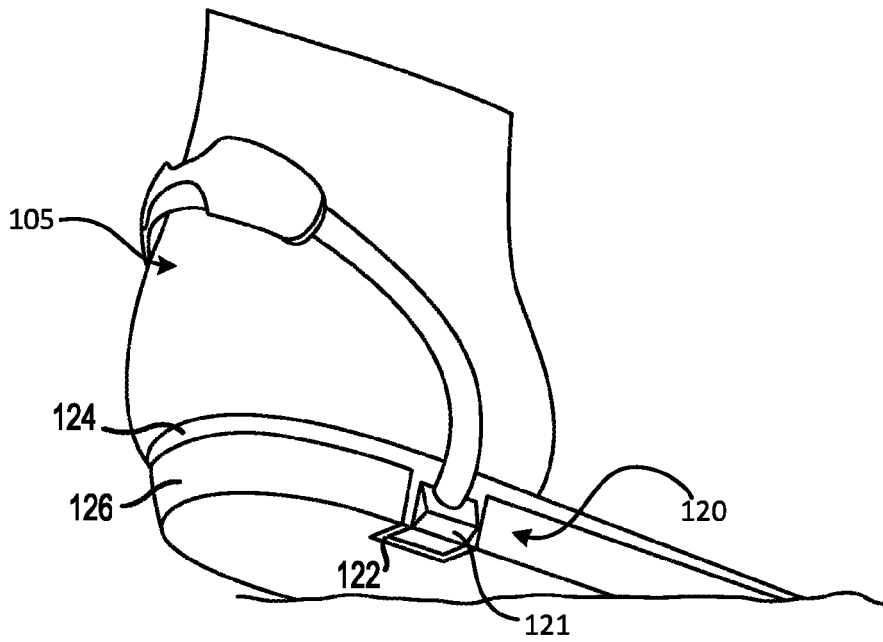


FIG. 2A

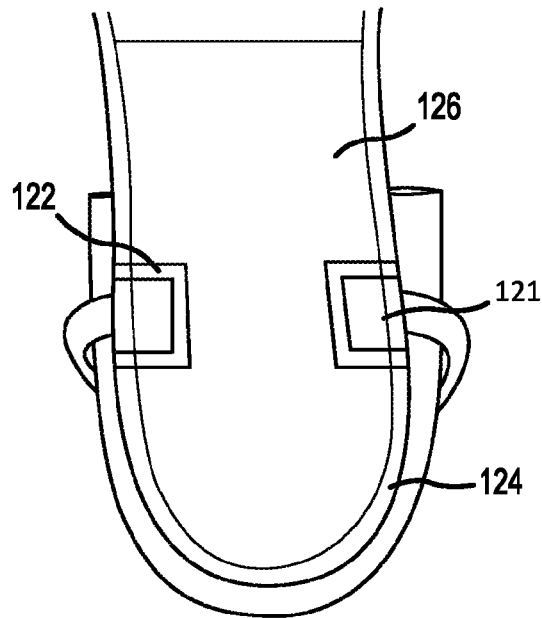


FIG. 2B




FIG. 3A

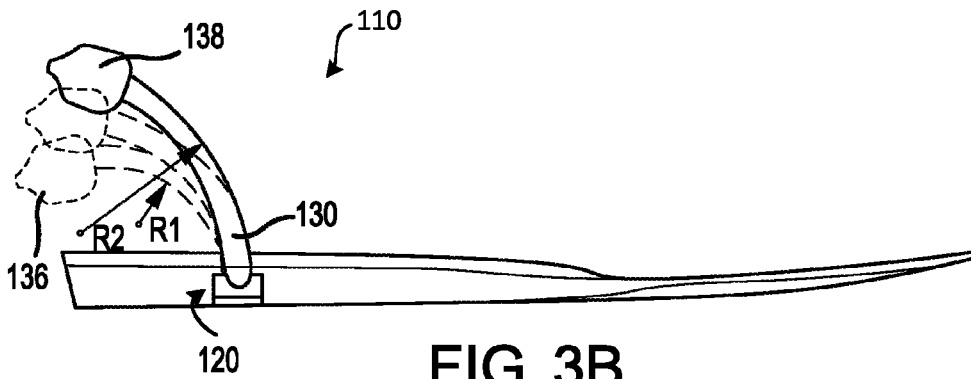


FIG. 3B

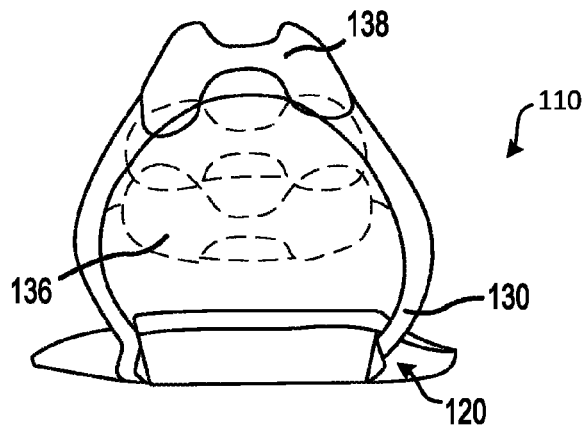


FIG. 3C

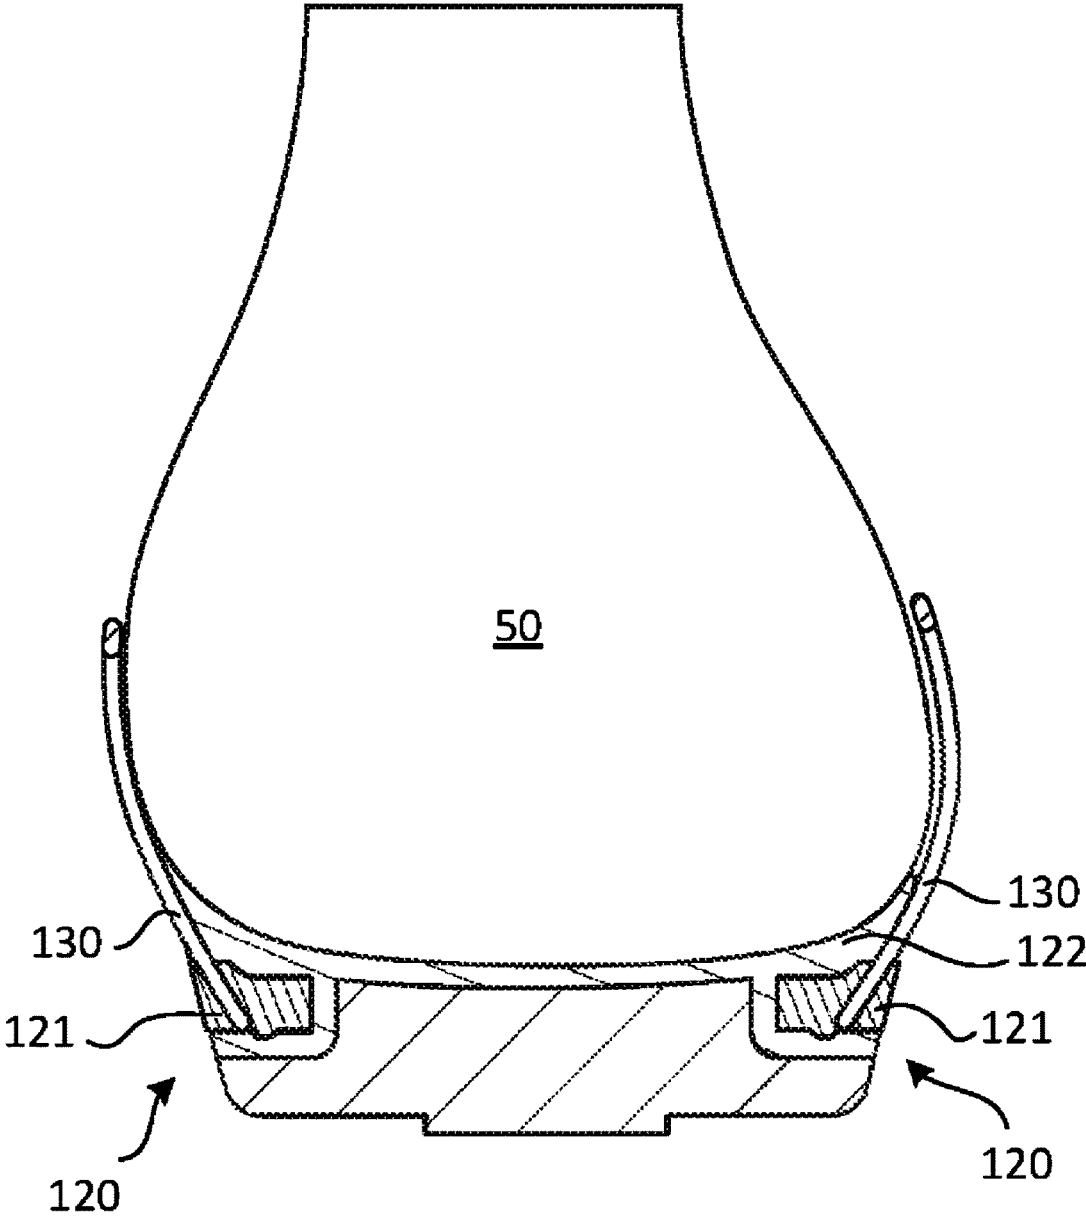


FIG. 3D

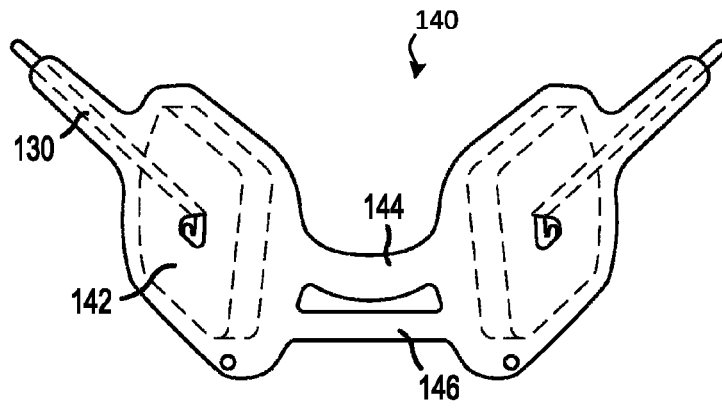


FIG. 4A

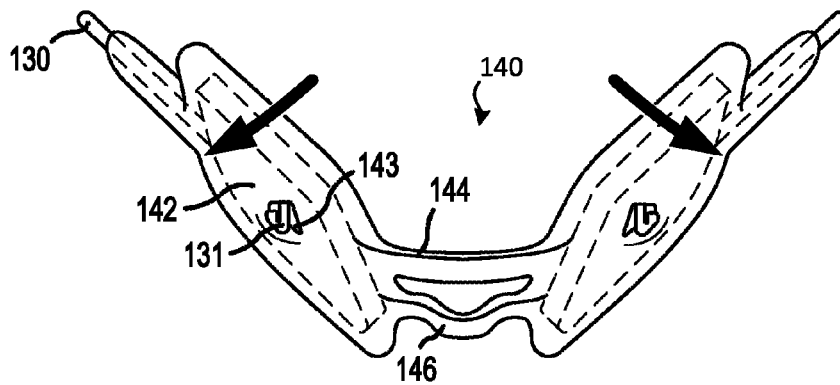


FIG. 4B

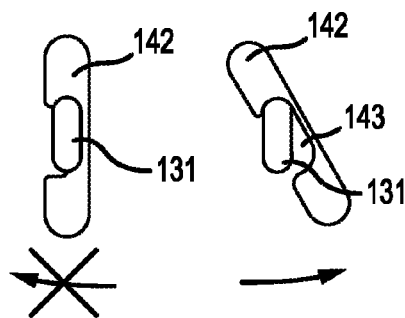


FIG. 4C

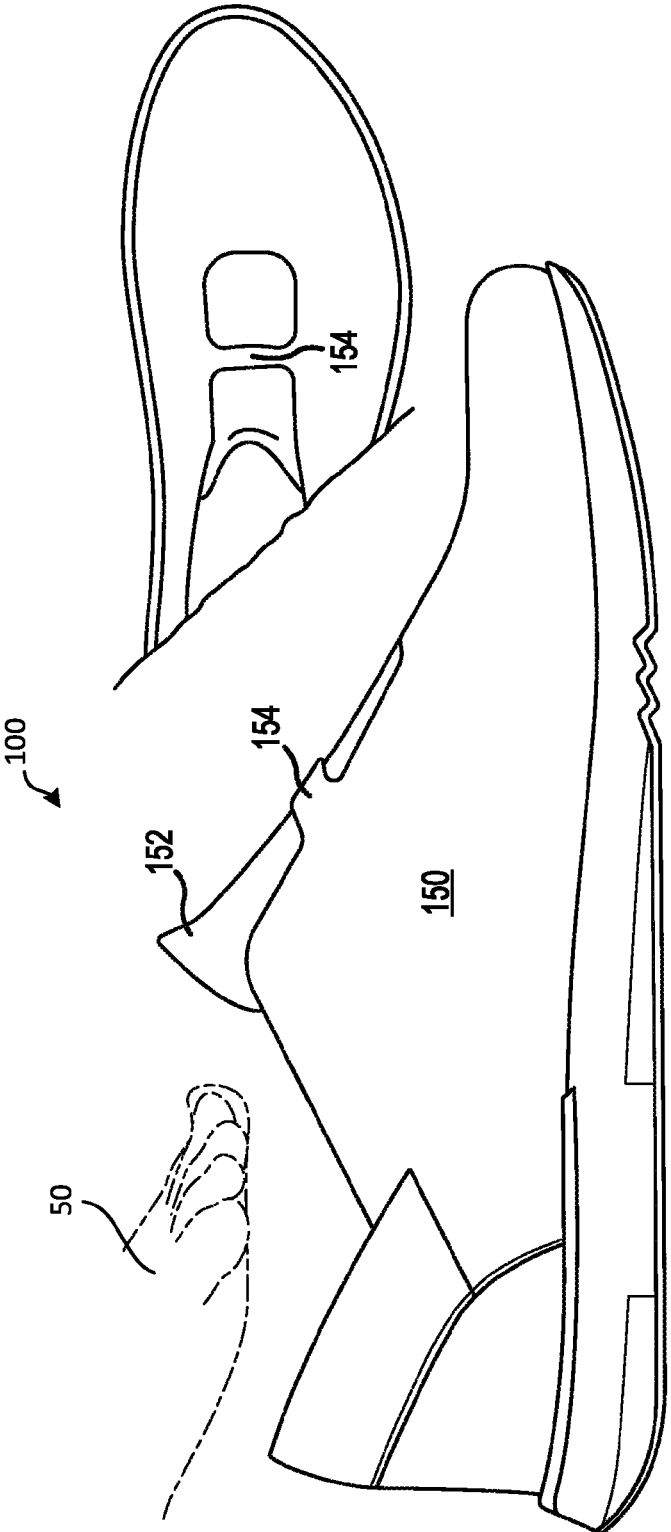


FIG. 5

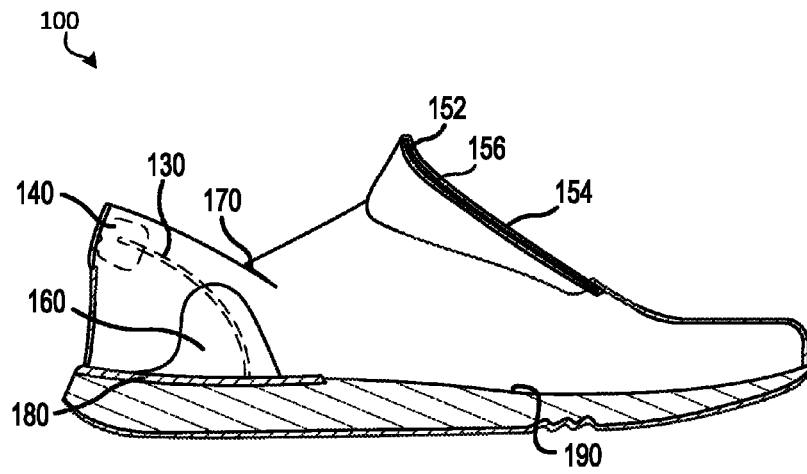


FIG. 6A

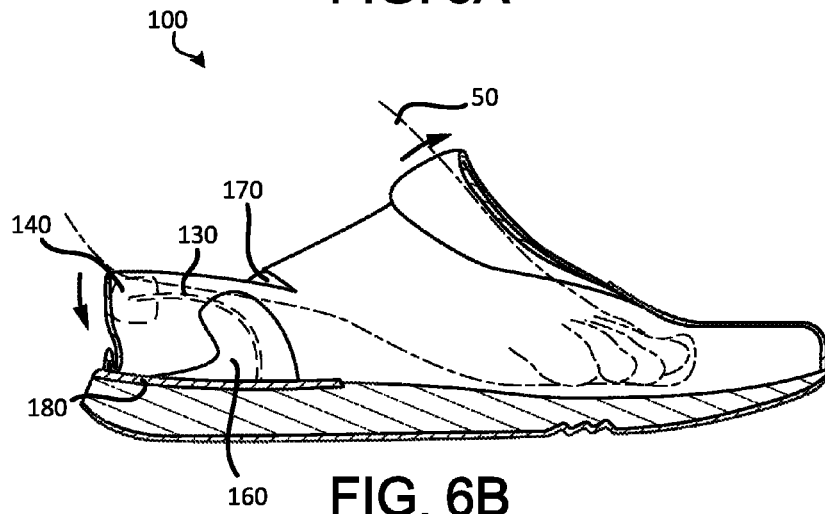


FIG. 6B

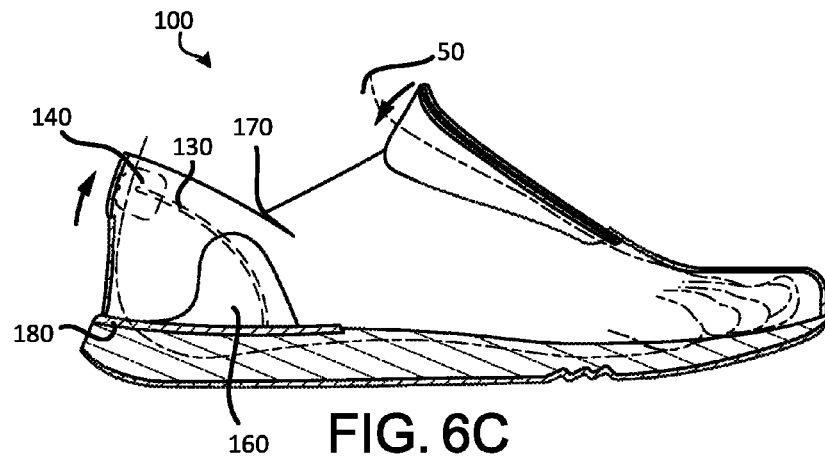


FIG. 6C

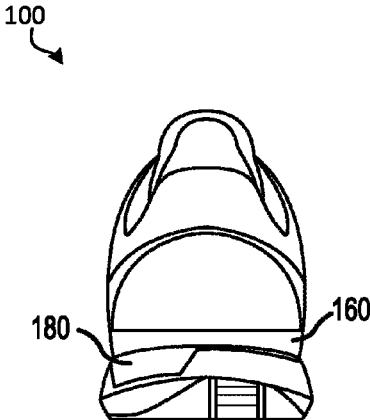


FIG. 6D

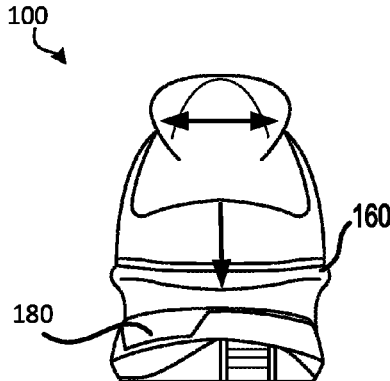


FIG. 6E

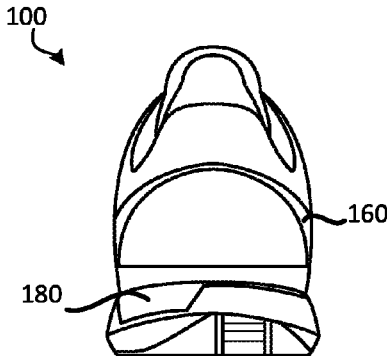


FIG. 6F

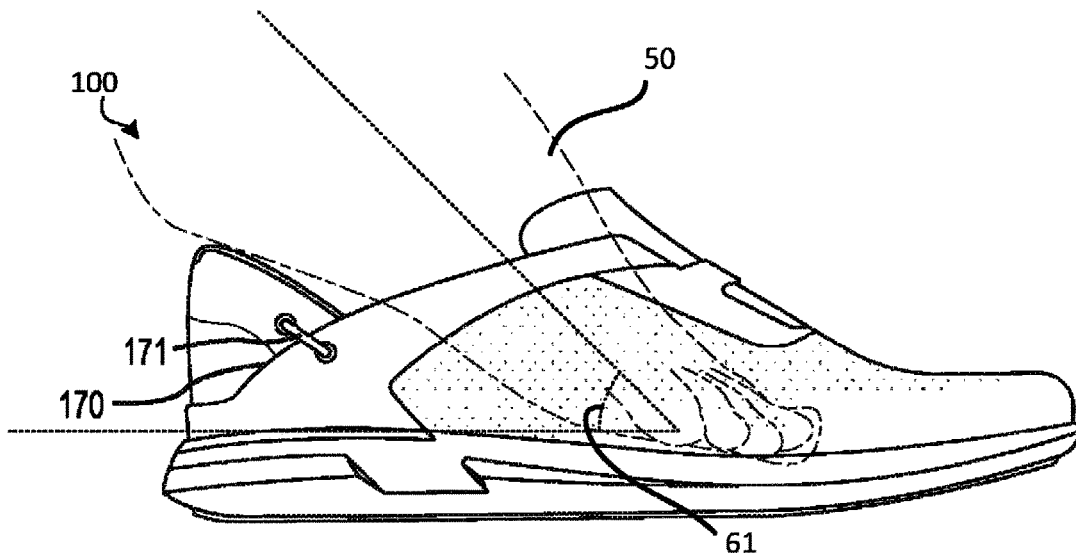


FIG. 7A

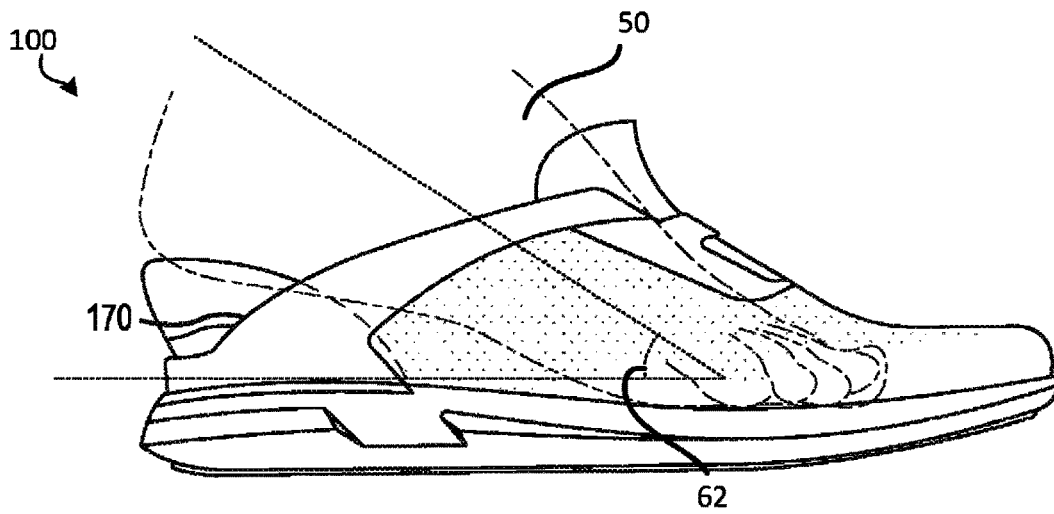


FIG. 7B

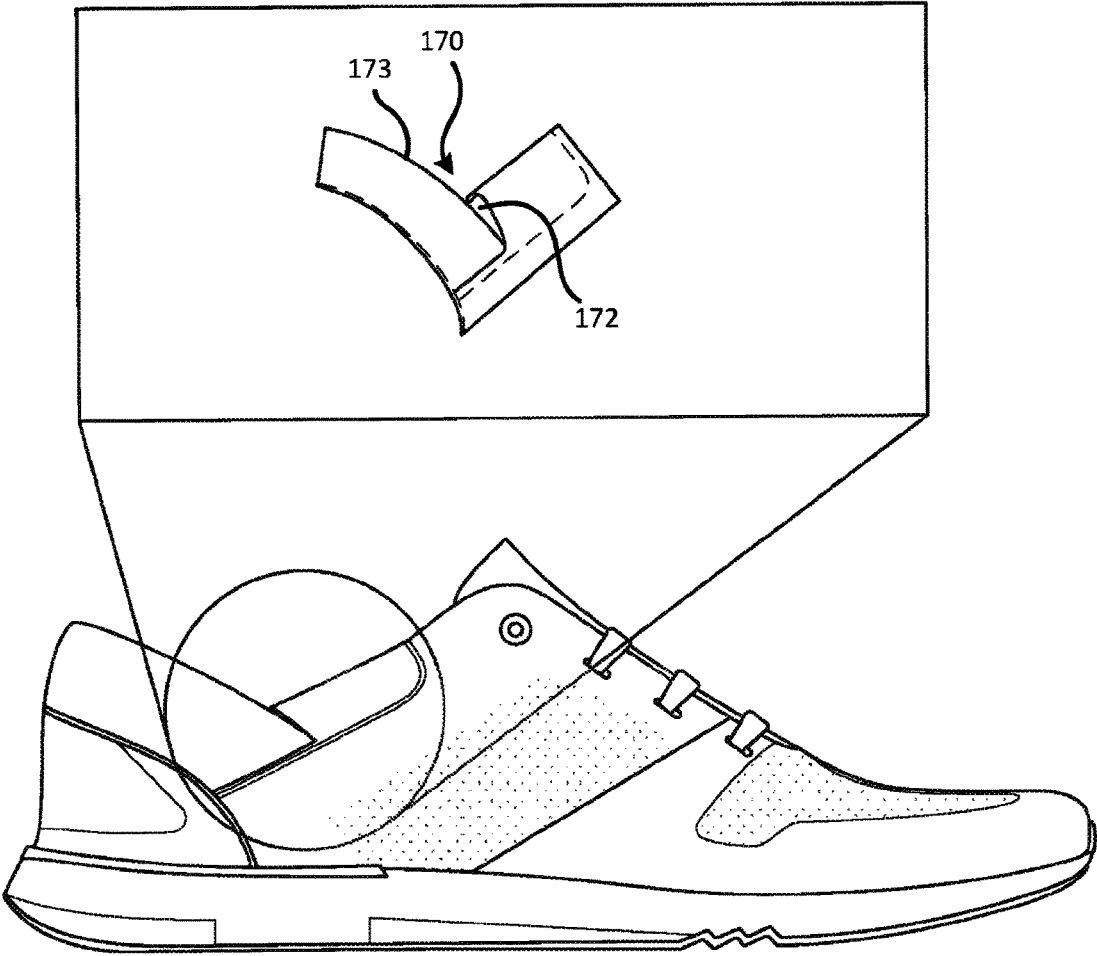


FIG. 7C

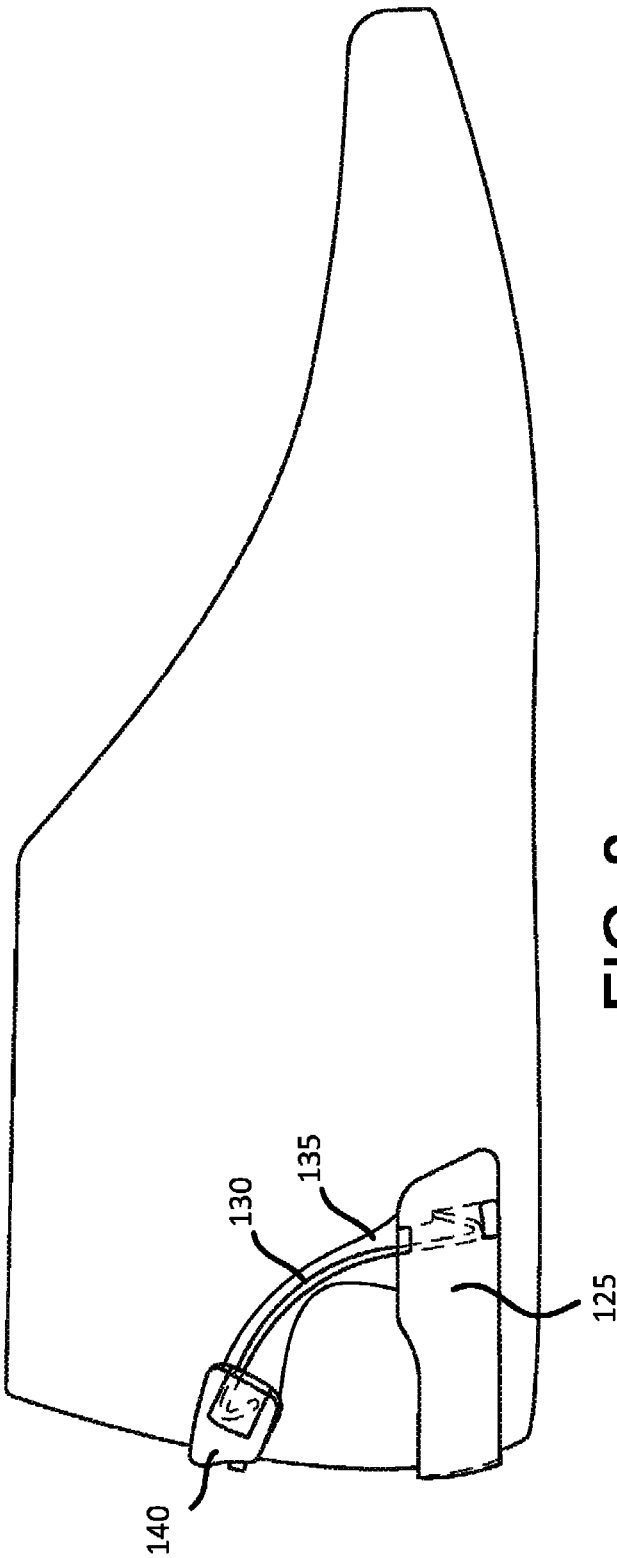


FIG. 8

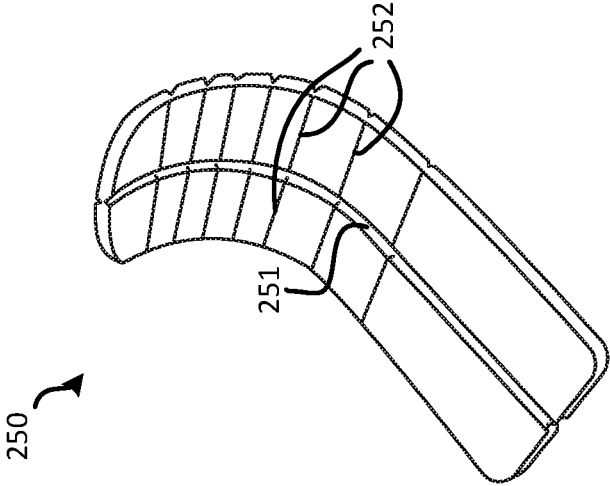


FIG. 9A

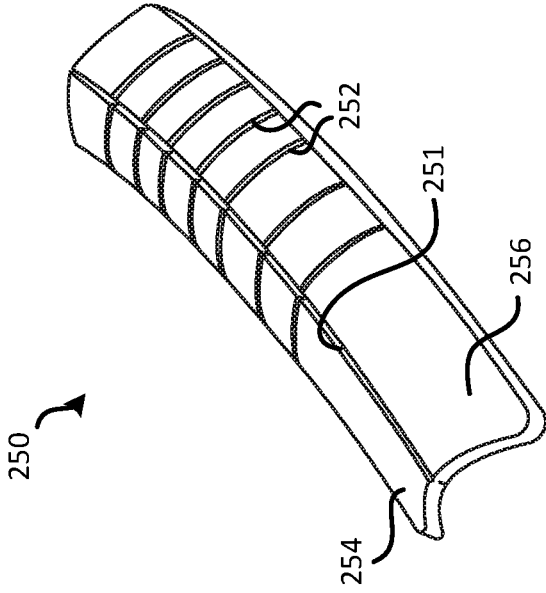


FIG. 9B




FIG. 9D

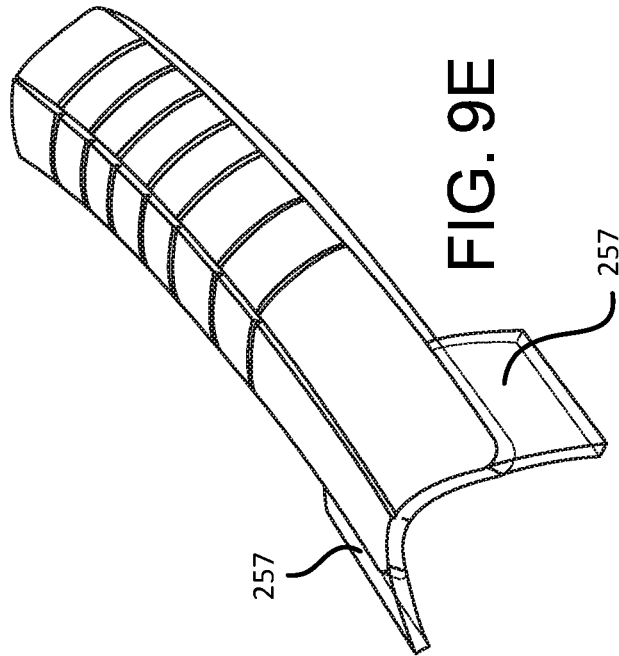


FIG. 9E

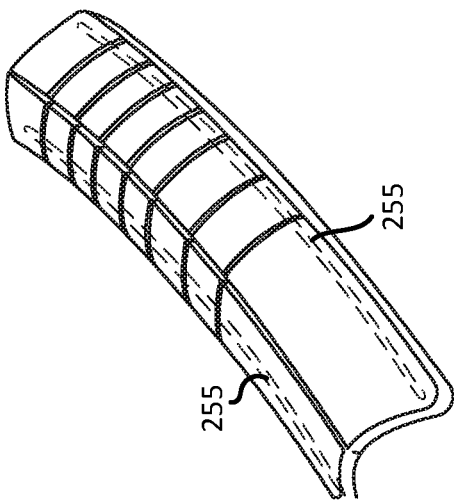


FIG. 9C

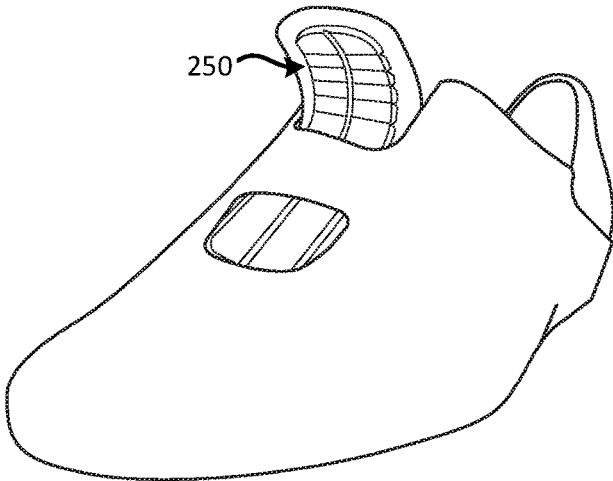


FIG. 9F

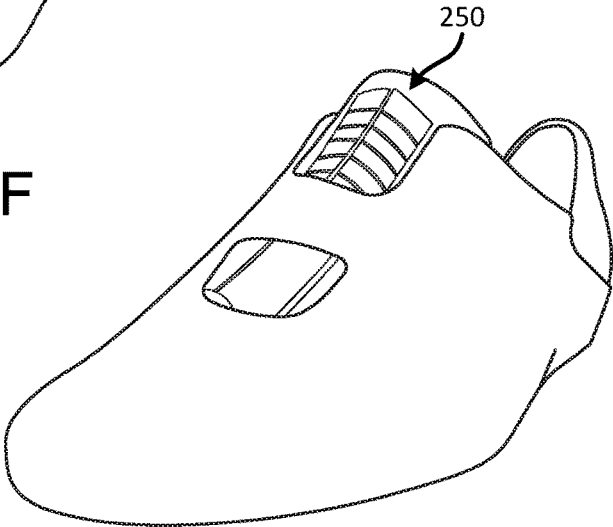


FIG. 9G

1

RAPID-ENTRY FOOTWEAR WITH REBOUNding FIT SYSTEM

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of U.S. Provisional Patent Application No. 62/368,497, filed Jul. 29, 2016 entitled "RAPID-ENTRY FOOTWEAR WITH REBOUNding FIT SYSTEM," and U.S. Provisional Patent Application No. 62/326,650, filed Apr. 22, 2016 entitled "RAPID-ENTRY SHOE," both of which are incorporated herein by reference in their entireties.

FIELD

The present disclosure relates to footwear, and more particularly to rapid-entry footwear with rebounding fit system.

BACKGROUND

Shoes come in a wide variety of shapes, sizes, functionalities, and purposes. While it is relatively easy to remove many types of shoes, it may not be so simple to put all such shoes back on again. Instead, many shoes require several steps to put the shoes on, including lacing and tying the shoes, using other fasteners, or the like, and such steps may include loosening and/or untying shoes that were not properly loosened or untied the last time the shoes were worn. In addition, many shoes require a shoe horn to make it easier to get the shoe on.

SUMMARY

Disclosed herein, according to various embodiments, is a rapid-entry and rebounding fit shoe having one or both of a rapid-entry heel structure and a rapid-entry tongue element, wherein both snap back for fit. The rapid-entry shoe directs a user's foot into or otherwise accommodates a user's foot with respect to, a shoe opening, and thereafter secures a rear portion of the rapid-entry shoe about a user's heel as well as forefoot.

The forgoing features and elements may be combined in various combinations without exclusivity, unless expressly indicated herein otherwise. These features and elements as well as the operation of the disclosed embodiments will become more apparent in light of the following description and accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings are included to provide a further understanding of the present disclosure and are incorporated in, and constitute a part of, this specification, illustrate various embodiments, and together with the description, serve to explain the principles of the disclosure. In the drawings, only one shoe (either a left shoe or a right shoe) is illustrated. It is understood that the illustrated structure may be mirror-imaged to fit the opposite shoe.

FIG. 1A illustrates a side view of a rapid-entry shoe in accordance with an example embodiment of the present disclosure;

FIG. 1B illustrates a rapid-entry heel element in accordance with an example embodiment of the present disclosure;

2

FIGS. 2A and 2B illustrate anchors in accordance with an example embodiment of the present disclosure;

FIGS. 3A-3C illustrate deformable elements in accordance with an example embodiment of the present disclosure;

FIG. 3D illustrates a cross-sectional rear view of a deformable element engaged with an anchor, in accordance with various embodiments of the present disclosure;

FIGS. 4A-4C illustrate heel pieces in accordance with an example embodiment of the present disclosure;

FIG. 5 illustrates side and top views of a rapid-entry tongue element in accordance with an example embodiment of the present disclosure;

FIGS. 6A-6C progressively illustrate use of a rapid-entry shoe in accordance with an example embodiment of the present disclosure;

FIGS. 6D-6F illustrate rear views of FIGS. 6A-6C, respectively;

FIGS. 7A-7C illustrate a rapid-entry shoe in accordance with another example embodiment of the present disclosure;

FIG. 8 illustrates a wire anchored in a heel counter where the heel counter is shaped to allow collapse of the heel in accordance with an example embodiment of the present disclosure;

FIGS. 9A-9E illustrate various views of a rapid-entry with snap back fit tongue element in accordance with an example embodiment of the present disclosure;

FIG. 9F illustrates a view of the rapid-entry with snap back fit tongue element as a foot of the user is being inserted into the rapid-entry shoe in accordance with an example embodiment of the present disclosure; and

FIG. 9G illustrates a view of the rapid-entry with snap back fit tongue element when a foot of the user is located within the rapid-entry shoe in accordance with an example embodiment of the present disclosure.

The subject matter of the present disclosure is particularly pointed out and distinctly claimed in the concluding portion of the specification. A more complete understanding of the present disclosure, however, may best be obtained by referring to the detailed description and claims when considered in connection with the drawing figures.

DETAILED DESCRIPTION

The detailed description of various embodiments herein makes reference to the accompanying drawings, which show various embodiments by way of illustration. While these various embodiments are described in sufficient detail to enable those skilled in the art to practice the disclosure, it should be understood that other embodiments may be realized and that logical, chemical, mechanical and structural changes may be made without departing from the spirit and scope of the disclosure. Thus, the detailed description herein is presented for purposes of illustration only and not of limitation.

For example, the steps recited in any of the method or process descriptions may be executed in any order and are not necessarily limited to the order presented. Furthermore, any reference to singular includes plural embodiments, and any reference to more than one component or step may include a singular embodiment or step. Also, any reference to attached, fixed, connected, coupled or the like may include permanent (e.g., integral), removable, temporary, partial, full, and/or any other possible attachment option. Any of the components may be coupled to each other via bolts, dowels, glue, stitching, welding, soldering, brazing, sleeves, brackets, clips or other manners known in the art or

hereinafter developed. Additionally, any reference to without contact (or similar phrases) may also include reduced contact or minimal contact.

The present disclosure is directed toward rapid-entry footwear (e.g., a shoe) with rebounding fit system. The rapid-entry shoe, according to various embodiments, advantageously allows the user to put on and take off his or her shoes without the use of hands and/or without having to bend down to tie the laces, without having to use a shoe horn, or without using other such adjustment features, elements, or mechanisms for fit. In various embodiments, the rapid-entry shoe may include a one-time adjustment feature (e.g., an adjustment element that is not intended to be used each time a user puts on the rapid-entry shoe). For example, the rapid-entry shoe may include a hook-and-loop type fastener arrangement (e.g., Velcro®) that is intended to be adjusted upon purchase/initial use of the shoe. In another embodiment, a length or other dimension of one or more deformable elements may be adjusted/changed by a user to correspondingly adjust/change the circumference, tightness, or other dimension of the shoe opening. The rapid-entry shoe allows easy and rapid putting on and removal of the shoe and secures the shoe tightly and snugly to the user's foot. In some embodiments, the rapid-entry shoe does not include laces.

In various embodiments, the rapid-entry shoe includes one or both of a rapid-entry heel structure and a rapid-entry snap back fit tongue element. A rapid-entry heel structure, in turn, can include one or more anchors, deformable elements, and/or heel pieces, as described in greater detail below, while a rapid-entry tongue element can include one or more tongue flares, cross elements, and/or tongue stiffeners. Additional elements and features are disclosed for use in connection with the present disclosure. A rapid-entry shoe, in accordance with the example embodiments, easily allows or directs a user's foot into, or otherwise accommodates, a user's foot with respect to, a shoe opening. A rapid-entry shoe, as disclosed herein, can collapse when a user's foot enters the shoe opening and then rebound from a collapsed configuration to an uncollapsed configuration, to thereby secure a rear portion of rapid-entry shoe about a user's heel, quarter panel and/or in-step.

In discussing the illustrated embodiments of the rapid-entry shoe, certain directional words may be used. By way of example, words such as "right," "left," "front," "back," "forward," "backward," "rearward," "upper," "lower," "up," "down," and the like may be used to describe embodiments of the rapid-entry shoe. These words should be given meaning according to the manner in which a rapid-entry shoe is most typically designed for use, with the rapid-entry shoe on a user's foot and with the user's shod foot disposed on or ready for placement on an underlying surface. Thus, these directions may be understood relative to the rapid-entry shoe in such use. Similarly, as the rapid-entry shoe is intended primarily for use as footwear, words such as "inner," "inward," "outer," "outward," "innermost," "outermost," "inside," "outside," and the like should be understood in reference to a rapid-entry shoe's intended use, such that inner, inward, innermost, and the like signify relatively closer to the user's foot, and outer, outward, outermost, and the like signify relatively farther from the user's foot when the rapid-entry shoe is being used for its intended purpose. Notwithstanding the foregoing, if the foregoing definitional guidance is contradicted by an individual use herein of any of the foregoing terms, the term should be understood and read according to the definition that gives life and meaning to the particular instance of the term.

With reference now to FIG. 1A, as discussed above, example embodiments of the present disclosure include a rapid-entry shoe 100. While the rapid-entry shoe 100 is shown in the figures as a casual-type shoe, the rapid-entry shoe may be a formal shoe, a dress shoe, a heel, a sports/athletic shoe (e.g., a tennis shoe, a golf shoe, a bowling shoe, a running shoe, a basketball shoe, a soccer shoe, a ballet shoe, etc.), a walking shoe, a sandal, a flip flop, a boot, or other suitable type of shoe. Additionally, rapid-entry shoe 100 may be sized and configured to be worn by men, women, and children.

Rapid-entry shoe 100 can include a rapid-entry heel structure 110, as referenced in FIG. 1B. Heel structure 110 is generally any structure, assembly, or mechanism configured to return a rear portion 105 of rapid-entry shoe 100 from a collapsed configuration to an uncollapsed configuration (as described in greater detail below), according to various embodiments. As used herein, a rear portion 105 of rapid-entry shoe 100 can refer to the quarter of the shoe, a heel portion of the upper of the shoe, the heel seat, the heel counter, the back strap (e.g., in the case of a sandal), or other portion of the shoe that is configured to be disposed around a heel of a user. As described in greater detail below, at least a portion of the heel structure 110 (such as the deformable element 130 described below) is embedded within and/or extends along the rear portion 105 of the rapid-entry shoe 100.

In this regard, heel structure 110 can, itself, have a collapsed configuration 136 (momentary reference to FIGS. 3B and 3C) and an uncollapsed configuration 138 (momentary reference to FIGS. 3B and 3C), according to various embodiments. In example embodiments, and with reference to FIGS. 1A, 1B, 3B, and 3C, heel structure 110 is biased toward an uncollapsed configuration. In the uncollapsed configuration 138, heel structure 110 can secure a rear portion 105 of rapid-entry shoe 100 about a user's heel. Said differently, in example embodiments, the heel structure 110 is collapsed downward (i.e., towards the sole of the rapid-entry shoe 100) in the collapsed configuration 136, and the heel structure 110 is returned upward (i.e., away from the sole of the rapid-entry shoe 100) in the uncollapsed configuration 138 so as to extend around a user's heel. In various embodiments, while the compression of the heel structure 110 is greater in the collapsed configuration 136 than in the uncollapsed configuration 138, the uncollapsed configuration 138 of the heel structure 110 may still be at least partially compressed (i.e., preloaded compression) so as to be able to hold the rear portion 105 of the rapid-entry shoe 100 about the heel of the user. For example, the rear portion 105 of the shoe may hold or retain the heel structure 110 in the preloaded, uncollapsed configuration. In various embodiments, in the uncollapsed configuration 138 the heel structure may be disposed in a more upright/vertical orientation and/or may have little to no compression.

In a collapsed configuration, heel structure 110 can direct a user's foot into, or otherwise accommodate a user's foot with respect to, a shoe opening. The collapsed configuration can be caused by the user's foot pushing against or downward on heel structure 110 while at the same time expanding a shoe opening using, for example, a goring element or panel 170 (as described below with reference to, for example, FIG. 6A). In various embodiments, heel structure 110 in the collapsed configuration is pushed downward or is deformed and a shoe opening is expanded by at least about 5%, or at least about 10%, or at least about 15%. For example, a circumference of the shoe opening may be expandable by at least about 1.0 inch (about 2.54 centimeters). By way of

5

illustration, and with momentary reference to the arrows depicted in FIG. 6E, the shoe opening may expand in response to the downward collapse of the rear portion of the rapid-entry shoe.

The amount of the expansion of the shoe opening can vary with the shoe style and size. In various embodiments, the rear portion 105 in the collapsed configuration is pushed downward or is compressed. In various embodiments, the heel height in the collapsed configuration is about 50% lower than the heel height in the uncollapsed configuration, however, as with other parameters, this may vary depending on the shoe style and size.

Once the user's foot is within rapid-entry shoe 100 or removed from rapid-entry shoe 100, the heel structure 110 returns to the uncollapsed configuration (i.e., its original position). In a collapsed configuration of example embodiments, heel structure 110 exhibits a return force toward an uncollapsed configuration of between about 1 pound-force and about 10 pound-force. In various embodiments, in a collapsed configuration the heel structure 110 exhibits a return force toward an uncollapsed configuration of between about 4 pound-force and about 8 pound-force. In various embodiments, in a collapsed configuration the heel structure 110 exhibits a return force toward an uncollapsed configuration of between about 5 pound-force and about 7 pound-force.

In various embodiments, the return force is strong enough such that the rear portion 105 of the shoe rebounds back up and snugly fits around the user's heel. In example embodiments, heel structure 110 returns from a collapsed configuration to an uncollapsed configuration in less than about 1 second. In various embodiments, the heel structure 110 returns from a collapsed configuration to an uncollapsed configuration in less than about 0.5 seconds. In various embodiments, the heel structure 110 returns from a collapsed configuration to an uncollapsed configuration in less than about 0.2 seconds. This rebound time is measured absent any external forces, e.g., as may be imparted by the user's heel.

Heel structure 110 can be manufactured as a standalone product, for incorporation into finished shoes, or can be manufactured to be integral with or within finished shoes.

In various embodiments, and with continued reference to FIG. 1B, the heel structure 110 of the rapid-entry shoe 100 comprises at least one base 120 and at least one deformable element 130. The deformable element 130 is coupled to the base 120 and is generally embedded within and/or is coupled to and extends along the rear portion 105 of the rapid-entry shoe 100. While a single deformable element 130 may extend continuously about the rear portion 105, the heel structure 110 may include a heel piece 140 positioned between two separate and distinct deformable elements 130, according to various embodiments described below. As used herein, the term "deformable element" refers to a resiliently flexible member that can be bent or compressed but has a bias to move towards a non-bent or uncompressed state. Additional details pertaining to the deformable element 130 are included below.

The deformable element(s) 130 is/are coupled to the base 120, according to various embodiments. The term "base" may refer to a rigid portion or section of the rapid-entry shoe 100 to which the deformable element(s) 130 is/are coupled. Said differently, the base 120 refers to an anchoring connection point(s) to which the deformable element(s) 130 is/are coupled. The base 120 may refer to an outsole or portions thereof, a midsole or portions thereof, an insole or portions thereof, a wedge or portions thereof, the upper or

6

portions thereof (e.g., a heel counter), or other suitable structure disposed between and/or adjacent to these listed parts of the rapid-entry shoe 100.

While in various embodiments the deformable element 130 is directly coupled, mounted, or attached to the base 120, in other embodiments the base 120 may optionally include one or more anchors 121. In various embodiments, the anchor 121 may be a portion of the base 120 that engages and retains the deformable element(s) 130 in place. In various embodiments, the anchor(s) 121 can be integrally formed with, coupled to and/or located within or between, or outside of an insole, midsole, outsole, upper, or other rear portion 105 of rapid-entry shoe 100. In various embodiments, for example, the anchor 121 is disposed in a block or a wedge. Anchor 121 can be located in the upper, in the heel counter 125 (with reference to FIG. 8) or other device located above the outsole. Anchor 121 also can be located between the midsole and the outsole, between the footbed and the midsole, and/or outside the upper. In an embodiment, the midsole can be carved or cut out to attach or house anchor 121 to the rapid-entry shoe 100. Anchor 121 may also be attached to or in the heel counter 125. FIG. 8 illustrates a wire anchored in a heel counter 125 where the heel counter 125 is shaped to allow collapse of the heel in accordance with an example embodiment of the present disclosure. In various embodiments, the base 120 of heel structure 110 can include a single anchor 121 extending the full width of rapid-entry shoe 100 or the base 120 may include two anchors on opposing sides (e.g., lateral and medial) of the rapid-entry shoe 100.

Anchor 121 is generally a structure provided to secure deformable elements 130 and/or heel pieces 140 to rapid-entry shoe 100. For example, and with reference to FIGS. 2A and 2B, the base 120 may include an anchor 121 and an anchor receptacle 122. Said differently, the anchor 121 can be seated in the anchor receptacle 122 formed by an extension of a midsole tuck 124 into a midsole wedge or midsole block 126.

Anchor 121 can include one or more materials such as nylon, acetal homopolymer/polyoxymethylene, aluminum, graphite, thermoplastic polyurethane (TPU), thermoplastic copolyester elastomer (TPC-ET), polypropylene, acrylic resin, rubber, titanium, acrylonitrile butadiene styrene (ABS), and polycarbonate.

Deformable element 130, as briefly introduced above, is generally a structure provided to return heel structure 110 from a collapsed configuration to an uncollapsed configuration. Heel structure 110 can include one or more deformable elements 130, for example, one on either side of rapid-entry shoe 100. As an example, a single deformable element 130 can travel from one side of shoe 100 to the other side of shoe 100 and can be attached to one or more anchors 121.

Deformable element 130 can include one or more of a tube, a wire, a spring, a shape memory structure or material, and the like. In example embodiments, deformable element 130 includes a single, unitary piece. For instance, and according to various embodiments, a first end of deformable element 130 can be embedded in or attached to a left anchor 121 (or the left side of a unitary anchor 121), a second end of deformable element 130 can be embedded in or attached to a right anchor 121 (or the right side of a unitary anchor 121), and a middle portion of deformable element 130 can extend around the heel (or be coupled to or be embedded within a heel piece 140), according to various embodiments.

In various embodiments, the first and second ends of the deformable element 130 are disposed below the footbed of

the rapid-entry shoe **100**. Said differently, the connection locations (e.g., anchors **121**) of the base **120**, to which the deformable element **130** is connected, are positioned below the footbed of the rapid-entry shoe **100**. In various embodiments, the heel structure **110** may be configured so rear portion **105** remains positioned above the footbed of the rapid-entry shoe **100** at all times. Said differently, regardless of whether the heel structure **110** is in the collapsed configuration **136** or the uncollapsed configuration **138**, rear portion **105** may remain above the footbed of the rapid-entry shoe **100**, according to various embodiments.

In other embodiments, deformable element **130** includes a plurality of separate and distinct components. For instance, deformable element **130** can include two separate components, with a first component having a first end embedded in or attached to a left anchor **121** (or the left side of a unitary anchor **121**) and a second end embedded in or attached to the left side of heel piece **140** (or a left paddle of heel piece **140**, as described below), and with a second component having a first end embedded in or attached to a right anchor **121** (or the right side of a unitary anchor **121**) and a second end embedded in or attached to the right side of heel piece **140** (or a right paddle of heel piece **140**, as described below). The plurality of separate and distinct components can be secured together, for example, with one or more of a tape wrap, woven encasing, overmold (e.g., TPU), heat shrink tube, and the like, each of which can provide different stabilities and strengths. By way of non-limiting example, and with reference to FIG. 3A, deformable element **130** can include one or more wires **132** encased or encased together in a cover, sleeve, overmold, or heat shrink tube **134**. The one or more wires **132** can arch, bend and sway and then return to its initial/normal state.

Deformable element **130** can have variable mechanical properties along its length and/or at distinct points along its length. Such variation can be provided by deformable element **130**, one or more of its plurality of separate and distinct components, and/or a securement surrounding all or a portion of deformable element(s) **130**, having a variable cross-section, density, material, and/or the like along its length. A variable cross-section, in turn, can be provided by variation in thickness or shape, or twisting of deformable element **130** otherwise having a constant thickness or shape along its length. In various embodiments, the plurality of deformable elements **130** can comprise the same or different mechanical properties, for example, they can flex independent of each other.

In various embodiments, and with momentary reference to FIG. 8, the deformable element **130** includes a cover, sleeve, overmold, or other suitable structure (schematically shown as element **135**). This cover **135** can protect the deformable element **130** and may control, guide, support and/or otherwise affect the flexure or compression of the deformable element **130**. In various embodiments, the cover **135**, based on its material of manufacture, shape, geometry etc., is configured to facilitate mechanical stress distribution by transferring mechanical bending/deforming forces from the deformable element **130** to the cover **135** to prevent or at least inhibit the deformable element from damage or breakage that may otherwise result from the concentrated and repeated mechanical stress experienced by the deformable element **130**. For example, the cover **135** may have dimensions that vary along its length, such as the funnel-like tapering shape shown in FIG. 8, to help distribute stress and contribute to the dynamic flexing of the deformable element **130**. In the rare event that the deformable element **130** breaks, the cover **135** may provide at least some degree of

bias, thereby still enabling a certain level of rebound to help the entry shoe **100** return to the uncollapsed position. Further, the cover may provide additional padding and/or support to the deformable element and may prevent or at least inhibit the user from feeling the deformable element extending around the heel.

Deformable element **130** can further have directional biases. Such biases can be provided as described above, by deformable element **130**, one or more of its plurality of separate and distinct components, and/or a securement surrounding all or a portion of deformable element(s) **130**, having a variable cross-section, density, material, and/or the like along its length. By way of non-limiting example, deformable element **130** can include a first component or wire (e.g., nitinol) that is sufficiently resiliently flexible to return heel structure **110** from a collapsed configuration to an uncollapsed configuration, and can further include a second component or wire (e.g., graphite) that directs one or more desired arc(s) of curvature of deformable element **130** (e.g., an arc viewed from a side of a shoe, and an arc viewed from an end of a shoe). These two components can be covered or encased with a plastic coating or shield, as described above, as will be described in greater detail below with reference to FIG. 8. The heel structure **110** can be collapsed by a user's foot depressing down on it from the sides or the rear heel of the rapid-entry shoe **100**. The heel structure **110** can be depressed off-center (e.g., from the sides) and still work and rebound properly.

With reference to FIGS. 3B and 3C, deformable element **130** can exhibit one or more desired arc(s) of curvature as heel structure **110** moves between an uncollapsed configuration **138** and a collapsed configuration **136**. For example, deformable element **130** can comprise a first arc of curvature viewed from a side of a shoe (FIG. 3B), and a second arc of curvature viewed from an end of a shoe (FIG. 3C). In this regard, deformable element **130** is not planar in some embodiments.

An arc of curvature can originate from anchor **121**, however, in example embodiments, deformable element **130** does not pivot (i.e., is non-pivoting) about the base **120** (e.g., about an insole, midsole, or outsole) of the rapid-entry shoe **100**. Said differently, the deformable element **130** may be non-rotatably coupled to the base **120**. In various embodiments, engagement between the deformable element **130** and the base **120** (or anchor **121**) is free of play, meaning that there is little or no relative movement between the two components **130**, **120**.

In some embodiments, an arc of curvature is constant along its length, while in other embodiments, an arc varies along its length and/or at distinct points along its length, for example, by exhibiting variable mechanical properties, as described above. In some embodiments, variation between an uncollapsed configuration and a collapsed configuration may be due to the constraints of the upper construction of the shoe.

With particular reference to FIG. 3B, an arc of curvature viewed from a side of a shoe exhibited by deformable element **130** can have a first radius of curvature **R1** when heel structure **110** is in a collapsed configuration, and a second radius of curvature **R2** (that is greater than first radius of curvature **R1**) when heel structure **110** is in an uncollapsed configuration. In example embodiments, first radius of curvature **R1** is about 30% to about 60% smaller, or about 45% smaller than second radius of curvature **R2**.

Deformable element **130** can include one or more materials such as carbon steel, stainless steel, titanium, nickel titanium (nitinol) and other metals and alloys (shape-

memory or otherwise), polymers (shape-memory or otherwise), composite materials, foam materials, graphite, carbon fiber, fiberglass, TPC-ET, silicone, TPU, and polycarbonate. For example, deformable element **130** can include titanium or be a titanium wire. Also, one or more deformable elements **130** can be made of a first material, e.g., titanium, and one or more deformable elements **130** can be made of a second material, e.g., graphite, which advantageously allow easier deformation of heel structure **110** while at the same time providing faster rebounding of heel structure **110** to its original position (i.e., the uncollapsed configuration).

In various embodiments, and with reference to FIG. 3D, the ends of the deformable element **130** that are mounted to the base **120** are oriented outwards at an angle relative to a vertical axis extending through the base **120**. This angled orientation allows the deformable element **130** to extend around and/or follow the contours of the heel of the foot **50** of the user, according to various embodiments. The deformable element can be configured to follow natural contours of a user's foot/heel in the uncollapsed configuration and/or in the collapsed configuration. Accordingly, in various embodiments, the flexure, curvature, and/or length of the deformable element **130** on one side of the foot **50** (e.g., medial side) may be different than the curvature and/or length of the deformable element **130** on the other side of the foot **50** (e.g., lateral side).

At least a portion of the deformable element **130** may be connected to the rear portion **105** of the shoe. For example, the deformable element **130** may be coupled to the shoe in proximity to the topline of the shoe opening so that the rear portion **105** of the shoe collapses in response to the heel structure **110** changing to the collapsed configuration and the rear portion **105** of the shoe rebounds in response to the heel structure **110** reverting back to the uncollapsed configuration. In various embodiments, portions of the deformable element **130** may move within the rear portion **105** (e.g., the quarter) of the shoe. For example, the deformable element **130** may be disposed between, an inner surface and an outer surface of the quarter or heel counter of the shoe and, in response to deformation of the deformable element **130**, may move relative to the inner and outer surfaces of the shoe. In example embodiments, the deformable element **130** or heel piece **140** can be completely contained within the rear portion **105** of the shoe **100**. While the deformable element **130** is visible by a user in some embodiments, in other embodiments, the deformable element **130** is not visible by a user.

In various embodiments, and with reference to FIG. 3B, the deformable element **130** extends from the base **120** in an upwards and backwards (i.e., towards the rear portion **105** of the shoe) direction. This extension direction of the deformable element **130**, according to various embodiments, prevents or at least inhibits the deformable element **130** from folding substantially inwards relative to the shoe opening in response to insertion of a user's foot. Said differently, while the deformable element **130** generally deforms and responds to a user's foot **50** being inserted into the shoe **150**, the deformable element **130** generally prevents the topline (e.g., collar topline of shoe opening) from folding or bending inwards (i.e., prevents the shoe opening from substantially collapsing). In various embodiments, however, the deformable element **130** allows the shape of the rear portion of the topline of the shoe opening to deform and contour to the shape of the user's foot.

In various embodiments, as mentioned above, the base **120** may include an anchor **121** and an anchor receptacle **122**. The anchor **121** may be able to be installed/coupled to

the anchor receptacle **122**, for example, via a resistance fit, compression fit, a snap fit, or via an interlocking mechanism/configuration. In such embodiments, the deformable element **130** may be first coupled to the anchor **121** and then the anchor **121** may be installed/coupled to the anchor receptacle **122**.

Optional heel piece **140** is generally a structure provided to secure a rear portion **105** of rapid-entry shoe **100** about a user's heel when heel structure **110** is in an uncollapsed configuration, and direct a user's foot into, or otherwise accommodate a user's foot with respect to, a shoe opening when heel structure **110** is in a collapsed configuration. Heel structure **110** can include a plurality of heel pieces **140**.

With reference to FIGS. 4A and 4B, heel piece **140** can include one or more paddles **142** that may be connected with one or more bridges or necks **144**, **146**. The bridges **144**, **146** may be separated by a gap or an opening (as shown in FIGS. 4A and 4B). Paddles **142**, in example, embodiments, are rotatable and/or moveable independent of each other. One or more paddles **142** connected with one or more necks **144**, **146** can include a single, unitary piece, or a plurality of separate and distinct components, in some embodiments secured together, for example, with one or more of a tape wrap, woven encasing, overmold (e.g., TPU), heat shrink tube, and the like. Paddles **142** can also be joined together by the material making up the heel portion of the upper. The upper material can be used as the bridge and two separate, unconnected paddles can be used, according to various embodiments. Any kind of a cushioning system can be used as the paddles **142**. The bridge **144**, **146** can be a spring wire or an elastic, flexible, or pliable material that is connected to the two wires or wrapped around one wire. The deformable element **130** can be attached to only one anchor **121** and left unconnected at the other end, according to various embodiments. The paddles may be positioned within a quarter or heel counter of the rapid-entry shoe. In various embodiments, the paddles are connected to the rear portion of the rapid-entry in proximity to the topline of the shoe opening.

In example embodiments, no portion of any deformable element **130** extends completely through heel piece **140**. Stated another way, in example embodiments, deformable element **130** is not continuous between medial and lateral sides of rapid-entry shoe **100**. For example, paddles **142** can be rotatably coupled to deformable element **130**. In various embodiments, the deformable element **130** can rotate to a certain degree about its longitudinal axis (e.g., torsion about is longitudinal axis). In other embodiments, the deformable element **130** extends completely through the heel piece **140** and/or forms the heel piece **140**.

In some embodiments, lower bridge or neck **146** prevents inward rotation of paddles **142** about deformable element **130** (i.e., roll-in of paddles **142**). More specifically, lower bridge or neck **146** can prevent the lower portions of paddles **142** from spreading apart. In example embodiments, a gap or opening is present between necks **144**, **146**. Alternatively, a single bridge or neck may be used to connect paddles **142**.

Outward rotation of paddles **142** about deformable element **130** (i.e., flaring of paddles **142**), as depicted by the arrows in FIG. 4B, is directed in example embodiments with a one-directional rotation feature. For example, and with reference to FIGS. 4B and 4C, paddle **142** can have an aperture **143**, or increased internal volume on only one side into which an enlarged portion **131** of deformable element **130** can rotate in only one direction (e.g., an outward direction). Enlarged portion **131** can include a portion of deformable element **130** folded back on itself, a crimped portion of deformable element **130**, or the like.

Outward rotation of a paddle of heel piece **140** about deformable element **130** can be further assisted by the collapsing of the heel piece or the heel material of the upper, as illustrated in FIG. 6B. In such embodiments, the collapsing of the heel material of the upper can cause a paddle of heel piece **140** to splay open.

Heel piece **140** can include one or more bendable or flexible materials such as thermoplastic rubber (TPR), silicone, styrene-ethylene/butylene-styrene (SEBS), nylon, acetal homopolymer/polyoxymethylene, aluminum, TPU, TPC-ET, polypropylene, acrylic resin, rubber, ABS, and polycarbonate.

Heel piece **140** may be manufactured of differing materials in the paddles **142** and necks **144**, **146**. Additionally, heel piece **140** may include differing layers of material to provide adequate stiffness and strength overall while providing a desired soft feel on the surfaces directed toward the user's foot or otherwise for the comfort of the user.

It will be evident to those skilled in the art that, in some embodiments, rapid-entry shoe **100** can have one or more traditional tightening/loosening features, such as laces, allowing a user to adjust the tightness of the fit of rapid-entry shoe **100**. In addition to, or in lieu of such feature(s), and with reference to FIGS. 5 and 9A-9G, rapid-entry shoe **100** can include a rapid-entry and snap back fit tongue element **150** having one or more tongue flares **152**, cross element **154**, and/or tongue stiffeners. As used herein, a "cross element" can be a rigid, semi-rigid, or flexible element, for example, a strap, a bar, a gusset, or the like. In example embodiments, tongue flare **152** is shaped (e.g., funnel-like shape) to direct a user's foot **50** into rapid-entry shoe **100**. Tongue element **150** may also move upward when pressure is applied by a foot entering or exiting the shoe. In various embodiments, the tongue element **150** is configured to buckle (e.g., bend, curve, bow) about the cross element **154**. Said differently, the cross element **154** may facilitate bending of the tongue element **150** at a certain location along the length of the tongue element such that a top portion (e.g., the tongue flare **152**) of the tongue element **150** bends to allow a user's foot **50** to enter the shoe while a lower portion (e.g., the portion below the cross element **154**) remains unbent. The cross element **154** or other such feature may be coupled to, or may be part of, the quarter, the gusset, or other suitable portion of the shoe **150**.

The cross element **154**, in example embodiments, can be associated with the quarter of rapid-entry shoe **100**, either as a separate panel or integrally formed as part of the quarter. The cross element **154** can also be a lace, webbing or other material sewn into or movable in the upper. In general, cross element **154** provides a semi-rigid area for the tongue to flex around when pushed outward by a user's foot entering rapid-entry shoe **100**. In some embodiments, cross element **154** may be adjustable up and/or down to vary the amount of flex allowed to the tongue and to adjust the tightness of the fit. Adjustment up and/or down can be accomplished with a slide mechanism. In example embodiments, once an appropriate flex or tightness is achieved, cross element **154** is only rarely used. In another embodiment, there is no cross element. Instead, the vamp of the shoe extends up to a desired location on the tongue and performs the same function as the cross element **154**.

With reference now to FIG. 6A, a tongue stiffener **156** can include a flexible, spring-like material, for example plastic or another flexible, semi-rigid material. In example embodiments, tongue stiffener **156** flexes outward and/or upward when pushed by a user's foot entering rapid-entry shoe **100**. In such embodiments, tongue stiffener **156** then rebounds to

a closed position after a user's foot has entered rapid-entry shoe **100**. In some embodiments tongue stiffener **156** is visible on the tongue, while in other embodiments tongue stiffener **156** is sewn into the interior layers of the tongue.

In various embodiments, a rapid-entry shoe of the present disclosure can include one or more collapse elements and/or additional features described below with continued reference to FIG. 6A.

In some embodiments, rapid-entry shoe **100** includes a heel or material stiffener **160**. The welded TPU protects the user and the liner material from rubbing against the wire. In example embodiments, heel or material stiffener **160** directs collapse of a more flexible heel material for consistent collapse. Material stiffener **160** can be shaped to flare at its widest point as the heel collapses, guiding the more flexible heel material to fold inward in a controlled way. Material stiffener **160** can be raised above the shoe outsole of a rear portion **105** of rapid-entry shoe **100**, providing resistance and further guiding the more flexible heel material to fold inward. Material stiffener **160** can be applied to an outer or inner surface of rapid-entry shoe **100**, or anywhere there between. Material stiffener **160** can include a TPU weld, a backing or the like. Alternatively, and with momentary reference to FIGS. 7A and 7B, the quarter panels of rapid-entry shoe **100** can extend to a rear portion **105** of rapid-entry shoe **100** to provide a structure and function substantially similar to material stiffener **160**.

FIG. 7C illustrates an exploded view of a split **170** and an elastic gore **172** in the top rim of the rapid-entry shoe in accordance with an example embodiment of the present disclosure. Rapid-entry shoe **100** includes a split **170** formed in the shape of a triangle in some embodiments. In example embodiments, split **170** includes a split in the top rim, heel or rear of rapid-entry shoe **100**, which can be in the lowest point of the collar topline **173** of rapid-entry shoe **100**. Split **170** can include an elastic gore **172** or another stretchable material. In example embodiments, split **170** widens during heel compression, allowing the heel to collapse without pulling the lateral and medial quarters of rapid-entry shoe **100** inward. In another embodiment, and with momentary reference to FIGS. 7A and 7B, split **170** can distinguish a more substantially separated heel that moves independent of the quarter panels of rapid-entry shoe **100**. Split **170** can be accompanied by an elastic member **171** (see FIG. 7A), to enhance the return of the heel to the quarter panels.

In various embodiments, and with reference to FIGS. 7A and 7B, the collapsibility of the rapid-entry shoe **100** enables the insertion angle of the foot **50** to be changed. As used herein, "insertion angle" refers to an angle between a longitudinal axis of the foot **50** and the longitudinal axis of the footbed of the shoe. FIG. 7A shows a first foot insertion angle **61** and FIG. 7B shows a second foot insertion angle **62** that is less than the first foot insertion angle **61**. Without the collapsibility of the rapid-entry shoe **100**, as provided herein, the user would not be able to change from the first foot insertion angle **61** to the second foot insertion angle **62** and thus would need to maintain the first foot insertion angle **61**, or potentially increase the first insertion angle **61**, in order to insert the foot **50** into the shoe. For example, using a conventional shoe the user may need to manually loosen shoe laces or may need to use a shoe horn in order to insert his/her foot into the conventional shoe. Accordingly, the heel mechanism **110** (e.g., including the deformable element **130**) enables the foot insertion angle to be reduced, thereby improving the ease of putting on the rapid-entry shoe **100**. Said differently, with user's foot **50** may deform the heel mechanism into the collapsed configuration, thereby allow-

ing the instep and/or ball of the foot **50** to be lower during insertion. Once again, after completely inserted the foot **50** within the rapid-entry shoe, the heel mechanism **110** causes the rear portion **105** of the rapid-entry to rebound upwards around the heel for a snug fit.

In various embodiments, the split **170** does not extend along the entire height of the quarter/upper of the shoe. The split **170** may extend from about 30% to about 40% of the distance between the topline **173** and the footbed, however, as with other parameters, this may vary depending on the shoe style and size.

In some embodiments, rapid-entry shoe **100** includes a kick plate **180**. In example embodiments, kick plate **180** is formed or is otherwise integral with the anchor receptacle **122** described above with reference to FIG. 3D. That is, in some embodiments, kick plate **180** can be configured to retain (or contribute to the retention of) an anchor **121**. In various embodiments, the kick plate **180** (anchor receptacle **122**) includes a widened portion on a medial or lateral side of the heel of rapid-entry shoe **100**, providing a location for the toe of the opposite shoe to remove rapid-entry shoe **100** for hands-free operation. Kick plate **180** can include a TPU mold, nylon or other rigid material, a backing or the like, embedded into the midsole of rapid-entry shoe **100**.

In accordance with example embodiments, as shown in FIGS. 6A-6C, rapid-entry shoe **100** may provide for wire protection, for example, a TPU weld, a backing or the like on a portion of the liner material to protect the liner and a user's foot from wire rub, and/or provide pressure dissipation to minimize hot spots.

Having described the numerous rapid-entry features of the present disclosure, FIGS. 6A-6F illustrate how the features provided by the heel element and the tongue element facilitate rapid entry and fit of a user's foot into rapid-entry shoe **100**. In FIGS. 6A and 6B, rapid-entry shoe **100** is resting on an underlying surface, ready to receive a user's foot.

When the user wishes to put on rapid-entry shoe **100**, he/she begins by inserting the user's foot into the traditional shoe opening, as shown in FIGS. 6B and 6E. Tongue flare **152** flares outward, increasing the size of the opening for the user's foot, to direct the user's foot into rapid-entry shoe **100**. At the same time, tongue stiffener **156** flexes outward when pushed by the user's foot entering rapid-entry shoe **100** then the tongue snaps back down to fit over instep.

As the user's foot is inserted into rapid-entry shoe **100**, the increasing amount of the user's foot in rapid-entry shoe **100** begins to press downward on the rear of the upper, causing it to deflect downward against the tension imparted to the rear of the upper by deformable element **130**. As the user's foot nears full entry into rapid-entry shoe **100**, the rear of the upper is almost fully depressed. Given the extent of deformation of the rear of rapid-entry shoe **100** in example embodiments, it will be appreciated that the materials of the quarter will generally be selected to permit a desired amount of deformation while maintaining a desired appearance. In some embodiment, the materials of the quarter are selected to direct or otherwise facilitate a desired deformation. For example, with continued reference to FIGS. 6B and 6E, material stiffener **160** can guide the more flexible heel material to fold inward in a controlled way. In the same or other embodiments, split **170** can widen during heel compression, allowing the heel to collapse without pulling the lateral and medial quarters of rapid-entry shoe **100** inward.

As the user's foot fully enters rapid-entry shoe **100**, the tension in deformable element **130** causes the rear part of the upper to rebound upward around the user's foot, until rapid-entry shoe **100** again assumes its natural configuration,

as shown in FIGS. 6C and 6F. Tongue stiffener **156** can then rebound to a closed position after the user's foot has entered rapid-entry shoe **100**. Cross element **154** may be adjustable to vary the amount of flex allowed to the tongue and to adjust the tightness of the fit, similar to the one-time adjustment feature described above. In this configuration, rapid-entry shoe **100** naturally retains the user's foot in rapid-entry shoe **100** against unwanted removal. Slide zone **190** may allow a user's foot to slide on the footbed during entry.

The user can then wear rapid-entry shoe **100** as normal until the user wishes to remove rapid-entry shoe **100**, at which time rapid-entry shoe **100** can be rapidly removed. While many shoes cannot be removed without being untied, the rapid-entry features provided by the heel element and the tongue element further facilitate removal. The user simply presses down on the kick plate **180** either with the other foot or with the hand or another object, greatly easing the foot's removal from rapid-entry shoe **100**. In example embodiments, contact by the toe or other portion of the opposite shoe with kick plate **180** facilitates removal of rapid-entry shoe **100** for hands-free operation.

As the user's foot enters and leaves rapid-entry shoe **100**, different portions of the user's foot contact heel piece **140**. These different portions of the user's foot have different contours, and the construction of heel piece **140** allows heel piece **140** to deform and generally conform to the portion of the user's foot then contacting heel piece **140**. For example, as the user's foot enters rapid-entry shoe **100** (e.g., as shown in FIGS. 6B and 6E), the paddles of heel piece **140** may rotate and splay about one or more necks and their connection to deformable element **130**, so that the user does not feel like he/she is stepping on a narrow edge of the opening of rapid-entry shoe **100**. Instead, the user feels a flat or gently sloping portion naturally receiving his or her foot. In contrast, when the user's foot is completely within rapid-entry shoe **100**, the paddles of heel piece **140** rotate to a more vertical position and may draw together, more naturally embracing the area around the user's Achilles tendon. In various embodiments, the heel piece **140** may include a ledge or a lip that helps to retain the foot/heel within the shoe. This rotation improves the feel, fit, and security of rapid-entry shoe **100** once fully on the user's foot. Thus, the configuration of heel piece **140** greatly improves functionality, fit, and comfort of rapid-entry shoe **100**.

Referring to FIGS. 9A-9G, an exemplary rapid-entry snap back fit tongue element **250** is shown. The tongue element **250** may be made of a thermal plastic or nylon material. The tongue element **250** has a center channel **251** that travels along a length and a plurality of cuts or indentations **252** that travel along a width, according to various embodiments. The center channel **251** allows the tongue element **250** to bend into two side-by-side sections **254**, **256** as shown in FIG. 9B. The plurality of cuts **252** allow for the tongue element to bend upward. As shown in FIG. 9A, the plurality of cuts **252** are spaced closer together at the front of the tongue element **250** and spaced farther apart at the back of the tongue element **250**, according to various embodiments. These cuts and non-uniform spacing of the cuts advantageously allows for the tongue element **250** to provide a larger and steeper opening for easier access by the user's foot into the shoe and better stability when the user's foot is inside the shoe. The plurality of cuts **252** may also be spaced an equidistance apart from one another, according to various embodiments. When the user's foot **50** enters the rapid-entry shoe and upward pressure is applied by the foot to the front of the tongue element, the tongue element easily flexes upward and outward to further open and widen the shoe opening, with

reference to FIG. 9A and according to various embodiments. When the foot is inside the rapid-entry shoe, the arch of the foot applies upward pressure on the underside of the tongue element causing the tongue element to flatten and then curve around the foot (e.g., the underside of the tongue element 250 may be concave in response to the foot 50 being within the shoe (see FIGS. 9B, 9C, 9E and 9G). The tongue element 250 pushes back down on the foot after the foot slides into the shoe, according to various embodiments. This advantageously allows for a snug and better fit. Also, the tongue element provides better flexibility and wearability.

According to various embodiments, and with reference to FIG. 9D, a cushion 258, such as a foam cushion, a gel element, an or liquid filled bag, etc., can be attached, coupled or positioned next to an underside of the tongue element 250 to allow for better comfort and to assist in keeping the tongue element 250 in a locked or secure position while the foot 50 is inside the shoe. In various embodiments, and with reference to FIG. 9C, one or more resiliently flexible wires 255 or straps can be embedded within or attached/coupled to the tongue element 250 to aid in the flex and snap back of the tongue element 250. The tongue element 250 can be covered by a canvas, leather or other material and/or can replace or be inserted into a standard shoe tongue to provide rapid-entry into the shoe. In various embodiments, the tongue element 250 may have flaps 257 or other flanges or extensions that contribute to the resilient flexibility of the tongue element 250.

It will be apparent to those skilled in the art that various modifications and variations can be made in the present disclosure without departing from the spirit or scope of the disclosure. For example, while the present disclosure has been described primarily with reference to shoes, those skilled in the art will understand that the disclosure may be applied to various apparatuses having foot restraints as integral components, for example, water skis. Thus, it is intended that the embodiments described herein cover the modifications and variations of this disclosure provided they come within the scope of the appended claims and their equivalents.

Numerous characteristics and advantages have been set forth in the preceding description, including various alternatives together with details of the structure and function of the devices and/or methods. The disclosure is intended as illustrative only and as such is not intended to be exhaustive. It will be evident to those skilled in the art that various modifications can be made, especially in matters of structure, materials, elements, components, shape, size and arrangement of parts including combinations within the principles of the invention, to the full extent indicated by the broad, general meaning of the terms in which the appended claims are expressed. To the extent that these various modifications do not depart from the spirit and scope of the appended claims, they are intended to be encompassed therein.

Benefits, other advantages, and solutions to problems have been described herein with regard to specific embodiments. Furthermore, the connecting lines shown in the various figures contained herein are intended to represent exemplary functional relationships and/or physical couplings between the various elements. It should be noted that many alternative or additional functional relationships or physical connections may be present in a practical system. However, the benefits, advantages, solutions to problems, and any elements that may cause any benefit, advantage, or

solution to occur or become more pronounced are not to be construed as critical, required, or essential features or elements of the disclosure.

The steps recited in any of the method or process descriptions may be executed in any order and are not necessarily limited to the order presented. Furthermore, any reference to singular includes plural embodiments, and any reference to more than one component or step may include a singular embodiment or step. Elements and steps in the figures are illustrated for simplicity and clarity and have not necessarily been rendered according to any particular sequence. For example, steps that may be performed concurrently or in different order are illustrated in the figures to help to improve understanding of embodiments of the present disclosure.

Any reference to attached, fixed, connected or the like may include permanent, removable, temporary, partial, full and/or any other possible attachment option. Additionally, any reference to without contact (or similar phrases) may also include reduced contact or minimal contact. Surface shading lines may be used throughout the figures to denote different parts or areas but not necessarily to denote the same or different materials. In some cases, reference coordinates may be specific to each figure.

Systems, methods and apparatus are provided herein. In the detailed description herein, references to "one embodiment", "an embodiment", "various embodiments", etc., indicate that the embodiment described may include a particular feature, structure, or characteristic, but every embodiment may not necessarily include the particular feature, structure, or characteristic. Moreover, such phrases are not necessarily referring to the same embodiment. Further, when a particular feature, structure, or characteristic is described in connection with an embodiment, it is submitted that it is within the knowledge of one skilled in the art to affect such feature, structure, or characteristic in connection with other embodiments whether or not explicitly described. After reading the description, it will be apparent to one skilled in the relevant art(s) how to implement the disclosure in alternative embodiments.

Furthermore, no element, component, or method step in the present disclosure is intended to be dedicated to the public regardless of whether the element, component, or method step is explicitly recited in the claims. No claim element is intended to invoke 35 U.S.C. 112(f) unless the element is expressly recited using the phrase "means for." As used herein, the terms "comprises", "comprising", or any other variation thereof, are intended to cover a non-exclusive inclusion, such that a process, method, article, or apparatus that comprises a list of elements does not include only those elements but may include other elements not expressly listed or inherent to such process, method, article, or apparatus.

What is claimed is:

1. A rapid-entry shoe, comprising:

- a heel piece comprising a first paddle coupled to a second paddle by a neck, wherein the heel piece is adapted to be located at a rear portion of the rapid-entry shoe;
- a first anchor and a second anchor, each disposed beneath the footbed of the shoe, wherein the first anchor is disposed on a medial side of the rapid-entry shoe and wherein the second anchor is disposed on a lateral side of the rapid-entry shoe;
- a first deformable element extending from beneath the footbed of the shoe and between the first anchor and the first paddle, wherein torsion of the first deformable element about its longitudinal axis facilitates outward rotation of the first paddle; and

17

a second deformable element extending from beneath the footbed of the shoe and between the second anchor and the second paddle, wherein torsion of the second deformable element about its longitudinal axis facilitates outward rotation of the second paddle;

wherein the shoe comprises a collapsed configuration and an uncollapsed configuration, wherein in the collapsed configuration at least one of the first deformable element and the second deformable element is in a compressed state and bends downward and in the uncollapsed configuration at least one of the first deformable element and the second deformable element is oriented upwards and is in a partially compressed state,

wherein in the collapsed configuration the first paddle and the second paddle are rotated outward and the first paddle and the second paddle are prevented from rotating inward.

2. The rapid-entry shoe of claim 1, further comprising an aperture disposed in the heel piece, wherein the engagement between the aperture and an enlarged portion of the deformable element allows rotation of at least one of the first paddle and the second paddle in a first direction, and prevents rotation of at least one of the first paddle and the second paddle in a second direction.

3. The rapid-entry shoe of claim 1, wherein at least one of the first deformable element and the second deformable element prevents inward folding of a topline of the shoe.

4. The rapid-entry shoe of claim 1, wherein the first deformable element and the second deformable element have a second radius of curvature in the uncollapsed configuration that is greater than a first radius of curvature in the collapsed configuration.

5. The rapid-entry shoe of claim 1, wherein the first deformable element and the second deformable element are configured to follow natural contours of a user's foot/heel in both the uncollapsed configuration and the collapsed configuration.

6. The rapid-entry shoe of claim 1, wherein a first side of the first deformable element has a first curvature that is different than a second curvature of a second side of the first deformable element.

7. The rapid-entry shoe of claim 1, wherein engagement between the first deformable element and the first anchor is

18

non-pivoting and engagement between the second deformable element and the second anchor is non-pivoting.

8. The rapid-entry shoe of claim 7, wherein the engagement between the first deformable element and the first anchor is free of play and engagement between the second deformable element and the second anchor is free of play.

9. The rapid-entry shoe of claim 1, wherein the first deformable element is coupled to the first anchor and the first anchor is coupled to an anchor receptacle.

10. The rapid-entry shoe of claim 1, wherein the first deformable element comprises a cover that affects flexure of the first deformable element.

11. The rapid-entry shoe of claim 1, wherein in response to moving from the uncollapsed configuration to the collapsed configuration, an opening of the shoe expands by at least about 10%.

12. The rapid-entry shoe of claim 1, wherein a middle portion of at least one of the first deformable element and the second deformable element exhibits a return force toward the uncollapsed configuration of between 1 pound-force and 10 pound-force.

13. The rapid-entry shoe of claim 1, wherein a middle portion of at least one of the first deformable element and the second deformable element returns from the collapsed configuration to the uncollapsed configuration in less than about 1 second.

14. The rapid-entry shoe of claim 1, wherein the heel piece includes a ledge configured to facilitate retaining a user's heel within the rapid-entry shoe.

15. The rapid-entry shoe of claim 1, wherein inward rotation of the first paddle and the second paddle is prevented by the neck.

16. The rapid-entry shoe of claim 1, further comprising a rapidentry tongue element comprising one or more of a tongue flare, a cross element or a tongue stiffener.

17. The rapid-entry shoe of claim 1, further comprising a material stiffener configured to direct collapse of a more flexible heel material.

18. The rapid-entry shoe of claim 1, wherein the first anchor and the second anchor are housed within a base which in turn comprises one or more of an outsole, a midsole, an insole or a wedge.

* * * * *