



US009498805B2

(12) **United States Patent**  
**Hammers et al.**

(10) **Patent No.:** **US 9,498,805 B2**  
(45) **Date of Patent:** **Nov. 22, 2016**

(54) **AIRBORNE COMPONENT EXTRACTOR WITH IMPROVED FLOW PATHS**

(2013.01); **B08B 15/002** (2013.01); **B23K 9/325** (2013.01); **B23K 26/142** (2015.10); **B23K 37/08** (2013.01); **F24F 7/007** (2013.01)

(71) Applicant: **Illinois Tool Works Inc.**, Glenview, IL (US)

(58) **Field of Classification Search**  
CPC ..... B08B 15/00; B08B 15/04  
USPC ..... 454/60, 63  
See application file for complete search history.

(72) Inventors: **Brian J. Hammers**, Appleton, WI (US); **Adam Joseph Frank**, Menasha, WI (US); **William Maske**, Bear Creek, WI (US); **Bradley G. Carman**, Chicago, IL (US)

(56) **References Cited**

(73) Assignee: **ILLINOIS TOOL WORKS INC.**, Glenview, IL (US)

U.S. PATENT DOCUMENTS  
2,185,919 A 1/1940 Kurth  
2,210,458 A \* 8/1940 Keilholtz ..... 454/233  
(Continued)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 679 days.

FOREIGN PATENT DOCUMENTS

(21) Appl. No.: **13/767,601**

AU 637737 6/1993  
CH 682512 9/1993

(22) Filed: **Feb. 14, 2013**

(Continued)

(65) **Prior Publication Data**

US 2013/0244556 A1 Sep. 19, 2013

**Related U.S. Application Data**

(60) Provisional application No. 61/737,653, filed on Dec. 14, 2012, provisional application No. 61/611,885, filed on Mar. 16, 2012.

OTHER PUBLICATIONS

International Search Report & Written Opinion of PCT/US2012/022599 mailed May 2, 2012.

(Continued)

(51) **Int. Cl.**

**B08B 15/02** (2006.01)  
**B05B 15/12** (2006.01)  
**B05C 15/00** (2006.01)  
**F24F 7/00** (2006.01)  
**F24F 7/007** (2006.01)  
**B08B 15/00** (2006.01)  
**B23K 9/32** (2006.01)  
**B23K 37/08** (2006.01)

*Primary Examiner* — Steven B McAllister

*Assistant Examiner* — Jonathan Cotov

(74) *Attorney, Agent, or Firm* — Fletcher Yoder P.C.


(52) **U.S. Cl.**

CPC ..... **B08B 15/02** (2013.01); **B08B 15/00**

(57) **ABSTRACT**

A component extraction system utilized a base unit that produces a positive pressure air stream and that draws a negative pressure air stream into the base unit. To enhance performance, and reduce head requirements and power consumption, a number of bends in the flow paths is minimized in the base unit.

**17 Claims, 13 Drawing Sheets**

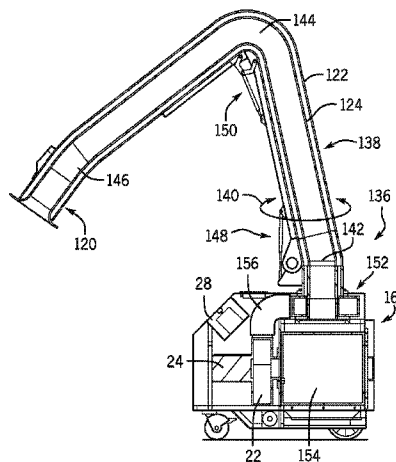

(56)

References Cited

U.S. PATENT DOCUMENTS

2,289,474 A \* 7/1942 Anderson ..... A47L 7/00  
415/121.2

2,367,104 A 1/1945 Demuth  
RE24,637 E 4/1959 Wulle

2,910,558 A 10/1959 Engelhardt

3,318,227 A 5/1967 Nelson

3,364,664 A 1/1968 Doane

3,430,551 A 3/1969 Hauville

3,487,767 A 1/1970 Kristiansen

4,016,398 A \* 4/1977 Herrick ..... 219/137.41

4,043,257 A 8/1977 Aaberg

4,158,462 A 6/1979 Coral

4,160,407 A 7/1979 Duym

4,163,650 A \* 8/1979 Watson et al. .... 96/57

4,450,756 A 5/1984 Kling

4,493,970 A 1/1985 Rieppel

4,502,375 A \* 3/1985 Hignite et al. .... 454/56

4,552,059 A \* 11/1985 Potter ..... 454/66

4,607,614 A 8/1986 Higashino

4,717,805 A 1/1988 Miyagawa

4,905,716 A \* 3/1990 Hubbard ..... 132/212

5,058,490 A 10/1991 Sodex

5,069,197 A 12/1991 Wisting

5,223,005 A 6/1993 Avondoglio

5,263,897 A \* 11/1993 Kondo ..... F24C 15/2028  
454/189

5,281,246 A \* 1/1994 Ray et al. .... 55/302

5,395,410 A 3/1995 Jang

5,410,120 A 4/1995 Taylor

5,427,569 A 6/1995 Plymoth

5,540,214 A 7/1996 Boudreault

5,713,346 A \* 2/1998 Kuechler ..... 126/299 D

5,718,219 A 2/1998 Boudreault

5,890,484 A 4/1999 Yamada

6,037,725 A 3/2000 Tolbert, Jr.

6,099,607 A \* 8/2000 Haslebacher ..... 55/356

6,332,837 B1 \* 12/2001 Wilk et al. .... 454/63

6,358,137 B1 \* 3/2002 Threlfall ..... 454/61

6,607,573 B1 \* 8/2003 Chaurushia et al. .... 55/356

6,616,720 B1 \* 9/2003 Smith ..... 55/385.2

6,620,038 B1 \* 9/2003 Kikuchi et al. .... 454/66

6,632,132 B1 \* 10/2003 Kikuchi et al. .... 454/66

6,780,213 B2 \* 8/2004 Chang et al. .... 55/385.2

7,000,634 B2 2/2006 Lindborg

7,959,696 B2 \* 6/2011 Martic et al. .... 55/344

8,176,766 B1 5/2012 Ruiz

8,211,194 B2 7/2012 Takayanagi

8,312,873 B2 \* 11/2012 Gagas et al. .... 126/299 D

8,460,417 B2 \* 6/2013 Reid et al. .... 55/356

8,892,222 B2 11/2014 Simms

2002/0039881 A1 4/2002 Coral

2003/0181158 A1 \* 9/2003 Schell et al. .... 454/229

2005/0170767 A1 8/2005 Enzenroth

2005/0204582 A1 9/2005 Rossi

2006/0157048 A1 7/2006 Heilman

2008/0305731 A1 \* 12/2008 Reid et al. .... 454/65

2009/0088060 A1 4/2009 Arnold

2009/0321403 A1 \* 12/2009 Brenneke ..... 219/137.41

2010/0206799 A1 8/2010 Leavitt

2010/0282728 A1 \* 11/2010 Cole ..... 219/133

2012/0193334 A1 8/2012 Mehn

2013/0122795 A1 5/2013 Hammers

2013/0162177 A1 6/2013 Hofsdal

2014/0213164 A1 7/2014 Leisner

2014/0214213 A1 7/2014 Rockenfeller

FOREIGN PATENT DOCUMENTS

CN 2146665 11/1993  
CN 2225253 4/1996

CN 2413708 1/2001  
CN 1384909 12/2002  
CN 200984583 12/2007  
CN 101327109 12/2008  
CN 101332392 12/2008  
CN 101526239 9/2009  
CN 201609707 10/2010  
CN 202087569 12/2011  
CN 102483240 5/2012  
CN 102699002 10/2012  
DE 1604293 9/1970  
DE 3412204 10/1985  
DE 4413600 11/1995  
DE 10020736 10/2001  
DE 20221100 1/2005  
DE 102005016721 10/2006  
DE 102005033224 7/2007  
DE 102006055001 5/2008  
DE 102009030220 12/2010  
EP 0511576 11/1992  
EP 0536871 4/1993  
EP 1227283 7/2002  
EP 1967796 9/2008  
EP 2368646 9/2011  
EP 2422865 2/2012  
FR 2613551 10/1988  
FR 2911520 7/2008  
GB 546878 8/1942  
GB 1069868 A 5/1967  
GB 2030825 5/1980  
GB 2032825 A 5/1980  
JP S54147647 11/1979  
JP H01179841 7/1989  
JP H04063183 2/1992  
JP H06292970 10/1994  
JP H10288371 10/1998  
WO 0048752 A1 8/2000  
WO 0184054 11/2001  
WO 2004088812 10/2004  
WO 2005022046 3/2005  
WO 2005045323 5/2005  
WO 2005106337 11/2005  
WO 2008032571 3/2008

OTHER PUBLICATIONS

International Search Report from PCT application No. PCT/US2012/064081 dated Feb. 14, 2013, 12 pgs.

International Search Report from PCT application No. PCT/US2013/031237 dated Jul. 23, 2013, 11 pgs.

International Search Report from PCT application No. PCT/US2013/031261 dated Jul. 25, 2013, 13 pgs.

International Search Report from PCT application No. PCT/US2013/030694 dated Aug. 20, 2013, 15 pgs.

International Search Report from PCT application No. PCT/US2013/031246 dated Aug. 9, 2013, 13 pgs.

International Search Report from PCT application No. PCT/US2013/031251 dated Aug. 6, 2013, 15 pgs.




International Search Report from PCT application No. PCT/US2013/030697 dated Jul. 30, 2013, 13 pgs.




International Search Report from PCT application No. PCT/US2014/036956, dated Aug. 29, 2014, 14 pgs.



International Search Report from PCT application No. PCT/US2014/044119, dated Sep. 10, 2014, 10 pgs.

International Search Report from PCT application No. PCT/US2014/011860, dated Apr. 24, 2015, 10 pgs.

\* cited by examiner

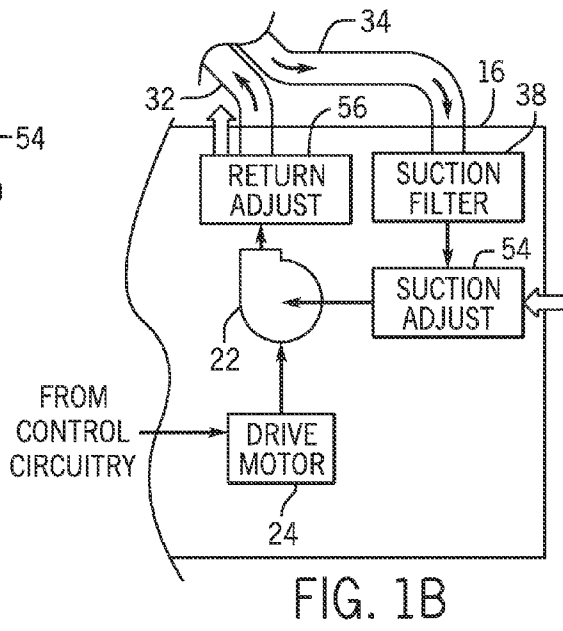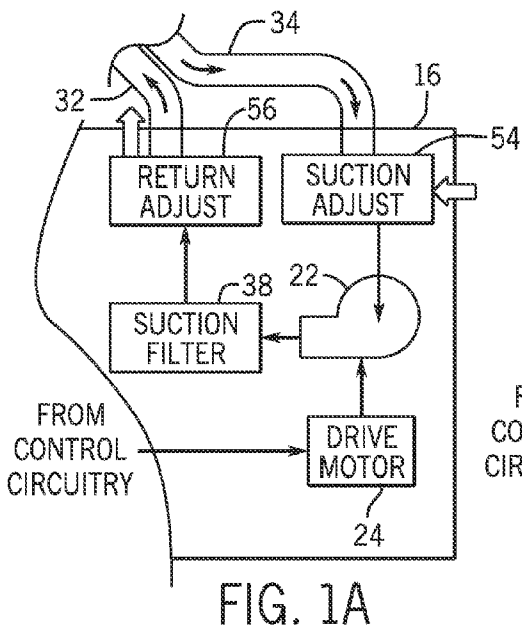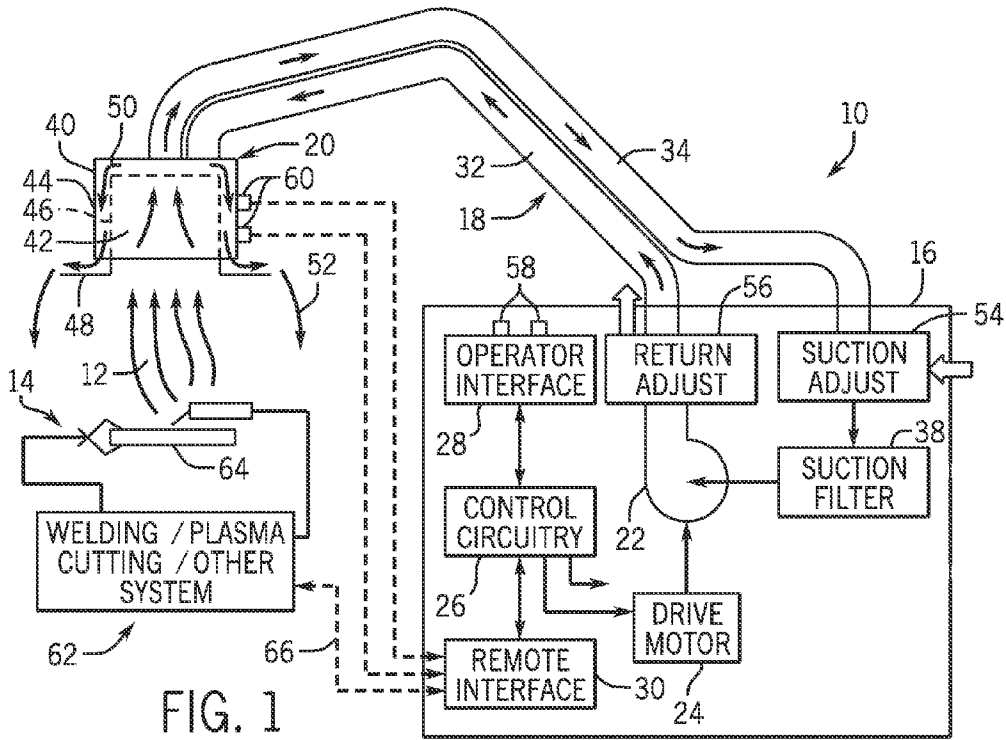

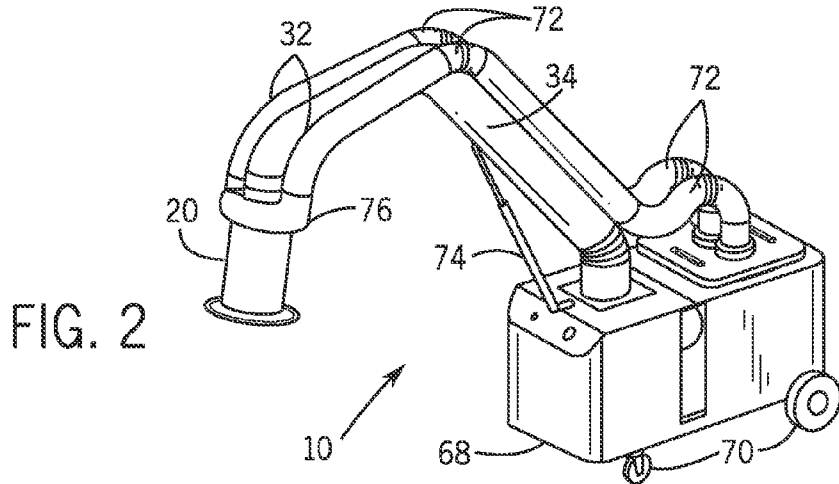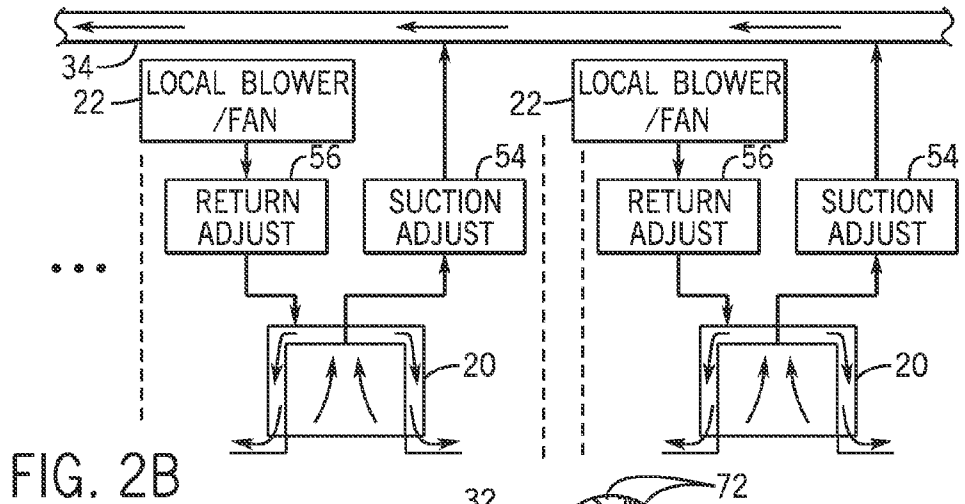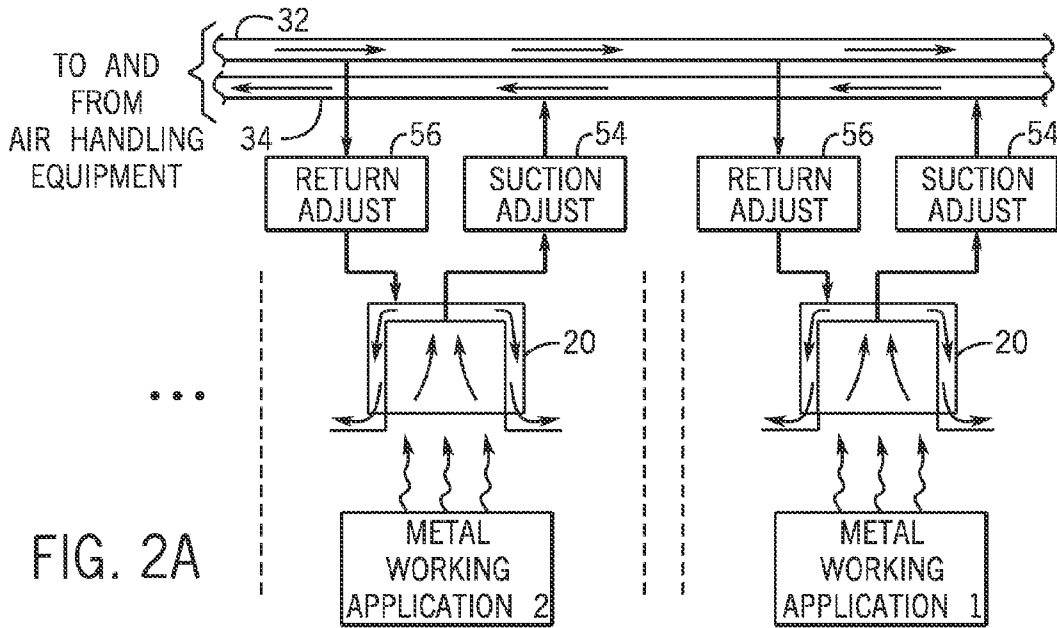

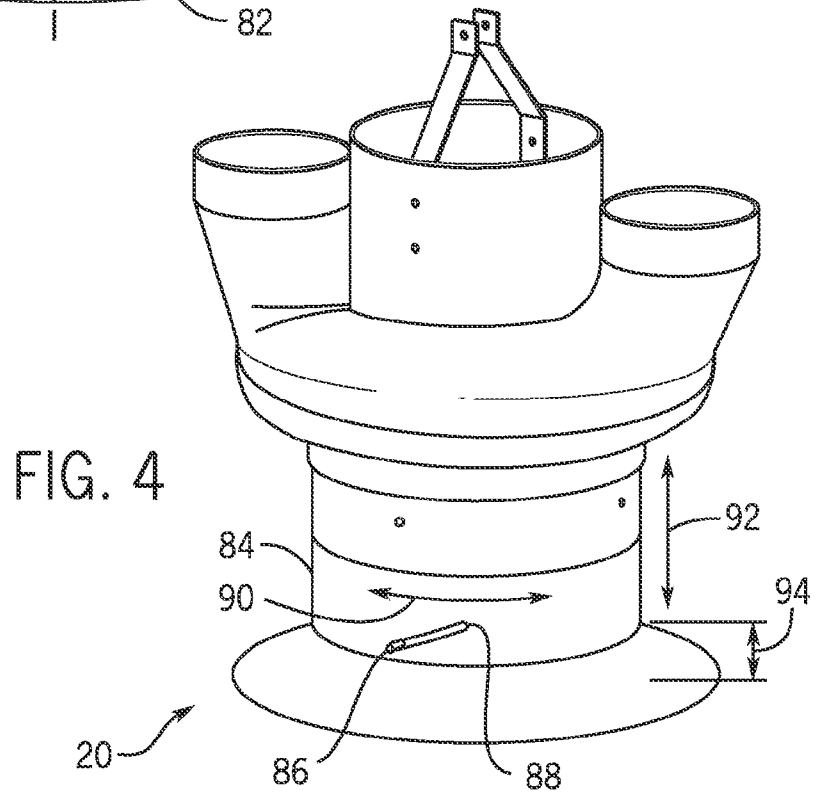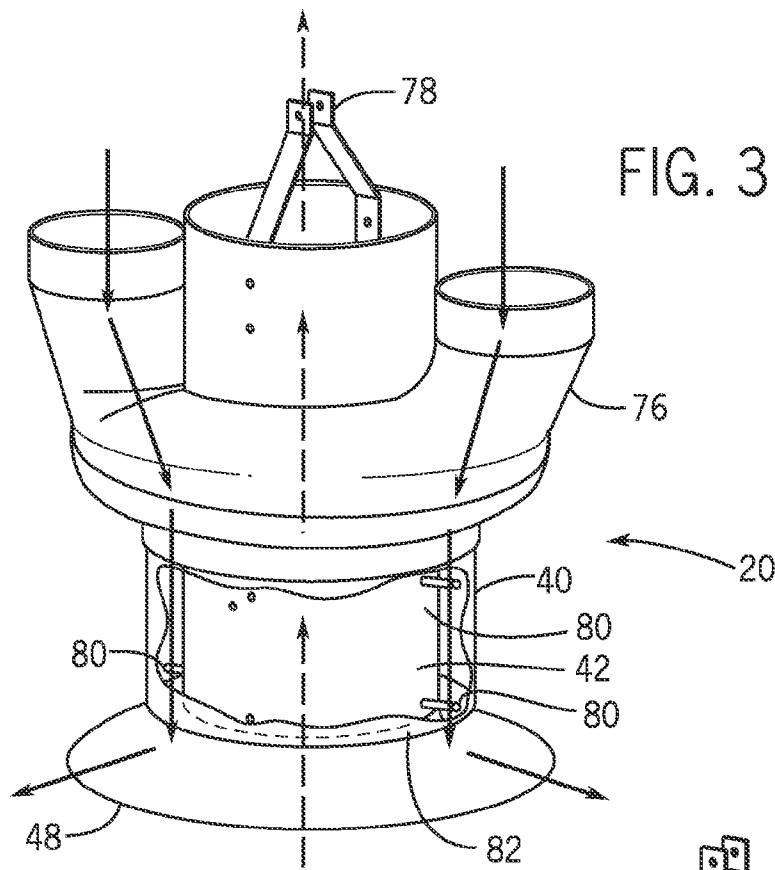

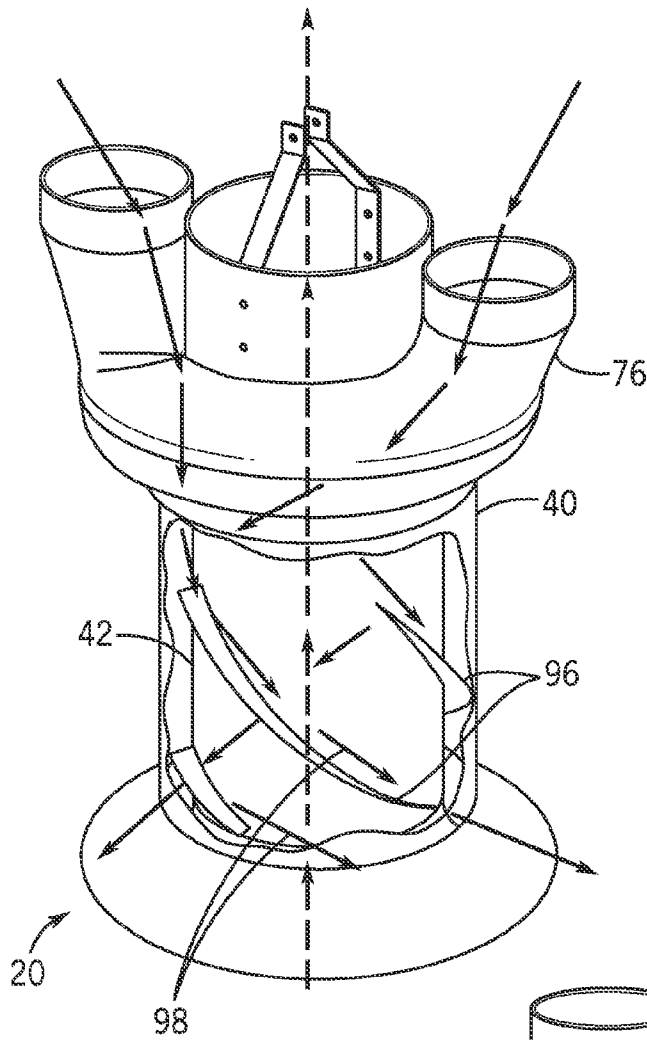
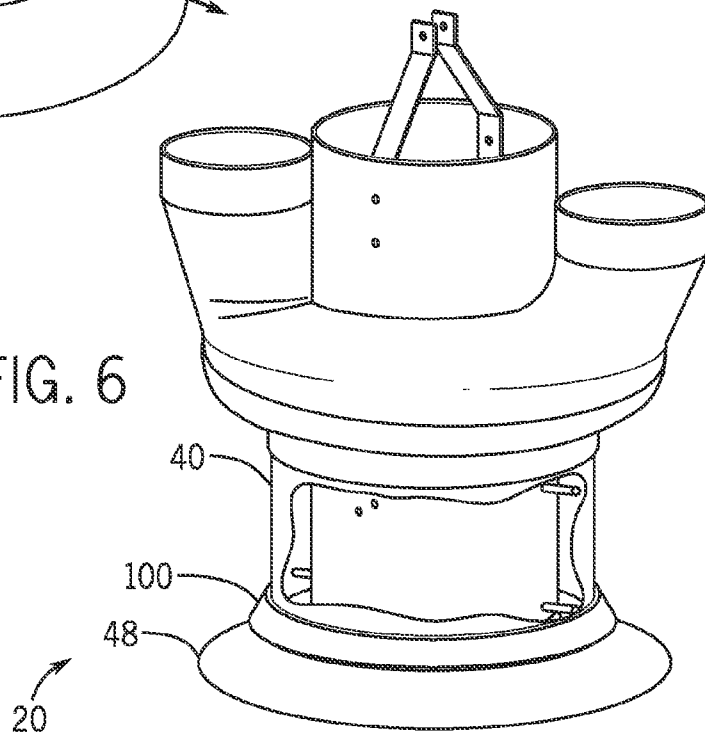


FIG. 5

FIG. 6



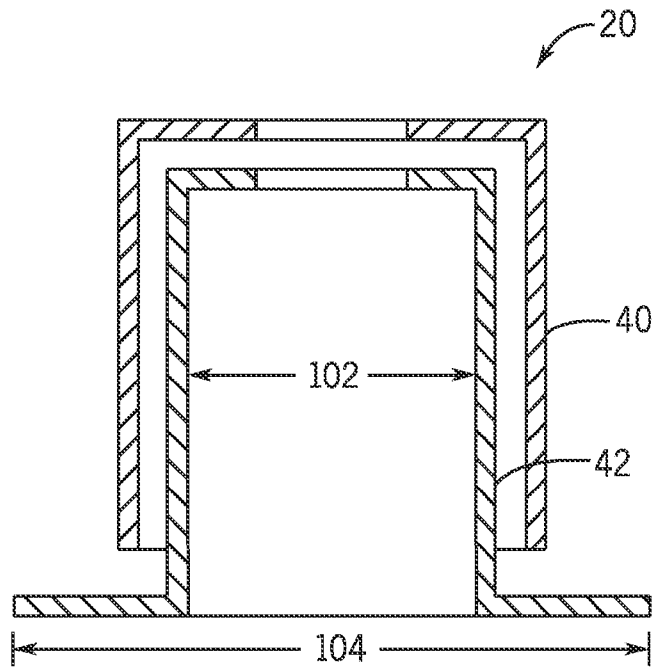


FIG. 7

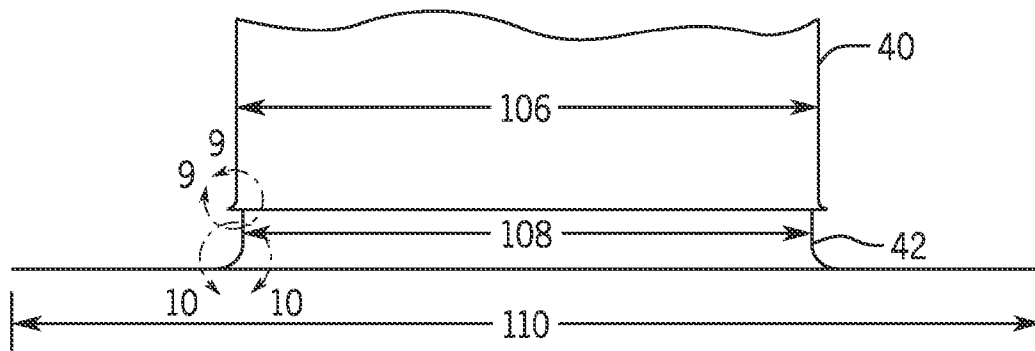


FIG. 8

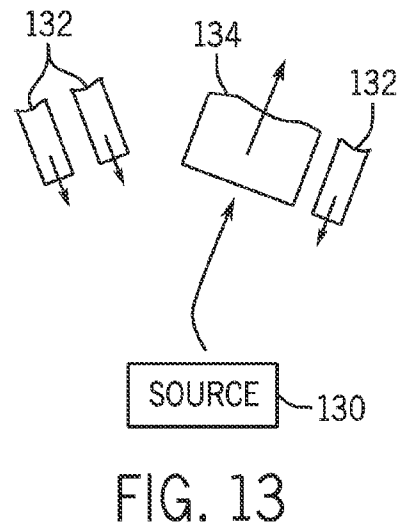
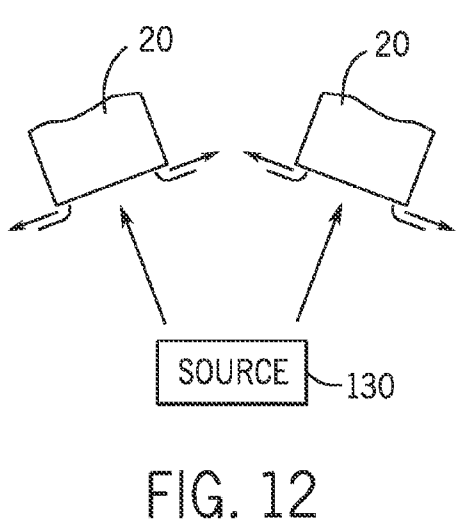
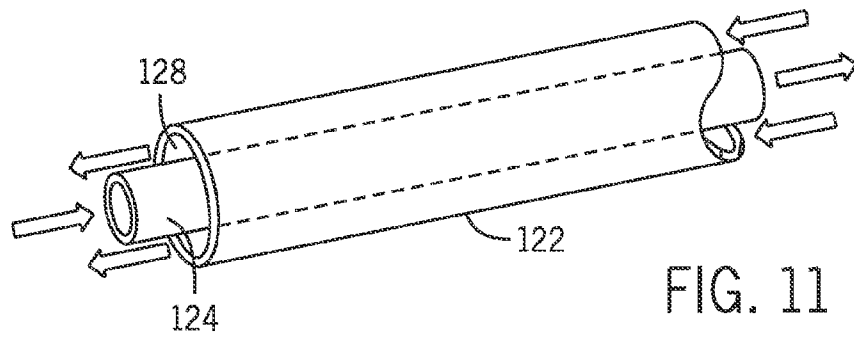
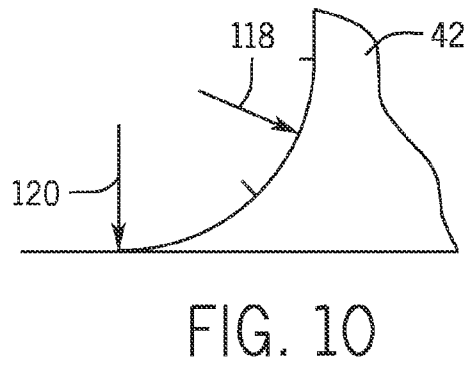
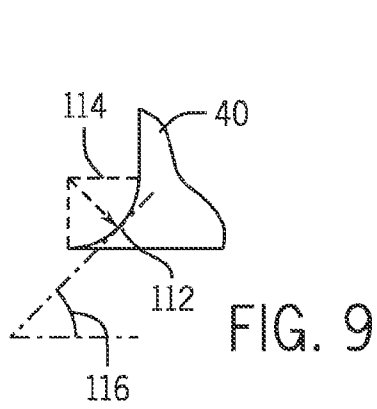






FIG. 16

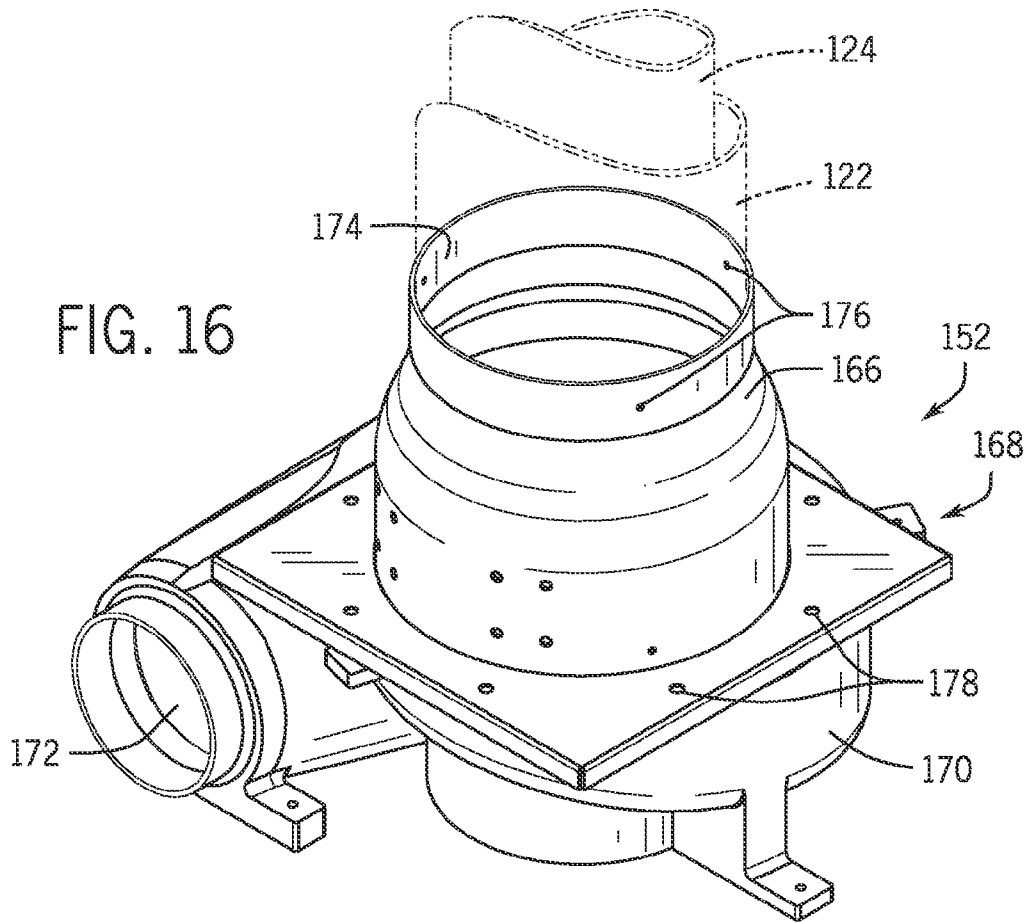
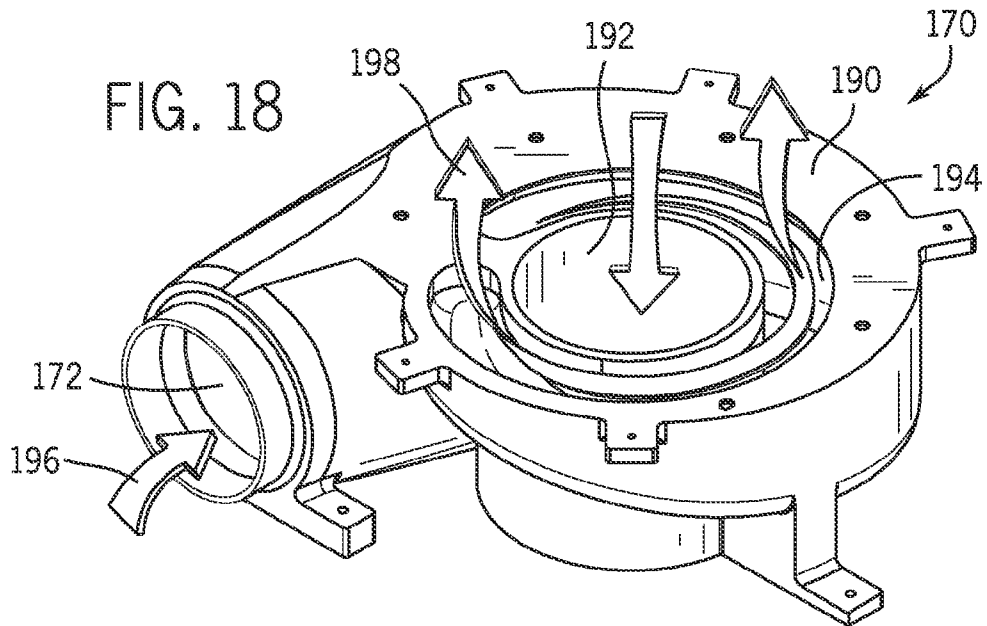


FIG. 18



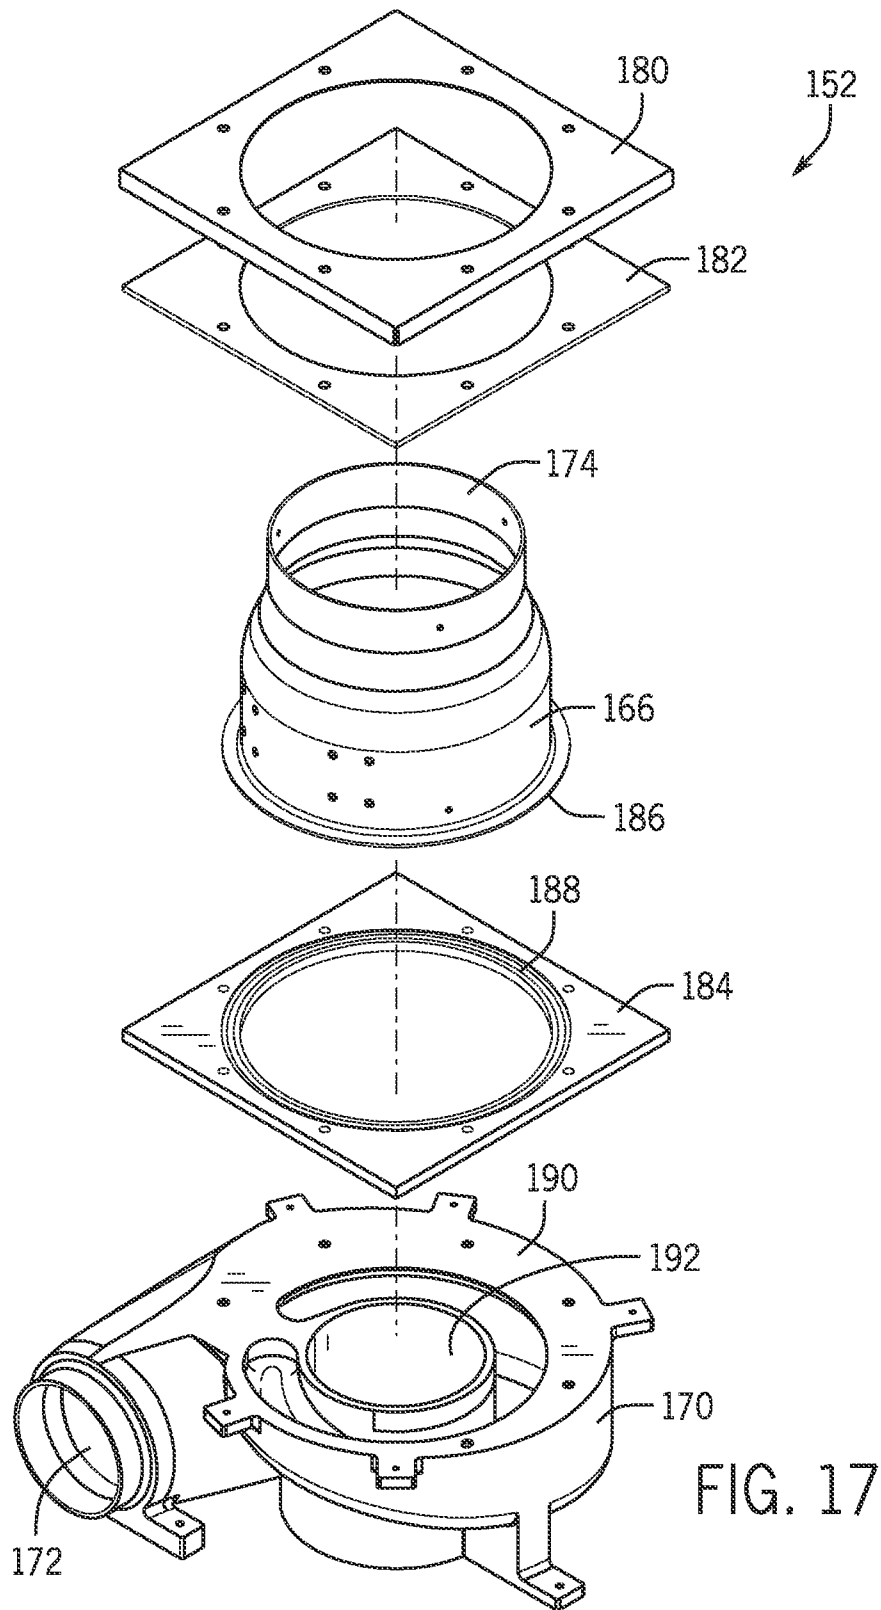
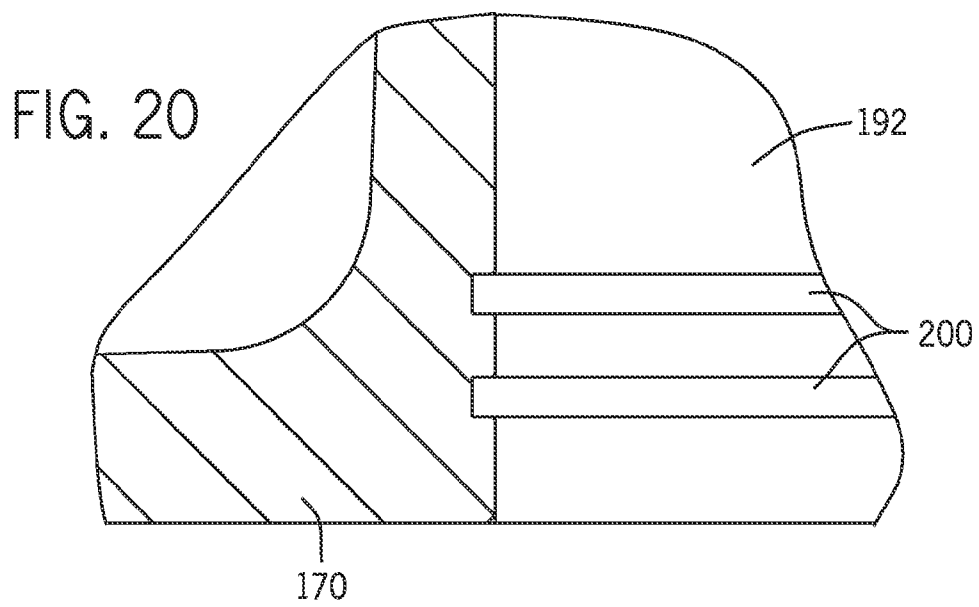
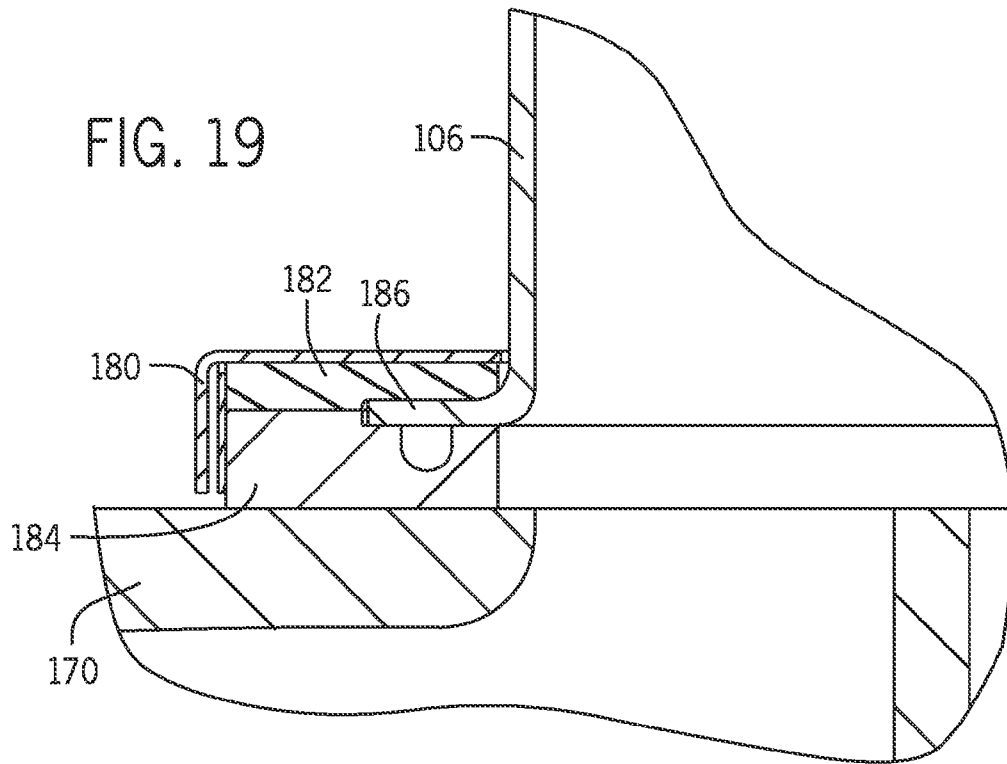


FIG. 17



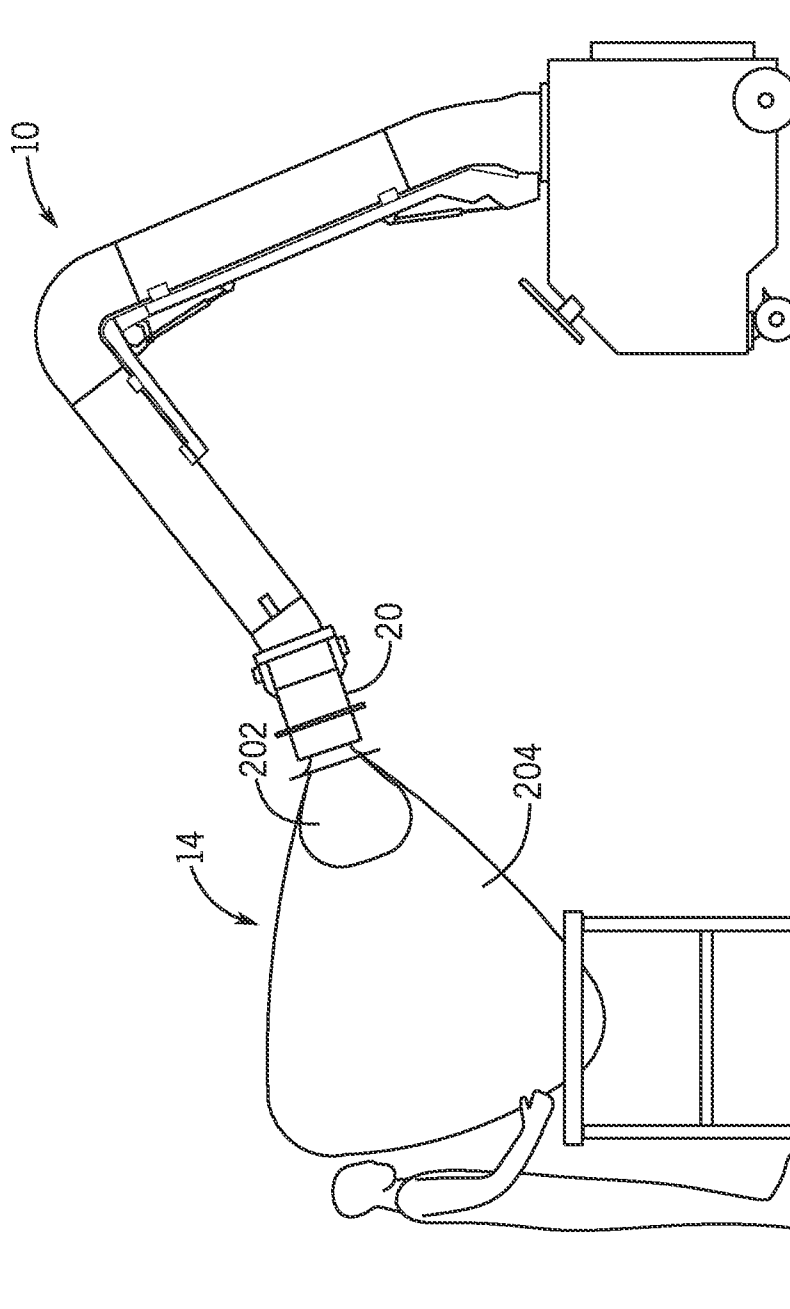


FIG. 21

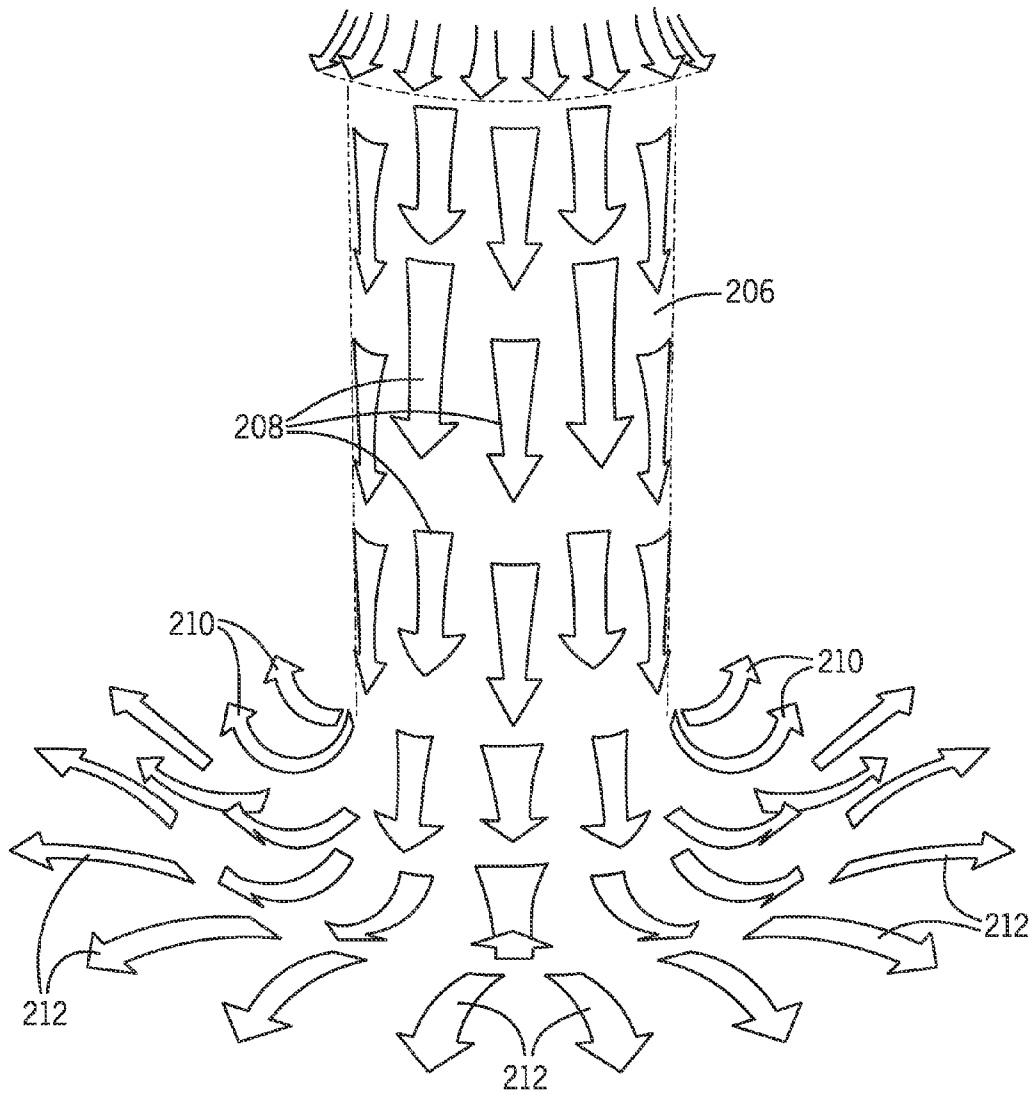


FIG. 22

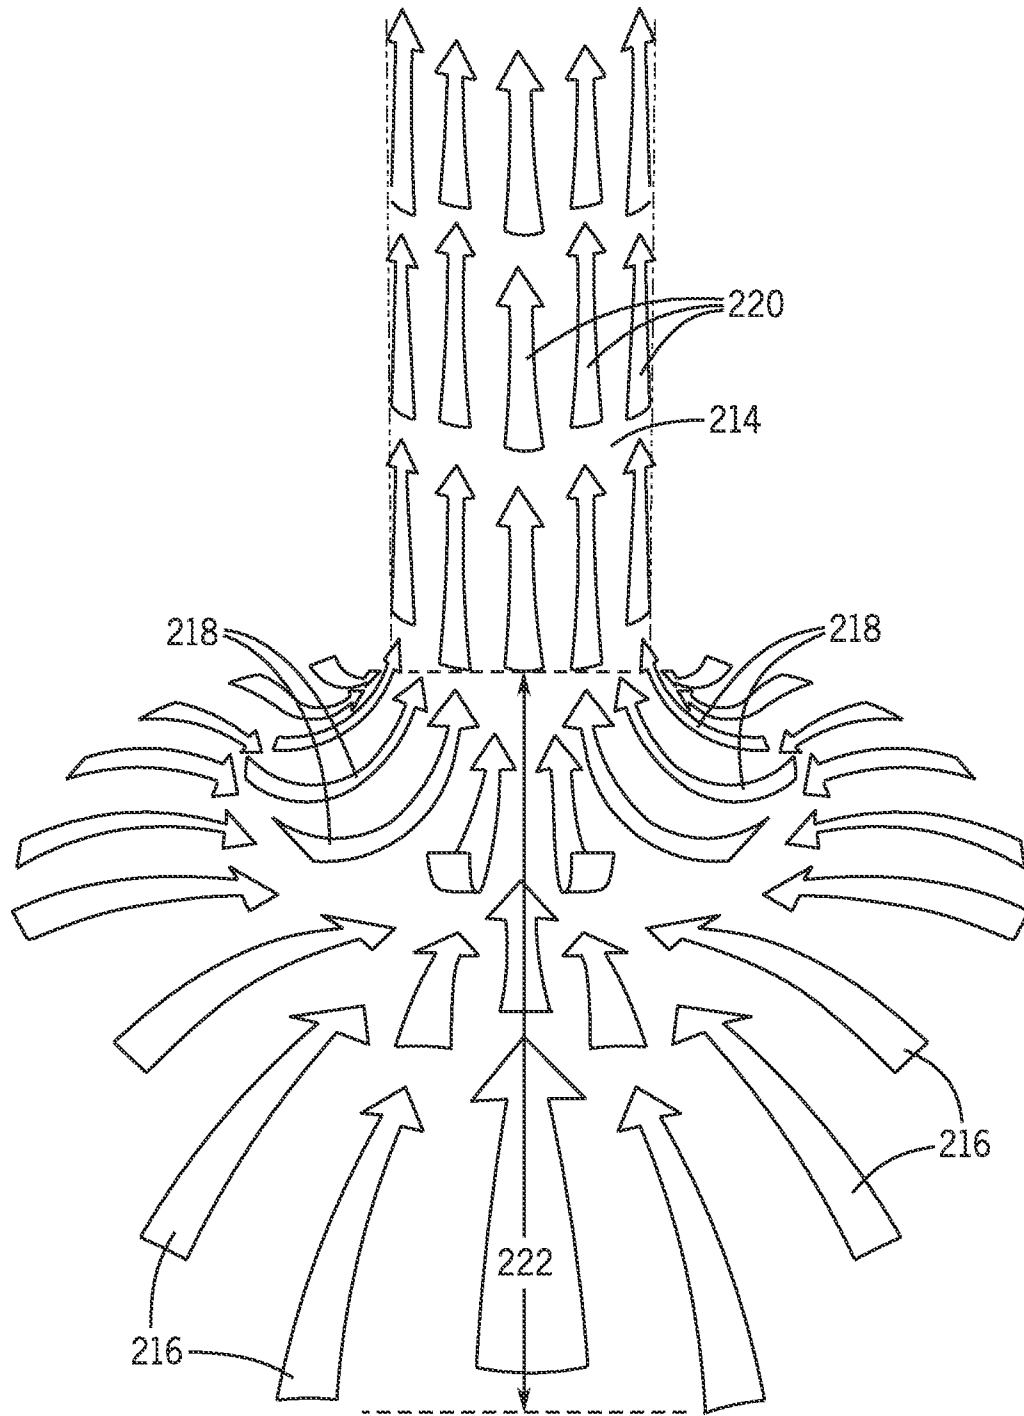


FIG. 23

1

## AIRBORNE COMPONENT EXTRACTOR WITH IMPROVED FLOW PATHS

### CROSS REFERENCE TO RELATED APPLICATIONS

This application is a Nonprovisional Patent Application of U.S. Provisional Application No. 61/737,653, entitled "Airborne Component Extractor", filed Dec. 14, 2012; and Provisional Application No. 61/611,885, entitled "Fume Extractor", filed Mar. 16, 2012, which are herein incorporated by reference.

### BACKGROUND

The present disclosure relates generally to systems for extracting airborne components from air streams, such as in welding, cutting, metal working, wood working, and other applications.

A wide range of industrial, commercial, hobby and other applications result in airborne components that can be removed with proper extraction and filtering. Metal working operations, for example, range from cutting, welding, soldering, assembly, and other processes that may generate smoke and fumes. In smaller shops it may be convenient simply to open ambient air passages or to use suction or discharge air from fans to maintain air spaces relatively clear. In other applications, cart-type fume extractions are used. In industrial settings, more complex fixed systems may be employed for extracting fumes from specific works cells, metal working locations, and so forth. In other settings, such as machine shops, woodworking shops, worksites where cutting, sanding and other operations are performed, dust, fumes, particulate and other types of airborne components may be generated that it may be desirable to collect and extract from work areas and controlled spaces.

A number of systems have been developed for fume extraction, and a certain number of these are currently in use. In general, these use suction air to draw fumes and smoke from the immediate vicinity of the metal working operation, and to filter the fumes and smoke before returning the air to the room or blowing the air to an outside space. Further improvements are needed, however, in fume extraction systems. For example, it would be useful to increase the effective ability of the systems to draw the fumes and smoke from the metal working workspace. Moreover, it would be useful to increase the distance and expand the volume over which the fume extractor can effectively remove fumes and smoke.

### BRIEF DESCRIPTION

The present disclosure provides improvements to extractors designed to respond to such needs. The techniques are based upon the use of a positive airflow in conjunction with a suction airflow that draws airborne components out of the workspace for filtration. The innovations set forth in the disclosure have a number of different facets, and may be used in conjunction with one another to obtain particular synergies and advantages, or separately in some cases.

### DRAWINGS

These and other features, aspects, and advantages of the present disclosure will become better understood when the following detailed description is read with reference to the

2

accompanying drawings in which like characters represent like parts throughout the drawings, wherein:

FIG. 1 is a diagrammatical representation of a fume extractor in accordance with aspects of the present techniques;

FIGS. 1A and 1B illustrate certain presently contemplated variations on the interconnection of components used to provide positive pressure air and draw fumes and smoke from an application;

FIG. 2 is a perspective view of an exemplary implementation of the fume extractor in a cart-like apparatus;

FIGS. 2A and 2B are diagrammatical representations of fixed or semi-fixed installations utilizing the techniques described herein;

FIG. 3 is a perspective view of an exemplary hood for directing positive pressure air flow to an operation and extracting fumes and smoke through an inner shroud;

FIG. 4 is a similar hood provided with manual means for adjusting outgoing air;

FIG. 5 is a similar representation of a further implementation of a hood designed to create a swirling air flow;

FIG. 6 is a further implementation of a hood employing a radial collar to assist in directing positive pressure air flow outwardly from the hood;

FIG. 7 is a diagrammatical section of an exemplary hood illustrating certain dimensions that may be advantageous to provide a degree of adjustability in the provision of air to and withdrawal of air from the hood;

FIG. 8 is an elevational view of a portion of a hood in accordance with certain embodiments of the present techniques;

FIGS. 9 and 10 are detail views of parts of the hood of FIG. 8;

FIG. 11 is a broken perspective view of a coaxial conduit arrangement for providing positive pressure air flow and suction flow;

FIGS. 12 and 13 are diagrammatical views of certain alternative embodiments that include multiple hoods and/or nozzles;

FIGS. 14 and 15 are diagrammatical views of a currently contemplated extraction cart in accordance with aspects of the present techniques;

FIGS. 16-20 are illustrations of parts of an exemplary manifold and support assembly for an arm of a cart of the type shown in FIGS. 14 and 15;

FIG. 21 is a diagram illustrating generally a comparison of component collection regions with and without the innovations summarized in the present disclosure; and

FIGS. 22 and 23 are vector flow diagrams illustrating the flow of gas to and from the nozzle of the system illustrated in the previous figures.

### DETAILED DESCRIPTION

Turning now to the drawings, and referring first to FIG. 1, an extraction system 10 is illustrated for extracting airborne components, such as smoke, fumes, particulate matter, and more generally, workspace air as indicated by reference numeral 12 from a work area 14. In the illustrated embodiment the extraction system 10 comprises a base unit 16 coupled to conduits 18 that channel air to and from a hood 20. The hood is designed to be placed at or near (typically somewhat above) the area 14 and, when the base unit is activated, serves to create region of air around the area and to extract the workspace air, directing extracted air to the base unit for processing.



It should be noted that while in certain embodiments described in the present disclosure a stand-alone base unit **16**, and in one presently contemplated embodiment a cart-type unit is described, the present techniques is not limited to any particular physical configuration. More generally, innovations provided by and described in the present disclosure may be implemented into fixed or semi-fixed installations, such as those used in industrial, commercial, hobby, and other settings. That is, certain of the components of the base unit described herein may serve multiple workspaces, work cells, weld cells, work locations and areas, and so forth, by common conduits that direct positive-pressure air to and channel air and airborne components from multiple workspaces. Operator controls, where provided as described below, may be positioned remotely from these workspaces, or within the workspaces for control of flow to and from the particular workspace.

It should be noted that the “airborne components” discussed in the present disclosure may include any substance that is borne by, suspended in or otherwise carried by the air, or more generally the fluid present in the area considered. Depending upon the application, the airborne components may be in an aerosol form, such as solid, liquid or gaseous phase particles that are suspended in air. Such airborne components may form smoke, fumes (including chemical fumes), of clouds present or given off by an operation ongoing in the area, whether or not visible to the human operators. In other applications, the airborne components may be at least temporarily airborne but not suspended in the air, such as in the case of larger particulate, such as droplets, mist (e.g., from oils, coolants, and so forth), dust (e.g., from drywall, grain, minerals, cements, or other dust sources), chips, debris, and so forth. The present techniques are directed to collecting and extracting any such airborne components in the manners described. Similarly, reference is made in this disclosure to “air” or “airborne”, although the fluid in which the airborne components are found and that is circulated by the system may be, more generally, a gaseous substance that need not contain the same constituents, or in the same ratios as found in atmospheric air. Such gasses are intended nevertheless be included in the term “air” or “airborne”. Moreover, it is presently contemplated that the same principles of fluid dynamics and borne component removal may be applied to other “fluids” than air or gasses (including liquids), and to that extent the teachings of the present disclosure are intended to extend to those applications.

Returning to FIG. 1, as illustrated the base unit **16** comprises a blower **22**, such as a squirrel-cage blower, driven by a drive motor **24**. The drive motor is controlled by control circuitry **26** which may provide drive signals to the motor for fixed-speed or variable-speed operation. The base unit **16** may be designed to draw power from any source, such as the power grid, battery sources, engine-generator sets, and so forth. The control circuitry **26** typically includes processing circuitry and memory for carrying out drive operations as desired by the operator or in response to system inputs as described below. Accordingly, the control circuitry **26** may communicate with an operator interface **28** for receiving operator settings, speed settings, on-off commands, and so forth. Similarly, the control circuitry **26** may communicate with a remote interface **30** designed to receive signals from remote inputs, remote systems, and so forth. The remote interface may also provide data to such remote systems such as for monitoring and/or controlling operation of the extraction system.

In the illustrated embodiments conduits **18** extending between the base unit **16** and the hood **20** comprise a positive pressure air conduit **32** and a return air conduit **34**. In general, the positive pressure air conduit **32** provides air to the hood, while the return air conduit **34** is under a negative or slight suction pressure to draw air containing the airborne components from the workspace. The air returning from the hood in conduit **34** may be directed through a suction filter **38** before being re-introduced into the blower **22**. As described below, the system may also include components designed to allow for adjustment of the individual or relative flow rates of one or both of the positive and negative pressure air streams.

In the embodiment illustrated in FIG. 1, the hood **20** comprises an outer shroud **40** which is essentially a rounded bell in a present embodiment, as well as an inner shroud **42** positioned within the outer shroud **40**. The sidewall **44** of the outer shroud is spaced from the inner shroud sidewall **46**, and the inner shroud sidewall terminates in a lower peripheral flange **48**. An annular space **50** is thus defined between the sidewalls **44** and **46** of the outer and inner shrouds. Positive pressure air flows through this annular space and is distributed within it, ultimately flowing downwardly as indicated by the arrows in FIG. 1 and impacting the flange **48**. The flange forces a generally radially outward flow of air to form the air region **52**. In a presently contemplated embodiment, the flange **48** is substantially perpendicular to the center line of the inner and outer shrouds, which are generally aligned coaxially with one another. It has been found that the substantially perpendicular, radial outflow of air creates a very effective air region, allowing the hood to be spaced a considerable distance from the workspace or workpiece positions while still providing very effective evacuation of airborne components.

As noted above, the present techniques may allow for adjustment of the positive pressure air flow and/or the return air flow to optimize operation of the system. Several different techniques are presently contemplated for such adjustment. For example, in the embodiment illustrated in FIG. 1, a suction air adjustment **54** may be provided before the suction filter **38**. This adjustment may comprise, for example, a bypass valve, a louver, or other mechanical device which may be adjusted to limit the flow of air from the suction filter and, consequently, the intake of air into the blower **22** from the ambient surroundings. Similarly, a return air adjustment **56** may be provided that may be similarly configured to allow for adjustment for the flow rate of returning air. In some cases, this adjustment may allow some air to exit to the environment, as illustrated in FIG. 1. Such adjustment may advantageously allow for relative mass or volumetric flow rates of the positive pressure and return airstreams to enhance creation of the air region and extraction of workspace air. In an alternative configuration, manual adjustment of one or both of the suction and return air streams may be replaced by electronic control via inputs, designated by reference numeral **58**. These may be provided on the base unit, such as through adjustment dials, membrane switches, operator touch controls, and so forth. Still further, manual and/or electronic adjustment of one or both airstreams may be provided at the hood. In the embodiment illustrated in FIG. 1, for example, electronic inputs **60** are provided for both adjustments. These are communicated to the remote interface **30** of the base unit which, in turn, communicates them to the control circuitry **26**. The control circuitry may be coupled to any suitable device, such as the suction and return adjustments **54** and **56** to regulate their operation (e.g., via small adjustment motors and actuator

5

assemblies). It should also be noted that adjustments to flow rates for the positive and negative pressure airstreams may be made by altering the speed of one or more motors and/or blowers, fans or compressors.

It should also be noted that a system may be adapted to exchange data with other system components, such as a welding/plasma cutting or other system **62**. In the illustrated embodiment, the system **62** may comprise, for example, welding or plasma cutting power supplies, wire feeders, shielding gas supplies, and so forth. In other metal working settings, the system may include various other manual and machine tools. In still other settings, the system may include various robots, production lines, power tools (e.g., saws, workstations, etc.). These will typically be coupled to the operation to accomplish the desired task on a workpiece **64**. Certain of these systems may be capable of providing control signals to the extraction system to allow for turning the extraction system on and off, regulating speeds and air flows, and so forth. Such communications may be provided via suitable cabling **66** or by other means by wireless communications. An exemplary system designed to control operation of a fume extractor is described, for example, in U.S. patent application Ser. No. 13/356,160, filed on Jan. 23, 2012, by Mehn et al., and entitled "Fume Extractor for Welding Applications", which is hereby incorporated by reference.

FIGS. **1A** and **1B** illustrate certain alternative configurations and interconnections of the components of the base unit **16**. In particular, as shown in FIG. **1A**, the filter **38** may be placed downstream of the blower **22**, and the suction adjustment **54** may direct air into the blower directly. In this case, the filter **38** may discharge directly into the return adjustment **56**. In the alternative of FIG. **1B**, the suction filter **38** is placed upstream of the suction adjustment **54**, which here again directs air into the blower.

Here again, it should be noted as well that although separate adjustment mechanisms are described in connection with certain embodiments, a single adjustment could be provided that allows for simply adjusting the ratio of the flow rates, such as via a single knob or input at a base unit, at the hood, or at any convenient location.

Moreover, other and additional components and functionalities may be built into the system. For example, it is presently contemplated that at least one of the components described above, or additional components may provide for temperature regulation of the positive pressure air stream. For example, due to the significant assist offered by the positive pressure region for airborne component removal, the operator may desire to discontinue use of other fans, blowers and so forth in the work area. The positive pressure airstream may be cooled by one or more components of the base unit (or centralized system) to provide not only the desired region surrounding the work area for component removal, but also cooling for the operator. Heating in a similar manner may also be provided.

FIG. **2** illustrates an exemplary embodiment of the system **10** implemented as a cart **68**. The cart is designed to be rolled on wheel or casters **70** to the vicinity of a metal working operation. As described above, conduits **32** and **34** direct positive pressure air to the hood **20** and draw suction air back to the base unit. The base unit components described above are situated in or on the cart **68**. The cart is designed to be plugged into a conventional outlet, such as to draw power from the power grid. The embodiment illustrated in FIG. **2** comprises two positive pressure air conduits **32** positioned on either side of a return air conduit **34**. All the conduits include flexible joints **72**, allowing raising, lower-

6

ing, lateral and other positioning of the hood at or near, typically above, the work space. Support structures, indicated by reference numeral **74**, may assist in supporting the conduits and hood. All of these components may be retracted back towards the cart for ease of storage and transportation. Moreover, in the embodiment illustrated in FIG. **2** and as discussed in greater detail below, this arrangement of conduits may make use of a manifold **76** that aides in distributing positive pressure air flow to the annular space between the inner and outer shrouds of the hood.

As mentioned above, the present techniques may be employed in systems and arrangements other than carts or systems and base units that are local to a work location. FIGS. **2A** and **2B** illustrate exemplary fixed or semi-fixed systems of the type that may be employed in workshops, factories, assembly and metalworking plants, and so forth. In the embodiment of FIG. **2A**, a positive air conduit **32** provides air from a common air handling system, such as one equipped with a blower, filter, and any other components desired to provide air flow to multiple weld cells or other application locations. A negative air conduit **34** similarly draws air from multiple application locations. In this sense, the conduits form headers or manifolds that may be positioned over the work areas or otherwise routed between them. Each work area, then, is provided with a respective hood **20** for extracting fumes and smoke, as well as respective suction and return adjustments **54** and **56**. These may operate manually or electrically, as mentioned above in the case of the cart-type embodiment. FIG. **2B** shows an alternative arrangement in which a suction conduit is provided, but in which each work area has its own local blower or fan. These may be provided either upstream or downstream of a return adjustment **56**, while a suction adjustment **54** is provided for adjustment the volumetric or mass flow rate of air and gas flowing to the common header or manifold defined by conduit **34**.

FIG. **3** is a more detailed view of an exemplary hood in accordance with certain aspects of the present techniques. As shown in FIG. **3**, the hood **20** includes an outer shroud **40** and inner shroud **42** spaced from one another to allow for airflow as described above. Attachment components **78** may be secured to the return air conduit (or one or more positive pressure air conduits) for supporting the hood on the conduits. Moreover, various mechanical structures, such as stand-offs **80** may be provided for defining and maintaining the annular spacing between the outer shroud **40** and inner shroud **42**. As will be appreciated by those skilled in art, flange **48** has an upper surface that is spaced from the lower peripheral edge of the outer shroud **40** to define an annular opening or gap **82**. Positive pressure air flows down into the manifold **76**, is distributed by manifold around the annular spacing between the inner and outer shrouds, flowing downwardly through the annular spacing and outwardly through the opening or gap **82** to provide the desired air region, as indicated by the arrows in FIG. **3**. Various forms of manifolds may be provided, and these may accommodate one, two or more positive pressure airstream conduits. For example, two such inlets are provided in the manifold **76** of FIG. **3**, and these may direct air or partially or fully around the annulus. In some embodiments, the shroud may be effective to distribute the positive pressure air flow without the need for a manifold. Another embodiments, diverting structures, baffles, and so forth may be provided in a manifold to generally equally distribute the incoming airflow around the hood.

FIG. **4** illustrates a further embodiment of a hood **20** designed to allow for manual adjustment of positive airflow.

As noted above, electronic control inputs, such as push buttons, dials, and touch controls, may be provided on the hood to channel signals via conductors or wirelessly to the base unit, or more generally, to the location of the flow control devices. However, manual control of one or more airstreams, may be provided, such as illustrated in FIG. 4. In this embodiment, a movable outer shroud section **84** is provided immediately above the lower flange. The movable outer shroud section is mounted on one or more pins **86** extending from either the inner shroud or a fixed outer shroud section as illustrated in FIG. 4. The movable outer shroud section **84** thus comprises a slot **88** that is inclined and receives the pin **86**. Where multiple pins are provided, multiple slots **88** may be used for mounting the movable outer shroud section. The movable outer shrouds section **84** may thus be rotated as indicated by reference numeral **90** to cause axial translation of the movable outer shroud section as indicated by reference numeral **92**. This translation allows for adjustment of the air gap **94** between the movable outer shroud section and the flange **48**, providing control of the mass or volumetric airflow of air region-producing positive pressure airstream. Other structures may, of course, be devised to provide for adjustment of this gap so as to permit regulation of air flow.

FIG. 5 illustrates a further embodiment of the hood designed to create a swirling air flow. In this case, the components of the hood may be substantially similar to those described above, but in the annular space between the outer shroud **40** and inner shroud **42** multiple helical fins **96** are provided. The angle, width, extent, and so forth of these fins, in addition to the number of fins, may be selected to impart a swirling pattern to the outgoing air that creates the air region. The incline of the flange **48** may also be adjusted to enhance the creation of the air region. Air flowing down through the annular space, then, has a downward and outward directional component as well as a circumferential component, as indicated by arrows **98** in FIG. 5.

Still further, FIG. 6 illustrates an alternative configuration of the hood in which a radial collar **100** is positioned between a lower peripheral edge of the outer shroud **40** and the flange **48**. Such a collar may be used to aide in directing the exiting air as it impacts and flows over the flange **48**.

It should be noted that the hood provided in all of these implementations may include a single flange for directing the positive pressure air radially outwardly, thereby significantly facilitating manufacture of the hoods and reducing their weight. In certain presently contemplated embodiments, for example, the outer and inner components of the hood are molded or otherwise formed separately, and then assembled by simply inserting the inner component into the outer and securing it in place, with the single flange spaced from the lower periphery of the outer component.

It should also be noted that the adjustability of the volumetric or mass flow rates of positive and negative pressure air streams provides a significant improvement over other fume and smoke or more generally, airborne component extractors. It has been found that the ability to strike a balance between the flow of positive pressure air into the region surrounding the work area and the flow of negative pressure air drawn from the work area results in an extremely flexible system that can be adapted to the needs of the user, while providing enhanced component removal at greater distances from the work than previous systems.

There are several ways in which the best ratio or balance between positive and negative pressure air flows may be qualified, with this ratio being adjustable by adjustment of the air flow parameters. For example, the ratio provided by:

$$R = \frac{\text{positive pressure airstream flow rate} \times \text{positive pressure airstream velocity}}{\text{negative pressure airstream flow rate} \times \text{negative pressure airstream velocity}}$$

has been found to provide a good indication of the effectiveness of fume evacuation. The positive pressure airstream velocity may be measured, for example, at the region between the lower periphery of the outer shroud and the peripheral flange of the inner shroud. The negative pressure airstream velocity may be measured, for example, at the inlet (lower opening) of the inner shroud. Such locations offer a convenient and standard place to compare air movement parameters. In presently contemplated embodiments, the ratio R is advantageously between about 0.25 and 100, and it is believed that the ratio is particularly advantageously between about 0.6 and 10.

It should also be noted that particularly good performance has been found to result from particular ratios of mass or volumetric flow rates of the positive and negative pressure airstreams. For example, in currently contemplated embodiments, these airstreams may have mass or volumetric flow ratios (positive-to-negative airstream ratios) of between approximately 1:1 and 0.5:1, with a ratio of approximately 0.8:1 being used in a present configuration. As disclosed above, these flow rates may be obtained by system design (e.g., the sized of the conduits), but also by intaking additional air to the blower from the environment, or expelling air from the blower, each of which may, where desired, be adjustable.

Performance may be improved as compared to conventional evacuation systems, and optimized in the current techniques by appropriate selection and sizing of the system components, particularly of the conduits used to convey the airstreams to and from the work area. For example, in a currently contemplated design based on co-axial conduits, described below, an inner conduit has a nominal diameter of 7 inches, or a cross-sectional area of approximately 38 in<sup>2</sup>, while the outer conduit has a nominal diameter of 10 inches, or a cross-sectional area of approximately 79 in<sup>2</sup>, such that the annular area for the outgoing airstream has a cross-sectional area of approximately 41 in<sup>2</sup>. It is believed that a ratio of the outgoing flow area to the return flow area of between approximately 4:1 and 0.7:1 may be particularly optimal for obtaining the best airborne component removal. In a present configuration, the ratio is between approximately 1:1 and 1.5:1. As will be appreciated by those skilled in the art, the flow areas selected may contribute significantly to the total static head required of the blower or blowers, and this may be one of the design factors leading to the ratios specified.

Further, it has been found that for a single-flange hood of the type discussed, certain dimensional relationships may provide for optimal component removal. FIG. 7 illustrates such a hood, diagrammatically, in which an effective inner diameter of the inner shroud **42** bears a particular relation to the outer effective diameter of the flange of the inner hood. In particular, a ratio of the effective inner diameter **102** of the inner shroud to the effective diameter **104** of the flange is advantageously between about 0.25 and 0.75, and is believed to be particularly advantageously about 0.5. By way of example, in a present embodiment, the inner diameter **102** is about 8 inches, while the outer diameter **104** is about 16 inches. It should be noted that the term "effective diameter" is used here to accommodate cases in which the

shape of the inner shroud is not a right cylinder, or where either this shape or the shroud shape is other than circular in section.

FIG. 8 illustrates a particular implementation for the hood of the type shown in FIG. 7. The hood illustrated in FIG. 8 has an outer shroud 40 and inner shroud 42 as described above. In this particular embodiment, the outer shroud 40 has a nominal diameter 106 of 10 inches, and the inner shroud 148 has a nominal diameter of 7 inches. The flange extending from the inner shroud has a nominal diameter of 110 of 18 inches. The outer shroud 140, moreover, has a radiused lip as best illustrated in FIG. 9. This lip, indicated generally by reference numeral 112, aids in smooth redirection of the airstream from the annular area between the outer shroud and inner shroud. In the embodiment illustrated in FIG. 9, the lip 112 has a radius of 0.25 inches as indicated by reference numeral 114, and extends to an angle 116 of approximately 45 degrees. It should be noted that in some embodiments, the lip on the outer shroud may be extended to form a flange much like that on the inner shroud, forming a sort of "double flange" structure. As illustrated in FIG. 10, the outer flange of the inner shroud has a similar radius to promote smooth redirecting of the air flow both out of the angular area between the shrouds and back into the inner shroud. In the illustrated embodiment, two radiuses are present at this transition point, a first radius 118 of approximately 2 inches, followed by a larger radius of approximately 7 inches transitioning to a generally flat section which is approximately perpendicular with the centerline of the shroud.

As discussed above, various configurations of conduits, numbers of conduits and so forth may be envisaged. FIG. 11 represents, for example, conduits arrangement in a generally coaxial or tube-in-tube arrangement. Such arrangement may facilitate mounting, routing, supporting and handling of the hood with respect to the base unit. In the embodiment shown in FIG. 11, for example, an outer conduit 122 has positioned generally coaxially within it an inner conduit 124 to produce an annular flow space 124. In this embodiment, positive pressure air flows through the annular space, with return air flowing through the inner conduit. It may be desirable to place standoffs or other fixed structures between these conduits to maintain them spaced between one another, or in some arrangements these may be dispensed with and the conduits allowed to be more or less freely disposed one within the other.

It should be noted that, while reference has been made to a single nozzle having inner and outer shrouds, certain adaptations may be made to the system without deviating from the techniques discussed in the present disclosure. For example, FIGS. 12 and 13 illustrate variations in which multiple shrouds or nozzles may be used for positive pressure air flow and/or negative pressure air flow. In the illustration of FIG. 12, two hoods 20 are illustrated adjacent to a source 30 from which fumes, gasses, particulate matter and so forth are to be drawn. These may be coupled to the same or to a different system, which again may be cart-like extractor or a fixed installation. As shown in FIG. 13, in some embodiments the positive flow and extraction flow may be separated. In this embodiment, multiple blower nozzles 132 are shown separated from an extraction conduit 134. In such embodiments, nozzles 132 may be positioned in any desired manner around a source 130. In certain embodiments, for example, there may be positioned radially around the source, with one or more extraction conduits being positioned adjacent to the outflow nozzles, such as in a central position.

FIGS. 14 and 15 illustrate they currently contemplated arrangement for a system as described above in a cart-like product. The cart, designated generally by reference numeral 136, includes a base unit 16 generally of the type described above. In this particular embodiment, an arm 138 extends from the base unit and includes concentrically positioned conduits as described above. The arm provides both a positive pressure or outgoing flow and a return flow that may contain airborne components to be extracted from the work area. In this embodiment the arm 138 is adapted for rotation as indicated by arrow 140. The arm may rotate more or less than 360°, and in a present embodiment rotation is limited to somewhat less than the 360°, although full multi-rotation capabilities may be designed into the joint between the arm and the base unit.

In the embodiment of FIG. 14, the arm 38 has a lower joint 142 where it joins the base unit, a middle joint 144 that joins two generally linear sections of conduit and a hood joint 146 about which the hood 120 may be pivoted at least within a limited angular range. A support structure 148 is provided adjacent to the lower joint 142 to aid in supporting the arm as it is extended toward and retracted from a work area. A similar support 150 is provided adjacent to joint 144. In presently contemplated embodiments, the joints include smooth inner walls that can be deformed so as to permit extension, retraction and, more generally, positioning of the arm with respect to the base unit, while adding little or no head loss as compared to a linear section of conduit. A manifold and support assembly 152 is provided at a top section of the cart and aids in transitioning return flow and outgoing flow to and from the cart as described more fully below. The manifold and support assembly 152 also aids in mechanically supporting the arm on the cart as it is extended, retracted, and rotated.

Within the cart, return flow enters a filter box 154 where it is filtered to remove fine and larger particulate matter and other components borne by the airstream. The assembly may be designed for pressure cleaning, in a process that may direct pressurized air against one or more filter elements to promote the release of the captured particulate. From the filter box 154, air is drawn into the blower 22 which is driven by a motor 24 as described above. The blower discharges to a turn or elbow 156 that directs outgoing flow to the manifold and support assembly 152. It should be noted that in some embodiments, one or more motors and/or blowers may be employed. For example, one motor and blower set may be used for the outgoing or positive air stream, while another motor and blower set may be used for the return or negative air stream.

It is believed that greatly enhanced performance is obtained by the design of the cart in which as few as possible turns are provided in the incoming and outgoing flows. That is, as best illustrated in FIG. 15, the incoming flow is virtually linear from the arm to the filter box 154 as illustrated by arrow 158. Air within the filter box is nearly static, depending upon the size of the filter box and the flow rate of the air. Thus, a bend may be considered to occur in the filter box, although from a practical standpoint in a current embodiment little or no head loss occurs at this point. Flow from the filter box, indicated by arrow 160, enters the fan or blower 22, and exits as indicated at reference numeral 162. From this point a single redirection is made in the turn or elbow 156 (which in the presently contemplated embodiment is a smooth, radiused elbow that confines directs the flow), and the outgoing flow enters the manifold and support assembly 152 as indicated by arrow 64. As described more fully below, the manifold and support

assembly efficiently redirects the air into the annular area between the coaxial conduits, while permitting rotation of the arm.

As described herein, a “bend” within the base unit corresponds to a change in direction of between 25° and 180°, and in a particular embodiment a change in direction of approximately 90°. With this definition in mind, the only bend that occurs within the base unit is essentially at turn or elbow **156**. That is, within the filter box **154**, although the air is redirected to the blower inlet, air within the filter box may be considered essentially static. Air within the manifold and support assembly **152** is carefully directed by a volute structure as described below. In this sense, the base unit may be considered below. In this sense, the base unit may be considered to have a single bend. Depending upon the design of the components, the unit may be considered to have two or three bends (or more) within the filter box **154**, within the turn **156**, which again in the presently contemplated embodiment is a smooth elbow that efficiently directs air, and within the manifold or support assembly **152**. The redirection performed by blower is considered differently inasmuch as the blower is the source of the static and dynamic head imparted on the airstream. Again, it is believed that by minimizing the bends or necessary redirection of the flow within the cart, greatly enhanced performances obtained with minimal head loss. The cart may best be designed with a small and highly efficient drive motor on the blower. By way of example, current designs provide airflow with a total head across the blower on the order of 14 in H<sub>2</sub>O. Depending upon the condition of the air filter, the total static head of the system may vary between 10 in H<sub>2</sub>O and 18 in H<sub>2</sub>O. With such reductions in power requirements, current designs with an airstream volumetric flow of 900 CFM may utilize a motor having a power rating of 5 Hp. However, a presently contemplated range of between 3 and 7.5 Hp motors may provide excellent operation, particularly in an industrial context. Other power ratings and sized may, of course, be used. As noted above, in some embodiments, more than one motor and/or blower, fan or compressor may be used. Similarly the motor or motors may be fixed or variable speed.

In currently contemplated embodiments, the system may be designed such that the electrical requirements of the motor or motors, and other components may be supplied by a 460 V, 3 phase power source. In other embodiments, the system may be designed to receive 230 V, 1 phase power. In still other embodiments, the system may designed for 115 V, 1 phase power. It is also contemplated, that, in addition to “professional” and “commercial” implementations, the techniques may be employed for hobbyist and other applications. Indeed, it is contemplated that original equipment or even retrofits may be made to equipment such as shop vacuum systems, existing evacuation installations, and so forth. It is also contemplated that structures and teachings based on those set forth in the present disclosure may be utilized in specific settings to provide airborne component collection to enhanced effect. For example, smaller systems may be based on a 1 Hp or smaller motors, with short positive and negative pressure conduits, such as for desk or table-top use. Such systems may be particularly useful at workbenches, for smaller applications, for commercial and hobbyists, and so forth.

Moreover, as will be appreciated by those skilled in the art, in general, the head provided by the system will typically be a function of such factors as the flow areas involved (and their relative sizes), the number of bends in the system (and the nature of these—smooth and controlled versus more

turbulent or tight), the nature of surfaces in the system, the length of the components (e.g., the arm), and so forth. The power required, then, will typically be a function of this head, and other factors, such as the flow rates, the type of air mover (e.g., fan, blower, or compressor), and the number of these. It is contemplated that the motor, air mover, components and so forth will be selected and set (or adjustable with ranges) to maintain efficient use of the components, particularly to maintain the air mover within a proper portion of its performance curve.

FIGS. **16-20** illustrate a current embodiment for the manifold and support assembly **152** and its constituent parts. The assembly itself is best illustrated in FIG. **16**. The assembly includes an adapter **166** that receives the coaxial conduits **122** and **124**. The adapter is rotatable with the conduits in embodiments where an arm extends from the base unit and may be rotated. The adapter is captured by a plate assembly **168**. An air handler **170** has an inlet **172** for receiving the airstream from the blower and for redirecting the airstream through the annular area between the coaxial conduits. An opening **174** is provided in which the coaxial conduits are fitted. Apertures **176** are provided for receiving fasteners or standoffs that connect the conduit assembly to the adapter.

This structure is shown in exploded view in FIG. **17**. As shown in FIG. **17**, the plate assembly comprises an upper plate **180** and an intermediate plate **182**. A lower plate **184** is positioned on a lower side of the adapter **166**. The adapter has a lower peripheral flange **186** that is positioned in a recess **188** of the lower plate **148**. Thus, when the plates are assembled on either side of the adapter, the adapter is effectively captured and supported between the plates, mechanically supporting the arm to which the adapter is connected. The air handler **170** has an upper surface **190** to which the lower plate **148** is mounted during assembly of the system. A central passage **192** is defined through the air handler and serves to receive and communicate with the inner conduit for return flow to the air handler. The inlet **172**, again, is adapted to receive flow from the blower and to direct this flow through the annular space between the coaxial conduits.

A flow illustration of the air handler **170** is provided in FIG. **18**. As shown in FIG. **18**, the air handler **170** has an inner or central passage through which return flow is directed. From the inlet **172**, the air handler forms a volute passage **194** that efficiently redirects flow from the inlet toward the annular area between the coaxial conduits as described above. The inner flow to the air handler is indicated in FIG. **18** by reference numeral **196**. This flow is then redirected through the volute passage as indicated by arrow **198**.

FIG. **19** illustrates a present embodiment for mechanically supporting the adapter **166** within the manifold and support assembly. As shown, the adapter has a peripheral flange **186** that is captured between intermediate plate **182** and lower plate **184**. Again, lower plate **184** is fixed, in this embodiment, to an upper surface of the air handler. The upper plate **180**, then, secures the assembly together and provides mechanical support for the adapter and thereby for the arm. In certain variations, this arrangement may be adapted by addition of seals, bearings, and so forth. As illustrated in FIG. **20**, a lower portion of the air handler within the central passage **192** is adapted for sealing engagement of the inner conduit. In this embodiment, two circumferential grooves **200** are provided that may receive seals that are compressed by the air handler and the inner conduit (not shown in FIG. **20**). The inner conduit is thus essentially “stabbed” into the

13

air handler at the same time that the outer conduit and adapter are mounted to the cart.

It may be noted that still other adaptations and improvements may also be envisaged for the system. For example, lights, flow sensors, or other components may be provided on the hood to assist in the work performed or in the evaluation or control of the evacuation system. Where such sensors are provided, closed-loop control of motor speeds, valve or louver positions, flow rates, and so forth may be based upon sensed parameters.

It has been found that the foregoing techniques allow for greatly enhanced capture of airborne components, such as particulate matter, smoke, fumes, gases and so forth as compared to existing technologies. In particular, for a given flow rate of gas a target velocity that is useful in capturing such components may be provided in a larger area and further from the nozzle than previously possible. In particular, in a presently contemplated embodiment, a target gas velocity in a capture region was approximately 100 ft/min, for a gas flow rate of approximately 900 CFM. Tests indicated that such velocities could be realized at approximately 3 ft from the nozzle inlet. It is believed that approximately 50 ft/min was achieved at 5 ft from the nozzle inlet. These results were realized with the system described above operating with a 5 Hp motor.

FIGS. 21-23 illustrate this enhanced capture and velocities. In particular, in the illustration of FIG. 21, a cart-type extraction system 10 is shown as described above. The nozzle 20 is positioned near a work area 14. In this example, an operator desired to clear airborne components from the work area. The smaller region 202 represents an approximate limit for the effective capture and extraction of airborne components in prior techniques. The larger region 204 represents the much greater effective capture and extraction region afforded in a current embodiment described above. While the effectiveness of the extraction will depend upon factors such as particle size, the graphic illustration of FIG. 21 has been found to be borne out in actual testing.

FIGS. 22 and 23 are arrow diagrams developed through computer simulation of the same system. As shown in FIG. 22, the positive pressure air stream 206 may be represented by generally parallel flow arrows 208 within the confines of the conduits (not shown). As noted above, in this embodiment, concentric conduits were used, such that the positive pressure air stream 206 is confined in an annular region, although multiple and/or non-concentric conduits may also be used. As the air stream exits the nozzle (not shown), it is diverted radially, as shown by arrows 210. Such diversion is assisted by the geometries of the nozzle elements, as described above. Following deflection, then, the stream diverges, as indicted by arrows 212 to form a region that is generally protected from perturbation, allowing for enhanced capture by the negative pressure air stream. It may be noted that in certain applications, such as welding applications utilizing shielding gases, this region definition may allow for improved component capture, cooling, and other benefits without perturbing the flow and effectiveness of shielding gases used in the welding process.

FIG. 23 illustrates the flow of gas back into the nozzle (again not shown) as part of the negative pressure air stream 214. As indicated by arrows 216, the velocity of gas (and airborne components) begins at some distance from the nozzle entrance, as described above. The gas then converges near the entrance of the nozzle, as indicated by arrows 218, and ultimately is drawn into a generally linear path in the conduits, as indicated by arrows 220. Here again, it has been confirmed through actual testing that desired velocities may

14

be obtained, for a given gas flow rate, at enhanced distances 222 from the nozzle entrance.

While only certain features of the disclosure have been illustrated and described herein, many modifications and changes will occur to those skilled in the art. It is, therefore, to be understood that the appended claims are intended to cover all such modifications and changes as fall within the true spirit of the disclosure.

The invention claimed is:

1. An extractor system comprising:

a base unit comprising a source of a positive pressure gas stream and a negative pressure gas stream;  
a positive pressure conduit configured to convey a positive pressure gas stream towards a work area;  
a negative pressure conduit configured to convey a negative pressure gas stream from the work area; and  
a hood coupled to receive the positive pressure gas stream and to direct the positive pressure gas stream into a region around the work area and to draw airborne components from the work area into the negative pressure gas stream;

wherein the base unit comprises at most 5 bends between a location of return of the negative pressure gas stream and a location of exit of the positive pressure gas stream, wherein one of the at most 5 bends comprises a smooth, radiused elbow that delivers the positive pressure gas stream to a manifold, wherein the manifold comprises:

a central passage fluidly coupled to the negative pressure conduit, the central passage extending along a central axis, and configured to receive the negative pressure gas stream;  
an inlet fluidly coupled to the elbow and configured to receive the positive pressure gas stream; and  
a volute passage fluidly coupled to the inlet and disposed about the central passage, wherein the volute passage is configured to receive the positive pressure gas stream from the inlet and direct the positive pressure gas stream to an annular space extending along the central axis between the negative pressure conduit and the positive pressure conduit.

2. The system of claim 1, wherein the base unit comprises at most 4 bends between a location of return of the negative pressure gas stream and a location of exit of the positive pressure gas stream.

3. The system of claim 1, wherein the base unit comprises at most 3 bends between a location of return of the negative pressure gas stream and a location of exit of the positive pressure gas stream.

4. The system of claim 1, wherein the base unit comprises at most 2 bends between a location of return of the negative pressure gas stream and a location of exit of the positive pressure gas stream.

5. The system of claim 1, wherein each bend redirects gas approximately 90 degrees.

6. The system of claim 1, wherein the manifold is configured to receive the negative pressure gas stream and configured to output the positive pressure gas stream.

7. The system of claim 6, wherein the base unit comprises a filter between the negative pressure gas stream and the positive pressure gas stream.

8. The system of claim 7, wherein the base unit comprises a blower for drawing the negative pressure gas stream into the base unit and for expressing the positive pressure gas stream from the base unit.

9. The system of claim 8, comprising a single bend between an outlet of the blower and the manifold.

15

10. The system of claim 1, wherein the base unit comprises a mobile cart.
11. An extractor system comprising:  
 a base unit comprising a source of a positive pressure gas stream and a negative pressure gas stream;  
 a positive pressure conduit configured to convey a positive pressure gas stream towards a work area;  
 a negative pressure conduit configured to convey a negative pressure gas stream from the work area; and  
 a hood coupled to receive the positive pressure gas stream and to direct the positive pressure gas stream into a region around the work area and to draw airborne components from the work area into the negative pressure gas stream;  
 wherein the base unit comprises a manifold for receiving the negative pressure gas stream and for outputting the positive pressure gas stream, the manifold comprising:  
 a central passage fluidly coupled to the negative pressure conduit, the central passage extending along a central axis, and configured to receive the negative pressure gas stream;  
 an inlet fluidly coupled to a smooth, radiused elbow and configured to receive the positive pressure gas stream;  
 a volute passage fluidly coupled to the inlet and disposed about the central passage, wherein the volute passage is configured to receive the positive pressure gas stream from the inlet and direct the positive pressure gas stream to an annular space extending along the central axis between the negative pressure conduit and the positive pressure conduit;  
 a filter between the negative pressure gas stream and the positive pressure gas stream;  
 a blower for drawing the negative pressure gas stream into the base unit and for expressing the positive pressure gas stream from the base unit;  
 and a single bend between an outlet of the blower and the manifold, the single bend comprising the elbow that delivers the positive pressure gas stream to the manifold, wherein the bend redirects gas from between approximately 25 degrees and approximately 180 degrees.
12. The system of claim 11, wherein the bend redirects gas approximately 90 degrees.

16

13. An extractor system comprising:  
 a base unit comprising a source of a positive pressure gas stream and a negative pressure gas stream, the positive and negative pressure gas streams being suitable for removing airborne components from a work space, wherein the base unit comprises at most 5 bends between a location of return of the negative pressure gas stream and a location of exit of the positive pressure gas stream, wherein each bend of the at most 5 bends redirects gas from between approximately 25 degrees and approximately 180 degrees, wherein one of the at most 5 bends comprises a smooth, radiused elbow that delivers the positive pressure gas stream to a manifold, wherein the manifold comprises:  
 a central passage fluidly coupled to a negative pressure conduit, the central passage extending along a central axis, and configured to receive the negative pressure gas stream;  
 an inlet fluidly coupled to the elbow and configured to receive the positive pressure gas stream; and  
 a volute passage fluidly coupled to the inlet and disposed about the central passage, wherein the volute passage is configured to receive the positive pressure gas stream from the inlet and direct the positive pressure gas stream to an annular space extending along the central axis between the negative pressure conduit and a positive pressure conduit.
14. The system of claim 13, wherein the base unit comprises at most 4 bends between a location of return of the negative pressure gas stream and a location of exit of the positive pressure gas stream.
15. The system of claim 13, wherein the base unit comprises at most 3 bends between a location of return of the negative pressure gas stream and a location of exit of the positive pressure gas stream.
16. The system of claim 13, wherein the base unit comprises at most 2 bends between a location of return of the negative pressure gas stream and a location of exit of the positive pressure gas stream.
17. The system of claim 13, wherein each bend redirects gas approximately 90 degrees.

\* \* \* \* \*